




Left View

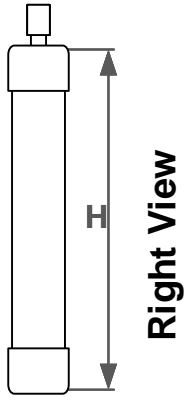

Rear View

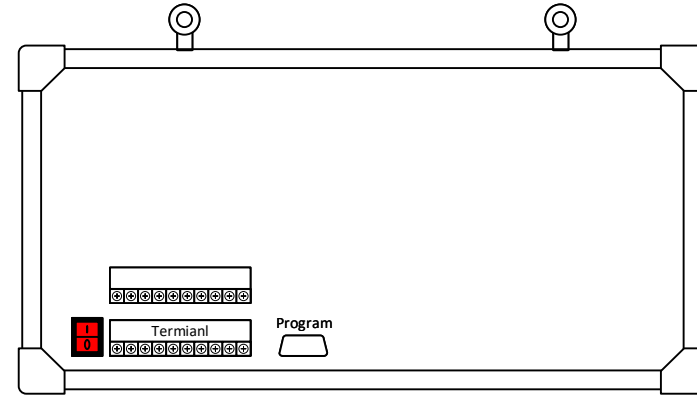

Front View

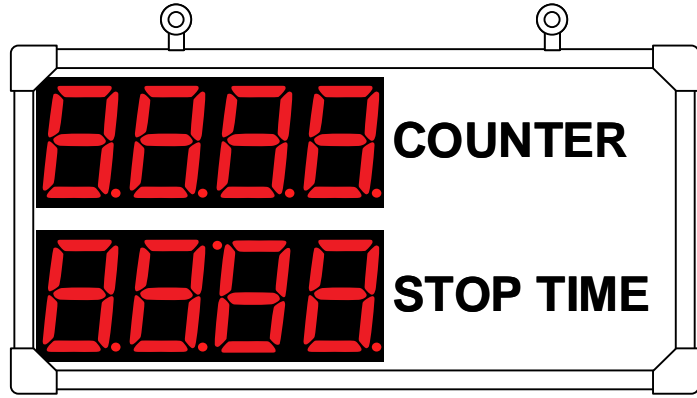

### Detail

DISPLAY 7 Segment. SIZE 2.3"

Supply

- 110-240VAC | 50-60Hz

INPUT

- Counter PNP NPN ,Contact 1 Channel

- Reset Counter 1 Channel

OUTPUT

- Alarm Relay 1 Channel

COMMUNICATION

- RS485 Modbus RTU slave

### FUNCTION

- ตั้งค่า ตัวคูณตัวหารได้ 1 - 999

- ตั้งค่า ทศนิยมได้

- ตั้งค่า Setpoint Alarm ได้ 0 - 9999

- สามารถเชื่อมต่อ RS485 Modbus RTU ได้

### FEATURE

- เมื่อเครื่องจักรหยุดทำงาน **STOP TIME** เริ่มนับจากค่าเดิมเพิ่มขึ้นทุก 1 นาที

- และเมื่อเครื่องจักรทำงาน **COUNTER +1** และ **STOP TIME** หยุดนับและค้างค่าไว้

- Alarm Relay ทำงานเมื่อ **COUNTER** มากกว่า **SETPOINT**

ตัวเครื่องประกอบด้วย


- Display 7 Segment 8 digit + Control board Master 1 ชุด

### Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment 2.3"
Input	Counter NPN PNP, Contact
Output	Alarm Relay 1 Channel
Memory	EEPROM Internal 1k
Setting	Remote IR.
Communication	RS485 Modbus RTU slave

REMARK	
Frame	Aluminum
Color	Black
Protection	IP30
Model	TGM-63160
APPEND	
Dimension	1.2" <input type="checkbox"/>
milli meter (mm.)	2.3" 450W x 250H x 100D mm. <input checked="" type="checkbox"/>
(1.2", 2.3", 4", 8", 12")	4" <input type="checkbox"/>
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.	
Draft by	SUPHOT
Date	07.12.2020
Revision	0
Customer	
Approve	
Program Process	4 day.

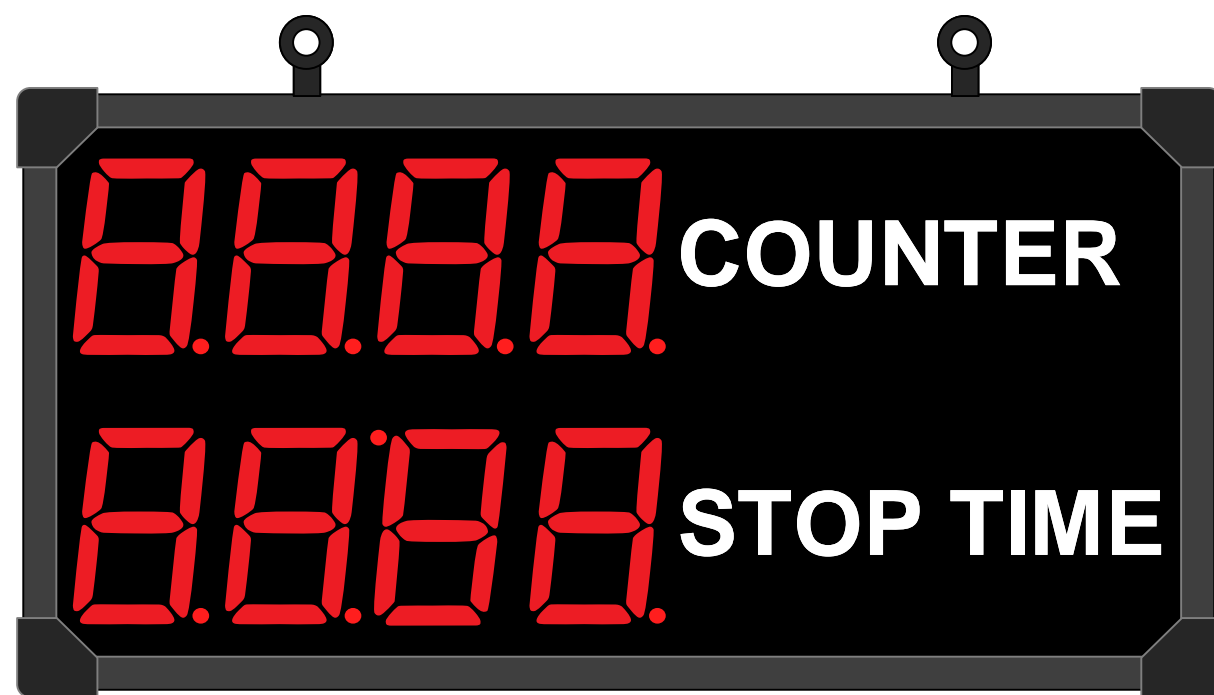

ราคาตั้ง Big Display 2.3" : 15,500 บาท

- TGM-63161

-