


Left View




Top View

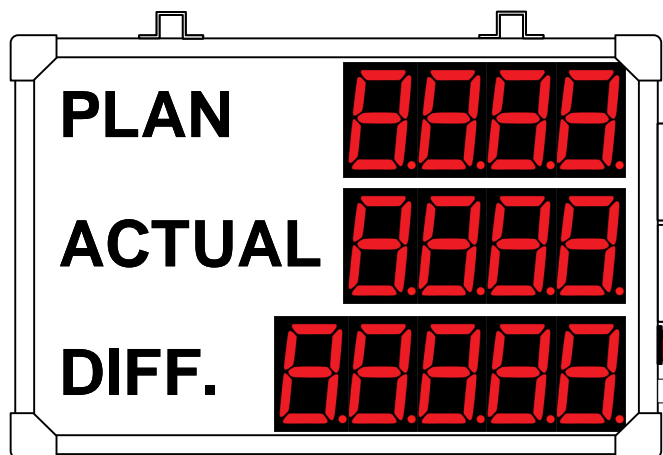

Front View



Rear View

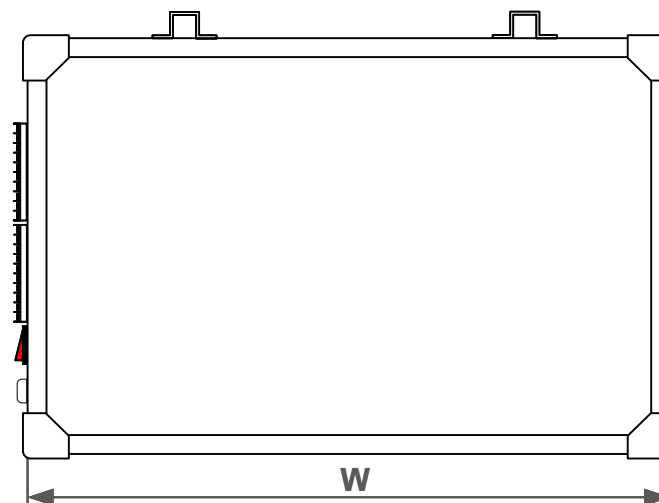

Right View

Detail

DISPLAY 7 Segment. SIZE 2.3"

Supply

- 110-240VAC | 50-60Hz

INPUT

- Counter Sensor(pnp npn), Contact switch 1 Ch.

OUTPUT

- Relay Alarm Setpoint 1 Ch.

COMMUNICATION

-

FUNCTION

- สามารถนับ Counter ได้ 0 - 9999
- ตั้งค่าตัวคูณ/ตัวหารได้ แบบ Real Time
- ตั้งค่าทศนิยมได้ สูงสุด 2 จุด
- ตั้งค่าให้สามารถนับขึ้น/ลงได้
- ตั้งค่าเลือก Type Input ได้
- ตั้งค่า Alarm Setpoint ได้ 0 - 9999

PLAN

ป้อนข้อมูลจาก Remote

ACTUAL

แสดงผล Counter จาก Input

DIFF.

แสดงผลลัพธ์เมื่อ ACTUAL - PLAN

**ติดตั้งห่วงสำหรับแขวนแบบที่ 3

**ติดตั้ง Terminal ด้านข้าง

ตัวเครื่องประกอบด้วย


- Display 7 Segment 13 digit + Control board Master 1 ชุด

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment 2.3"
Input	Counter Sensor, Contact
Output	Relay Alarm
Memory	EEPROM Internal 1k
Setting	Remote IR.
Communication	-

REMARK	
Frame	Aluminum
Color	Black
Protection	IP30
Model	TGM-63156
APPEND	
Dimension	1.2" <input type="checkbox"/>
milli meter (mm.)	2.3" 400W x 350H x 100D mm. <input checked="" type="checkbox"/>
(1.2", 2.3", 4", 8", 12")	4" <input type="checkbox"/>
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.	
Draft by	SUPHOT
Date	27.11.2020
Revision	0
Customer	
Approve	
Program Process	5 day.

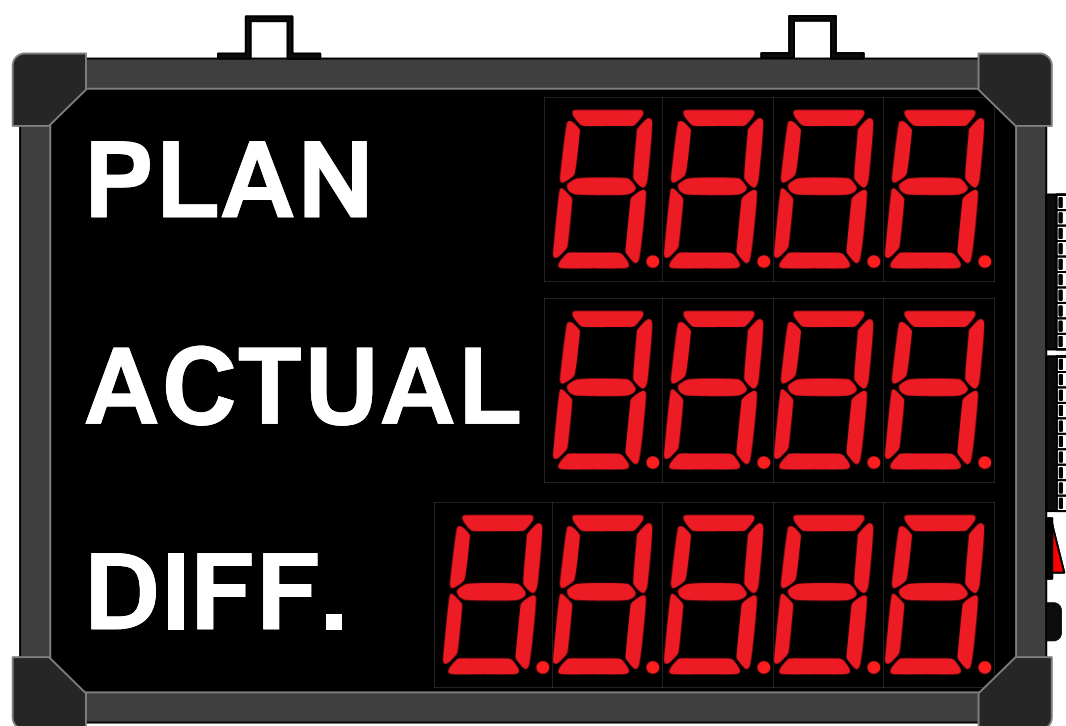

ราคาตั้ง Big Display 2.3" : 18,500 บาท

- TGM-63156

-