



Left View

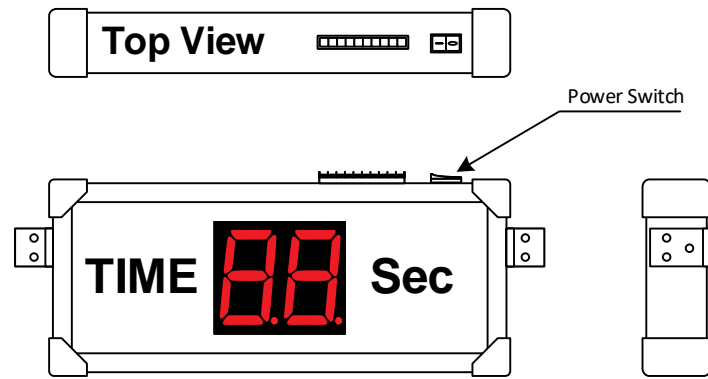

Front View

Rear View

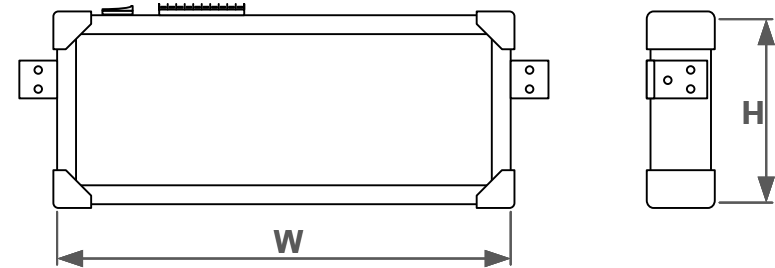

Right View

- Detail :**
- แสดงผลผ่านหน้าจอ 7 Segment สีแดง 2 หลัก
 - INPUT 12-24VDC 1 channel
 - OUTPUT Alarm contact 2 channel
 - ตั้งค่าการทำงาน ผ่านรีโมท
 - สามารถเลือก นับ ขึ้น/ลง ได้
 - สามารถตั้งค่า เริ่มต้น ได้
 - สามารถตั้งค่า Set Point ได้

- - หน่วยการนับเป็น Sec
- - เมื่อมี input 24vdc เข้ามาที่บอร์ด กรณีเป็นการ **นับขึ้น** ให้เริ่ม ทำการนับ จนกว่าจะถึงค่าที่ตั้งไว้
- - เมื่อมี input 24vdc เข้ามาที่บอร์ด กรณีเป็นการ **นับลง** ให้เริ่ม ทำการนับ จนกว่าจะเป็น 0
- (ตัวอย่างที่ : ตั้งค่าเป็นโหมด / นับลง / ค่าที่ตั้งไว้ = 10 (Sec) เริ่มนับตั้งแต่ 10,9,8...จน ถึง 0 และเมื่อมี input 24 vdc เข้ามาใหม่ ให้บอร์ด ทำการรีเซ็ตตัวเอง และทำการนับใหม่ (วนลูป)

Technical Specification

Power Supply	110-240VAC 50-60Hz
Display	7 SEGMENT สีแดง
Input	12 – 24 VDC 1 ch
Output	Alarm Set point 2 ch
Memory	EEPROM with Battery
Setting	Remote IR
Communication	-

REMARK	
Frame	Aluminum
Color	Black
Protection	IP30
Model	TGM-63049
APPEND	
Dimension	1.2" <input type="checkbox"/>
	2.3" <input type="checkbox"/>
	4" 600W x 250H x 100Dmm. <input checked="" type="checkbox"/>
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.	
Draft by	Suphot
Date	27.03.2020
Revision	0
Customer	
Approve	
Program Process	3 day.



ราคาตั้ง Big Display 4"
TGM-63049 [4"]: 9,400 บาท