



Left View

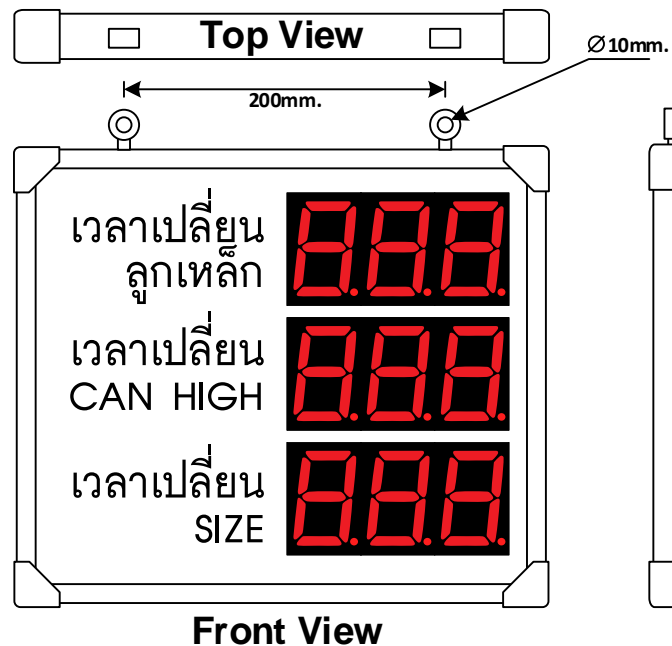

Front View

Rear View

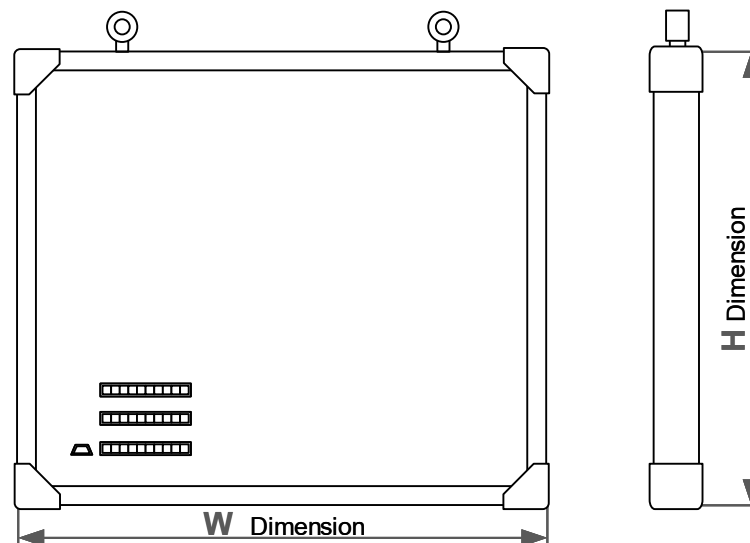

Pm
PRIMUS

Right View

Detail :


- แสดงผลด้วยตัวเลข 7 SEGMENT สีแดง
- INPUT Counter sensor[NPN PNP] 3 Channel
- INPUT Reset contact 3 Channel
- RS485 Modbus RTU slave mode
- ตั้งค่าการทำงานผ่าน Remote
- Input 3 แสดงผลแยกกัน 3 แถว
- - สามารถตั้งค่า Mode Count Up, Count Down ได้
- Reset Count สามารถกำหนดค่าสำหรับ Reset ได้
- - เช่น ตั้งค่า Reset เป็น "0" เมื่อกด RESET ค่า Count จะเป็น "0"
- หรือ ตั้งค่า Reset เป็น "100" เมื่อกด RESET ค่า Count จะเป็น "100"
- RS485 Modbus RTU
- *Slave mode
- สามารถตั้งค่า Address ได้ 1 – 240
- สามารถตั้งค่า Baudrate ได้ 4800 9600 19200 38400 57600
- สามารถตั้งค่า Parity ได้ None Odd Even
- Bits fix : 8
- Stop bit : 1

Technical Specification

Power Supply	110-240VAC 50-60Hz
Display	7 SEGMENT สีแดง 4"
Input	Sensor [NPN PNP] 3 Ch
Output	-
Memory	EEPROM with Battery
Setting	Remote IR
Communication	RS485 MODBUS RTU

REMARK		
Frame	Aluminum	
Color	Black	
Protection	IP30	
Model	TGM-63042	
APPEND		
Dimension	1.2"	<input type="checkbox"/>
	2.3"	<input type="checkbox"/>
	4"	550W x 550H x 100Dmm. <input checked="" type="checkbox"/>
Character	Arial (Font), White PVC Sticker	

PRIMUS CO., LTD.		
Draft by	Suphot	
Date	13.03.2020	
Revision	1	
Customer		
Approve		
Program Process	4	day.

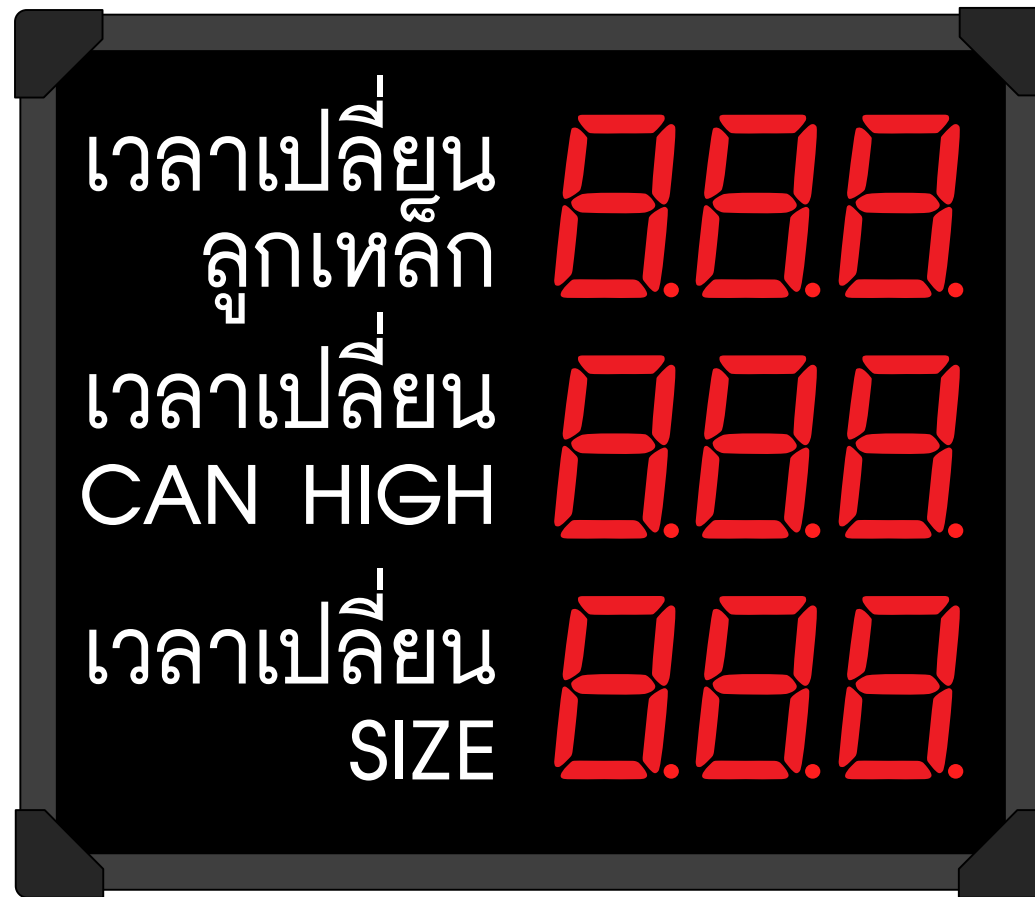

ราคาตั้ง Big Display 4"
TGM-63042rev1 [4"]: 22,800 บาท