Texecom Exodus Series Fire Detector


EN54 smoke/heat detectors for alarm panels · 12 V 4-wire · relay

STOCK CODE

41AGB-0001

EN54-certified smoke and heat detectors that wire straight onto an intruder alarm panel.

⚠ Datasheet covers the Exodus OH, RR, FT64 and FT90. Confirm which model this stock code is.

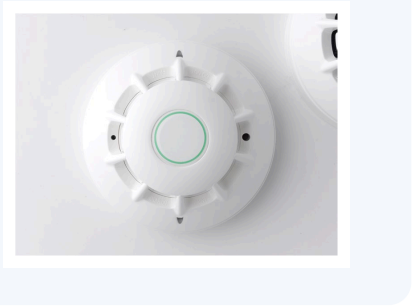

EN54	12 V	15 mA	Relay
-5 / -7	4-wire	typical	built in

WHY CUSTOMERS CHOOSE IT

- Built-in N.C. alarm relay
- Latching or auto-reset
- Test button
- Ceiling connector base

BEST FOR

- ✔ Adding fire detection to an alarm panel
- ✔ Homes and small businesses
- ✔ Kitchens/garages (heat versions)

NOT FOR

- ✖ Certified fire-panel systems (use a fire panel)

KEY SPECS

Power	**9–16 VDC · 15 mA**
Relay	**<24 VDC 50 mA**
Size	**107 × 55 mm**

FAMILY — PICK THE RIGHT ONE

Exodus OH	**Optical + heat · smoke & fire**
Exodus RR	**Rate of rise · above 58 °C**
Exodus FT64	**Fixed 64 °C**
Exodus FT90	**Fixed 90 °C · hot areas**

COUNTER QUICK ANSWERS

Kitchen? Use a heat version (RR/FT64).

Which panel? Any 12 V alarm panel zone.

Which model? Check the stock code.