DSC Bravo 6

Dual PIR Pet-Immune Motion Detector · Indoor

STOCK CODE

22BV601

The go-to indoor PIR for homes with pets — ignores dogs & cats up to 38 kg, still catches people.



Illustration — compact white case with white lens

38 kg	12 m	100°	12 V
pet immunity	max range	coverage angle	DC powered

WHY CUSTOMERS CHOOSE IT

- **Twin dual-element sensors** + Multi-Level Signal processing — fewer false alarms
- **Temperature compensation** — still detects on hot summer days
- Strong immunity to RF, static, power spikes & white light
- **Harsh/Normal jumper** for multi-pet homes · LED on/off jumper
- **Tamper switch** built in (BV-601) · 12-month warranty


BEST FOR

- ✔ Homes with pets up to **38 kg / 85 lbs** (under 0.75 m tall)
- ✔ Lounges, passages, bedrooms, kitchens
- ✔ Small offices & shops (indoor)
- ✔ Rooms up to **12 m deep × 15 m wide**
- ✔ Wall or corner mounting

NOT FOR

- ✖ Outdoors, garages open to weather
- ✖ Near heaters, fireplaces, aircon / duct outlets
- ✖ Facing windows, mirrors or direct sun
- ✖ Stairways pets can climb
- ✖ Steamy / oily areas (laundry, braai areas)

COVERAGE (TOP VIEW)

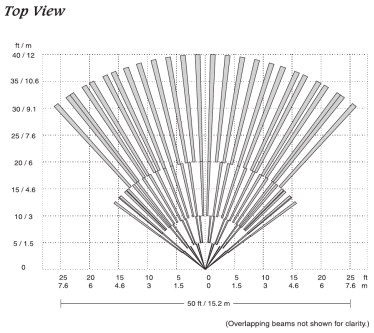

Range	**12 m / 40 ft**
Width	**15.2 m / 50 ft**
Mount height	**2.1–3.2 m (ideal 2.3 m)**
Vertical adjust	**+2° to −5°**
Walk speed	**0.15–3 m/s**

KEY SPECS

Operating voltage	**9.5 – 14.5 VDC**
Current draw	**16.5 mA standby / 17.5 mA alarm**
Contacts	**Form A alarm + tamper, 100 mA @ 24 VDC**
Operating temp / humidity	**0 – 49 °C · 5–93% RH non-condensing**
Size	**124.5 × 70 × 44.5 mm · white**

FAMILY — PICK THE RIGHT ONE

BV-601	**Form A alarm + tamper — this unit**
BV-600	**Form A alarm, no tamper**
BV-602	**Form C alarm + tamper**

COUNTER QUICK ANSWERS

Big dog? OK to 38 kg — remove J2 jumper (harsh mode) for large or multiple pets.

Cat on the couch? Keep furniture over 0.9 m at least 2.1 m from the detector.

Wireless? No — wired, 12 V, to an alarm panel.

Source: DSC Bravo 6 installation instructions (29034622 R001). Walk-test after install and weekly.

Internal counter reference