

How to run MR Lab Demos

Michael Mihocic

Last update: 02.09.2025


Switch on Hardware

- switch on PC in rack
- switch on monitor
- log on on PC as user “MRLab” (password required)
- on Windows desktop: run “[Start PDU](#)” to switch on all amplifiers and devices
- wait a few seconds until all of them are booted up
- on Windows desktop: run “[d24-unmute](#)” to unmute all amplifiers
 - note: unmuting the amplifiers they will double their power consumption
 - using the script “[d24-mute](#)” will soft mute them again



Run Demos

- make sure that all amplifiers are unmuted (no red icon on the top left edge of their screen)
- on Windows desktop:
 - “[Mix 1 \(192ch\)](#)” loads the configuration for all 192 channels, used by some demos
 - “[Mix 2 \(64ch\)](#)” loads the configuration for 64 channels, used by some demos
 - when changing Mixes, there might be a prompt asking to discard manual changes → confirm the dialogue

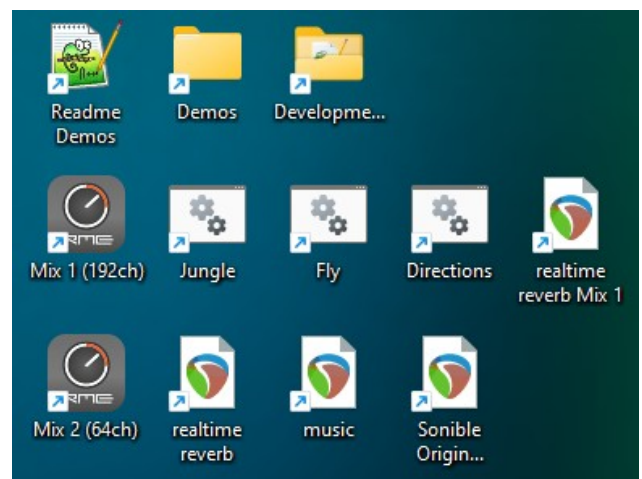

List of Demos Mix 1

load “Mix 1 (192ch)”


- [Jungle](#): birds, rain and thunder
 - double click link to batch file
 - press green button to start demo
 - optional: use light green buttons to start delayed, or to enable loop
 - orange fader (left) controls volume
 - demo can be combined with demo “realtime reverb Mix 1”
 - press “stop” or close all Pd windows to stop demo
- [Fly](#): a fly circling around the room

- double click link to batch file
- press green button to start demo
- optional: use light green buttons to start delayed, or to enable loop
- orange fader (left) controls volume
- demo can be combined with demo “realtime reverb Mix 1”
- press “stop” or close all Pd windows to stop demo
- **Directions:** single directions, each played with 3s signals of pink noise
 - directions (azi, ele):
 - 0,0: North (long wall, directing entrance with glass door)
 - 90,0: West (short wall)
 - 180,0: South (long wall, opposite entrance)
 - 270,0 (short wall, directing LED wall)
 - 45,45 (elevation up)
 - 225,-45 (elevation down)
 - double click link to batch file
 - press green button to start demo
 - optional: use light green buttons to start delayed, or to enable loop
 - orange fader (left) controls volume
 - demo can be combined with demo “realtime reverb Mix 1”
 - press “stop” or close all Pd windows to stop demo
- **realtime reverb Mix 1**
 - double click on link
 - demo starts automatically
 - **warning:** it might be necessary to lower the volume of “MicArray IN” to avoid feedback (see screenshot)
 - close Reaper to stop demo

List of Demos Mix 2

load “Mix 2 (64ch)”

- **realtime reverb**
 - double click on link
 - demo starts automatically
 - **warning:** it might be necessary to lower the volume of “MicArray IN” to avoid feedback (see screenshot)
 - close Reaper to stop demo
- **music**
 - double click on link
 - hit “Space” button to launch the demo
 - hit “Space” again, or close Reaper to stop demo
- **Sonible Original**
 - kept as backup; this is the state we received the demo from Sonible

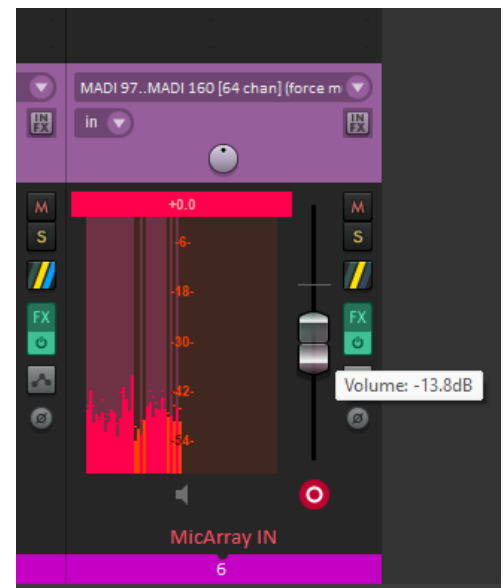

Switch off Hardware

- on Windows desktop: run “[d24-shotdown](#)” to shutdown amplifiers
- wait a few seconds until all of the amplifiers are shut down
- on Windows desktop: run “[Stop PDU](#)” to switch off amplifiers (and save a lot of power...)
- shut down PC
- switch off monitor

