

Edify Lectern EL

Assembly Instructions



How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.


Hardware & Parts List

Edify Lectern

Side Surface (L)	Side Surface (L) Door	35mm Furniture Bolt	1/4-20 Phillips Head Bolt	1/2-13 Leveler
 Qty:1	 Qty:1	 Qty:6	 Qty:132	 Qty:4
Bottom Surface	Corner Bracket	Angle Bracket		
 Qty:1	 Qty:14	 Qty:8		
Side Surface (R)	Back Surface	Wood Screw	Top Surface	
 Qty:1	 Qty:1	 Qty:16	 Qty:1	
Inner Vertical Divider	4mm Allen Wrench	Euro Hinge	16" Pole	8mm Machine Screw
 Qty:1	 Qty:1	 Qty:2	 Qty:1	 Qty:4
Pull Out Tray	Mantis Arm	Wire Management Clip	Lock Nut	
 Qty:1	 Qty:1	 Qty:4	 Qty:1	

Exploded View

Edify Lectern

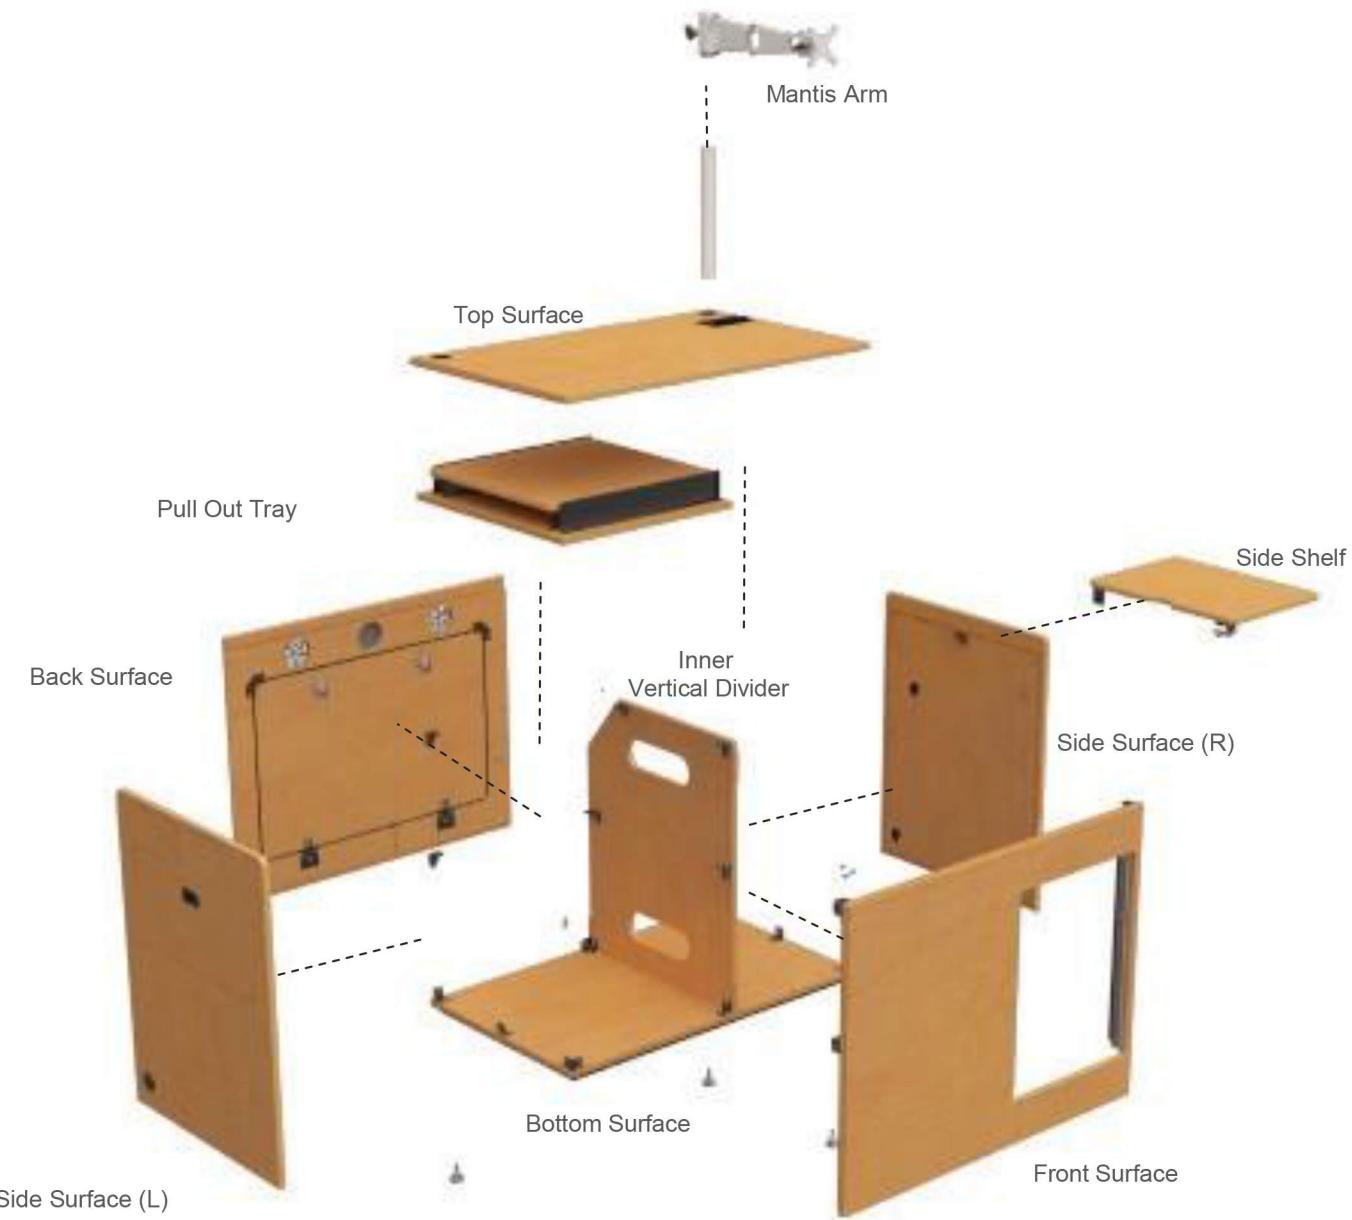

Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping




Step 1

1/4-20 Phillips Head Bolt



Qty:16

Attach (6) Corner Brackets and (2) Angle Brackets to Bottom Surface using (16) 1/4-20 Phillips Head Bolts.

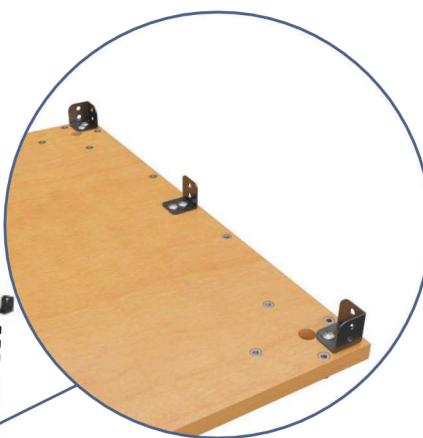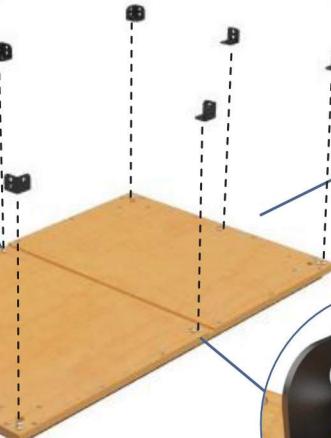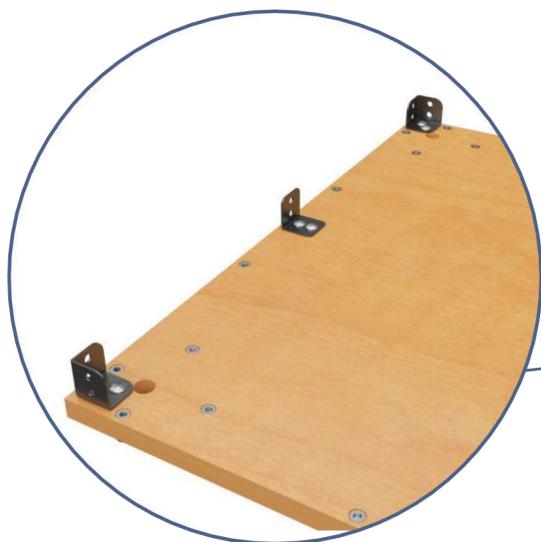

Step 2



Levelers

Leveling Glide



Qty:4

Insert Levelers into Bottom Surface.

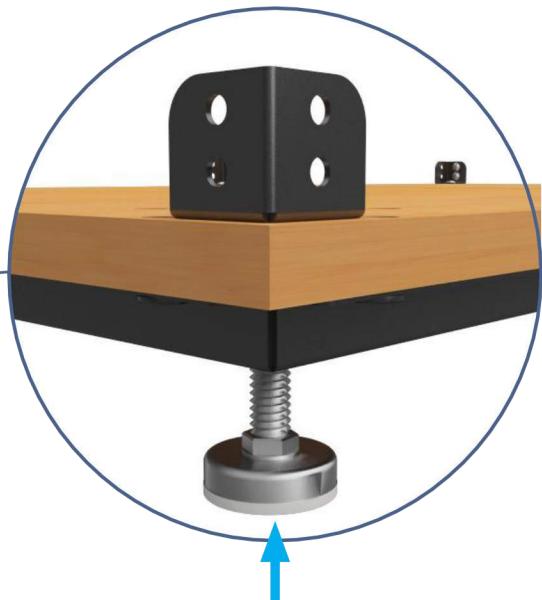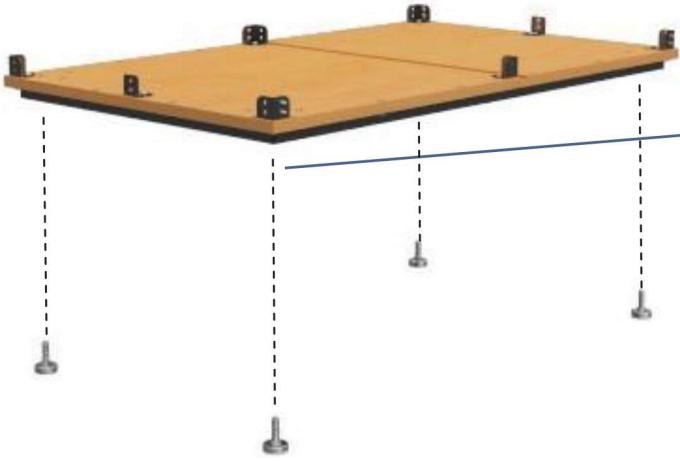

Step 3

Brackets


Edify Lectern

1/4-20 Phillips Head Bolt



Qty:8

Attach (2) Corner Brackets and (2) Angle Brackets to Inner Vertical Divider using (8) 1/4-20 Phillips Head Bolts.

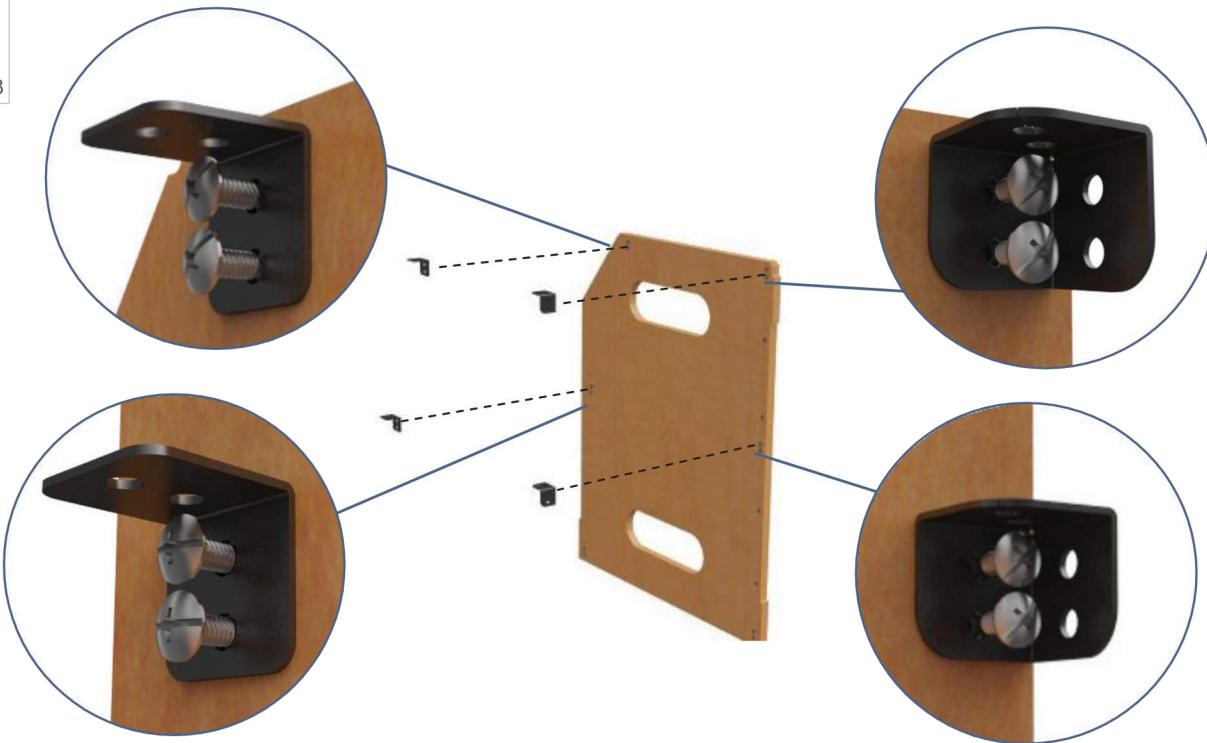

Step 4


Inner Vertical Divider

1/4-20 Phillips Head Bolt



Qty:4

Attach Inner Vertical Divider to Bottom Surface using (4) 1/4-20 Phillips Head Bolts. Leave screws loose until all surfaces are assembled.

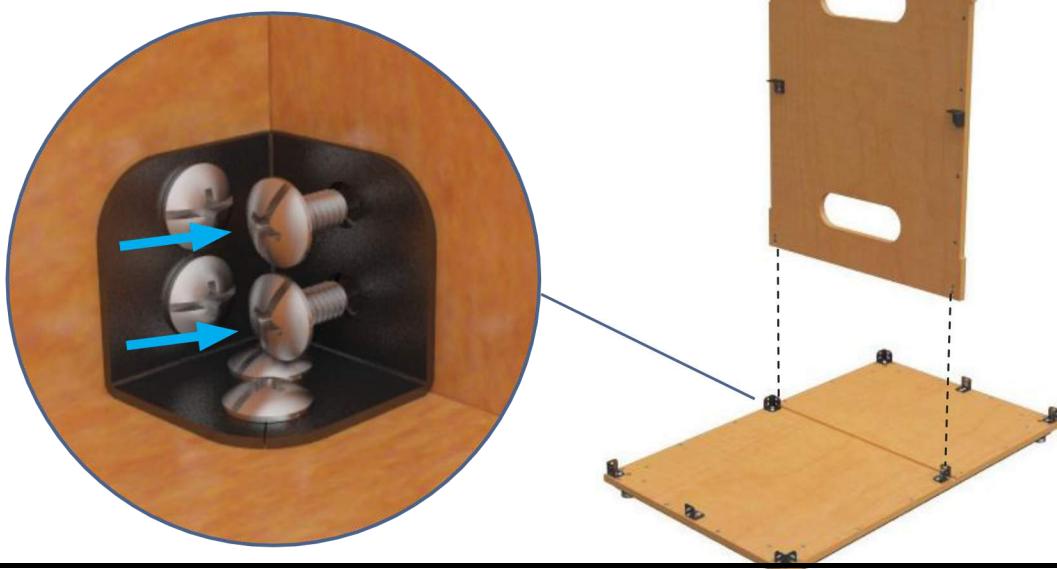

Step 5


1/4-20 Phillips Head Bolt



Qty:10

Attach (3) Corner Brackets and (1) Rack Angle Mount to Front Surface using (10) 1/4-20 Phillips Head Bolts.

Brackets

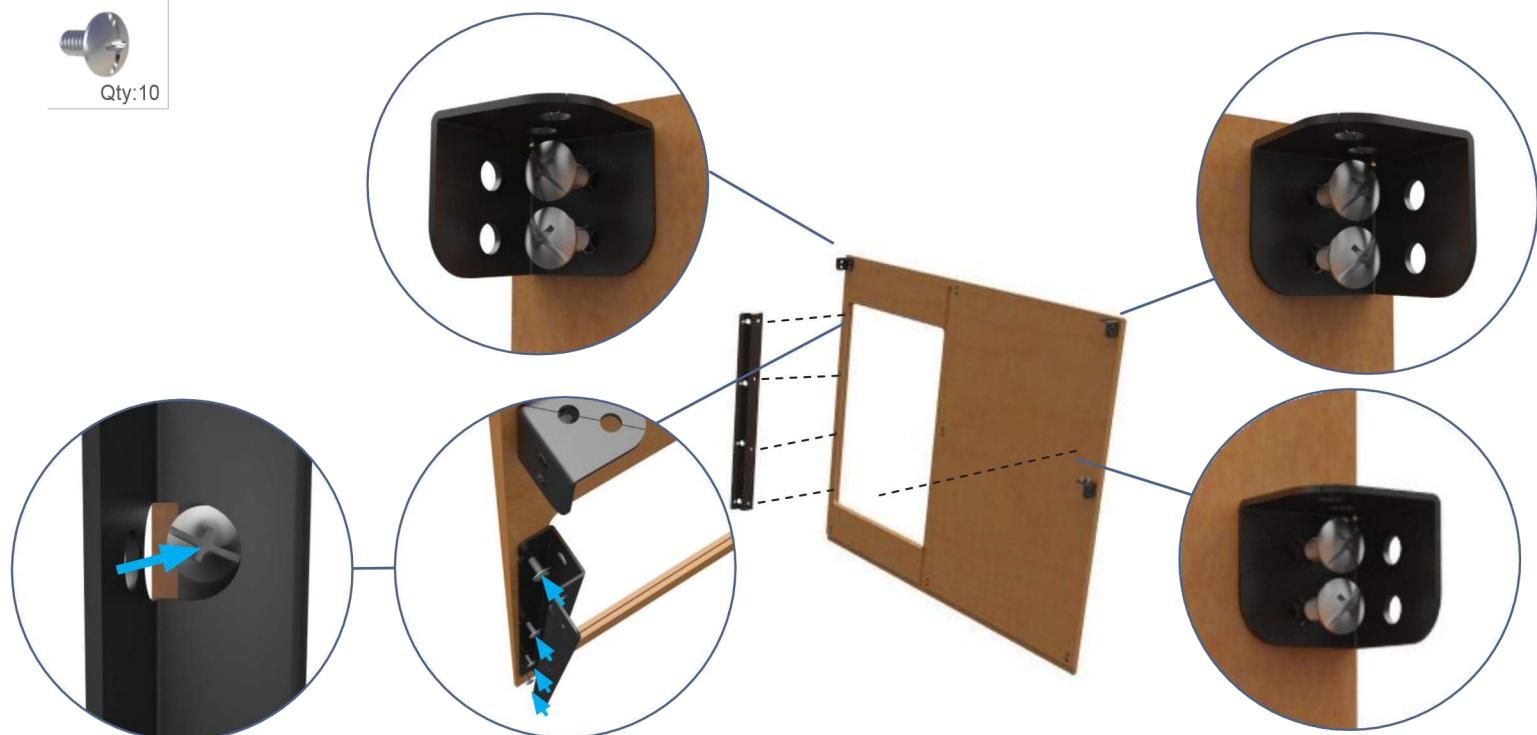

Step 6



1/4-20 Phillips Head Bolt



Qty:10

Attach Front Surface using (10) 1/4-20 Phillips Head Bolts.

Front Surface

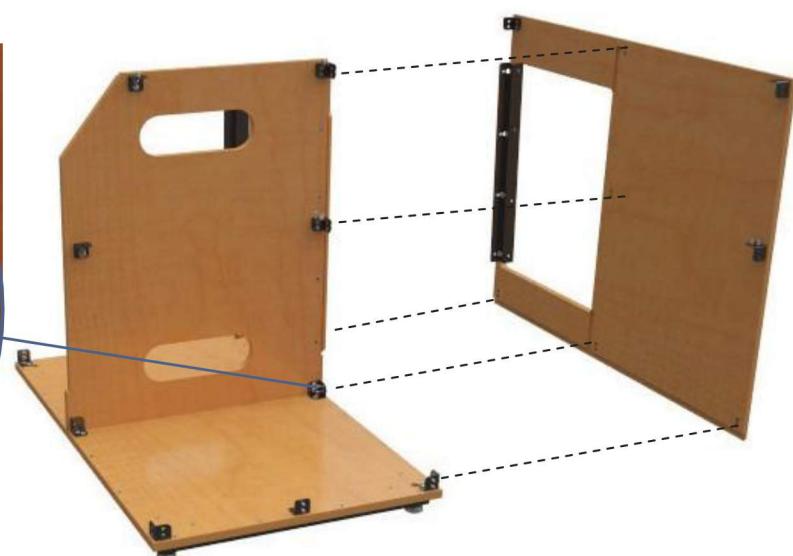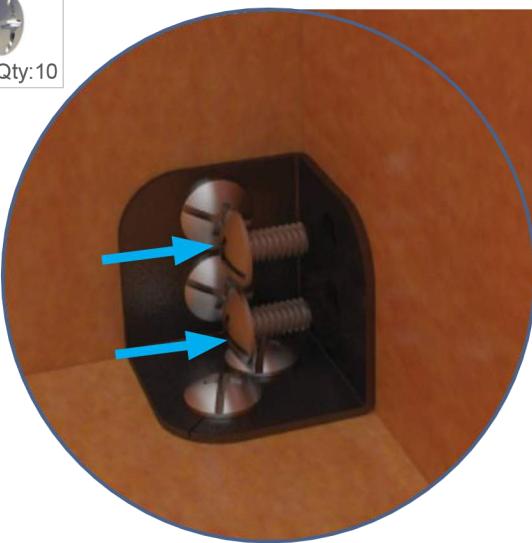


Step

7

Remove Back Door

Remove Door to make the rest of the assembly easier. Unlock and remove.

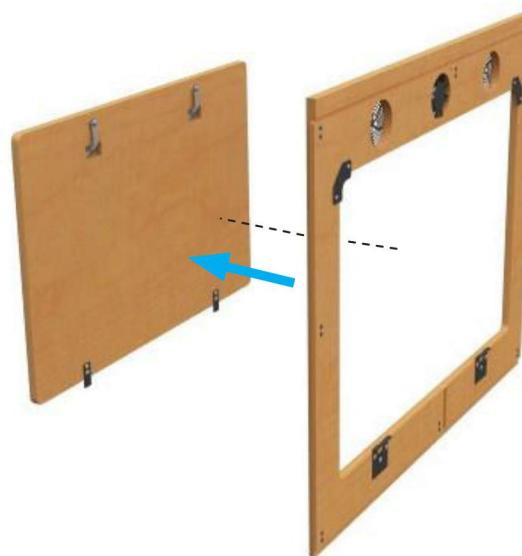


Step

8

Brackets

1/4-20 Phillips Head Bolt
Qty:10

Attach (3) Corner Brackets and (2) Angle Brackets to Inner Back Surface using (10) 1/4-20 Phillips Head Bolts.

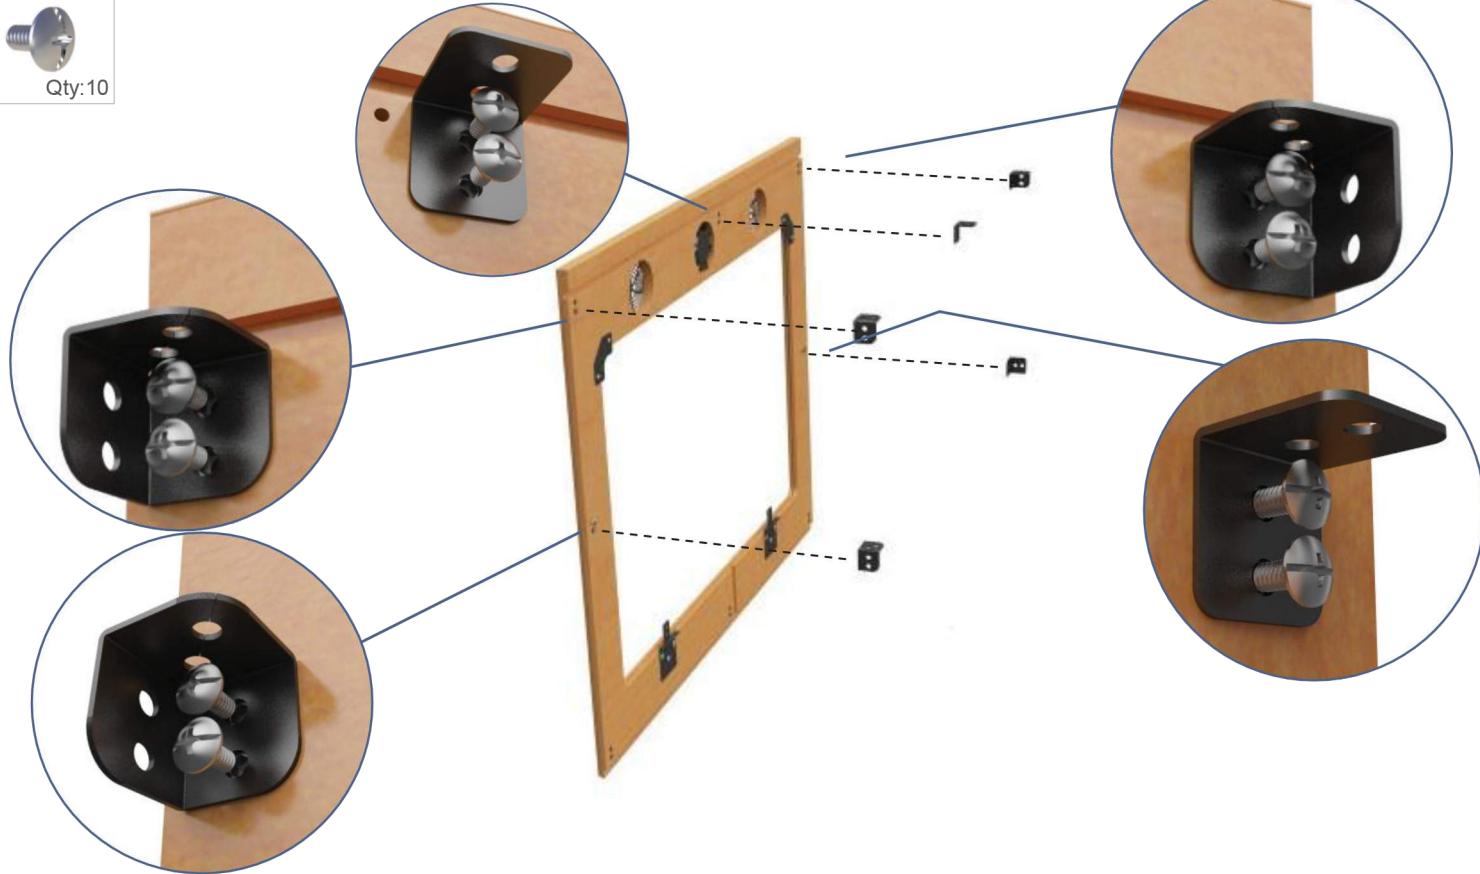

Step 9


Back Surface

1/4-20 Phillips Head Bolt



Qty:6

Attach Back Surface to Bottom Surface using (6) 1/4-20 Phillips Head Bolts.

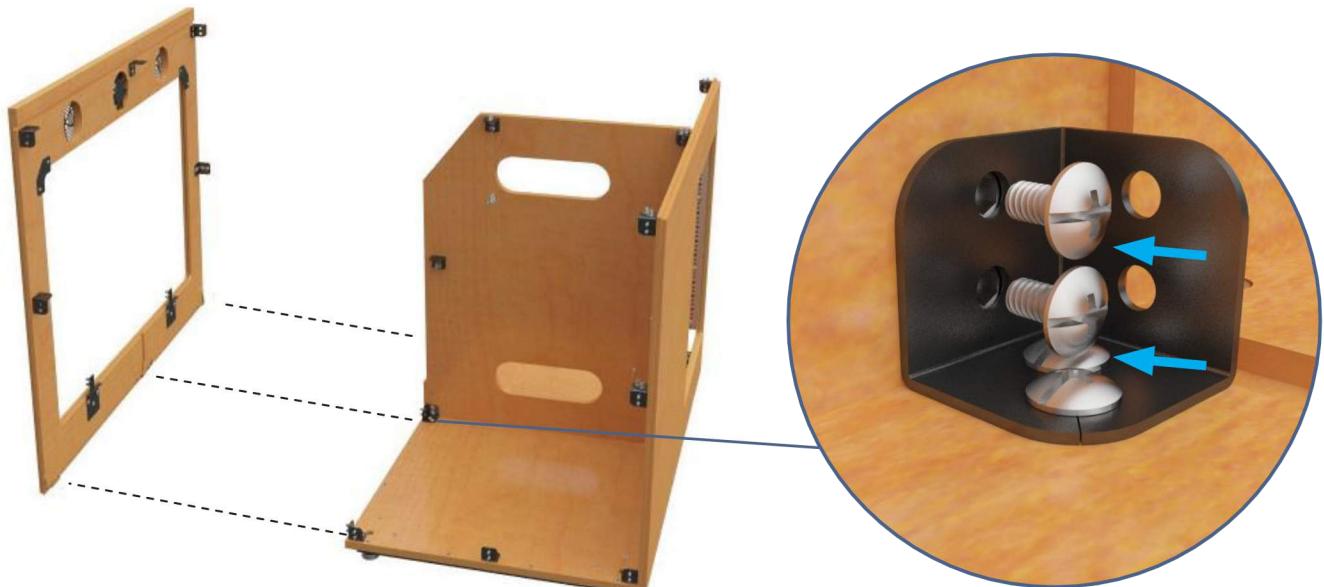

Step 10


Pull Out Tray

1/4-20 Phillips Head Bolt



Qty:8

Attach Pull Out Tray using (8) 1/4-20 Phillips Head Bolts.

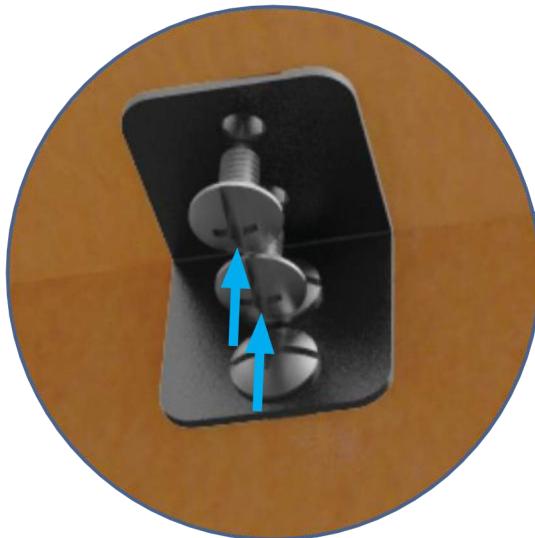

Step 11

Brackets

1/4-20 Phillips Head Bolt



Qty:4

Attach (2) Angle Brackets to Top Surface using (4) 1/4-20 Phillips Head Bolts.



Step 12


Power Box

Wood Screws



Qty:4

Attach Power Box using (4) Wood Screws.

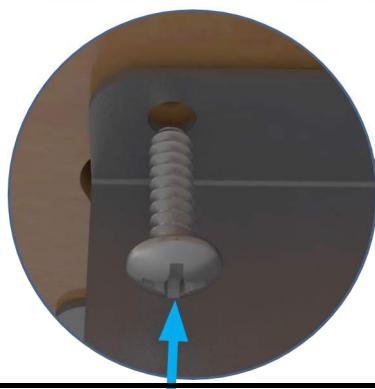

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com

Step 13



Top Surface

1/4- 20 Phillips Head Bolt



Qty:14

Attach Top Surface using (14) 1/4-20 Phillips Head Bolts.

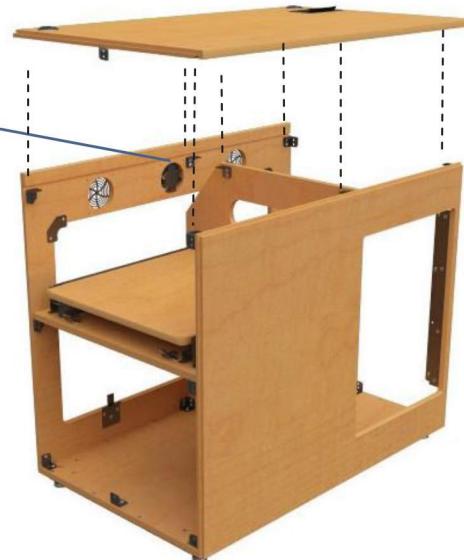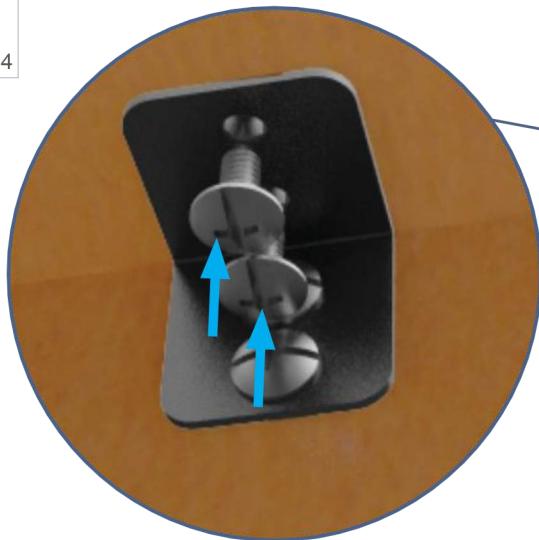

Step 14



Side Surface (R)

1/4- 20 Phillips Head Bolt



Qty:18

Attach Side Surface (R) using (18) 1/4-20 Phillips Head Bolts.

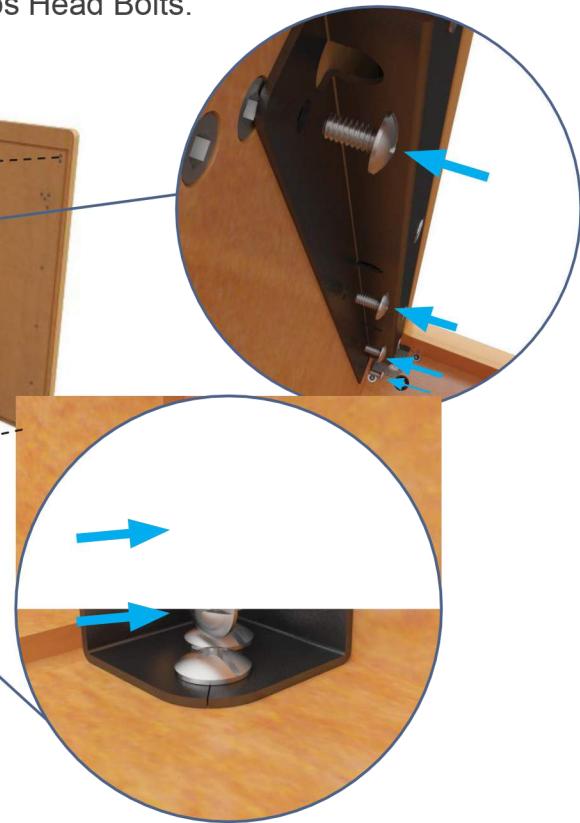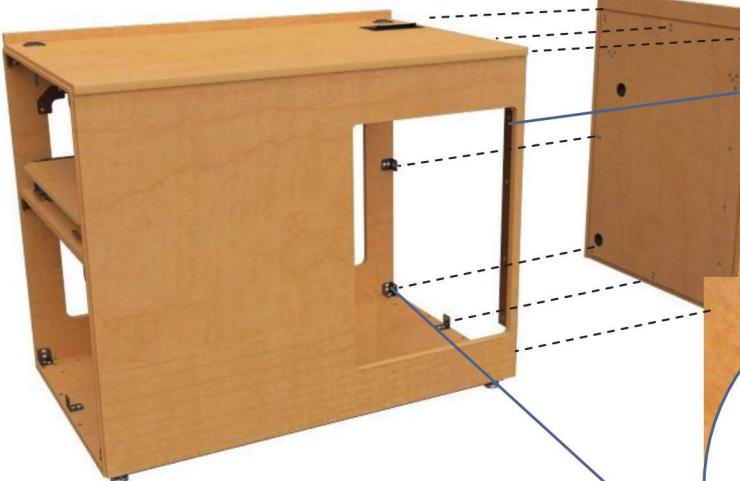


Step 15

Attach (2) Rack Angles using (8) 1/4-20 Phillips Head Bolts.

1/4- 20 Phillips
Head Bolt



Qty:8

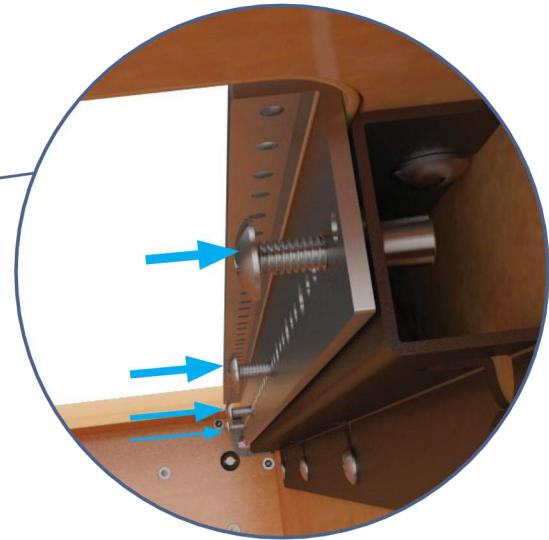

Step 16



Side Surface (L)

1/4- 20 Phillips
Head Bolt



Qty:16


Attach Side Surface (R) using (16) 1/4-20 Phillips Head Bolts.

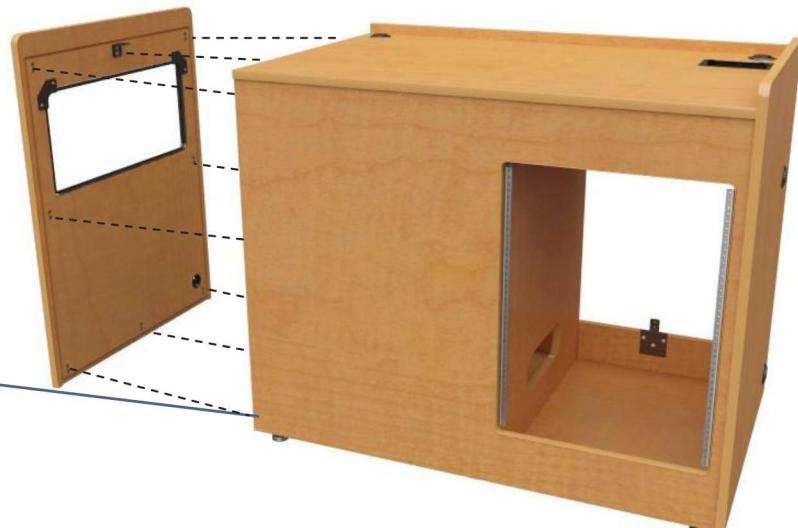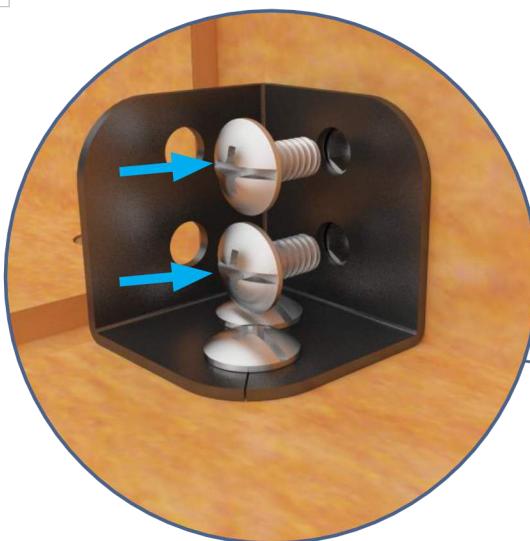

Step 17

Side Shelf Brackets


35mm
Furniture Bolt
Qty:6

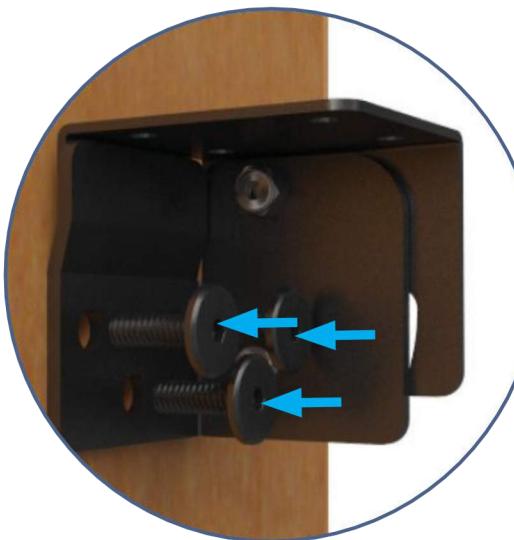

Step 18

Side Shelf

Wood
Screws
Qty:8

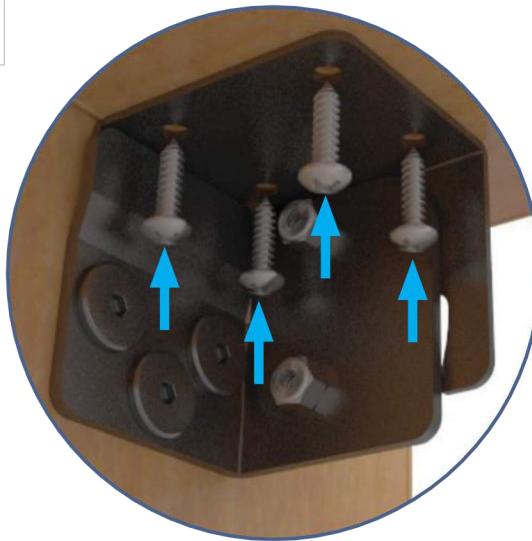

VersaTables.com
14105 Avalon Blvd.
Los Angeles, CA 90061



Lifetime Warranty



Quantity Discounts



Assembled in USA



Fast Shipping

Support:

Local: 310-353-7100
Toll Free: 888-929-0322
Fax: 310-353-7109
Support@VersaTables.com



Step 19

Side Surface (L) Door

Wood
Screws

Qty:4

- Attach Side Surface (L) Door using (2) Euro Hinges and (2) Wood Screws on each Hinge.

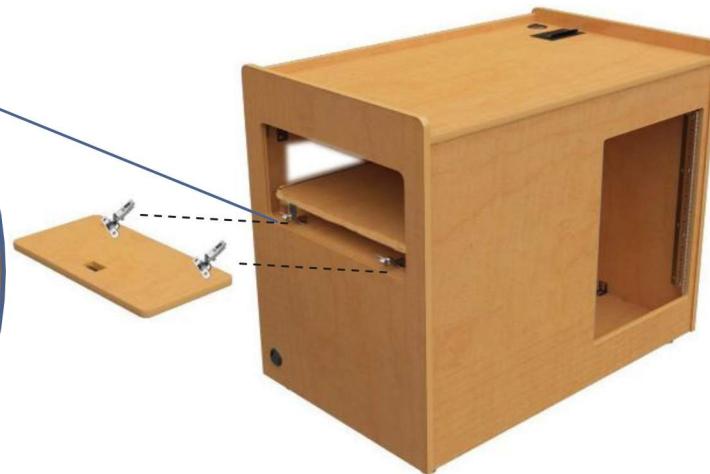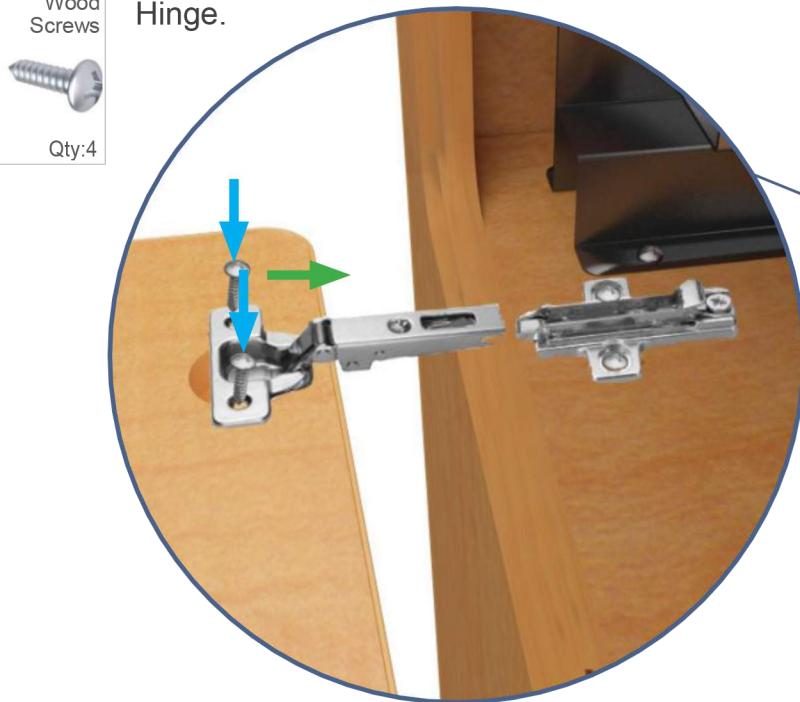

Step 20

Wood Grommet


- Remove Wood Grommet.



Step 21

16" Pole


Insert 16" Pole to Grommet cutout. From underneath the surface screw on Lock Nut, teeth facing upward. Then turn the Pole to tighten and place cutout where desired.

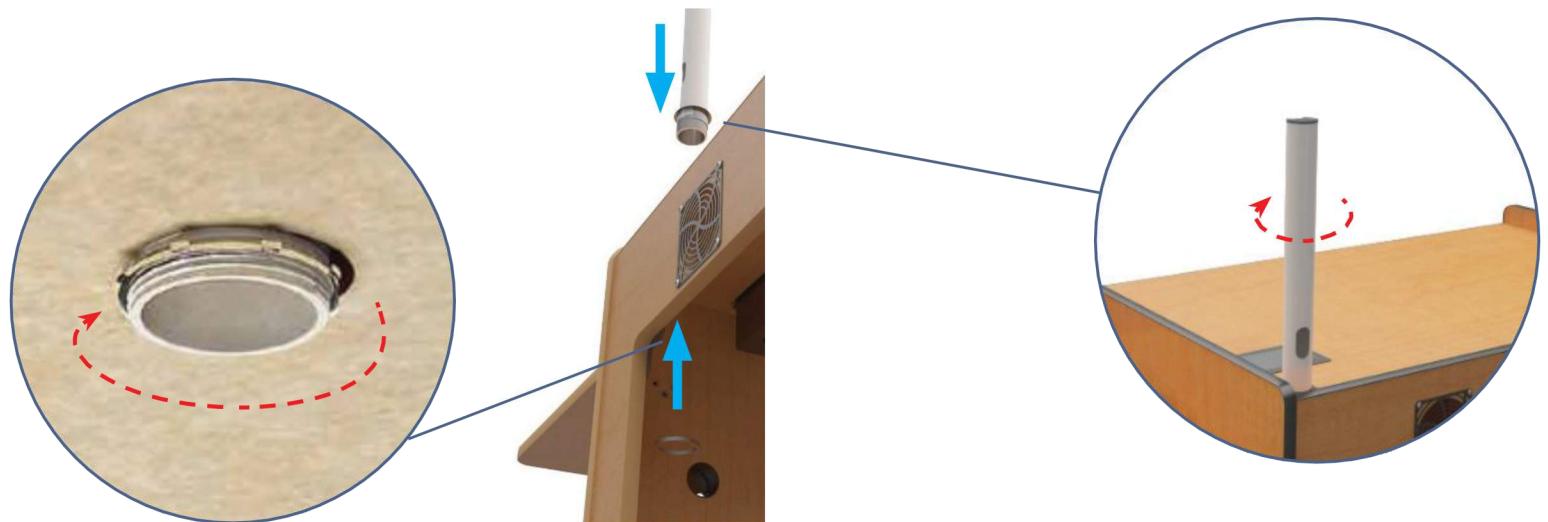

Step 22

Replace Back Door


Place back Back Door and lock it.

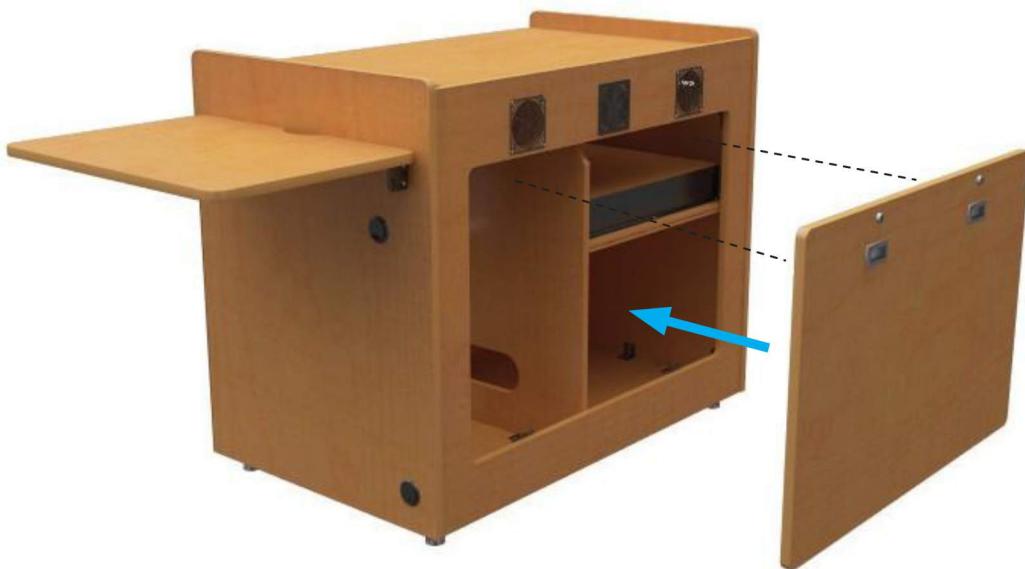

Step 23

Mantis Arm

Slide Mantis Arm on to 16" Pole and tighten in place with 'T' Knob.

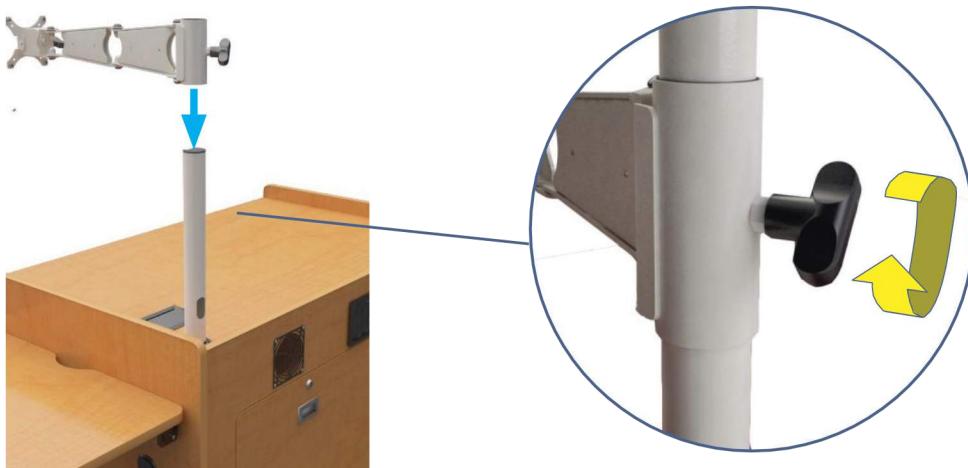


Step 24

LCD Monitor

Attach LCD monitor to the Vesa Plate with (4) 8mm Phillips Machine Screws.

8mm Phillips
Machine Screw

Qty:4

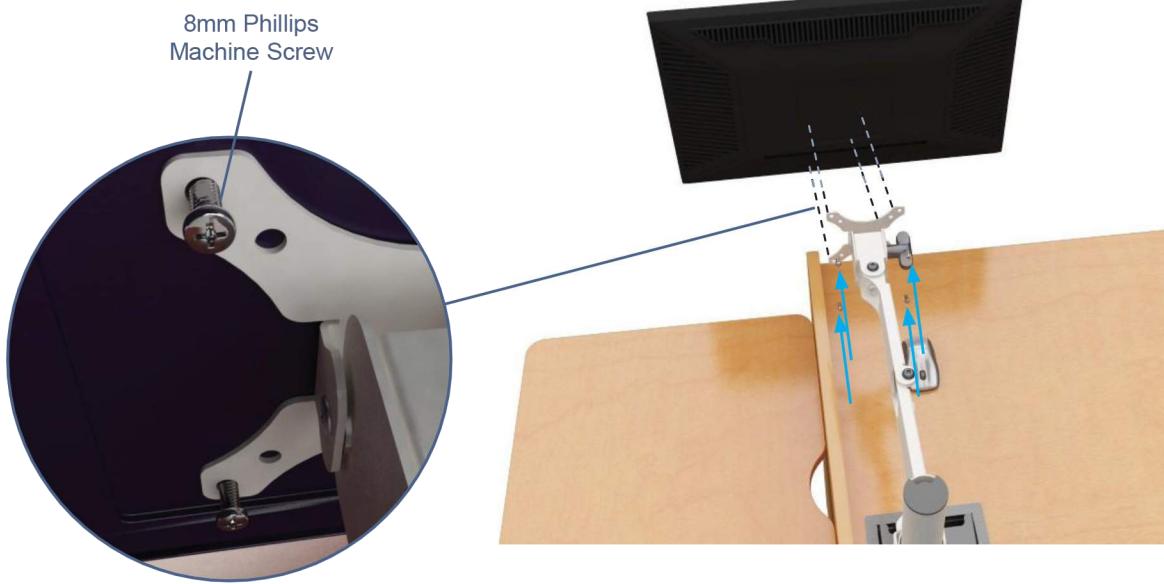

Step 25


Cable Management Clips

Cable
Management
Clip



Qty:4


Insert (4) Cable Management Clips into Arm.

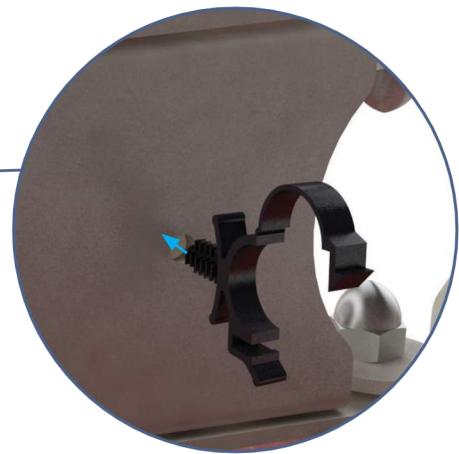

Step 26

Cable Management

Run cables through Cable Management Clips for a cleaner look. Then Push Clips to secure your cables.

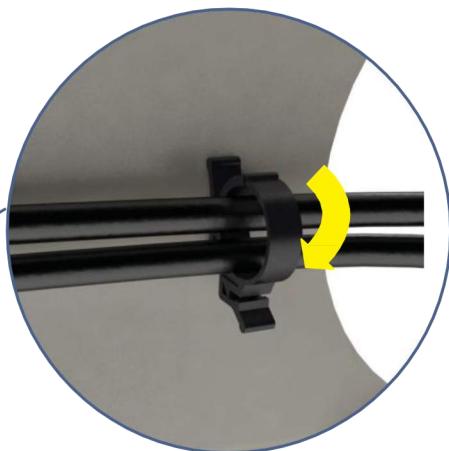

How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.