ANENG Multimeter / ANENG 621A Multimeter Digital 9999 Counts



ANENG 621A Multimeter Digital 9999 Counts


Product Code: aneng-621a

Brand: Aneng Multimeter Manufacturer

Description

| Brand | ANENG Multimeter | |
|-----------------------|----------------------|--|
| Model | ANENG 621A | |
| Color | Red, Black | |
| Item Weight | 0.4kg | |
| Product Dimensions | 133 x 66.5 x 22.5 cm | |
| Operating Temperature | 0°c - 40°c | |
| Display(LCD) | 9999 Counts | |
| Power Source | Battery Powered | |
| ACIN | DODODDI CMLI | |



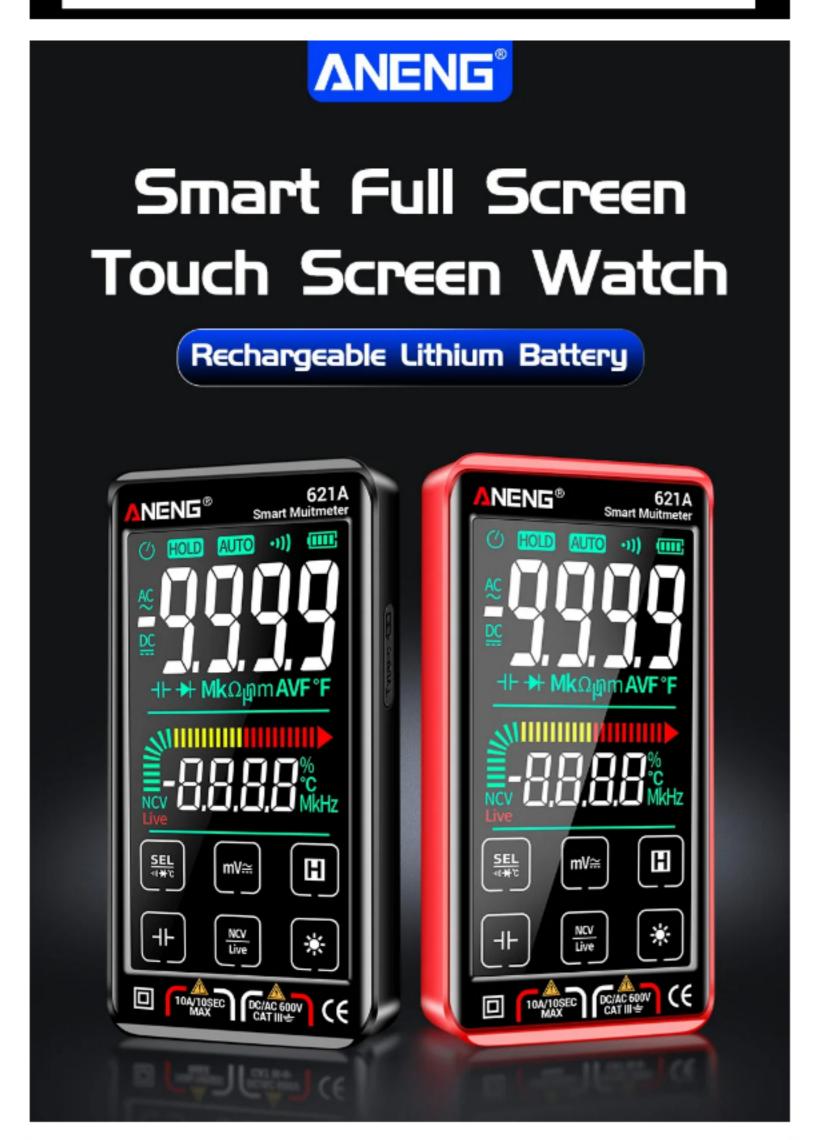



| | | | (E |
|-------------------------------------|---|-------------------|-------------------------|
| Functional parameters (Model: 621A) | | | |
| Features | range | Resolution | Accuracy |
| DC voltage | 0.5V~999.9V | 0.1mV~0.1V | ±(0.5% reading+3digits) |
| mA DC voltage | 0~600.0mV | 0.1mV~0.1V | ±(0.5% reading+3digits) |
| AC voltage | 0.5V~999.9V | 0.1mV~0.1V | ±(0.8% reading+5digits) |
| mA AC voltage | 0~600.0mV | 0.1mV~0.1V | ±(0.8% reading+5digits) |
| DC current | 20mA~10A | 1mA~0.01A | ±(1.0% reading+5digits) |
| AC current | 20mA~10A | 1mA~0.01A | ±(1.0% reading+8digits) |
| Hz (AC gear) | 40Hz~1000Hz | 0.1Hz~1Hz | ±(1.0% reading+5digits) |
| Capacitance | 9.999nF~99.99mF | 0.001nF~0.01mF | ±(2.5% reading+20digits |
| Resistance | 999.9Ω~99.99ΜΩ | 0.1Ω~0.01ΜΩ | ±(0.8% reading+3digits) |
| Temperature °F | -40~1832 °F | 1 °F | ±(1% reading+3°F) |
| Temperature °C | -40~1000°C | 1℃ | ±(1% reading+3°C) |
| Diode | ₹ | On-OFF Detection | ₹ |
| Data Retention | ₹ | Live Detection | ✓ |
| Flashlight | ₹ | NCV Sensing | ₹ |
| Reverse Display | ₹ | Auto Shut-down | (10 minutes of no use) |
| Smart Anti-burn | ₹ | Max Display | 9999 counts |
| Product Material | ABS | Wire Material | PVC/Brass |
| Silicone Sheath | ₹ | Total Wire Length | 90cm/35.4in |
| Battery Type | lithium battery | Weight | 162g |
| Product Size | ze 133*66.5*22.5cm / 5.23in*2.62*0.88in | | |