
Openterface KeyMod Datasheet

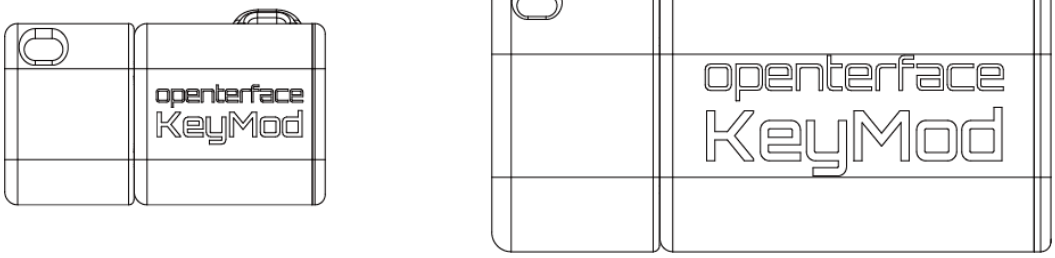

Overview

Openterface™ KeyMod is a compact, open-source, and community-driven USB control device. It turns your smartphone (referred to as the Controller device) into a portable keyboard and mouse for a computer or other USB-enabled device (referred to as the Target device), using the KeyCmd app.

By plugging directly into the Target device's USB port, KeyMod provides hardware-based keyboard and mouse control without requiring additional software on the Target, Wi-Fi, or network configuration. This compact approach simplifies your setup for field operations, BIOS-level access, system maintenance, presentations, and quick local control.

The KeyMod series includes two hardware variants:


- KeyMod Mini — USB-C Male
- KeyMod Plus — USB-A Male + USB-C Female

Both models share the same core keyboard and mouse functionality. KeyMod Mini connects to the Controller device via Bluetooth LE, while KeyMod Plus supports both Bluetooth LE and a wired USB connection through its USB-C port.

Specifications


Parameter name	Characteristics
Product Name	Openterface KeyMod
Manufacturer	TechxArtisan Limited
Product Name / Model / Contents	
KeyMod Mini (OP-KEYMOD-MINI) Contents: Openterface **KeyMod Mini** Quick Start Guide	
KeyMod Plus (OP-KEYMOD-PLUS) Contents: Openterface **KeyMod Plus** Quick Start Guide	
Phone-to-KeyMod connection	
KeyMod Mini	BLE 5.3 (Limited by BLE 2 Mbps)
KeyMod Plus	BLE 5.3 or wired USB (Up to 10 Mbps via USB connection)
Power	
Connection Type	USB-A or USB-C powered. (5V1A) No external power supply required
Environmental	
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 50°C
Humidity	80% RH

Dimensions

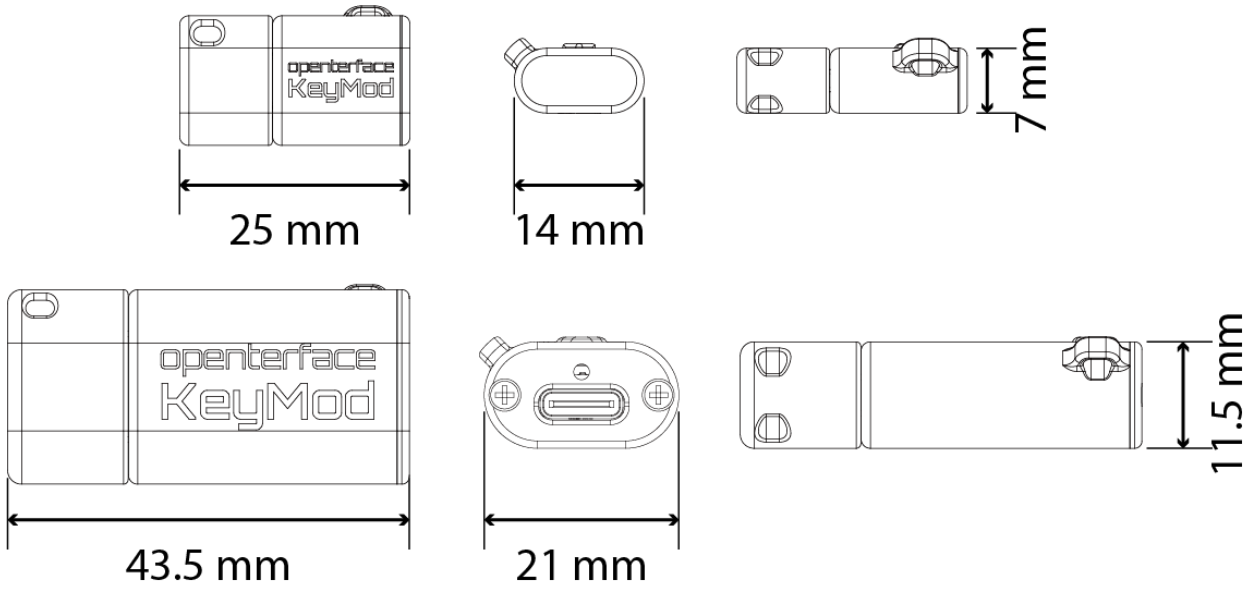

Size (Length x Width x Height**)**	
KeyMod Mini	25 × 14 × 7 mm
KeyMod Plus	43.5 × 21 × 11.5 mm
Weight	
KeyMod Mini	~2.4 g
KeyMod Plus	~8.9 g

Connections

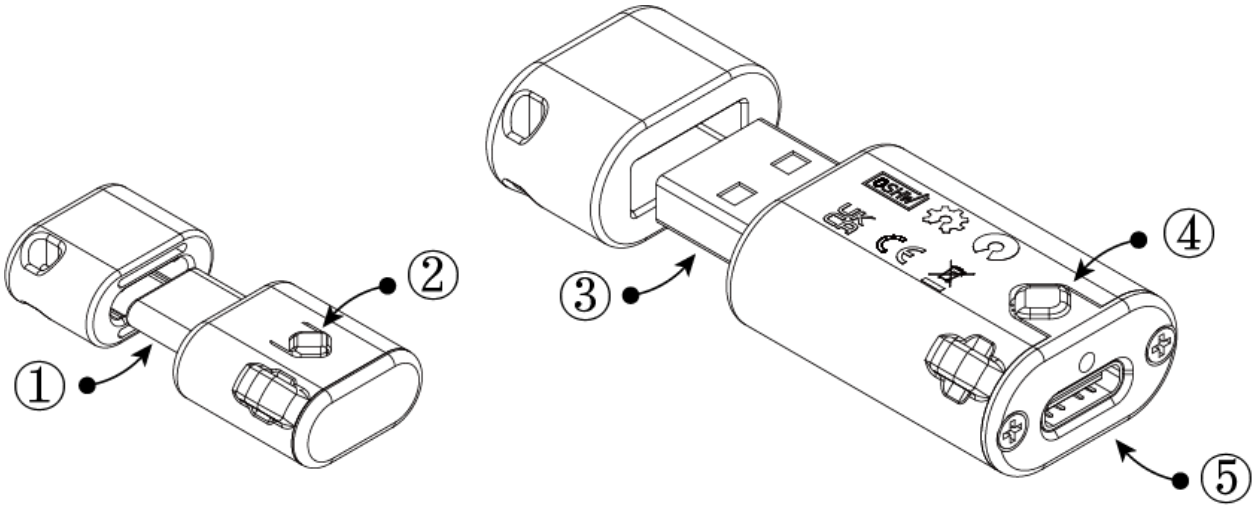

Connectivity / Interfaces	
①KeyMod Mini Type-C	Insert a target, used for keyboard/mouse control and SSH
② KeyMod Mini Button	For flashing (programming) and Bluetooth pairing
③ KeyMod Plus Type-A	Insert a target, used for keyboard/mouse control and SSH
④ KeyMod Plus Button	For flashing (programming) and Bluetooth pairing
⑤ KeyMod Plus Type-C	Connect to the host via a wired link to receive signals from the master device; this is more stable than a Bluetooth connection

Host Applications

Openterface KeyMod is a practical companion for a wide range of users and scenarios:

- Keyboard & Mouse (Basic) — Full-screen keyboard with long-press repeat, key preview, and numpad
- Keyboard & Mouse Pro — Composite layout with Shortcut Hub strips, split keyboard, and IME
- Presentation mode — Slide remote control with timer for Google Slides and other apps
- Gamepad — Virtual controller with customizable preset layouts, multi-touchpad support
- Shortcut Hub — Profile-based keyboard shortcuts for creative and dev tools (Blender, KiCAD, Photoshop, VS Code), with create, import, and export
- Macros — Programmable key sequences with delays
- Voice input — Speech-to-keyboard with AI (Whisper API)
- Terminal — SSH over Bluetooth for remote command access
- Agent — AI-driven direct interaction with HID or SSH commands to control another computer

Software for the Controller Device

To use KeyMod with your **iPhone or Android smartphone**, install the KeyCmd app.The KeyCmd app focuses on Android and iOS (including iPadOS). Connect your phone to KeyMod via Bluetooth LE, or use a wired USB connection with KeyMod Plus.

No additional software or drivers are required on the Target device for keyboard and mouse control.

True Hardware HID

Built on the proven HID core from Openterface Mini-KVM. Hardware-based keyboard and mouse emulation—no software installation required on the target device.

Network Bridge

Terminal (SSH) over BLE/USB: open SSH sessions straight from KeyCmd, no separate network setup needed. Works with macOS and Linux targets today; Windows target support via RNDIS is in development.

The same network bridge also enables VNC, file transfer (scp, rsync), and any TCP-based tool between your controlling device and the target. Bandwidth-intensive tasks like VNC and bulk file transfers need KeyMod Plus's wired USB connection; the Mini's BLE link is built for SSH.

Device Compatibility

KeyMod is designed to work with a wide range of devices, including iPhones, iPads, Android tablets, and computers running macOS, Windows, or Linux.

KeyMod emulates a standard USB HID keyboard and mouse, enabling plug-and-play operation on compatible target devices without requiring additional drivers or software installation on the target system.

- **Mobile Devices:** iPhone, iPad, and Android tablets (as the control device, using the KeyCmd app and a supported connection method).
- **Desktop & Laptop Systems:** macOS, Windows, and Linux.
- **Tested Compatibility:** Successfully tested with devices across the platforms listed above.

Compatibility may vary depending on the device model, operating system version, USB port, and connection method.

Open Source & Compliances

Openterface apps are **AGPL-3.0** licensed, with active development by TechxArtisan. The device is **OSHWA-certified** , ensuring open access to all schematics and source code on GitHub: Openterface_KeyMod_Hardware.

Stay Updated

Visit openterface.com and join our Discord community to stay informed, get support, and collaborate with other users.