# **COG Dielectric, 10 – 250 VDC (Commercial Grade)**



### **Overview**

KEMET's COG dielectric features a 125°C maximum operating temperature and is considered "stable." The Electronics Components, Assemblies & Materials Association (EIA) characterizes COG dielectric as a Class I material. Components of this classification are temperature compensating and are suited for resonant

circuit applications or those where Q and stability of capacitance characteristics are required. COG exhibits no change in capacitance with respect to time and voltage and boasts a negligible change in capacitance with reference to ambient temperature. Capacitance change is limited to ±30 ppm/°C from -55°C to +125°C.

### **Benefits**

- -55°C to +125°C operating temperature range
- · Lead (Pb)-free, RoHS, and REACH compliant
- EIA 0201, 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, and 2225 case sizes
- DC voltage ratings of 10 V, 16 V, 25 V, 50 V, 100 V, 200 V, and 250 V
- Capacitance offerings ranging from 0.5 pF up to 0.47 μF
- Available capacitance tolerances of ±0.10 pF, ±0.25 pF, ±0.5 pF, ±1%, ±2%, ±5%, ±10%, and ±20%
- · No piezoelectric noise
- Extremely low ESR and ESL
- · High thermal stability
- High ripple current capability



# **Ordering Information**

| C       | 1206   | С                                     | 104   | J  | 3   | G          | Α                       | C                                  | TU   |
|---------|--|---------------------------------------|---|--|---|------------|-------------------------|------------------------------------|--|
| Ceramic | Case Size<br>(L" x W")   | Specification/<br>Series <sup>1</sup> | Capacitance<br>Code (pF)  | Capacitance<br>Tolerance <sup>2</sup>  | Rated<br>Voltage<br>(VDC)   | Dielectric | Failure Rate/<br>Design | Termination<br>Finish <sup>3</sup> | Packaging/<br>Grade (C-Spec)                                 |
|         | 0201<br>0402<br>0603<br>0805<br>1206<br>1210<br>1805<br>1808<br>1812<br>1825<br>2220<br>2225 | C =<br>Standard                       | Two significant digits and number of zeros. Use 9 for 1.0 - 9.9 pF Use 8 for 0.599 pF e.g., 2.2 pF = 229 e.g., 0.5 pF = 508 | B = ±0.10 pF<br>C = ±0.25 pF<br>D = ±0.5 pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br>M = ±20% | 8 = 10<br>4 = 16<br>3 = 25<br>5 = 50<br>1 = 100<br>2 = 200<br>A = 250 | G = COG    | A = N/A                 | C = 100% Matte Sn                  | See<br>"Packaging<br>C-Spec<br>Ordering<br>Options<br>Table" |

<sup>&</sup>lt;sup>1</sup> Flexible termination option is available. Please see FT-CAP product bulletin C1062\_C0G\_FT-CAP\_SMD

<sup>&</sup>lt;sup>2</sup> Additional capacitance tolerance offerings may be available. Contact KEMET for details.

<sup>&</sup>lt;sup>3</sup> Additional termination finish options may be available. Contact KEMET for details.



## **Packaging C-Spec Ordering Options Table**

| Packaging Type <sup>1</sup>               | Packaging/Grade<br>Ordering Code (C-Spec)                                       |
|---|---|
| Bulk Bag/Unmarked                         | Not required (Blank)  |
| 7" Reel/Unmarked                          | TU  |
| 13" Reel/Unmarked                         | 7411 (EIA 0603 and smaller case sizes)<br>7210 (EIA 0805 and larger case sizes) |
| 7" Reel/Unmarked/2 mm pitch²              | 7081  |
| 13" Reel/Unmarked/2 mm pitch <sup>2</sup> | 7082  |

<sup>&</sup>lt;sup>1</sup> Default packaging is "Bulk Bag". An ordering code C-Spec is not required for "Bulk Bag" packaging.

### Benefits cont.

- Preferred capacitance solution at line frequencies and into the MHz range
- No capacitance change with respect to applied rated DC voltage
- Negligible capacitance change with respect to temperature from -55°C to +125°C
- · No capacitance decay with time
- Non-polar device, minimizing installation concerns
- 100% pure matte tin-plated termination finish allowing for excellent solderability
- SnPb plated termination finish option available upon request (5% Pb minimum)

# **Applications**

Typical applications include critical timing, tuning, circuits requiring low loss, circuits with pulse, high current, decoupling, bypass, filtering, transient voltage suppression, blocking and energy storage.

### **Qualification/Certification**

Commercial Grade products are subject to internal qualification. Details regarding test methods and conditions are referenced in Table 4, Performance and Reliability.

# **Environmental Compliance**


Lead (Pb)-free, RoHS, and REACH compliant without exemptions.

<sup>&</sup>lt;sup>1</sup> The terms "Marked" and "Unmarked" pertain to laser marking option of capacitors. All packaging options labeled as "Unmarked" will contain capacitors that have not been laser marked. The option to laser mark is not available on these devices. For more information see "Capacitor Marking".

<sup>&</sup>lt;sup>2</sup> The 2 mm pitch option allows for double the packaging quantity of capacitors on a given reel size. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information".



# **Dimensions - Millimeters (Inches)**



| EIA Size<br>Code | Metric Size<br>Code | L<br>Length                   | W<br>Width                    | T<br>Thickness  | B<br>Bandwidth                | S<br>Separation<br>Minimum | Mounting<br>Technique           |
|------------------|---------------------|-------------------------------|-------------------------------|-----------------|-------------------------------|----------------------------|---------------------------------|
| 0201             | 0603                | 0.60 (0.024)<br>±0.03 (0.001) | 0.30 (0.012)<br>±0.03 (0.001) |                 | 0.15 (0.006)<br>±0.05 (0.002) | N/A                        | Solder Reflow                   |
| 0402             | 1005                | 1.00 (0.040)<br>±0.05 (0.002) | 0.50 (0.020)<br>±0.05 (0.002) |                 | 0.30 (0.012)<br>±0.10 (0.004) | 0.30 (0.012)               | Only                            |
| 0603             | 1608                | 1.60 (0.063)<br>±0.15 (0.006) | 0.80 (0.032)<br>±0.15 (0.006) |                 | 0.35 (0.014)<br>±0.15 (0.006) | 0.70 (0.028)               |                                 |
| 0805             | 2012                | 2.00 (0.079)<br>±0.20 (0.008) | 1.25 (0.049)<br>±0.20 (0.008) |                 | 0.50 (0.02)<br>±0.25 (0.010)  | 0.75 (0.030)               | Solder Wave or<br>Solder Reflow |
| 1206             | 3216                | 3.20 (0.126)<br>±0.20 (0.008) | 1.60 (0.063)<br>±0.20 (0.008) |                 | 0.50 (0.02)<br>±0.25 (0.010)  |                            |                                 |
| 1210             | 3225                | 3.20 (0.126)<br>±0.20 (0.008) | 2.50 (0.098)<br>±0.20 (0.008) | See Table 2 for | 0.50 (0.02)<br>±0.25 (0.010)  |                            |                                 |
| 1805             | 4513                | 4.50 (0.177)<br>±0.50 (0.020) | 1.27 (0.050)<br>±0.38 (0.015) | Thickness       | 0.60 (0.024)<br>±0.35 (0.014) |                            |                                 |
| 1808             | 4520                | 4.70 (0.185)<br>±0.50 (0.020) | 2.00 (0.079)<br>±0.20 (0.008) |                 | 0.60 (0.024)<br>±0.35 (0.014) |                            |                                 |
| 1812             | 4532                | 4.50 (0.177)<br>±0.30 (0.012) | 3.20 (0.126)<br>±0.30 (0.012) |                 | 0.60 (0.024)<br>±0.35 (0.014) | N/A                        | Solder Reflow<br>Only           |
| 1825             | 4564                | 4.50 (0.177)<br>±0.30 (0.012) | 6.40 (0.252)<br>±0.40 (0.016) |                 | 0.60 (0.024)<br>±0.35 (0.014) |                            | ,                               |
| 2220             | 5650                | 5.70 (0.224)<br>±0.40 (0.016) | 5.00 (0.197)<br>±0.40 (0.016) |                 | 0.60 (0.024)<br>±0.35 (0.014) |                            |                                 |
| 2225             | 5664                | 5.60 (0.220)<br>±0.40 (0.016) | 6.40 (0.248)<br>±0.40 (0.016) |                 | 0.60 (0.024)<br>±0.35 (0.014) |                            |                                 |



### **Electrical Parameters/Characteristics**

| Item  | Parameters/Characteristics  |
|---|---|
| Operating Temperature Range   | -55°C to +125°C   |
| Capacitance Change with Reference to<br>+25°C and 0 VDC Applied (TCC) | ±30 ppm/°C  |
| Aging Rate (Maximum % Capacitance Loss/Decade Hour)                   | 0%  |
| <sup>1</sup> Dielectric Withstanding Voltage (DWV)                    | 250% of rated voltage<br>(5±1 seconds and charge/discharge not exceeding 50 mA)         |
| <sup>2</sup> Dissipation Factor (DF) Maximum Limit at 25°C            | 0.1%  |
| <sup>3</sup> Insulation Resistance (IR) Limit at 25°C                 | 1,000 megohm microfarads or 100 GΩ<br>(Rated voltage applied for 120±5 seconds at 25°C) |

<sup>&</sup>lt;sup>1</sup>DWV is the voltage a capacitor can withstand (survive) for a short period of time. It exceeds the nominal and continuous working voltage of the capacitor.

1 MHz  $\pm$ 100 kHz and 1.0 Vrms  $\pm$ 0.2 V if capacitance  $\leq$  1,000 pF

1 kHz ±50 Hz and 1.0 Vrms ±0.2 V if capacitance > 1,000 pF

Capacitance and Dissipation Factor (DF) measured under the following conditions:

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

### **Post Environmental Limits**

|            | High Temperatu      | ıre Life, Biased     | Humidity, Mois                 | ture Resistance      |                          |
|------------|---------------------|----------------------|--------------------------------|----------------------|--------------------------|
| Dielectric | Rated DC<br>Voltage | Capacitance<br>Value | Dissipation Factor (Maximum %) | Capacitance<br>Shift | Insulation<br>Resistance |
| COG        | All                 | All                  | 0.5                            | 0.3% or ±0.25 pF     | 10% of Initial<br>Limit  |

<sup>&</sup>lt;sup>2</sup> Capacitance and dissipation factor (DF) measured under the following conditions:

<sup>&</sup>lt;sup>3</sup> To obtain IR limit, divide  $M\Omega$ - $\mu$ F value by the capacitance and compare to  $G\Omega$  limit. Select the lower of the two limits.



# Table 1A - Capacitance Range/Selection Waterfall (0201 - 1206 Case Sizes)

| Cap Cap Code  | 7.5 pF<br>8.2 pF | 759<br>829 | В | С    | D    |          |            |             |     |          |                |       |                 | BB<br>BB | ВВ       | ВВ       | ВВ       |    |     |     | CF<br>CF | CF<br>CF | CF<br>CF | CF       | CF       | CF       | CF       | DN       |          | EB<br>EB | EB<br>EB  | EB<br>EB | EB<br>EB | EB<br>EB | EB<br>EB |
|---|------------------|------------|---|------|------|----------|------------|-------------|-----|----------|----------------|-------|-----------------|----------|----------|----------|----------|----|-----|-----|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|----------|----------|----------|----------|
| Cap Code  | 9.1 pF<br>10 pF  | 919<br>100 | _ |      | D    |          |            |             |     | и        | \B¹            | AB¹   | AB¹             | BB<br>BB | BB<br>BB | BB<br>BB | BB<br>BB |    |     |     | CF<br>CF | DN<br>DN | DN<br>DN | DN<br>DN | DN<br>DN | DN<br>DN | DN<br>DN | DN       | EB<br>EB | EB<br>EB | EB<br>EB  | EB<br>EB | EB<br>EB | EB<br>EB | EB<br>EB |
| Cap Code   Voltage Code   Rated Voltage (VDC)   Capacitance   Voltage Code    | 11 pF<br>12 pF   | 110<br>120 |   |      |      | F (      | G .        | J I         | K N | и<br>И Д |                |       |                 | BB<br>BB | BB<br>BB | BB<br>BB | BB<br>BB |    |     |     | CF<br>CF | DN<br>DN | EB<br>EB | EB<br>EB | EB<br>EB  | EB<br>EB | EB<br>EB | EB<br>EB | EB<br>EB |
| Cap Code   Voltage Code   R   4   3   8   4   3   5   1   2   A   8   4   3   5   1   | 13 pF<br>15 pF   | 130<br>150 |   |      |      | F (      |            | J I         | K N | и        |                |       |                 | BB<br>BB | BB<br>BB | BB<br>BB | BB<br>BB |    |     |     | CF<br>CF | DN<br>DN | EB<br>EB | EB<br>EB | EB<br>EB  | EB<br>EB | EB<br>EB | EB<br>EB | EB<br>EB |
| Cap   | 16 pF            | 160        |   |      | - 1  | F (      | G .        | J           | K N | и        |                |       |                 | ВВ       | ВВ       | ВВ       | ВВ       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | ЕВ       |
| Cap Code  | •                | 1          |   |      | - 1  | F (      | -          | J           | K N | и        |                |       |                 |          |          | ВВ       | ВВ       |    |     |     |          |          |          |          | CF       |          | CF       | DN       | DN       | DN       |          | DN       | DN       | DN       |          |          |           |          |          |          |          |
| Cap Code   Voltage Code   8   4   3   8   4   3   5   1   2   A   8   4   3   5   1   | 16 pF            | 160        |   |      | - 1  | F (      | G .        | J           | K N | и        |                |       |                 | ВВ       | ВВ       | ВВ       | ВВ       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | ЕВ       |
| Cap   | 15 pF<br>16 pF   | 150<br>160 |   |      | - 1  | F (      | G .        | J I         | K N | и        |                |       |                 | BB<br>BB | BB<br>BB | BB<br>BB | ВВ       |    |     |     | CF<br>CF | CF       | CF       | CF       | CF<br>CF | CF<br>CF | CF<br>CF | DN<br>DN | EB<br>EB | EB<br>EB | EB<br>EB  | EB<br>EB | EB<br>EB | EB       | ЕВ       |
| Cap   | 15 pF            | 150        |   |      | 1    | F (      | G .        | J           | K N | Л        | B <sup>2</sup> | ΑB²   | AB²             | ВВ       | ВВ       | ВВ       | ВВ       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap   | 15 pF            | 150        |   |      | 1    | F (      | G .        | J           | K N | Л        | B <sup>2</sup> | ΑB²   | AB <sup>2</sup> | ВВ       | ВВ       | ВВ       | ВВ       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Voltage Code   R   4   3   8   4   3   5   1   2   A   8   4   3   5   1   | 13 pF            | 130        |   |      | ı    | F (      | G.         | J           | K N | и        |                |       |                 | ВВ       | ВВ       | ВВ       | _        |    |     |     | CF       | -        | -        | CF       | _        | CF       | CF       | DN       | EB       | EB       | EB        | EB       | EB       |          |          |
| Cap Code  |                  |            |   |      | ı    | F (      |            |             | K N | и        |                |       |                 | ВВ       |          | ВВ       | ВВ       |    |     |     |          | 1 -      | -        |          | 1 -      | CF       | CF       |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  |            |   |      |      |          | - 1        |             |     |          | B <sup>2</sup> | AB²   | AB <sup>2</sup> |          |          |          |          |    |     |     |          | 1 -      |          |          |          | 1        | 1        |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  | 1          |   |      | - 1  |          |            |             |     |          | ۱B¹            | AB¹   | AB¹             |          |          |          |          |    |     |     |          | 1 -      |          |          | 1 -      | 1        | 1        |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  | 1          | В | С    |      | _        | _          |             | ,   | رار      | D1             | ۸ D 1 | A D1            |          |          |          |          |    |     |     |          | 1        |          |          | 1 -      |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  |            | _ |      | _    |          | -          |             |     | ł        |                |       |                 |          | _        | _        | _        |    |     |     |          | -        | -        | -        | -        | -        | -        |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code   Voltage Code   R   4   3   8   4   3   5   1   2   A   4   4   4   4   4   4   4   4   4   | •                | 1          |   |      |      |          |            |             |     | ı        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          | 1 -      |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  | 1          |   | - 1  |      |          |            |             |     | ١        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          | 1 -      |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  | •                | 1          |   | - 1  |      |          |            |             |     | ١        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          | 1 -      |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  |                  | 1          |   |      | D    |          |            |             |     | ı        |                |       |                 |          |          |          | ВВ       |    |     |     |          | CF       | CF       | CF       | CF       | CF       |          |          |          |          |          |          |          |          |          |          | EB        | EB       | EB       | EB       | EB       |
| Cap Code  |                  | 1          |   | - 1  |      |          |            |             |     | ı        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          | 1 -      |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code   Voltage Code   8   |                  |            | _ | -    | _    |          |            |             |     | ٠        |                |       |                 |          | _        | _        | _        |    |     |     |          | -        | -        | -        | _        | _        | _        | _        | _        |          |          | _        |          |          |          | _        |           |          | _        |          |          |
| Cap Code   Voltage Code   | 5.1 pF           | 519        | В | С    | D    |          |            |             |     | 1        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Voltage Code   |                  |            |   |      |      |          |            |             |     | 1        |                |       |                 |          |          |          |          |    |     |     |          | 1 -      | -        |          | 1 -      | 1        |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code   Cod  |                  | 479        | В | С    | D    |          |            |             |     | ١        |                |       |                 | ВВ       |          |          | ВВ       |    |     |     | CF       |          |          |          |          | - 1      |          |          | EB       |          |           | EB       | EB       | EB       | EB       |
| Cap Code   Cod  | 4.3 pF           | 439        |   | С    | D    |          |            |             |     | 1        |                |       |                 |          | BB       |          | BB       |    |     |     | CF       | CF       | CF       | CF       | CF       |          |          | DN       |          |          |          | - 1      |          |          | EB       | EB       | EB        |          | EB       |          |          |
| Cap Code  |                  | 1          |   |      |      |          |            |             |     | ١        |                |       |                 |          |          |          |          |    |     |     |          | 1        | -        |          | 1 -      |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  | 3.9 pF           | 399        | В | C    | D    |          |            |             |     | 1        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EΒ       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code  |                  | 1          |   |      |      |          |            |             |     | 1        |                |       |                 |          |          |          |          |    |     |     |          | 1        |          |          |          |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code  | 3.6 pF           | 369        | В | C    | D    |          |            |             |     | 1        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code  |                  |            |   |      | _    |          |            |             |     | т        |                |       |                 |          |          | _        | _        |    |     |     |          | -        | -        |          | -        | _        | _        |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  | 3.3 pF           | 339        | В | C    | D    |          |            |             |     | н        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code  | •                | 1          |   |      |      |          |            |             |     | П        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  Voltage Code  Voltage (VDC)  Ball BB BB BB BB Code  Code  Code  Code  Voltage Code  Rated Voltage (VDC)  Capacitance  Tolerance  Code  Code | •                | 309        | B | С    | D    |          |            |             |     | П        |                |       |                 | BB       | BB       | BB       | BB       |    |     |     | CF       | lпи      | DN       | DN       | DN       | DN       | DN       | DN       | FB       | FB       | FB        | FB       | FB       | FB       | FB       |
| Cap Code  Voltage Code  Voltage (VDC)  Ball BB BB BB BB Code  Code  Code  Code  Voltage Code  Rated Voltage (VDC)  Capacitance  Tolerance  Code  Code | •                | 1          |   |      |      |          |            |             |     | н        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          | 1 -      |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code  | 2.7 pF           | 279        | В | С    | D    |          |            |             |     | П        |                |       |                 | ВВ       | ВВ       | ВВ       | ВВ       |    |     |     | CF       | IDN      | DN       | DN       | DN       | DN       | DN       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code  |                  |            |   |      |      |          |            |             |     | П        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code   Voltage Code   8   4   3   8   4   3   5   1   2   A   8   4   3   5   1   | 2.4 pF           | 249        | В | С    | D    |          |            |             |     | П        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | ĺDΝ      | DN       | DN       | DN       | DN       | DN       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Voltage Code   8   4   3   8   4   3   5   1   2   A   8   4   3   5   1   | 2.2 pF           | 229        | В | C    | D    |          |            |             |     | н        |                |       |                 | BB       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code    Voltage Code   8  |                  |            | _ |      | _    | _        | _          | _           | _   | 4        |                |       |                 |          | _        | _        | _        |    |     |     | _        | _        | -        | -        | -        | _        | _        | _        | _        |          | _        | _        |          |          | _        | _        | _         |          |          | _        |          |
| Cap Code  Voltage Code  8   |                  | 1          |   |      |      |          |            |             |     | П        |                |       |                 |          |          |          |          |    |     |     |          | 1 -      | -        |          |          |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code   Cod  |                  | 1          |   |      |      |          |            |             |     | 1        |                |       |                 |          |          |          | RR       |    |     |     |          | 1        | CF       |          |          |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code   Cod  | 1.6 pF           | 169        | В | С    | D    |          |            |             |     | П        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Cod  | 1.5 pF           | 159        | B | C    | D    |          |            |             |     | П        |                |       |                 | BB       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Cod  |                  | 1          |   |      |      |          |            |             |     | П        |                |       |                 |          |          |          |          |    |     |     |          | 1        | -        |          |          |          |          |          |          |          |          | - 1      |          |          |          |          |           |          |          |          |          |
| Cap Code   Cod  |                  |            |   |      | _    |          | т          |             |     | т        |                |       |                 |          | _        | _        | _        |    |     |     |          | -        | -        | -        | -        | _        | _        |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code   Cod  | 1.2 pF           | 129        | В | С    | D    |          |            |             |     | П        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | lον      | DN       | DN       | DN       | DN       | DN       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap Code   Cod  | 1.1 pF           | 119        |   | C    | וט   |          |            |             |     | П        |                |       |                 | BB       | BB       | BB       | BB       |    |     |     | CF       | DN       | FB       | FB       | FB        | EB       | FB       | FB       | EB       |
| Cap Code   Cod  | •                |            |   |      |      |          |            |             |     | н        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap   Code   C  | 1.0 - 9.1 pF*    | 109 - 919* | В | C    | D    |          |            |             |     | н        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     | CF       | DN       | EB       | EB       | EB        | EB       | EB       | EB       | EB       |
| Cap   Code   C  | •                |            |   |      |      |          |            |             |     | П        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          | 1 -      |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap   Code   Series   CU201C   CU402C   CU603C   CU805C   CU206C  |                  |            |   |      |      |          |            |             |     | 1        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Code   Series   CU201C   CU402C   CU603C   CU805C   CU206C  | 0.50 & 0.75 pF   | 508 & 758  | В | _    |      |          |            |             |     | t        |                |       |                 | ВВ       | BB       | BB       | BB       |    |     |     |          |          |          |          |          |          |          |          |          |          |          |          | DN       | DN       |          |          |           |          |          |          |          |
| Cap Code   Series   CU201C   CU402C   CU603C   CU805C   CU805C   CU206C   |                  |            | l |      |      |          |            |             |     | 1        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
| Cap Voltage Code 8 4 3 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A  |                  |            | Г | Ca   | ра   | ıcit     | tan        | ice         |     | Ť        |                |       |                 |          |          |          |          |    |     |     | odu      | ct A     | vaila    | abil     | ity a    |          |          | Th       | ckn      | ess      | Cod      | es       |          |          |          |          |           |          |          |          |          |
| Cap Voltage Code 8 4 3 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A  |                  |            | R | ated | Vo   | lta      | ıge        | (VI         | DC) | 1        | 2              | 9     | 52              | 2        | 9        | 25       | 20       | ĕ  | 20( | 25( | 2        | 9        | 25       | 20       | ĕ        | 20(      | 25(      | 2        | 16       | 25       | 22       | ĕ        | 20(      | 25(      | 2        | 16       | 22        | 20       | 10       | 20(      | 22(      |
| Cap Cap Voltage Code 8 4 3 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A 8 4 3 5 1 2 A  | - Cup            | Code       | ⊢ |      |      | <u> </u> |            |             |     | +        | _              |       |                 | ┢        | -        |          |          |    |     |     | _        |          |          |          | -        |          |          | _        |          |          |          | - 1      |          |          |          |          |           |          | -        |          | -        |
| Series   C0201C   C0402C   C0603C   C0805C   C1206C   | Cap              |            | l | V    | olta | ige      | Со         | de          |     | 1        | 8              | 4     | 3               | 8        | 4        | 3        | 5        | 1  | 2   | Α   | 8        | 4        | 3        | 5        | 1        | 2        | Α        | 8        | 4        | 3        | 5        | 1        | 2        | Α        | 8        | 4        | 3         | 5        | 1        | 2        | Α        |
|   |                  | Can        | L |      |      |          |            |             |     | +        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          |          |          | _        |          |          |          |          |          |          |          |          |          |           |          |          |          |          |
|   |                  |            | l |      | Se   | ?ri      | 65         | 3           |     | Т        | •              |       |                 |          |          |          |          |    |     |     |          |          | -        | ••       | •        |          |          |          |          | -        | •••      |          |          |          |          |          | ٠.        |          | •        |          |          |
| Casa Siza/  |                  |            | l | G    | 151  |          | 314        | <b>2</b> E, | /   | -14      | 'n             | 20    | 10              |          |          | CO       | 40       | 20 |     |     |          |          | CO       | 60       | 30       |          |          |          |          | CO       | ደበ፣      | 50       |          |          |          |          | <b>C1</b> | 20       | 60       |          |          |
|   |                  |            | l | •    |      |          | <b>~</b> : |             | ,   | н        |                |       |                 |          |          |          |          |    |     |     |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |           |          |          |          |          |

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91). xx¹ Available only in D, J, K, M tolerance

These products are protected under US Patents 7,172,985 & 7,670,981, other patents pending, and any foreign counterparts.

 $xx^2$  Available only in J, K, M tolerance.



# Table 1A - Capacitance Range/Selection Waterfall (0201 - 1206 Case Sizes) cont.

|                        | Con        | Case Size/<br>Series   | C020 | 1C |          |               | C <b>O</b> 4 | 402 | 2C       |     |     |          |          | CO       | 60       | 3C       |          |               |          |          | C0       | 80   | 5C       |     |               |          |    | C1       | 20  | 6C       |          |     |
|------------------------|------------|------------------------|------|----|----------|---------------|--------------|-----|----------|-----|-----|----------|----------|----------|----------|----------|----------|---------------|----------|----------|----------|------|----------|-----|---------------|----------|----|----------|-----|----------|----------|-----|
| Cap                    | Сар        | Voltage Code           | 8 4  | 3  | 8        | 4             | 3            | 5   | 1        | 2   | Α   | 8        | 4        | 3        | 5        | 1        | 2        | Α             | 8        | 4        | 3        | 5    | 1        | 2   | Α             | 8        | 4  | 3        | 5   | 1        | 2        | Α   |
|                        | Code       | Rated Voltage (VDC)    | 5 5  | 25 | 10       | 9             | 52           | 20  | 9        | 200 | 250 | 10       | 16       | 25       | 20       | 100      | 200      | 250           | 2        | 16       | 25       | 20   | 9        | 200 | 250           | 2        | 16 | 25       | 20  | 100      | 200      | 250 |
|                        |            | Capacitance            |      | 7  |          | _             | ~            | LI) | _        | 7   |     |          |          | _        |          |          |          |               |          | ckn      |          |      | _        | 7   | 7             |          |    | ~        | LI, | _        | ~        | 7   |
|                        |            | Tolerance              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          | Din      |          |      |          |     |               |          |    |          |     |          |          |     |
| 110 - 180 pF*          | 111 - 181* | F G J K M              |      |    | ВВ       | ВВ            | ВВ           | ВВ  | ВВ       | ВВ  |     | CF       |          | CF       |          | CF       | CF       |               |          |          |          |      |          | DN  | DN            | EB       | EB | EB       | EB  | EB       | EB       | EB  |
| 200 - 270 pF*          | 201 – 271* | F G J K M              |      |    | ВВ       | ВВ            | ВВ           | ВВ  | ВВ       | ВВ  | ВВ  | CF            | DN       | DN       | DN       | DN   | DN       | DN  | DN            | EB       | EB | EB       | EB  | EB       | EB       | EB  |
| 300 pF                 | 301        | F G J K M              |      |    | ВВ       | ВВ            |              |     |          |     |     | CF       | CF       | CF       |          | CF       | CF       |               |          |          |          |      |          |     | DN            |          |    |          |     | EB       | EB       |     |
| 330 pF                 | 331        | F G J K M              |      |    | ВВ       | BB            | _            | _   | BB       | BD  | BD  | -        | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      |          | _   | DN            |          | _  | _        | _   |          | EB       | _   |
| 360 pF                 | 361        |                        |      |    | ВВ       | BB            |              | BB  |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      | 1        | 1   | DN            |          |    | EB       | 1   | EB       |          | EB  |
| 390 pF                 | 391        | F G J K M              |      |    |          | ВВ            |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      | 1        | 1   | DN            |          | EB |          |     | EB       |          | EB  |
| 430 pF                 | 431        | F G J K M              |      |    | BB       | ВВ            |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      |          | 1   | DN            |          |    | EB       | 1   | EB       |          | EB  |
| 470 pF                 | 471        | F G J K M              |      |    | ВВ       | ВВ            |              | BB  |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      |          |     | DP            |          |    | 1        | 1   | EB       |          | EB  |
| 510 pF                 | 511        | F G J K M              |      |    | BB       | BB            | _            | BB  | _        |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      | _        | _   | I DN          |          | _  |          |     | EB       |          | EB  |
| 560 pF                 | 561        | F G J K M              |      |    | BB       | BB            |              | BB  |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      |          |     | DN            |          |    |          |     | EB       |          | EB  |
| 620 pF                 | 621<br>681 | F G J K M              |      |    | BB<br>BB |               |              |     | BB<br>BB |     |     | CF<br>CF | CF<br>CF | CF<br>CF | CF<br>CF | CF<br>CF | CF<br>CF |               |          |          |          |      |          |     | I DN<br>I DN  |          |    | EB<br>EB |     | EB<br>EB | EB<br>EB |     |
| 680 pF<br>750 pF       | 751        | F G J K M              |      |    |          | BB            |              |     | BB       |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      |          |     | I DN          |          |    |          |     | EB       | EB       |     |
| 820 pF                 | 821        | F G J K M              |      |    | ВВ       | BB            |              |     | BB       |     |     | CF       | CF       | CF       | CF       | CF       | CF       | 1 -           |          |          |          |      |          |     | DN            |          |    |          |     |          | EB       |     |
| 910 pF                 | 911        | F G J K M              |      |    | BB       | BB            | _            | BB  | _        |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          | DN       |          |      |          | _   |               |          | _  | EB       | _   | EB       | EB       |     |
| 1,000 pF               | 102        | F G J K M              |      |    |          | BB            |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       | CF       |               |          |          |          |      | 1        | 1   | DP            |          | EB | 1        | 1   | EB       |          | EB  |
| 1,100 pF               | 112        | F G J K M              |      |    | ВВ       | BB            |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       | 1        |               |          |          |          |      |          | 1   | DN            |          | 1  | EB       |     | EB       |          | EB  |
| 1,200 pF               | 122        | F G J K M              |      |    | ВВ       | вв            |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       |               |          |          |          |      |          | 1   | DN            |          |    |          |     | EB       |          | EB  |
| 1,300 pF               | 132        | FGJKM                  |      |    | ВВ       |               |              | вв  |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       |               | DP       | 1        | DP       |      | 1        | 1   |               |          | 1  | 1        | EB  | EC       | EC       | EC  |
| 1,500 pF               | 152        | F G J K M              |      |    | ВВ       | ВВ            | ВВ           | ВВ  |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       | СН            | DP       | DP       | DP       | DP   | DP       | DN  | DN            | EB       | EB | EB       | EB  | ED       | EC       | EC  |
| 1,600 pF               | 162        | F G J K M              |      |    | ВВ       | ВВ            | ВВ           |     |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       | СН            | DP       | DP       | DP       | DP   | DP       | DN  | DN            | EB       | EB | EB       | EB  | ED       | ED       | ED  |
| 1,800 pF               | 182        | F G J K M              |      |    | ВВ       | ВВ            | ВВ           |     |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       | СН            | DP       | DP       | DP       | DP   | DP       | DN  | DN            | EB       | EB | EB       | EB  | ED       | ED       | ED  |
| 2,000 pF               | 202        | F G J K M              |      |    | ВВ       | ВВ            | BB           |     |          |     |     | CF       | CF       | CF       | CF       | CF       | СН       | CH            | DN       | DN       | DN       | DN   | DN       | DN  | DN            | EB       | EB | EB       | EB  | ED       | ED       | ED  |
| 2,200 pF               | 222        | F G J K M              |      |    | ВВ       | BB            | BB           |     |          |     |     | CF       | CF       | CF       | CF       |          | СН       | CH            |          |          |          |      |          | _   | DN            |          | _  | EB       |     | EE       | EE       |     |
| 2,400 pF               | 242        |                        |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       |          |               |          |          |          |      |          | 1   | DN            |          |    | EB       |     | EC       | EC       | 1   |
| 2,700 pF               | 272        | F   G   J   K   M      |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       |          |               | DN       |          |          |      |          | 1   | DN            |          | EB |          |     | EC       |          | EC  |
| 3,000 pF               | 302        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       |          |               | DP       |          |          |      |          | 1   | DN            |          |    |          |     | EC       |          | EB  |
| 3,300 pF               | 332        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       |          |               | DP       |          | DP       |      | 1        | 1   | DN            |          | 1  | EC       |     | EE       |          | EB  |
| 3,600 pF               | 362        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF<br>CF |          |               | DP<br>DE | DP       | DP       |      | DN       | _   | _             |          | _  | _        | _   | EE       | EB       | _   |
| 3,900 pF<br>4,300 pF   | 392<br>432 | F G J K M<br>F G J K M |      |    |          |               |              |     |          |     |     | CF<br>CF | CF<br>CF | CF<br>CF | CF<br>CF | CF       |          |               | DE       | DE<br>DE | DE<br>DE |      | DN<br>DN |     |               |          |    |          |     | EF<br>EC | EB<br>EB |     |
| 4,700 pF               | 472        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       | CF       |          |               | DE       | DE       | DE       |      | DN       |     |               |          |    |          |     | EC       | EB       |     |
| 5,100 pF               | 512        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          | GF       |          |               | DE       | DE       | DE       |      | DN       |     |               |          |    |          |     | ED       | EB       |     |
| 5,600 pF               | 562        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          |          |          |               | DN       |          | DN       |      | DN       |     |               |          |    |          |     | ED       | EB       |     |
| 6,200 pF               | 622        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       |          |          |               | DN       |          |          |      |          | _   | _             |          | _  | _        | EB  | EB       | EB       | _   |
| 6,800 pF               | 682        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       | CF       |          |          |               | DN       |          |          | DN   |          | 1   |               |          | 1  | EB       | 1   | EB       |          | EB  |
| 7,500 pF               | 752        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          |          |          |               | DN       |          |          |      | 1        |     | -             |          | 1  | 1        | 1   | EB       | EB       |     |
| 8,200 pF               | 822        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          |          |          |               | DN       |          |          |      | 1        | 1   | DG            |          | 1  | EC       | 1   | EB       |          | EC  |
| 9,100 pF               | 912        | FGJKM                  |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          |          |          |               | DN       | DN       | DN       | DN   | DN       |     |               | EC       | EC | EC       | EC  | EB       | EC       | EC  |
| 10,000 pF              | 103        | F G J K M              |      |    |          |               |              |     |          |     |     | CG       | CG       | CG       |          |          |          |               | DN       | DN       | DN       | DN   | DP       |     |               | ED       | _  | ED       | ED  | EB       | EC       | _   |
| 12,000 pF              | 123        | F G J K M              |      |    |          |               |              |     |          |     |     |          | CF       |          |          |          |          |               |          | DN       |          |      |          |     |               | EB       |    |          |     | EB       | ED       |     |
| 15,000 pF              | 153        | F G J K M              |      |    |          |               |              |     |          |     |     | CF       | CF       | CF       |          |          |          |               |          | DN       |          |      | DG       |     |               | EB       |    |          |     | EB       |          |     |
| 18,000 pF              | 183        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          | DN       |          |      |          |     |               |          | EB |          |     |          |          |     |
| 22,000 pF              | 223        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               | DP       | DP       |          | DF   |          |     |               | EB       | _  |          |     | EC       | EH       | EH  |
| 27,000 pF              | 273        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               | DF       |          |          |      |          |     |               | EB       |    |          | EB  |          |          |     |
| 33,000 pF              | 333        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          | DG       |          |      |          |     |               | EC       |    |          | EC  |          |          |     |
| 39,000 pF              | 393        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          | DG       |          |      |          |     |               | EC       |    |          | EE  |          |          |     |
| 47,000 pF              | 473        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               | DG       | DG       | DG       |      |          |     |               | EC       |    |          | EE  | ΕH       |          |     |
| 56,000 pF              | 563        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          |          |          |      |          |     |               | ED<br>EF |    | ED       |     |          |          |     |
| 68,000 pF<br>82,000 pF | 683<br>823 | F G J K M<br>F G J K M |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          |          |          |      |          |     |               |          | EH |          | EH  |          |          |     |
| 82,000 pF<br>0.10 μF   | 104        | F G J K M              |      |    |          |               |              |     |          |     |     |          |          |          |          |          |          |               |          |          |          |      |          |     |               |          | EH |          |     |          |          |     |
| υ.τυ μι                | 104        | Rated Voltage (VDC)    | 5 5  | 25 | 1        | 9             | 52           | 20  | 9        | 200 | 250 | 10       | 91       | 25       | 22       | 100      | 200      | 250           | 2        | 9        | 25       | 20   | 100      | 200 | 250           | 2        | 9  |          |     | 100      | 200      | 250 |
| Сар                    | Cap Code   | Voltage Code           | 8 4  | 3  | 8        | $\overline{}$ | -            | 5   |          | 2   | A   | 8        | 4        | 3        | 5        | 1        | 2        | $\overline{}$ | 8        | 4        | 3        | 5    | 1        | 2   | $\overline{}$ | 8        | 4  | _        | _   | 1        | 2        |     |
|                        |            | Case Size/Series       | C020 | 1C | <u> </u> |               | CO           | 402 | С        |     |     |          |          | C        | 060      | 3C       |          |               |          |          | Cr       | 0805 | 5C       |     |               |          |    | C        | 120 | 6C       |          |     |
|                        | l .        |                        |      |    |          |               |              |     | _        |     |     |          |          |          |          |          |          |               |          |          |          |      |          |     |               |          |    |          |     |          |          |     |

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91).
For case size 0805 Cap Codes: 220 (250V, 200V & 100V) & 101 (250V and below) Thickness Code DM

xx¹ Available only in D, J, K, M tolerance

 $xx^2$  Available only in J, K, M tolerance.



# **Table 1B - Capacitance Range/Selection Waterfall (1210 - 1812 Case Sizes)**

|                      |             |   |    |     |          | _    |      |      |     |       |          |     |      |     |          |      |      |  |      |       |          |       |       |     |      |     |     |     |
|----------------------|-------------|---|----|-----|----------|------|------|------|-----|-------|----------|-----|------|-----|----------|------|------|--|------|-------|----------|-------|-------|-----|------|-----|-----|-----|
|                      | Com         | C | as | e S | Siz      | e/   | S    | er   | ies |       |          | C   | 121  | 0C  |          |      |      | C  | 180  | 5C    |          | C18   | 08C   |     |      | C18 | 12C |     |
| Cap                  | Сар         | Г |    | Vo  | ltaç     | je C | od   | e    |     | 8     | 4        | 3   | 5    | 1   |          | 2    | Α    | 5  | 1    | 2     | 5        | 1     | 2     | Α   | 5    | 1   | 2   | Α   |
| •                    | Code        | Г | Ra | ted | Vol      | tag  | e (\ | VDC  | :)  | 2     | 9        | 25  | 20   | 9   |          | 200  | 250  | 20   | 100  | 200   | 20       | 100   | 200   | 250 | 20   | 100 | 200 | 250 |
|                      |             | Н |    |     | pac      |      |      |      |     | H     | <u> </u> | .,, |      | _   |          |      |      |  |      |       | p Thic   |       |       |     |      |     | _ 7 | 7   |
|                      |             |   |    | T   | ole      | rar  | ice  |      |     |       |          |     |      |     | <u>s</u> | ee T | able | 2 for  | Chip | Thick | ness [   | Dimen | sions |     |      |     |     |     |
| 1.0 - 9.1 pF*        | 109 - 919*  | В | C  | D   |          |      |      |      |     | FB    | FB       | FB  | FB   |     |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 10 - 91 pF*          | 100 - 910*  | 1 |    |     | F        | _    |      |      | M   | FB    | FB       | FB  | FB   |     |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 110 pF               | 111         |   |    |     | F        | G    |      | - 1  |     | FB    | FB       | FB  | FB   |     |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 120 pF               | 121         | 1 |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   |     |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 130 pF               | 131         |   |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   |     |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 150 pF               | 151         |   |    |     | F        | G    | J    | K    | . M | FB    | FB       | FB  | FB   | FE  | 1        | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 160 pF               | 161         | 1 |    |     | F        | G    | J    | K    | М   | FB    | FB       | FB  | FB   | FE  | :        | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 180 pF               | 181         | 1 |    |     | F        | G    | J    | K    | М   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 200 pF               | 201         | 1 |    |     | F        | G    | J    | K    | . M | FB    | FB       | FB  | FB   | FE  | :        | FB   | FB   |  |      |       |          |       |       |     |      |     |     |     |
| 220 pF               | 221         | 1 |    |     | F        | G    | J    | K    | M   | FB    | FB       | FB  | FB   | FE  | :        | FB   | FB   | NC   | NC   | NC    |          |       |       |     |      |     |     |     |
| 240 pF               | 241         |   |    |     | F        | G    | J    | K    | M   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    |          |       |       |     |      |     |     |     |
| 270 pF               | 271         |   |    |     | F        | G    | J    | K    | М   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    |          |       |       |     |      |     |     |     |
| 300 pF               | 301         | ı |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    |          |       |       |     |      |     |     |     |
| 330 - 430 pF*        | 331 - 431*  | İ |    |     | F        | G    | J    | Ιĸ   | М   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    | LF       | LF    | LF    | LF  |      |     |     |     |
| 470 - 910 pF*        | 471 - 911*  | İ |    |     | F        | G    | J    | Ιĸ   | М   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,000 pF             | 102         | П | П  | П   | F        | G    | J    | K    | М   | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   | NC    | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,100 pF             | 112         | İ |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,200 pF             | 122         |   |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   | FE  |          | FB   | FB   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,300 pF             | 132         | l |    |     | F        | G    | J    |      |     | FB    | FB       | FB  | FB   | FE  |          | FC   | FC   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,500 pF             | 152         | l |    |     | F        | G    | J    |      |     | FB    | FB       | FB  | FB   | FE  |          | FE   | FE   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,600 pF             | 162         |   |    |     | F        | G    | J    | _    | _   | FB    | FB       | FB  | FB   | FE  |          | FE   | FE   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 1,800 pF             | 182         |   |    |     | F        | G    | J    |      |     | FB    | FB       | FB  | FB   | FE  |          | FE   | FE   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 2,000 pF             | 202         |   |    |     | F        | G    | 1    |      |     | FB    | FB       | FB  | FB   |     |          | FE   | FE   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 2,000 pF<br>2,200 pF | 202         |   |    |     | F        | G    |      | K    |     | FB    | FB       | FB  | FB   |     |          | FG   | FG   | NC   | NC   |       | LF       | LF    | LF    | LF  | GB   | GB  | GB  | GB  |
| 2,200 pF<br>2,400 pF | 242         |   |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   |     |          | FC   | FC   | NC   | NC   |       | LF<br>LF | LF    | LF    | LF  | l GB | GB  | GD  | GB  |
| 2,400 pF<br>2,700 pF | 272         |   |    |     | F        | G    | -    | _    |     | FB    | FB       | FB  | FB   |     |          | FC   | FC   | NC   | NC   |       | LF       | LF    | I F   | I F | GB   | GB  | GB  | GB  |
| 2,700 pF<br>3,000 pF | 302         | 1 |    |     | F        | G    |      |      |     | FB    | FB       | FB  | FB   | 1   |          | FF   | FF   | INC  | INC  |       | LF<br>LF | LF    | LF    | LF  | القا | GB  | GD  | מט  |
|                      | 332         | 1 |    |     | F        | G    | 1 -  |      |     | FB    | FB       | FB  | FB   | 1   |          | FF   | FF   |  |      |       | LF<br>LF | LF    |       |     | GB   | GB  | GB  | GB  |
| 3,300 pF             | 332<br>362  | 1 |    |     | F        | G    | 1 -  |      |     | FB    | FB       | FB  | FB   |     |          | FF   | FF   |  |      |       | LF<br>LF | LF    |       |     | l GB | GB  | GB  | GB  |
| 3,600 pF<br>3,900 pF | 362<br>392  | 1 |    |     | F        | G    |      |      | M   | FB FB | FB       | FB  | FB   |     |          | FF   | FF   |  |      |       | LF<br>LF | LF    |       |     | GB   | GB  | GB  | GB  |
| ა,აიი hւ             | 372         | ╀ |    |     | <u> </u> | _    | _    | _    |     | _     | _        | _   | _    |     |          |      |      | <del>                                     </del> | -    | -     |          |       | -     | -   |      |     |     |     |
|                      |             | L | Ra |     | Vol      |      |      |      | ;)  | 2     | 9        | 25  | 20   | 100 |          | 200  | 250  | 20   | 100  | 200   | 20       | 100   | 200   | 250 | 20   | 100 | 200 | 250 |
| Сар                  | Cap<br>Code |   |    | Vo  | ltaç     | je C | od   | е    |     | 8     | 4        | 3   | 5    | 1   |          | 2    | A    | 5  | 1    | 2     | 5        | 1     | 2     | A   | 5    | 1   | 2   | A   |
|                      | Coue        |   | C  | ase | Siz      | ze/  | Sei  | ries | ;   |       |          |     | C121 | OC  |          |      |      | _ c  | 1805 | С     |          | C18   | 08C   |     |      | C18 | 12C |     |

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91). These products are protected under US Patents 7,172,985 & 7,670,981, other patents pending, and any foreign counterparts.



Table 1B - Capacitance Range/Selection Waterfall (1210 - 1812 Case Sizes) cont.

|                    | Con         | Case Size/ Series                       |    |    | C1    | 210   | C   |       |      | C.          | 1805 | C     |                 | C18         | 08C   |     |                | C18 | 12C  |      |
|--------------------|-------------|---|----|----|-------|-------|-----|-------|------|-------------|------|-------|-----------------|-------------|-------|-----|----------------|-----|------|------|
| Cap                | Сар         | Voltage Code                            | 8  | 4  | 3     | 5     | 1   | 2     | Α    | 5           | 1    | 2     | 5               | 1           | 2     | Α   | 5              | 1   | 2    | Α    |
| •                  | Code        | Rated Voltage (VDC)                     | -0 | 16 | 25    | 20    | 100 | 200   | 250  | 20          | 100  | 200   | 20              | 100         | 200   | 250 | 20             | 100 | 200  | 250  |
|                    |             | Capacitance                             |    | ,  | • • • |       |     |       |      |             |      |       | p Thic          |             |       |     |                |     | _ 7  | _ 7  |
|                    |             | Tolerance                               |    |    |       |       |     | See 1 | able | 2 for       | Chip | Thick | ness C          | <u>imen</u> | sions |     |                |     |      |      |
| 4,300 pF           | 432         | F G J K M                               | FB | FB | FB    | FB    | FF  | FF    | FF   |             |      |       | LF              | LF          |       |     |                |     |      |      |
| 4,700 pF           | 472         | F G J K M                               | FF | FF | FF    | FF    | FG  | FG    | FG   |             |      |       | LF              | LF          |       |     | GB             | GB  | GD   | GD   |
| 5,100 pF           | 512         | F G J K M                               | FB | FB | FB    | FB    | FG  | FG    | FG   |             |      |       |                 |             |       |     |                |     |      |      |
| 5,600 pF           | 562         | F G J K M                               | FB | FB | FB    | FB    | FG  | FG    | FG   |             |      |       |                 |             |       |     | GB             | GB  | GH   | GH   |
| 6,200 pF           | 622         | F G J K M                               | FB | FB | FB    | FB    | FG  | FB    | FB   |             |      |       |                 |             |       |     |                |     |      |      |
| 6,800 pF           | 682         | F G J K M                               | FB | FB | FB    | FB    | FG  | FB    | FB   |             |      |       |                 |             |       |     | GB             | GB  | GJ   | GJ   |
| 7,500 pF           | 752         | F   G   J   K   M                       | FC | FC | FC    | FC    | FC  | FB    | FB   | 1           |      |       | •               |             |       |     |                |     |      |      |
| 8,200 pF           | 822         |   | FC | FC | FC    | FC    | FC  | FB    | FB   |             |      |       | 1               |             |       |     | GB             | GH  | GB   | GB   |
| 9,100 pF           | 912         |   | FE | FE | FE    | FE    | FE  | FB    | FB   |             |      |       | 1               |             |       |     |                |     |      |      |
| 10,000 pF          | 103         | F G J K M                               | FF | FF | FF    | FF    | FF  | FB    | FB   |             |      |       |                 |             |       |     | GB             | GH  | GB   | GB   |
| 12,000 pF          | 123         | F   G   J   K   M                       | FG | FG | FG    | FG    | FB  | FB    | FB   |             |      |       | l               |             |       |     | GB             | GG  | GB   | GB   |
| 15,000 pF          | 153         | F G J K M                               | FG | FG | FG    | FG    | FB  | FC    | FC   |             |      |       |                 |             |       |     | GB             | GB  | GB   | GB   |
| 18,000 pF          | 183         | F   G   J   K   M                       | FB | FB | FB    | FB    | FB  | FC    | FC   |             |      |       |                 |             |       |     | GB             | GB  | GB   | GB   |
| 22,000 pF          | 223         | F G J K M                               | FB | FB | FB    | FB    | FB  | FF    | FF   |             |      |       |                 |             |       |     | GB             | GB  | GB   | GB   |
| 27,000 pF          | 273         | F G J K M                               | FB | FB | FB    | FB    | FB  | FG    | FG   |             |      |       |                 |             |       |     | GB             | GB  | GB   | GB   |
| 33,000 pF          | 333         | F G J K M                               | FB | FB | FB    | FB    | FB  | FH    | FH   |             |      |       |                 |             |       |     | GB             | GB  | GB   | GB   |
| 39,000 pF          | 393         | F G J K M                               | FB | FB | FB    | FB    | FE  | FH    | FH   | İ           |      |       | İ               |             |       |     | GB             | GB  | GB   | GB   |
| 47,000 pF          | 473         | F   G   J   K   M                       | FB | FB | FB    | FB    | FE  | FJ    | FJ   | İ           |      |       | İ               |             |       |     | GB             | GB  | GD   | GD   |
| 56,000 pF          | 563         | F G J K M                               | FB | FB | FB    | FB    | FF  |       |      | İ           |      |       | İ               |             |       |     | GB             | GB  | GD   | GD   |
| 68,000 pF          | 683         | F G J K M                               | FB | FB | FB    | FC    | FG  |       |      |             |      |       | l               |             |       |     | GB             | GB  | GK   | GK   |
| 82,000 pF          | 823         | F G J K M                               | FC | FC | FC    | FF    | FH  |       |      |             |      |       |                 |             |       |     | GB             | GB  | GM   | GM   |
| 0.10 μF            | 104         | F G J K M                               | FE | FE | FE    | FG    | FM  |       |      | i           |      |       | i               |             |       |     | GB             | GD  | GM   | GM   |
| 0.10 μF            | 124         | F G J K M                               | FG | FG | FG    | FH    |     |       |      |             |      |       |                 |             |       |     | GB             | GH  | 0111 | 0111 |
| 0.12 μF            | 154         | F G J K M                               | FH | FH | FH    | FM    |     |       |      |             |      |       |                 |             |       |     | GD             | GN  |      |      |
| 0.18 μF            | 184         | F G J K M                               | FJ | FJ | FJ    | 1 141 |     |       |      |             |      |       | l               |             |       |     | GH             | 011 |      |      |
| 0.10 μF            | 224         | F G J K M                               | FK | FK | FK    |       |     |       |      |             |      |       |                 |             |       |     | GK             |     |      |      |
| 0.22 μF<br>0.27 μF | 274         | F G J K M                               | FK | FK | FK    |       |     |       |      | l           |      |       |                 |             |       |     | l Gr           |     |      |      |
| 0.27 μF<br>0.33 μF | 334         | F G J K M                               |    |    |       |       |     |       |      | l           |      |       |                 |             |       |     |                |     |      |      |
| 0.33 μF<br>0.39 μF | 394         | F G J K M                               |    |    |       |       |     |       |      | l           |      |       |                 |             |       |     |                |     |      |      |
| 0.39 μF<br>0.47 μF | 394<br>474  | F G J K M                               |    |    |       |       |     |       |      | l           |      |       |                 |             |       |     |                |     |      |      |
| υ.4/ μΓ            | 4/4         | 1 | _  |    |       | _     | -   | -     | -    | <del></del> | -    | -     | <del>  _ </del> | -           | -     | -   | <del>  _</del> | -   | -    | -    |
|                    | 0           | Rated Voltage (VDC)                     | 10 | 16 | 25    | 20    | 100 | 200   | 250  | 20          | 100  | 200   | 20              | 100         | 200   | 250 | 20             | 100 | 200  | 250  |
| Cap                | Cap<br>Code | Voltage Code                            | 8  | 4  | 3     | 5     | 1   | 2     | A    | 5           | 1    | 2     | 5               | 1           | 2     | A   | 5              | 1   | 2    | A    |
|                    | Couc        | Case Size/Series                        |    |    | C.    | 12100 | C   |       |      | c           | 1805 | С     |                 | C18         | 08C   |     |                | C18 | 12C  |      |

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91). These products are protected under US Patents 7,172,985 & 7,670,981, other patents pending, and any foreign counterparts.



Table 1C - Capacitance Range/Selection Waterfall (1825 - 2225 Case Sizes)

|                    | Con  | (  |       | e S<br>erie    | ize,<br>es | /   |    | C18 | 25C  |          | С                      | 2220   | C        |                    | C22 | 25C |     |
|--------------------|------|----|-------|----------------|------------|-----|----|-----|------|----------|------------------------|--------|----------|--------------------|-----|-----|-----|
| Сар                | Сар  |    | Volt  | age (          | Code       |     | 5  | 1   | 2    | Α        | 5                      | 1      | 2        | 5                  | 1   | 2   | Α   |
|                    | Code | Ra | ted V | oltag          | je (VI     | DC) | 20 | 90  | 200  | 520      | 20                     | 9      | 200      | 20                 | 9   | 200 | 250 |
|                    |      |    |       | acita<br>Ierai | ance       |     |    |     | Proc | duct Ava | nilability<br>2 for Ch | and Ch | in Thick | ness Co<br>imensio | des |     |     |
| 3,900 pF           | 392  | F  | G     | J              | K          | М   | НВ | НВ  | НВ   | НВ       |                        |        |          |                    |     |     |     |
| 4,700 pF           | 472  | F  | G     | J              | K          | M   | НВ | HB  | HB   | HB       |                        |        |          | KE                 | KE  | KE  | KE  |
| 5,100 pF           | 512  | F  | G     | J              | K          | M   |    |     |      |          |                        |        |          | KE                 | KE  | KE  | KE  |
| 5,600 pF           | 562  | F  | G     | J              | K          | M   | HB | HB  | HB   | HB       |                        |        |          | KE                 | KE  | KE  | KE  |
| 6,200 pF           | 622  | F  | G     | J              | K          | М   |    |     |      |          |                        |        |          | KE                 | KE  | KE  | KE  |
| 6,800 pF           | 682  | F  | G     | J              | K          | M   | HB | HB  | HB   | HB       | JE                     | JE     | JB       | KE                 | KE  | KE  | KE  |
| 7,500 pF           | 752  | F  | G     | J              | K          | M   |    |     |      |          |                        |        |          | KE                 | KE  | KE  | KE  |
| 8,200 pF           | 822  | F  | G     | J              | K          | M   | HB | HB  | HB   | HB       | JE                     | JE     | JB       | KE                 | KE  | KE  | KE  |
| 9,100 pF           | 912  | F  | G     | J              | K          | M   |    |     |      |          |                        |        |          | KE                 | KE  | KE  | KE  |
| 10,000 pF          | 103  | F  | G     | J              | K          | M   | НВ | НВ  | HE   | HE       | JE                     | JE     | JB       | KE                 | KE  | KE  | KE  |
| 12,000 pF          | 123  | F  | G     | J              | K          | М   | НВ | НВ  | HE   | HE       | JE                     | JE     | JB       | KE                 | KE  | KE  | KE  |
| 15,000 pF          | 153  | F  | G     | J              | K          | М   | НВ | НВ  |      |          | JE                     | JE     | JB       | KE                 | KE  | KE  | KE  |
| 18,000 pF          | 183  | F  | G     | J              | K          | М   | НВ | HE  |      |          | JE                     | JE     | JB       | KE                 | KE  |     |     |
| 22,000 pF          | 223  | F  | G     | J              | K          | М   | НВ | HE  |      |          | JE                     | JB     | JB       | KE                 | KE  |     |     |
| 27,000 pF          | 273  | F  | G     | J              | K          | М   | НВ | HG  |      |          | JE                     | JB     | JB       | KE                 | KE  |     |     |
| 33,000 pF          | 333  | F  | G     | J              | K          | М   |    |     |      |          | JB                     | JB     | JB       | KE                 |     |     |     |
| 39,000 pF          | 393  | F  | G     | J              | K          | М   |    |     |      |          | JB                     | JB     | JB       |                    |     |     |     |
| 47,000 pF          | 473  | F  | G     | Ĵ              | K          | М   |    |     |      |          | JB                     | JB     | JB       |                    |     |     |     |
| 56,000 pF          | 563  | F  | G     | J              | K          | М   |    |     |      |          | JB                     | JB     | JB       |                    |     |     |     |
| 68,000 pF          | 683  | F  | G     | J              | K          | м   |    |     |      |          | JB                     | JB     | JB       |                    |     |     |     |
| 82,000 pF          | 823  | F  | G     | J              | K          | М   |    |     |      |          | JB                     | JB     | JB       |                    |     |     |     |
| 0.10 μF            | 104  | F  | G     | J              | K          | М   |    |     |      |          | JB                     | JB     | JD       |                    |     |     |     |
| 0.10 μF            | 124  | F  | G     | J              | K          | M   |    |     |      |          | JB                     | JB     | JD       |                    |     |     |     |
| 0.12 μF            | 154  | F  | G     | J              | K          | M   |    |     |      |          | JB                     | JB     | JG       |                    |     |     |     |
| 0.18 μF            | 184  | F  | G     | J              | K          | M   |    |     |      |          | JB                     | JD     | JG       |                    |     |     |     |
| 0.22 μF            | 224  | F  | G     | J              | K          | M   |    |     |      |          | JB                     | JD     | JL       |                    |     |     |     |
| 0.27 μF            | 274  | F  | G     | J              | K          | M   |    |     |      |          | JB                     | JF     | 02       |                    |     |     |     |
| 0.27 μr<br>0.33 μF | 334  | F  | G     | J              | K          | M   |    |     |      |          | JD                     | JG     |          |                    |     |     |     |
| 0.39 μF            | 394  | F  | G     | J              | K          | M   |    |     |      |          | JG                     | 00     |          |                    |     |     |     |
| 0.47 μF            | 474  | F  | G     | J              | K          | M   |    |     |      |          | JG                     |        |          |                    |     |     |     |
| · •                |      | Ra | ted V | oltag          | je (V      |     | 50 | 100 | 200  | 250      | 20                     | 100    | 200      | 50                 | 100 | 200 | 250 |
| Сар                | Сар  |    | Volt  | age (          | Code       |     | 5  | 1   | 2    | Α        | 5                      | 1      | 2        | 5                  | 1   | 2   | Α   |
| r                  | Code | С  | ase S | Size/          | Seri       | es  |    | C18 | 25C  |          |                        |        |          | C22                | 25C |     |     |

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91). These products are protected under US Patents 7,172,985 & 7,670,981, other patents pending, and any foreign counterparts.



# Table 2A - Chip Thickness/Tape & Reel Packaging Quantities

| Thickness | Case              | Thickness ±            | Paper Q        | uantity <sup>1</sup> | Plastic (      | Quantity       |
|-----------|-------------------|------------------------|----------------|----------------------|----------------|----------------|
| Code      | Size <sup>1</sup> | Range (mm)             | 7" Reel        | 13" Reel             | 7" Reel        | 13" Reel       |
| AB        | 0201              | 0.30±0.03              | 15,000         | 0                    | 0              | 0              |
| BB        | 0402              | 0.50±0.05              | 10,000         | 50,000               | 0              | 0              |
| BD        | 0402              | 0.55±0.05              | 10,000         | 50,000               | 0              | 0              |
| CF        | 0603              | 0.80±0.07              | 4,000          | 15,000               | 0              | 0              |
| CG        | 0603              | 0.80±0.10              | 4,000          | 15,000               | 0              | 0              |
| CH<br>DM  | 0603<br>0805      | 0.85±0.07<br>0.70±0.20 | 4,000<br>4,000 | 10,000<br>15,000     | 0<br>0         | 0<br>0         |
| DN        | 0805              | 0.70±0.20<br>0.78±0.10 | 4,000          | 15,000               | 0              | 0              |
| DP        | 0805              | 0.70±0.10<br>0.90±0.10 | 4,000          | 15,000               | 0              | 0              |
| DE        | 0805              | 1.00±0.10              | 0              | 0                    | 2,500          | 10,000         |
| DF        | 0805              | 1.10±0.10              | 0              | 0                    | 2,500          | 10,000         |
| DG        | 0805              | 1.25±0.15              | Ö              | Ö                    | 2,500          | 10,000         |
| EB        | 1206              | 0.78±0.10              | 0              | 0                    | 4,000          | 10,000         |
| EC        | 1206              | 0.90±0.10              | 0              | 0                    | 4,000          | 10,000         |
| ED        | 1206              | 1.00±0.10              | 0              | 0                    | 2,500          | 10,000         |
| EE        | 1206              | 1.10±0.10              | 0              | 0                    | 2,500          | 10,000         |
| EF        | 1206              | 1.20±0.15              | 0              | 0                    | 2,500          | 10,000         |
| EH        | 1206              | 1.60±0.20              | 0              | 0                    | 2,000          | 8,000          |
| FB        | 1210              | 0.78±0.10              | 0              | 0                    | 4,000          | 10,000         |
| FC        | 1210              | 0.90±0.10              | 0              | 0                    | 4,000          | 10,000         |
| FE        | 1210              | 1.00±0.10              | 0              | 0                    | 2,500          | 10,000         |
| FF        | 1210              | 1.10±0.10              | 0              | 0                    | 2,500          | 10,000         |
| FG        | 1210              | 1.25±0.15              | 0              | 0                    | 2,500          | 10,000         |
| FH        | 1210              | 1.55±0.15              | 0              | 0                    | 2,000          | 8,000          |
| FM<br>FJ  | 1210<br>1210      | 1.70±0.20              | 0<br>0         | 0                    | 2,000<br>2,000 | 8,000          |
| FK FK     | 1210              | 1.85±0.20<br>2.10±0.20 | 0              | 0<br>0               | 2,000          | 8,000<br>8,000 |
| NC        | 1805              | 1.00±0.15              | 0              | 0                    | 4,000          | 10,000         |
| LF        | 1808              | 1.00±0.15              | 0              | 0                    | 2,500          | 10,000         |
| GB        | 1812              | 1.00±0.10              | 0              | ő                    | 1,000          | 4,000          |
| GD        | 1812              | 1.25±0.15              | 0              | Ö                    | 1,000          | 4,000          |
| GH        | 1812              | 1.40±0.15              | 0              | 0                    | 1,000          | 4,000          |
| GG        | 1812              | 1.55±0.10              | 0              | 0                    | 1,000          | 4,000          |
| GK        | 1812              | 1.60±0.20              | 0              | 0                    | 1,000          | 4,000          |
| GJ        | 1812              | 1.70±0.15              | 0              | 0                    | 1,000          | 4,000          |
| GN        | 1812              | 1.70±0.20              | 0              | 0                    | 1,000          | 4,000          |
| GM        | 1812              | 2.00±0.20              | 0              | 0                    | 500            | 2,000          |
| HB        | 1825              | 1.10±0.15              | 0              | 0                    | 1,000          | 4,000          |
| HE        | 1825              | 1.40±0.15              | 0              | 0                    | 1,000          | 4,000          |
| HG        | 1825              | 1.60±0.20              | 0              | 0                    | 1,000          | 4,000          |
| JB<br>JD  | 2220              | 1.00±0.15              | 0              | 0                    | 1,000          | 4,000          |
| JD<br>JE  | 2220<br>2220      | 1.30±0.15<br>1.40±0.15 | 0<br>0         | 0                    | 1,000<br>1,000 | 4,000<br>4,000 |
| JF        | 2220              | 1.50±0.15              | 0              | 0                    | 1,000          | 4,000          |
| JG        | 2220              | 1.70±0.15              | 0              | 0                    | 1,000          | 4,000          |
| JL        | 2220              | 2.00±0.20              | 0              | 0                    | 500            | 2,000          |
| KE        | 2225              | 1.40±0.15              | 0              | Ö                    | 1,000          | 4,000          |
| Thickness | Case              | Thickness ±            | 7" Reel        | 13" Reel             | 7" Reel        | 13" Reel       |
| Code      | Size <sup>1</sup> | Range (mm)             | Paper Q        | uantity <sup>1</sup> | Plastic        | Quantity       |

Package quantity based on finished chip thickness specifications.

<sup>&</sup>lt;sup>1</sup> If ordering using the 2 mm Tape and Reel pitch option, the packaging quantity outlined in the table above will be doubled. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information".



## Table 2B - Bulk Packaging Quantities

| Dookoa   | ing Type               | Loose Pa               | ackaging               |
|----------|------------------------|------------------------|------------------------|
| Раскау   | ing Type               | Bulk Bag               | (default)              |
| Packagir | ng C-Spec <sup>1</sup> | N,                     | /A²                    |
| Case     | e Size                 | Packaging Quantities ( | pieces/unit packaging) |
| EIA (in) | Metric (mm)            | Minimum                | Maximum                |
| 0402     | 1005                   |                        |                        |
| 0603     | 1608                   |                        |                        |
| 0805     | 2012                   |                        | 50,000                 |
| 1206     | 3216                   |                        |                        |
| 1210     | 3225                   | 1                      |                        |
| 1808     | 4520                   | ľ                      |                        |
| 1812     | 4532                   |                        |                        |
| 1825     | 4564                   |                        | 20,000                 |
| 2220     | 5650                   |                        |                        |
| 2225     | 5664                   |                        |                        |

<sup>&</sup>lt;sup>1</sup> The "Packaging C-Spec" is a 4 to 8 digit code which identifies the packaging type and/or product grade. When ordering, the proper code must be included in the 15th through 22nd character positions of the ordering code. See "Ordering Information" section of this document for further details. Commercial Grade product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging. Contact KEMET if you require a bulk bag packaging option for Automotive Grade products.

<sup>&</sup>lt;sup>2</sup> A packaging C-Spec (see note 1 above) is not required for "Bulk Bag" packaging (excluding Anti-Static Bulk Bag and Automotive Grade products). The 15th through 22nd character positions of the ordering code should be left blank. All product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging.



Table 3 - Chip Capacitor Land Pattern Design Recommendations per IPC-7351


| EIA<br>Size<br>Code | Metric<br>Size<br>Code | Size   Maximum (Most)   Median (Nominal) |      |      | )    | Density Level C:<br>Minimum (Least)<br>Land Protrusion (mm) |      |      |      |      |      |      |      |      |      |      |
|---------------------|------------------------|--|------|------|------|---|------|------|------|------|------|------|------|------|------|------|
| Code                | Oode                   | С  | Y    | X    | V1   | V2  | С    | Y    | X    | V1   | V2   | С    | Y    | X    | V1   | V2   |
| 0201                | 0603                   | 0.38                                     | 0.56 | 0.52 | 1.80 | 1.00  | 0.33 | 0.46 | 0.42 | 1.50 | 0.80 | 0.28 | 0.36 | 0.32 | 1.20 | 0.60 |
| 0402                | 1005                   | 0.50                                     | 0.72 | 0.72 | 2.20 | 1.20  | 0.45 | 0.62 | 0.62 | 1.90 | 1.00 | 0.40 | 0.52 | 0.52 | 1.60 | 0.80 |
| 0603                | 1608                   | 0.90                                     | 1.15 | 1.10 | 4.00 | 2.10  | 0.80 | 0.95 | 1.00 | 3.10 | 1.50 | 0.60 | 0.75 | 0.90 | 2.40 | 1.20 |
| 0805                | 2012                   | 1.00                                     | 1.35 | 1.55 | 4.40 | 2.60  | 0.90 | 1.15 | 1.45 | 3.50 | 2.00 | 0.75 | 0.95 | 1.35 | 2.80 | 1.70 |
| 1206                | 3216                   | 1.60                                     | 1.35 | 1.90 | 5.60 | 2.90  | 1.50 | 1.15 | 1.80 | 4.70 | 2.30 | 1.40 | 0.95 | 1.70 | 4.00 | 2.00 |
| 1210                | 3225                   | 1.60                                     | 1.35 | 2.80 | 5.65 | 3.80  | 1.50 | 1.15 | 2.70 | 4.70 | 3.20 | 1.40 | 0.95 | 2.60 | 4.00 | 2.90 |
| 1210 <sup>1</sup>   | 3225                   | 1.50                                     | 1.60 | 2.90 | 5.60 | 3.90  | 1.40 | 1.40 | 2.80 | 4.70 | 3.30 | 1.30 | 1.20 | 2.70 | 4.00 | 3.00 |
| 1808                | 4520                   | 2.30                                     | 1.75 | 2.30 | 7.40 | 3.30  | 2.20 | 1.55 | 2.20 | 6.50 | 2.70 | 2.10 | 1.35 | 2.10 | 5.80 | 2.40 |
| 1812                | 4532                   | 2.15                                     | 1.60 | 3.60 | 6.90 | 4.60  | 2.05 | 1.40 | 3.50 | 6.00 | 4.00 | 1.95 | 1.20 | 3.40 | 5.30 | 3.70 |
| 1825                | 4564                   | 2.15                                     | 1.60 | 6.90 | 6.90 | 7.90  | 2.05 | 1.40 | 6.80 | 6.00 | 7.30 | 1.95 | 1.20 | 6.70 | 5.30 | 7.00 |
| 2220                | 5650                   | 2.75                                     | 1.70 | 5.50 | 8.20 | 6.50  | 2.65 | 1.50 | 5.40 | 7.30 | 5.90 | 2.55 | 1.30 | 5.30 | 6.60 | 5.60 |
| 2225                | 5664                   | 2.70                                     | 1.70 | 6.90 | 8.10 | 7.90  | 2.60 | 1.50 | 6.80 | 7.20 | 7.30 | 2.50 | 1.30 | 6.70 | 6.50 | 7.00 |

¹ Only for capacitance values ≥ 22 μF

**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805 and 1206 case sizes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes. **Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC-7351).

Image below based on Density Level B for an EIA 1210 case size.





# **Soldering Process**

#### **Recommended Soldering Technique:**


- Solder wave or solder reflow for EIA case sizes 0603, 0805 and 1206
- · All other EIA case sizes are limited to solder reflow only

### **Recommended Reflow Soldering Profile:**

KEMET's families of surface mount multilayer ceramic capacitors (SMD MLCCs) are compatible with wave (single or dual), convection, IR or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/ J-STD-020 standard for moisture sensitivity testing. These devices can safely withstand a maximum of three reflow passes at these conditions.

| Profile Feature  | Termination Finish    |                       |  |  |  |
|--|-----------------------|-----------------------|--|--|--|
| 1 Tome Teature   | SnPb                  | 100% Matte Sn         |  |  |  |
| Preheat/Soak   |                       |                       |  |  |  |
| Temperature Minimum (T <sub>Smin</sub> )                         | 100°C                 | 150°C                 |  |  |  |
| Temperature Maximum (T <sub>Smax</sub> )                         | 150°C                 | 200°C                 |  |  |  |
| Time ( $t_s$ ) from $T_{smin}$ to $T_{smax}$                     | 60 - 120 seconds      | 60 - 120 seconds      |  |  |  |
| Ramp-Up Rate (T <sub>L</sub> to T <sub>P</sub> )                 | 3°C/second<br>maximum | 3°C/second<br>maximum |  |  |  |
| Liquidous Temperature $(T_L)$                                    | 183°C                 | 217°C                 |  |  |  |
| Time Above Liquidous (t <sub>L</sub> )                           | 60 - 150 seconds      | 60 - 150 seconds      |  |  |  |
| Peak Temperature (T <sub>P</sub> )                               | 235°C                 | 260°C                 |  |  |  |
| Time Within 5°C of Maximum<br>Peak Temperature (t <sub>p</sub> ) | 20 seconds<br>maximum | 30 seconds<br>maximum |  |  |  |
| Ramp-Down Rate $(T_p \text{ to } T_L)$                           | 6°C/second<br>maximum | 6°C/second<br>maximum |  |  |  |
| Time 25°C to Peak<br>Temperature                                 | 6 minutes<br>maximum  | 8 minutes<br>maximum  |  |  |  |

Note 1: All temperatures refer to the center of the package, measured on the capacitor body surface that is facing up during assembly reflow.

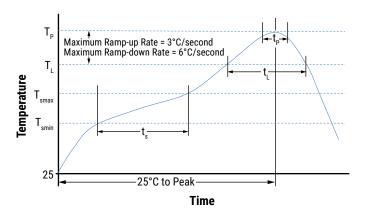



## Table 4 - Performance & Reliability: Test Methods and Conditions


| Stress                                   | Reference                             | Test or Inspection Method  |  |  |  |
|--|---------------------------------------|--|--|--|--|
| Terminal Strength                        | JIS-C-6429                            | Appendix 1, Note: Force of 1.8 kg for 60 seconds.  |  |  |  |
| Board Flex JIS-C-6429                    |                                       | Appendix 2, Note: Standard termination system – 2.0 mm (minimum) for all except 3 mm for COG. Flexible termination system – 3.0 mm (minimum).  |  |  |  |
|  |                                       | Magnification 50 X. Conditions:  |  |  |  |
| Caldarahilitu                            | J-STD-002                             | a) Method B, 4 hours at 155°C, dry heat at 235°C   |  |  |  |
| Solderability                            | J-51D-002                             | b) Method B at 215°C category 3  |  |  |  |
|  |                                       | c) Method D, category 3 at 260°C   |  |  |  |
| Temperature Cycling JESD22 Method JA-104 |                                       | 1,000 Cycles (-55°C to +125°C). Measurement at 24 hours +/- 4 hours after test conclusion.   |  |  |  |
| Biased Humidity                          | MIL-STD-202 Method                    | Load Humidity: 1,000 hours 85°C/85% RH and rated voltage. Add 100 K ohm resistor.  Measurement at 24 hours +/- 4 hours after test conclusion.  Low Volt Humidity: 1,000 hours 85°C/85% RH and 1.5 V. Add 100 K ohm resistor.                         |  |  |  |
|  |                                       | Measurement at 24 hours +/- 4 hours after test conclusion.   |  |  |  |
| Moisture Resistance                      | MIL-STD-202 Method<br>106             | t = 24 hours/cycle. Steps 7a and 7b not required.<br>Measurement at 24 hours +/- 4 hours after test conclusion.  |  |  |  |
| Thermal Shock                            | MIL-STD-202 Method<br>107             | -55°C/+125°C. Note: Number of cycles required – 300, maximum transfer time – 20 seconds, dwell time – 15 minutes. Air – Air.   |  |  |  |
| High Temperature Life                    | MIL-STD-202 Method<br>108<br>/EIA-198 | 1,000 hours at 125°C (85°C for X5R, Z5U and Y5V) with 2 X rated voltage applied.   |  |  |  |
| Storage Life                             | MIL-STD-202 Method<br>108             | 150°C, 0 VDC for 1,000 hours.  |  |  |  |
| Vibration                                | MIL-STD-202 Method<br>204             | 5 g's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8" X 5" PCB 0.031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10 – 2,000 Hz |  |  |  |
| Mechanical Shock                         | MIL-STD-202 Method<br>213             | Figure 1 of Method 213, Condition F.   |  |  |  |
| Resistance to Solvents                   | MIL-STD-202 Method<br>215             | Add aqueous wash chemical, OKEM Clean or equivalent.   |  |  |  |

# **Storage and Handling**

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within 1.5 years of receipt.



### Construction

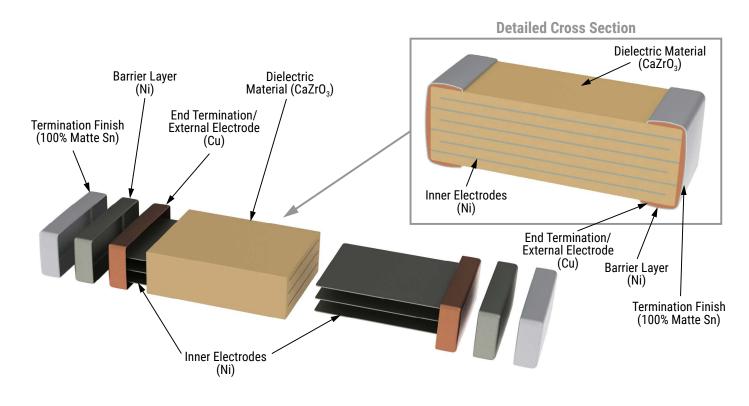

# **Capacitor Marking (Optional):**

Laser marking option is not available on:

- · COG, Ultra Stable X8R and Y5V dielectric devices
- · EIA 0402 case size devices
- EIA 0603 case size devices with Flexible Termination option.
- · KPS Commercial and Automotive grade stacked devices.

These capacitors are supplied unmarked only.



## **Tape & Reel Packaging Information**

KEMET offers multilayer ceramic chip capacitors packaged in 8, 12 and 16 mm tape on 7" and 13" reels in accordance with EIA Standard 481. This packaging system is compatible with all tape-fed automatic pick and place systems. See Table 2 for details on reeling quantities for commercial chips.

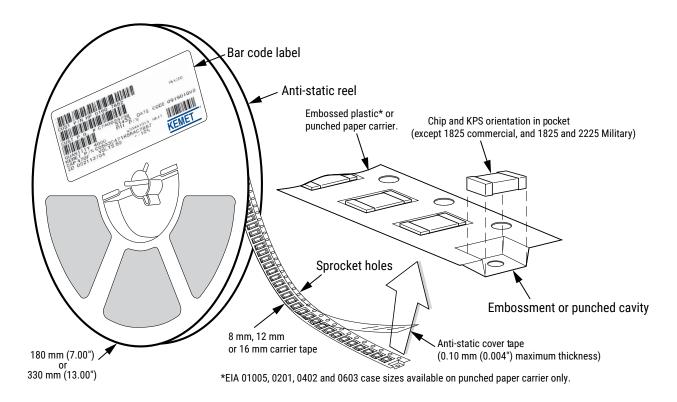


Table 5 - Carrier Tape Configuration, Embossed Plastic & Punched Paper (mm)

|                      | Tape | Embosse | d Plastic          | Punched Paper |          |  |
|----------------------|------|---------|--------------------|---------------|----------|--|
| <b>EIA Case Size</b> | Size | 7" Reel | 13" Reel           | 7" Reel       | 13" Reel |  |
|                      | (W)* | Pitch   | (P <sub>1</sub> )* | Pitch (P₁)*   |          |  |
| 01005 - 0402         | 8    |         |                    | 2             | 2        |  |
| 0603                 | 8    |         |                    | 2/4           | 2/4 -    |  |
| 0805                 | 8    | 4       | 4                  | 4             | 4        |  |
| 1206 - 1210          | 8    | 4       | 4                  | 4             | 4        |  |
| 1805 - 1808          | 12   | 4       | 4                  |               |          |  |
| ≥ 1812               | 12   | 8       | 8                  |               |          |  |
| KPS 1210             | 12   | 8       | 8                  |               |          |  |
| KPS 1812<br>and 2220 | 16   | 12      | 12                 |               |          |  |
| Array 0612           | 8    | 4       | 4                  |               |          |  |

<sup>\*</sup>Refer to Figures 1 and 2 for W and  $P_1$  carrier tape reference locations.

#### **New 2 mm Pitch Reel Options\***

|   | Packaging<br>Ordering Code<br>(C-Spec) | Packaging Type/Options             |
|---|--|------------------------------------|
| • | C-3190                                 | Automotive grade 7" reel unmarked  |
|   | C-3191                                 | Automotive grade 13" reel unmarked |
|   | C-7081                                 | Commercial grade 7" reel unmarked  |
|   | C-7082                                 | Commercial grade 13" reel unmarked |

<sup>\* 2</sup> mm pitch reel only available for 0603 EIA case size. 2 mm pitch reel for 0805 EIA case size under development.


#### Benefits of Changing from 4 mm to 2 mm Pitching Spacing

- · Lower placement costs.
- Double the parts on each reel results in fewer reel changes and increased efficiency.
- Fewer reels result in lower packaging, shipping and storage costs, reducing waste.

<sup>\*</sup>Refer to Tables 6 and 7 for tolerance specifications.



# Figure 1 – Embossed (Plastic) Carrier Tape Dimensions

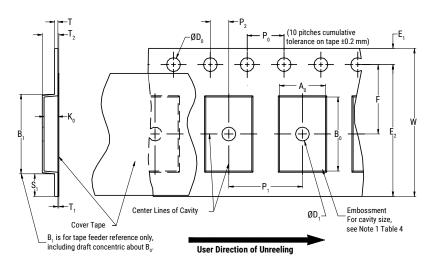

## **Table 6 – Embossed (Plastic) Carrier Tape Dimensions**


Metric will govern

|           | Constant Dimensions — Millimeters (Inches) |                                  |                              |                             |                              |                           |                                  |                                |                           |  |
|-----------|--|----------------------------------|------------------------------|-----------------------------|------------------------------|---------------------------|----------------------------------|--------------------------------|---------------------------|--|
| Tape Size | D <sub>0</sub>                             | D <sub>1</sub> Minimum<br>Note 1 | E <sub>1</sub>               | P <sub>0</sub>              | P <sub>2</sub>               | R Reference<br>Note 2     | S <sub>1</sub> Minimum<br>Note 3 | T<br>Maximum                   | T <sub>1</sub><br>Maximum |  |
| 8 mm      |  | 1.0<br>(0.039)                   |                              |                             |                              | 25.0<br>(0.984)           |                                  |                                |                           |  |
| 12 mm     | 1.5 +0.10/-0.0<br>(0.059 +0.004/-0.0)      | 1.5                              | 1.75 ±0.10<br>(0.069 ±0.004) | 4.0 ±0.10<br>(0.157 ±0.004) | 2.0 ±0.05<br>(0.079 ±0.002)  | 30                        | 0.600<br>(0.024)                 | 0.600<br>(0.024)               | 0.100<br>(0.004)          |  |
| 16 mm     |  | (0.059)                          |                              |                             |                              | (1.181)                   |                                  |                                |                           |  |
|           | Variable Dimensions — Millimeters (Inches) |                                  |                              |                             |                              |                           |                                  |                                |                           |  |
| Tape Size | Pitch                                      | B <sub>1</sub> Maximum<br>Note 4 | $E_2$ Minimum                | F                           | P <sub>1</sub>               | T <sub>2</sub><br>Maximum | W<br>Maximum                     | A <sub>0</sub> ,B <sub>0</sub> | & K <sub>0</sub>          |  |
| 8 mm      | Single (4 mm)                              | 4.35<br>(0.171)                  | 6.25<br>(0.246)              | 3.5 ±0.05<br>(0.138 ±0.002) | 4.0 ±0.10<br>(0.157 ±0.004)  | 2.5<br>(0.098)            | 8.3<br>(0.327)                   |                                |                           |  |
| 12 mm     | Single (4 mm)<br>and double (8 mm)         | 8.2<br>(0.323)                   | 10.25<br>(0.404)             | 5.5 ±0.05<br>(0.217 ±0.002) | 8.0 ±0.10<br>(0.315 ±0.004)  | 4.6<br>(0.181)            | 12.3<br>(0.484)                  | Note 5                         |                           |  |
| 16 mm     | Triple (12 mm)                             | 12.1<br>(0.476)                  | 14.25<br>(0.561)             | 7.5 ±0.05<br>(0.138 ±0.002) | 12.0 ±0.10<br>(0.157 ±0.004) | 4.6<br>(0.181)            | 16.3<br>(0.642)                  |                                |                           |  |

- 1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of the embossment location and the hole location shall be applied independently of each other.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)
- 3. If  $S_1 < 1.0$  mm, there may not be enough area for a cover tape to be properly applied (see EIA Standard 481, paragraph 4.3, section b.)
- 4. B, dimension is a reference dimension for tape feeder clearance only.
- 5. The cavity defined by  $A_{\alpha}$ ,  $B_{\alpha}$  and  $K_{\alpha}$  shall surround the component with sufficient clearance that:
  - (a) the component does not protrude above the top surface of the carrier tape.
  - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 3.)
  - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape (see Figure 4.)
  - (e) for KPS product,  $A_0$  and  $B_0$  are measured on a plane 0.3 mm above the bottom of the pocket.
  - (f) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.



## Figure 2 - Punched (Paper) Carrier Tape Dimensions

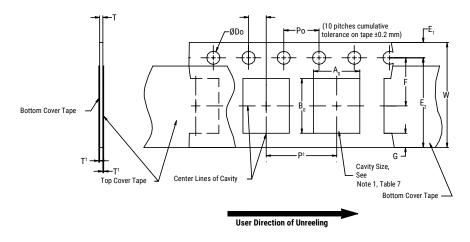

## **Table 7 - Punched (Paper) Carrier Tape Dimensions**

Metric will govern

|           | Constant Dimensions — Millimeters (Inches) |                              |                             |                             |                            |                 |                       |  |  |  |
|-----------|--|------------------------------|-----------------------------|-----------------------------|----------------------------|-----------------|-----------------------|--|--|--|
| Tape Size | D <sub>0</sub>                             | E <sub>1</sub>               | P <sub>0</sub>              | P <sub>2</sub>              | T <sub>1</sub> Maximum     | G Minimum       | R Reference<br>Note 2 |  |  |  |
| 8 mm      | 1.5 +0.10 -0.0<br>(0.059 +0.004 -0.0)      | 1.75 ±0.10<br>(0.069 ±0.004) | 4.0 ±0.10<br>(0.157 ±0.004) | 2.0 ±0.05<br>(0.079 ±0.002) | 0.10<br>(0.004)<br>maximum | 0.75<br>(0.030) | 25<br>(0.984)         |  |  |  |
|           | Variable Dimensions — Millimeters (Inches) |                              |                             |                             |                            |                 |                       |  |  |  |
| Tape Size | Pitch                                      | E2 Minimum                   | F                           | P <sub>1</sub>              | T Maximum                  | W Maximum       | $A_0B_0$              |  |  |  |
| 8 mm      | Half (2 mm)                                | 6.25                         | 3.5 ±0.05                   | 2.0 ±0.05<br>(0.079 ±0.002) | 1.1                        | 8.3<br>(0.327)  | Note 1                |  |  |  |
| 8 mm      | Single (4 mm)                              | (0.246)                      | (0.138 ±0.002)              | 4.0 ±0.10<br>(0.157 ±0.004) | (0.098)                    | 8.3<br>(0.327)  | Note 1                |  |  |  |

- 1. The cavity defined by  $A_{o}$ ,  $B_{o}$  and T shall surround the component with sufficient clearance that:
  - a) the component does not protrude beyond either surface of the carrier tape.
  - b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - c) rotation of the component is limited to 20° maximum (see Figure 3.)
  - d) lateral movement of the component is restricted to 0.5 mm maximum (see Figure 4.)
  - e) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)



## **Packaging Information Performance Notes**

1. Cover Tape Break Force: 1.0 kg minimum.


2. Cover Tape Peel Strength: The total peel strength of the cover tape from the carrier tape shall be:

| Tape Width   | Peel Strength                    |
|--------------|----------------------------------|
| 8 mm         | 0.1 to 1.0 newton (10 to 100 gf) |
| 12 and 16 mm | 0.1 to 1.3 newton (10 to 130 gf) |

The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.


**3. Labeling:** Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. *Refer to EIA Standards 556 and 624*.

## Figure 3 - Maximum Component Rotation



#### 

# Figure 4 - Maximum Lateral Movement

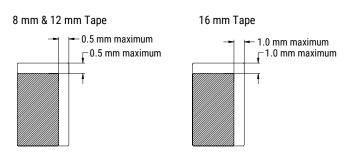

# Figure 5 - Bending Radius







Figure 6 - Reel Dimensions

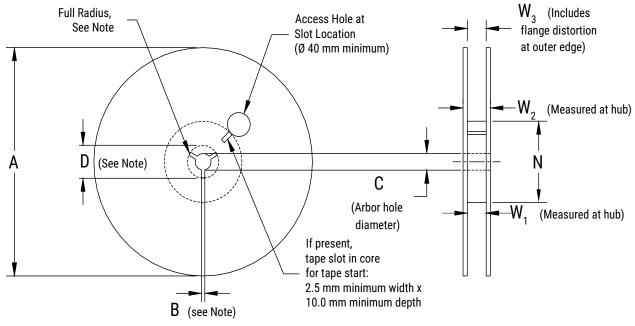

Note: Drive spokes optional; if used, dimensions B and D shall apply.


### **Table 8 - Reel Dimensions**

Metric will govern


| Constant Dimensions — Millimeters (Inches) |  |                                       |  |   |  |  |  |  |  |  |
|--|--|---------------------------------------|--|---|--|--|--|--|--|--|
| Tape Size                                  | A  | B Minimum                             | С                                      | D Minimum   |  |  |  |  |  |  |
| 8 mm                                       | 178 ±0.20                                  |                                       |  |   |  |  |  |  |  |  |
| 12 mm                                      | (7.008 ±0.008)<br>or                       | 1.5<br>(0.059)                        | 13.0 +0.5/-0.2<br>(0.521 +0.02/-0.008) | 20.2<br>(0.795)                                   |  |  |  |  |  |  |
| 16 mm                                      | 330 ±0.20<br>(13.000 ±0.008)               | , ,                                   | ,                                      | ,   |  |  |  |  |  |  |
|  | Variable Dimensions — Millimeters (Inches) |                                       |  |   |  |  |  |  |  |  |
| Tape Size                                  | N Minimum                                  | W <sub>1</sub>                        | W <sub>2</sub> Maximum                 | W <sub>3</sub>                                    |  |  |  |  |  |  |
| 8 mm                                       |  | 8.4 +1.5/-0.0<br>(0.331 +0.059/-0.0)  | 14.4<br>(0.567)                        |   |  |  |  |  |  |  |
| 12 mm                                      | 50<br>(1.969)                              | 12.4 +2.0/-0.0<br>(0.488 +0.078/-0.0) | 18.4<br>(0.724)                        | Shall accommodate tape width without interference |  |  |  |  |  |  |
| 16 mm                                      |  | 16.4 +2.0/-0.0<br>(0.646 +0.078/-0.0) | 22.4<br>(0.882)                        |   |  |  |  |  |  |  |



# Figure 7 - Tape Leader & Trailer Dimensions

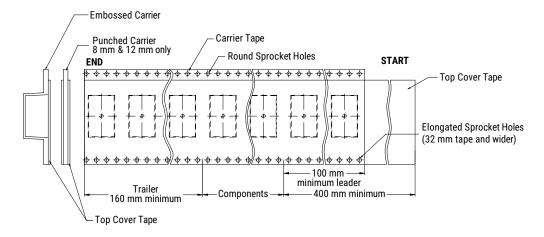

# Figure 8 – Maximum Camber

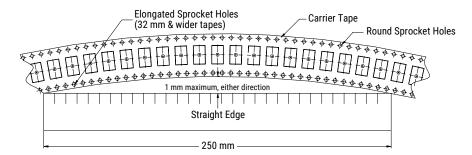



## **KEMET Electronics Corporation Sales Offices**

For a complete list of our global sales offices, please visit www.kemet.com/sales.

#### **Disclaimer**

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### **KEMET**:

```
C0402C120C5GACTU C0402C120J5GACTU C0402C100C5GACTU C0402C100D5GACTU C0402C100J5GACTU
 C0402C101J3GACTU C0402C101J5GACTU C0402C101K3GACTU C0402C129C5GACTU C0402C150C5GACTU
C0402C150G5GACTU C0402C150J4GACTU C0402C150J5GACTU C0402C300J5GACTU C0402C300K5GACTU
C0402C309C5GACTU C0402C180J5GACTU C0402C189C3GACTU C0402C189C5GACTU C0402C200J5GACTU
C0402C240J5GACTU C0402C240K5GACTU C0402C109B5GACTU C0402C109C5GACTU C0402C159C5GACTU
C0402C270J5GACTU C0402C309K5GACTU C0402C330D5GACTU C0402C330G5GACTU C0402C330J3GACTU
C0402C330J5GACTU C0402C369B5GACTU C0402C369C5GACTU C0402C479C5GACTU C0402C479D5GACTU
C0402C508C5GACTU C0402C510D5GACTU C0402C750J5GACTU C0402C360G5GACTU C0402C360J5GACTU
C0402C399C5GACTU C0402C399D5GACTU
                                 C0402C569C5GACTU
                                                  C0402C569D5GACTU C0402C689C5GACTU
C0402C220C5GACTU C0402C220G5GACTU C0402C220J3GACTU
C0402C220J4GACTU C0402C220J5GACTU C0402C229C5GACTU C0402C240J3GACTU C0402C279C5GACTU
C0402C339C5GACTU C0402C470D5GACTU C0402C470J3GACTU C0402C470J5GACTU C0402C510K5GACTU
C0402C519C5GACTU C0402C820G3GACTU C0402C820J3GACTU C0402C820J5GACTU C0603C102F3GACTM
C0603C102F3GACTU C0603C102F4GACTU C0603C102G3GACTU
                                                  C0603C102J3GACTU C0603C102J5GACTU
C0603C102J8GACTU C0603C102K3GACTU C0603C102K4GACTU
                                                  C0603C102K5GACTU C0603C111F3GACTU
C0603C111F5GACTU C0603C111G5GACTU
                                 C0603C111J5GACTU
                                                  C0603C111J8GACTU
                                                                   C0603C111K5GACTU
C0402C829C5GACTU C0402C829D5GACTU C0402C910J5GACTU C0603C100K2GACTU C0603C100K3GACTU
C0603C100K5GACTU C0603C101F1GACTU C0603C101F3GACTU C0603C101F5GAC C0603C101F5GACTM
C0603C101F5GACTU C0603C101G1GACTU C0603C101G5GACTM C0603C101G5GACTU C0603C101J1GACTU
C0603C101J3GACTU C0603C101J5GAC7411 C0603C101J5GACTM C0603C101J5GACTU C0603C101K1GACTU
```