


Linear Motor P01-23x80/50x110

Motor type <i>LinMot® P01-23x80/50x110</i>		Servo Controller	Series 100	
		Supply Voltage	24V	48V
Peak Force	F _p	N (lbf)	22 (4.9)	33 (7.4)
Continuous Force	F _c	N (lbf)	9 (2) / 16 ¹ (3.6 ¹)	
Limit Force	F _b	N (lbf)	14 (3.1)	21 (4.7)
Force Constant	c _F	N/A (lbf/A)	11 (2.5)	
Max. Stroke	s	mm (in)	110 (4.3)	
Shortened Stroke	SS	mm (in)	50 (2)	
Zero Position	ZP	mm (in)	50 (2)	
Max. Acceleration	a	m/s ² (10 ³ in/s ²)	163 (6.4)	245 (9.6)
Max. Velocity	v	m/s (in/s)	1.9 (75)	3.4 (134)
Position Repeatability		mm (in)	± 0.1 (0.004)	
Linearity		%	± 0.5	
Slider Mass	m _s	g (lb)	135 (0.3)	
Slider Length	l _s	mm (in)	190 (7.5)	


Stroke / Force - Diagram

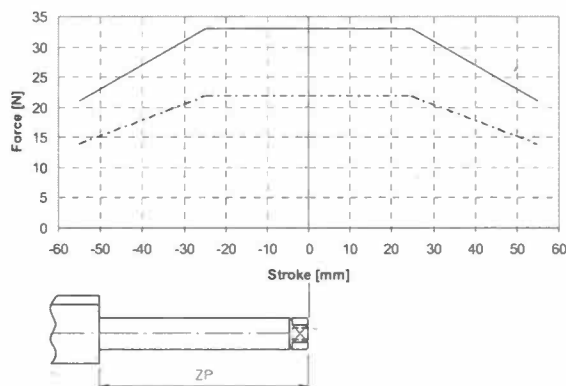

Servo Controller:

- Series 100
supply voltage 48 V DC
phase current 3.0 A
- - - Series 100
supply voltage 24 V DC
phase current 2.0 A

Position / Time - Diagram (Power 48V DC)

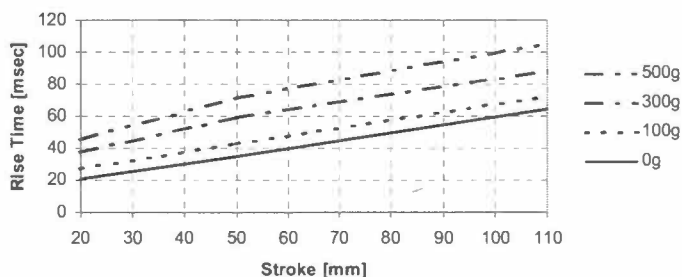

Physical dimensions Linear Motor Family P01-23x80 see page 48.

Ordering Information

Motor		Spare Parts			
(Stator and Slider)		Stator		Slider	
Description	Art. No.	Description	Art. No.	Description	Art. No.
P01-23x80/50x110	0150-1102	PS01-23x80	0150-1201	PL01-12x190/140	0150-1302
P02-23x80/50x110*	0150-1104	PS01-23x80	0150-1201	PL02-12x190/140	0150-1304


* Motor version P02 "Heavy-Duty" see page 42.

Specification of products are subject to change without notification

Linear Motor P01-23x80/30x90

Motor type <i>LinMot® P01-23x80/30x90</i>		Servo Controller Supply Voltage	Series 100	
			24V	48V
Peak Force	F _p	N (lbf)	22 (4.9)	33 (7.4)
Continuous Force	F _c	N (lbf)	9 (2) / 16 ¹ (3.6 ¹)	
Limit Force	F _b	N (lbf)	14 (3.1)	21 (4.7)
Force Constant	C _F	N/A (lbf/A)	11 (2.5)	
Max. Stroke	s	mm (in)	90 (3.6)	
Shortened Stroke	SS	mm (in)	30 (1.2)	
Zero Position	ZP	mm (in)	40 (1.6)	
Max. Acceleration	a	m/s ² (10 ³ in/s ²)	186 (7.3)	280 (11)
Max. Velocity	v	m/s (in/s)	1.9 (75)	3.4 (134)
Position Repeatability		mm (in)	± 0.1 (0.004)	
Linearity		%	± 0.5	
Slider Mass	m _s	g (lb)	118 (0.26)	
Slider Length	l _s	mm (in)	170 (6.7)	


Stroke / Force - Diagram

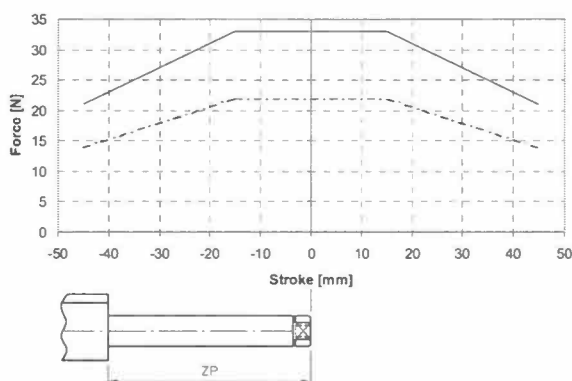

Servo Controller:

- Series 100
supply voltage 48 V DC
phase current 3.0 A
- - - Series 100
supply voltage 24 V DC
phase current 2.0 A

Position / Time - Diagram (Power 48V DC)

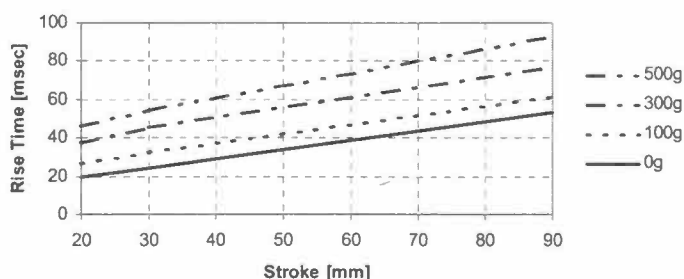

Physical dimensions Linear Motor Family P01-23x80 see page 48.

Ordering Information

Motor (Stator and Slider)		Spare Parts			
		Stator		Slider	
Description	Art. No.	Description	Art. No.	Description	Art. No.
P01-23x80/30x90	0150-1101	PS01-23x80	0150-1201	PL01-12x170/120	0150-1301
P02-23x80/30x90*	0150-1103	PS01-23x80	0150-1201	PL02-12x170/120	0150-1303

* Motor version P02 "Heavy-Duty" see page 42.

Specification of products are subject to change without notification