

DrainQ ONE

DrainQ ONE — Sewer Inspection Software

User Manual


Version 0.5.17

EN

Getting Started

Home

The Home screen is the app's start page, showing key statistics, storage status, and the most recently created projects at a glance. From here, users can start a quick capture or create a new project.

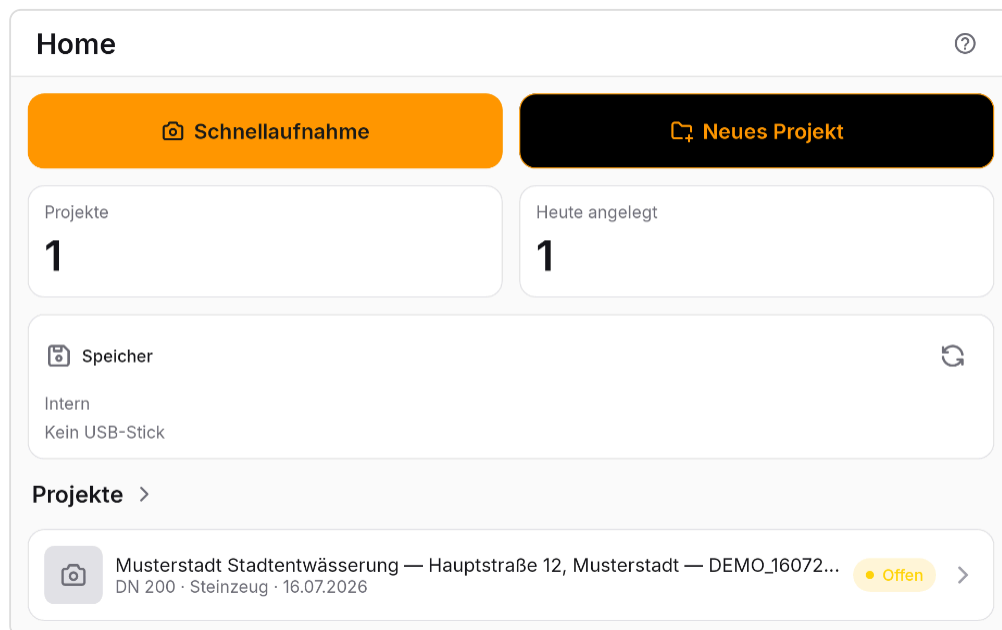

Element	Beschreibung
Home	The currently active entry in the left navigation rail. Tapping it always returns to the Home view.
Inspection	Navigation rail entry that switches to the inspection view with the live video stream.
Settings	Navigation rail entry that opens the app settings.
Quick capture	Large orange primary button that starts an inspection without a pre-created project and navigates directly to the inspection view.
New project	Secondary button with dark background that opens the form for creating a new project.
Project	Stat card showing the total count of all stored projects (here: 19).
Created today	Stat card showing how many


Element	Beschreibung
	projects were created on the current day (here: 3).
Storage	Card showing the current fill level of internal storage as a progress bar, plus a notice indicating whether a USB drive is detected.
Internal	Label for the device's internal storage; below it a green bar shows the used fraction.
53.6 GB free of 56.9 GB	Text below the progress bar stating the free and total internal storage in gigabytes.
No USB drive	Notice text that appears when no USB storage medium is connected.
Refresh	Circular refresh button at the top right of the storage card; tapping it re-reads the storage status immediately.
Project	Section heading with a chevron icon that also

Element	Beschreibung
	acts as a navigation link to the full project list.
Page 1 / 4	Page indicator and pager controls (numbered buttons 1–4 plus arrow buttons) for browsing up to 6 projects per page.
Musterstadt Stadtentwässerung — Hauptstraße 12, Musterstadt — DEMO_160726_0900_01	Project row showing the title, metadata (DN 200 · Steinzeug · 16.07.2026), and status chip. Tapping it opens the project detail view.
Open	Status chip (yellow) of the first project; indicates that the inspection has not yet been completed.
Quick capture_160726	Project row for a quick capture from 16.07.2026 with a status chip; tapping it opens the project detail view.
Open	Status chip (yellow) of the second project;

Element	Beschreibung
	indicates that the inspection has not yet been completed.
Schnellaufnahme_160726	Another project row for a quick capture from 16.07.2026; tapping it opens the project detail view.
Open	Status chip (yellow) of the third project; indicates that the inspection has not yet been completed.

Connection

The Connection screen is split into two areas: the left side contains all control and status cards, the right side shows the stream preview. Navigation is provided via the rail on the left edge with entries for Home, Inspection, and Settings.

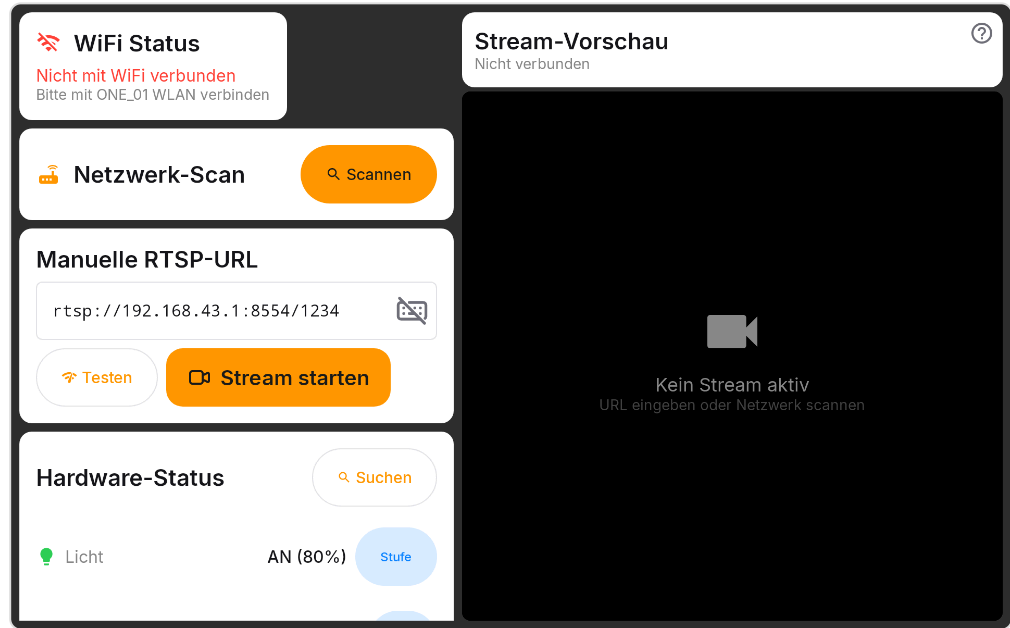

Element	Beschreibung
WiFi status	The card shows the current Wi-Fi network. In the screenshot the tablet is connected to SSID: TVNova-95" with IP address: 192.168.5.164 and Gateway: 192.168.5.1. The Wi-Fi icon next to the heading is green.
Network scan	The orange "Scanning" button searches the local network for reachable devices. The text below reads "No scan performed yet" as long as no scan has been started.
Manual RTSP URL	The text field shows the placeholder "rtsp://192.168.1.100:554/stream". A keyboard-hide icon is visible on the right side of the field. Below are two buttons: "Test" (outlined) and "Start stream" (orange, filled).
Hardware status	The card shows the state of the connected hardware. The outlined "Search" button is in the top right corner. The following rows are visible: • Light: Status "Not connected", with a light-blue "ON" button. • Probe: Status "No data", with a light-blue "ON" button. • Absolute: Value 0.72 m, with an outlined "0" button.
Stream preview	The right column shows the stream preview. The subtitle below "Stream preview" reads "Not connected". The black area contains a grey camera icon with the text "No stream active" and the hint "Enter URL or scan network".

Creating Projects

New project

This form is used to create a new inspection project. It collects general inspection details and technical pipeline data that are used as the basis for the PDF report.

 Neues Projekt

 Speichern

 Allgemeine Angaben

Projekt / Auftraggeber

Standort / Adresse



Inspektionsdatum
17.07.2026



Inspektor

Wetterbedingungen



 Leitungsdaten

Element	Beschreibung
Back	The arrow at the top left closes the form without saving and returns to the previous view.
Hide keyboard	This icon in the top right bar shows or hides the on-screen keyboard.
Save	Saves the new project with all entered data and returns to the project list.
General information	Section for general project information such as client, location, date, inspector, and weather conditions.
Project / Client	Text field for the project name or client name. This entry appears in the PDF report as the project title.
Location / Address	Address field for the inspection site. The search icon in the field looks up a typed address; the GPS icon fills in the current position; the map icon opens the map picker.
Get GPS location	The GPS icon next to the address field retrieves the current device position and fills in coordinates and address automatically.
Pick on map	The map icon next to the address field opens an interactive map where the location can be selected by tapping.
Inspection date	Date field for the day of inspection, pre-filled with the current date (here 16.07.2026). Tapping the calendar icon opens a date picker dialog.
Open calendar	The calendar icon on the right edge of the date field opens the date picker dialog for visually selecting the inspection date.
Inspector	Text field for the name of the person carrying out the inspection. The entry is shown in the PDF report.
Weather conditions	Dropdown field for selecting or typing the weather conditions at the time of inspection. The GPS icon next to it can automatically fetch current weather data.
Fetch weather via GPS	The GPS icon next to the weather field determines the current position and fills in the weather conditions automatically.
Pipeline data	Section for technical details about the pipeline to be inspected, including type, material, and diameter.
Pipeline type	Dropdown for selecting the pipeline type (e.g. sewer, wastewater, drainage, other).
Material	Dropdown for selecting the pipe material (e.g. PVC, concrete, stoneware, cast iron, unknown).
Diameter (mm)	Input field for the pipe diameter in millimetres.

Edit project

This screen allows editing all master data of an existing inspection project. General information and pipeline data are captured in separate sections and saved via the Save button.

 Allgemeine Angaben

Projekt / Auftraggeber

Musterstadt Stadtentwässerung

Standort / Adresse

Hauptstraße 12, Musterstadt



Inspektionsdatum

16.07.2026



Inspektor

M. Muster

Wetterbedingungen



 Leistungsdaten


Leistungstyp

Element	Beschreibung
Back	The left-arrow button in the top bar cancels editing and returns to the previous screen without saving any changes.
Edit project	The title indicates that an existing project is being edited rather than a new one being created.
Hide keyboard	The keyboard icon with an arrow collapses the on-screen keyboard without losing the current input focus.
Save	Saves all entered project data permanently to the local database and navigates back to the project list.
General information	Section for project-level master data including client, address, date, inspector, and weather conditions.
Project / Client	Free-text field for the project name or commissioning client; the entered value appears as the project title in the PDF report.
Location / Address	Address field for the inspection site; the magnifier icon triggers an address search, the GPS icon fetches the current device position, and the map icon allows picking a location on a map.
Search address	Magnifier button inside the address field; starts a geocoding search for the typed text.
GPS location	Target/crosshair icon to the right of the address field; retrieves the current GPS location and fills in the address automatically.
Pick on map	Map icon to the right of the GPS icon; opens a map picker where the location can be set by tapping.
Inspection date	Date field for the day of inspection; the date can be typed manually or set via the calendar icon which opens a date-picker dialog.
Date picker	Calendar icon on the right edge of the date field; opens a system date-picker dialog.
Inspector	Free-text field for the name of the inspector carrying out the inspection; printed in the PDF report.
Weather conditions	Dropdown field for the weather conditions during the inspection; presets can be selected from a list or entered manually. The GPS icon next to it fetches current weather data automatically.
Fetch weather via GPS	Target/crosshair icon to the right of the weather field; determines the GPS location and automatically populates the weather field with current conditions.
Pipeline data	Section for the technical properties of the pipeline to be inspected, such as pipeline type, material, diameter, and inspection length.
Pipeline type	Selection field for the pipeline type (e.g. wastewater, stormwater); the selection is made via a dropdown menu.
Material	Selection field for the pipe material (e.g. stoneware, concrete, PVC); the selection is made via a dropdown menu.

Element	Beschreibung
Diameter (mm)	Numeric field for the inside diameter of the pipeline in millimetres; documented in the PDF report.
Inspection length (m)	Numeric field for the length of pipeline to be inspected in metres; visible at the bottom edge of the screen and fully accessible by scrolling.

Edit project

The "Edit project" screen contains all master data for an inspection project. It is divided into two sections: "General information" and "Pipeline data". The screen is vertically scrollable.

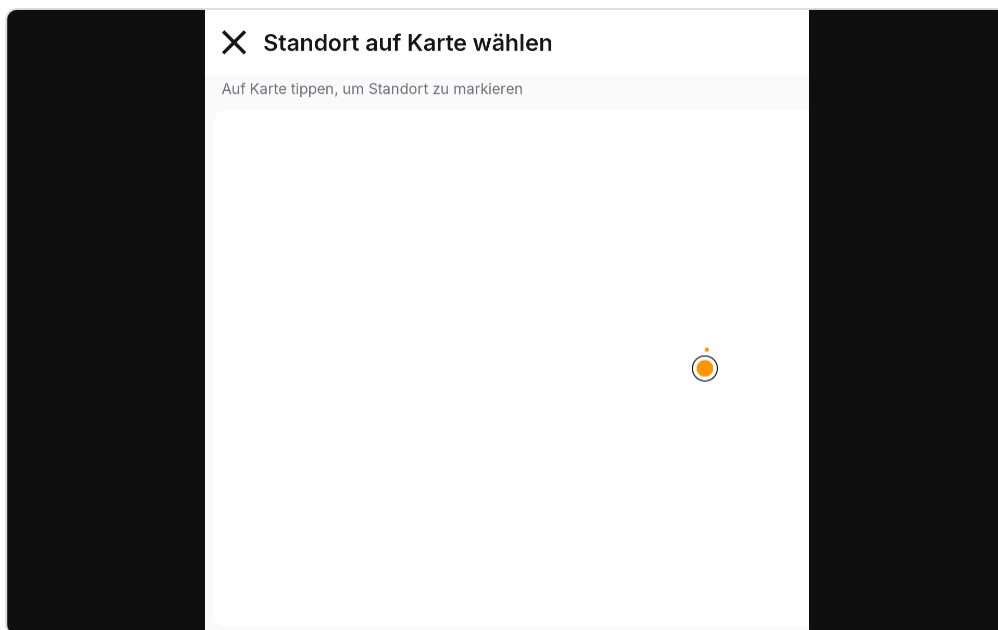


Element	Beschreibung
DrainQ logo	At the top of the navigation rail is the DrainQ logo: a black-and-yellow partial ring symbol with the text "DRAIN".
Home	Navigation entry with a house icon and the label "Home".
Inspection	Navigation entry with a video camera icon and the label "Inspection".
Settings	Navigation entry with a sliders icon and the label "Settings".
Back	Arrow button at the top left of the title bar. Closes the screen and returns to the previous view.
Title	The title bar shows "Edit project".
Hide keyboard	Icon-only button at the top right of the title bar (keyboard-hide icon). Hides the software keyboard.
Save	Orange button at the top right with a floppy disk icon and the label "Save". Saves the project.
General information	First section with an orange info-circle icon and the heading "General information".
Project / Client	Text field with the label "Project / Client". The example shows "Musterstadt Stadtentwässerung".
Location / Address	Text field with the label "Location / Address". The example shows "Hauptstrasse 12, Musterstadt". Three icons appear to the right of the field: a magnifier icon (address search), an orange crosshair icon (GPS location), and an orange map icon (pick location on map).
Inspection date	Text field with the label "Inspection date". The example shows "16.07.2026". A calendar icon appears inside the field on the right.
Inspector	Text field with the label "Inspector". The example shows "M. Muster".
Weather conditions	Dropdown field with the label "Weather conditions" and a dropdown arrow. An orange crosshair icon appears to the right.
Pipeline data	Second section with an orange ruler icon and the heading "Pipeline data".
Pipeline type	Dropdown field with the label "Pipeline type" and a dropdown arrow. The example shows "Schmutzwasser" selected.
Material	Dropdown field with the label "Material" and a dropdown arrow. The example shows "Steinzeug" selected.
Diameter (mm)	Text field with the label "Diameter (mm)". The example shows "200".
Inspection length (m)	Text field with the label "Inspection length (m)", partially visible at the bottom of the screen (the screen is scrollable downward).

Project List

Projects

The project list shows all saved inspection sections and quick captures. Page 1 of 4 is active; use the page buttons or arrows to navigate between pages. The search field can be used to filter projects.

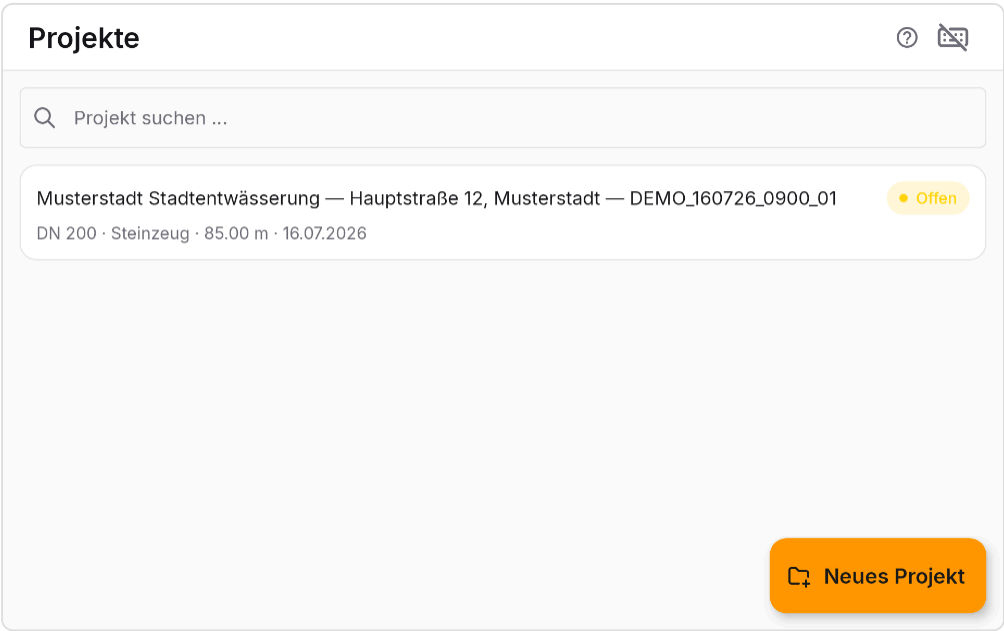


Element	Beschreibung
Navigation rail (left)	The left rail shows the DrainQ logo and three navigation entries: Home, Inspection, and Settings.
Page title	The title reads "Project". To the right, the pager shows "Page 1 / 4" with page buttons 1 (orange, active), 2, 3, 4 and forward/back arrows.
Keyboard hide button	The icon in the top right hides the on-screen keyboard.
Search field	The search field with placeholder "Search project ..." filters the list by project number, location address, and client. The search is not case-sensitive.
Project card	Each card shows a status badge on the right ("Open" throughout). Full inspection project cards show up to three title parts separated by " — " (client, location, project number) and below that metadata such as DN value, material, length, and date. Quick capture cards (e.g. "Quick capture_160726", "Schnellaufnahme_160726") show only a single name and below it only the date.
Status badge	The "Open" badge with a yellow dot is displayed on every visible card.
"New project" button	The orange button in the bottom right with a folder icon and the label "New project" opens the form for creating a new project.

Inspection

Inspection Live


The inspection screen displays the camera's live video stream in full screen and provides the main controls for recording, photo capture, and damage documentation in a toolbar at the bottom edge.

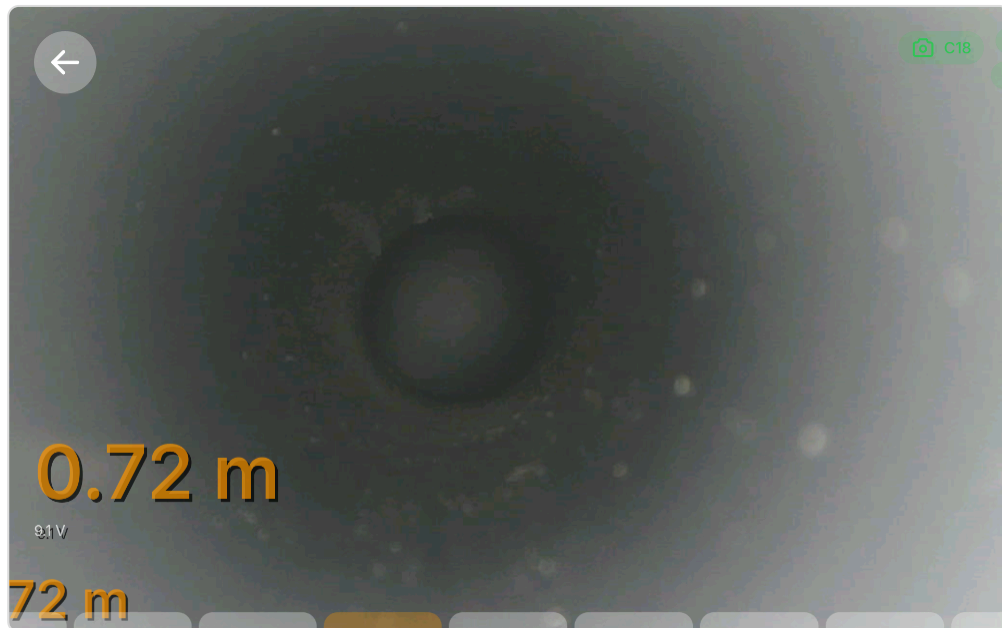

Element	Beschreibung
Back	The back arrow in the top-left corner leaves the inspection screen. When a project is active, the app returns to the project detail view; otherwise it navigates to the previous screen.
Camera head indicator	The green chip in the top-right area shows the detected camera head type (e.g. C10 or C18) from serial telemetry. It is only displayed when a camera head has been detected.
Battery indicator	The green chip with battery icon shows the Android tablet battery level as a percentage. Below 20 % the chip turns red.
Live video stream	The entire screen area shows the live video feed from the inspection camera in full screen. A single tap toggles the control bar; a double tap zooms to 2× or resets the zoom.
0.72 m	The meter readout in the bottom-left corner shows the current cable meter position of the camera in metres. The value updates live from hardware telemetry.
Power	A short press on Power has no direct action. A long press opens the dialog to exit the app.
Light	The Light button opens a slider popup above the button on first tap, allowing the camera illumination to be set from 0 to 100 %. Each subsequent tap increases brightness by 10 %.
Probe	The Probe button opens a frequency selection popup above the button on first tap. Subsequent presses cycle through the available probe transmit frequencies.
Recording	The highlighted Recording tile (amber colour) starts a video recording. During an active recording the icon changes to Pause or Resume; a tap toggles between pausing and continuing the recording.
Stop	The Stop button ends an active video recording and finalises the output file.
Photo	The Photo button immediately captures a still image from the live stream and saves it with OSD overlay in the current project. A brief white flash animation confirms the capture.
Damage	The Damage button captures a screenshot of the current frame and opens the damage dialog to record a preset category, metre position, and optional free text.
Gallery	The Gallery button navigates to the project detail view to review recorded photos, videos, and damage entries.
Settings	The Settings button opens the app settings where OSD options, connection settings, and other preferences can be configured.

Inspection — Recording Active

The inspection screen shows the live camera stream full-screen and the current metre counter reading. While a recording is active, the Recording button in the bottom toolbar is highlighted in amber.

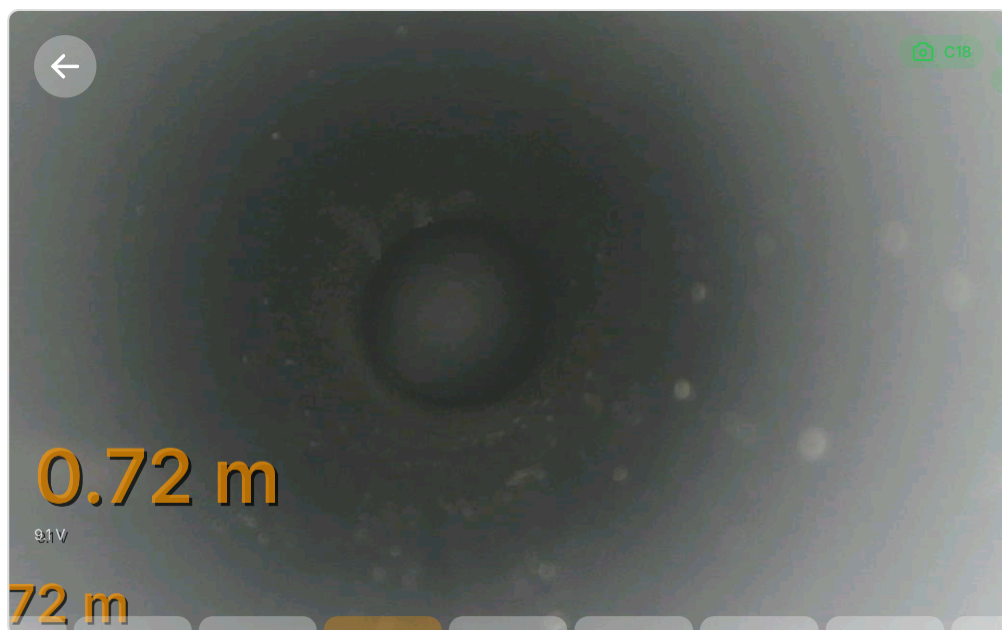

Element	Beschreibung
Back arrow	The back arrow in the top-left returns to the project detail view when the inspection belongs to a project, or navigates to the previous screen for a quick capture. It is always visible because the side navigation bar is hidden in full-screen mode.
Camera chip (top right)	The green camera chip in the top-right shows the detected camera head type (e.g. C10 or C18) from the serial telemetry. It is only visible when the type has been detected or manually set in the project form.
Battery chip (top right)	The green battery chip in the top-right shows the current tablet battery level in percent. The colour changes to red below 20 %.
Live camera feed	The live camera feed fills the entire screen. Pinch-to-zoom scales the image between 1× and 3×; a double-tap resets the zoom or switches to 2×.
0.72 m	The metre reading in the bottom-left shows the current cable advance in metres from the serial hardware telemetry. The display is amber/orange and always visible, regardless of the panel state.
Power	A short tap on the Power button has no function during operation. A long press opens a confirmation dialog to close the app.
Light	The first tap on the Light button opens a popup with a vertical slider for brightness control directly above the button. Additional taps increase brightness in 10 % steps; after 100 % it resets to 0 %.
Probe	The first tap on the Probe button opens a popup with the selectable frequency list directly above the button. Additional taps cycle through the transmit frequencies.
Recording	The Recording button is highlighted amber while a recording is active. In local mode (direct camera connection), additional taps toggle between pause and resume. When no recording is running, the first tap opens the recording mode selection.
Stop	The Stop button ends an active recording and finalises the MP4 file.
Photo	The Photo button captures a snapshot of the current camera image with burned-in OSD overlay and saves it directly as a damage entry at the current metre position.
Damage	The Damage button captures a screenshot of the current frame and opens the damage dialog for entering damage type, metre position and free text.
Gallery	The Gallery button navigates to the project detail view with all saved recordings, photos and damage entries for the current project.
Settings	The Settings button opens the app settings screen, e.g. for OSD configuration and stream parameters.


Record Damage

Opens after tapping 'Damage' in the control bar or after taking a photo. Record a damage entry with meter position, damage type, and optional description.

Element	Beschreibung
Position (m)	Pre-filled with the current meter reading. Can be corrected manually.
Damage Type	Preset damage types from settings (e.g. Cracks, Deposits). Select via dropdown.
Description (optional)	Free-text field for supplementary damage information.
Photo Area	Shows an attached photo. Without a photo, 'No screenshot available' is displayed.
Save	Saves the damage entry and closes the dialog.

Create Note


Opens by double-tapping a note in the inspection view (edit) or via the Notes section in the project detail (create new). Text and voice note are saved with the current meter position.

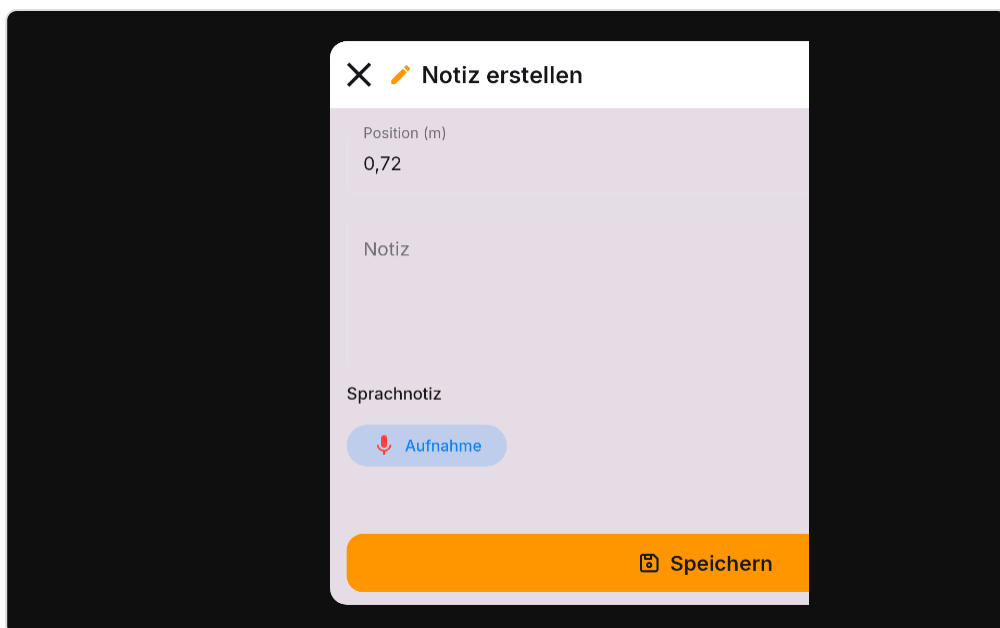

Element	Beschreibung
Position (m)	Current meter reading, filled automatically and can be corrected.
Note	Free-text field for remarks at the current position.
Voice Note	Starts an audio recording saved as a voice note.
Save	Saves text and voice note and closes the dialog.

Project Details

This screen shows all saved data for an inspection project: master data, photos, damage records, videos, and notes. From here the inspection can be continued or a PDF report generated.

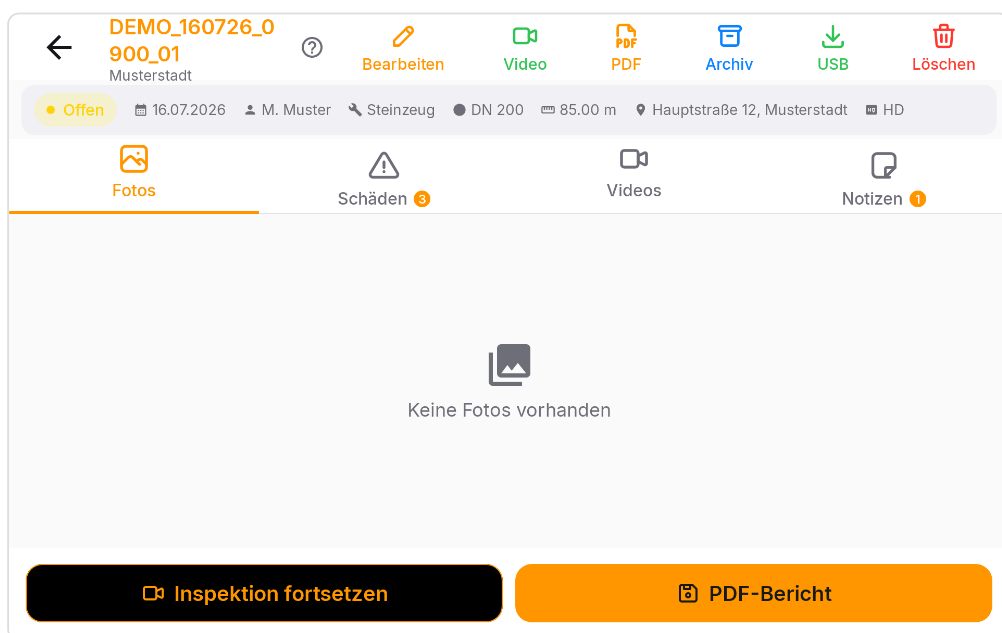


Element	Beschreibung
Back	The back arrow in the top-left corner navigates back to the project list.
DEMO_160726_0900_01	The project number is shown as the main title in the header.
Musterstadt Stadtentwässerung	The client of the project is displayed below the project number as a subtitle.
Edit	Opens the edit form where the project master data can be changed.
Video	Switches directly to the inspection screen to view the live video stream.
PDF	Opens the PDF export dialog with options for photos and site map.
Archive	Exports the entire project as a ZIP archive with options for photos and site map.
USB	Opens the USB export dialog to transfer project data directly to a connected USB drive.
Delete	Permanently deletes the entire project including all files after a confirmation prompt.
Open	The coloured status chip shows the current processing status of the project — here: not yet completed.
16.07.2026	The inspection date is shown as the first metadata chip in the header info bar.
M. Muster	The inspector's name is visible as a metadata chip.
Steinzeug	The pipe material of the inspected section is shown as a metadata chip.
DN 200	The nominal diameter of the pipe section is visible as a metadata chip.
85.00 m	The inspection length of the pipe section is shown as a metadata chip.
Hauptstraße 12, Musterstadt	The location address of the section is visible as a metadata chip with a location icon.
HD	The video quality setting of the project is displayed as the last metadata chip.
Photos	The active tab shows all damage photos of the project in a gallery view. If no photo is present, an empty state message is shown.
Damage 3	The Damage tab lists all recorded damage entries; the badge number shows the total count.
Videos	The Videos tab lists all recorded video files belonging to the project.
Notes 1	The Notes tab displays all free-text and audio notes; the badge shows the number of notes present.
No photos available	This message appears in the Photos tab when no damage photos have been saved for the project yet.
Continue inspection	The dark-background button at the bottom left opens the inspection screen to continue the ongoing inspection.

Element	Beschreibung
PDF report	The amber-coloured button at the bottom right opens the PDF export dialog to create and share the inspection report.

Reports & Export

Reports


The Reports screen lists all PDF reports stored on this device. Each entry shows the file name, creation date and time, and file size in KB. An orange button at the bottom allows generating a new report.

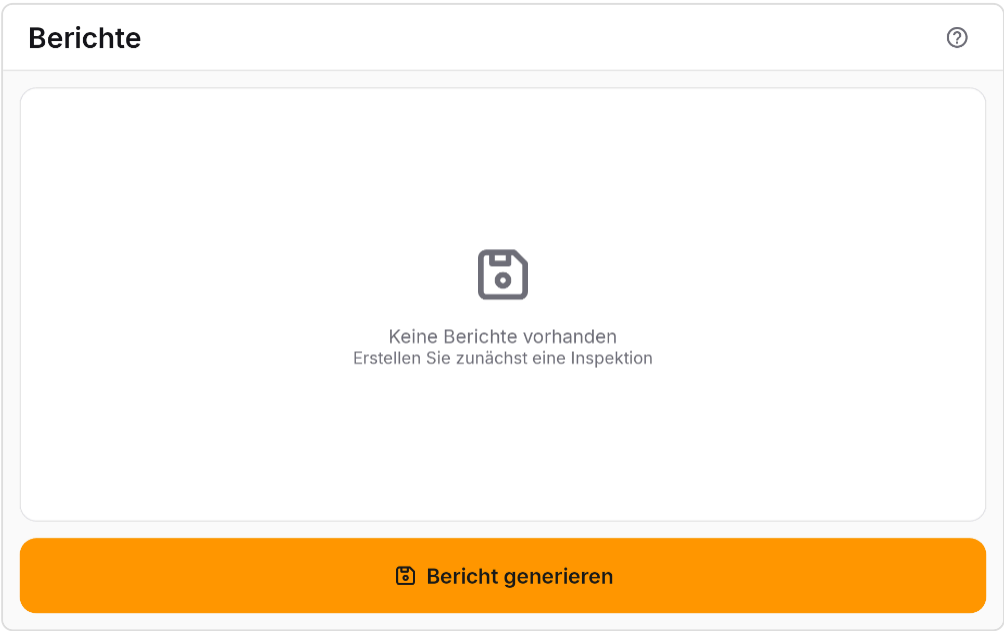

Element	Beschreibung
Navigation rail (left)	The left rail shows the DrainQ logo (black/yellow) and three navigation entries: Home (house icon), Inspection (camera icon), and Settings (sliders icon).
Page title	The heading "Reports" appears at the top left.
PDF list	The list shows four entries sorted in descending date order. Each entry contains an orange save icon, the file name, and below it the date, time, and file size in KB, plus a right-pointing chevron (>): 1. Bericht_130726_0606_006.pdf — 13.07.2026 06:54 · 624 KB 2. Bericht_Schnellaufnahme_120726.pdf — 12.07.2026 15:19 · 2077 KB 3. Bericht_120726_1320_004.pdf — 12.07.2026 13:22 · 679 KB 4. Bericht_Schnellaufnahme_110726.pdf — 11.07.2026 09:58 · 127 KB
"Generate report" button	At the bottom of the screen is a large orange button with a save icon and the label "Generate report". It navigates to the project selection from which a new PDF report can be created.

PDF Preview


Shows the complete inspection report as a PDF preview. The report can be exported directly.

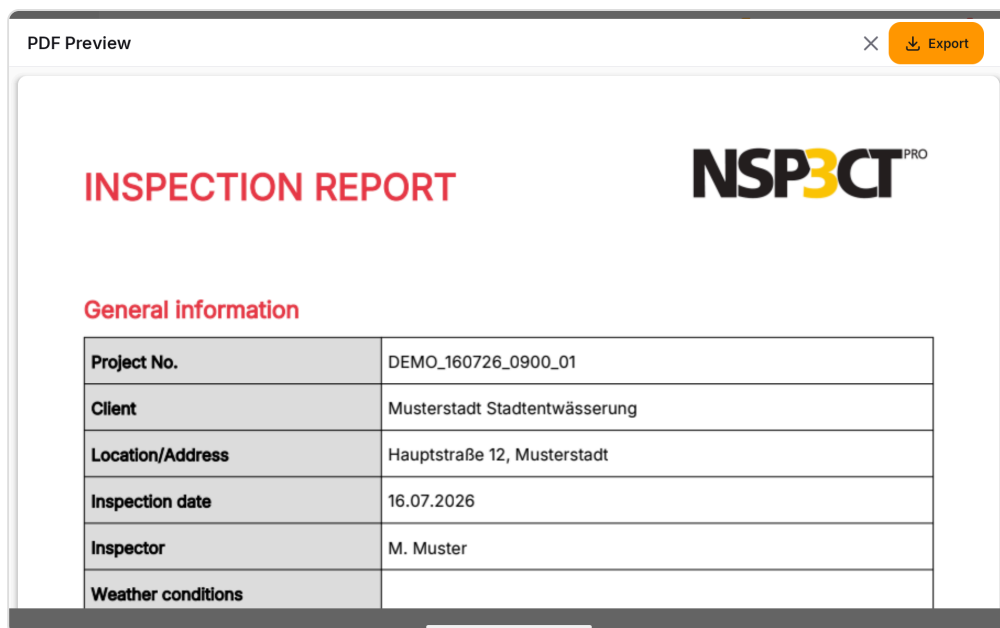

Element	Beschreibung
Close	Closes the PDF preview and returns to the project view.
Export	Saves the PDF report to internal storage or a connected USB drive.

Export to USB Drive

On the first USB export, the app requests file access once (Android setting). After granting permission, files are saved directly to the drive.

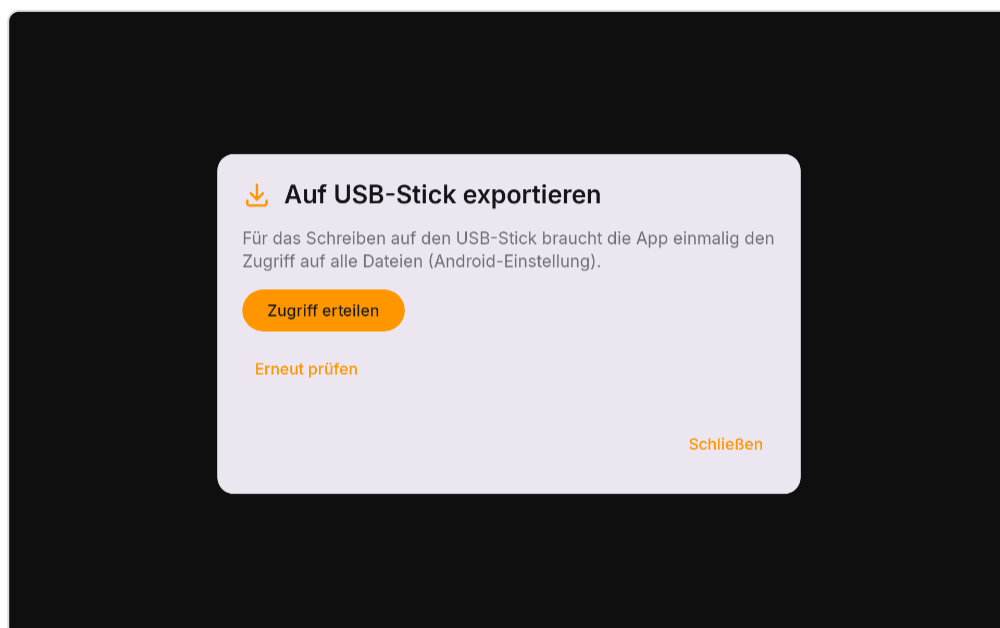


Element	Beschreibung
Grant Access	Opens the Android file manager to grant write permission on the USB drive.
Check Again	Checks again whether the USB drive is connected and permission is granted.
Close	Closes the dialog without exporting.

Settings

Settings


The Settings screen allows adjusting display, language, appearance, and system functions. The top-right toolbar shows two icon buttons: a keyboard-hide icon (keyboard with strikethrough) and a save icon (floppy disk in orange). The left navigation rail shows the DrainQ logo, Home, Inspection, and Settings (currently active, highlighted in orange).

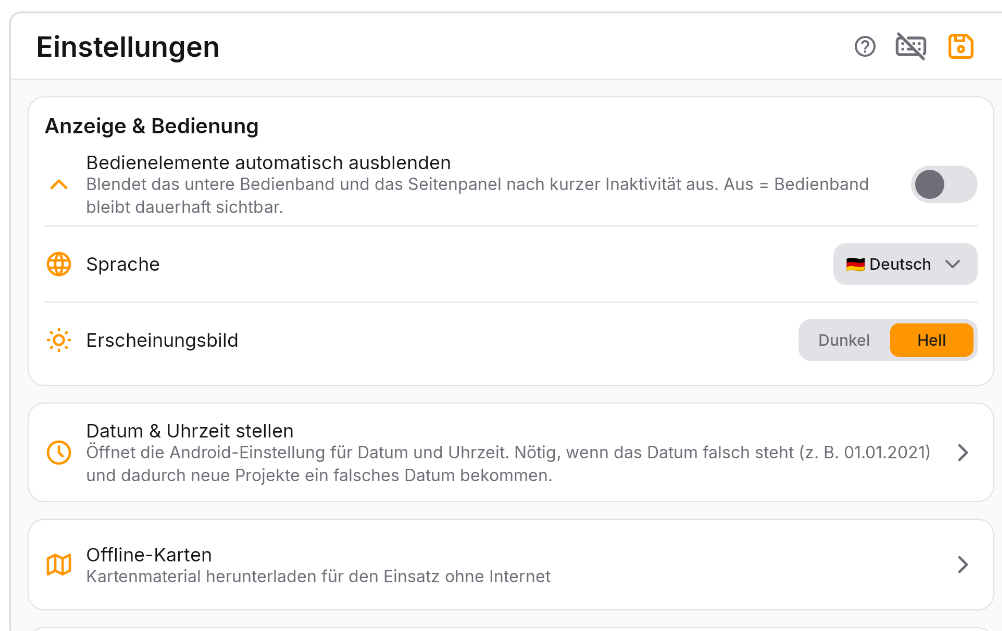

Element	Beschreibung
Hide keyboard	Icon: keyboard with strikethrough, top-right in the title bar. Hides the on-screen keyboard.
Save	Icon: floppy disk (orange), top-right next to the keyboard icon. Saves all currently changed settings.
Section: Display & operation	Group heading for display and operation settings.
Kiosk mode (fullscreen)	Toggle (off, gray). Description: "Hides the Android bars. For field devices. Off for development/service."
Auto-hide controls	Toggle (off, gray). Description: "Hides the bottom control bar and side panel after a short period of inactivity. Off = the control bar stays permanently visible."
Language	Dropdown menu, currently showing "English" (with UK flag). Shows the available app languages.
Appearance	Toggle with two buttons: "Dark" and "Light". The "Light" button is active (highlighted in orange).
Screen brightness	Current value: 13%. Slider with an orange bar (left) and light-blue track (right). The toggle in the top-right is active (orange).
Set date & time	List item with right-pointing arrow. Description: "Opens the Android date & time settings. Needed when the clock is wrong (e.g. 01/01/2021) and new projects therefore get a wrong date."
Offline maps	List item with right-pointing arrow. Description: "Download map data for use without internet."
Network & Connection	List item at the bottom edge of the screen, partially visible. Further settings are below the visible area.

Network & Connection


The "Network & Connection" screen shows the current online status of the tablet and provides access to Wi-Fi settings, USB / Bluetooth tethering, and the DrainQ cloud account.

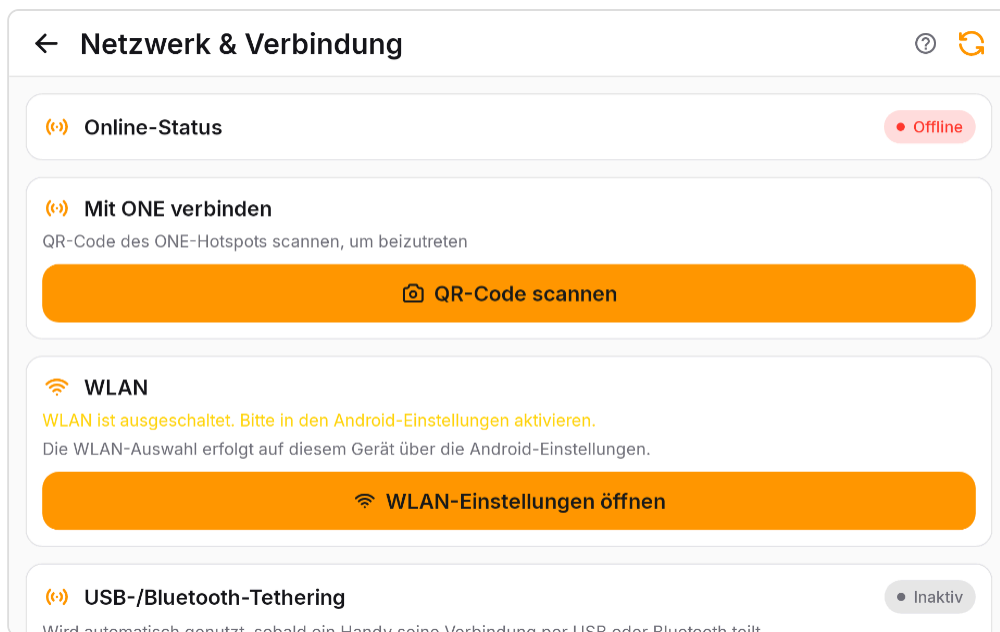

Element	Beschreibung
Navigation rail	The left rail shows the DrainQ logo at the top and the entries Home, Inspection, and Settings.
Top bar	Top left: back arrow button. Title: "Network & Connection". Top right: orange refresh icon.
Online status	Card with an orange antenna icon and the label "Online status". On the right a green chip labelled "Wi-Fi" indicates that the tablet is connected via Wi-Fi.
Wi-Fi	Card with an orange Wi-Fi icon and the heading "Wi-Fi". Below it reads: "On this device, Wi-Fi selection is done via the Android settings." An orange button labelled "Open Wi-Fi settings" with a Wi-Fi icon opens the Android Wi-Fi settings.
USB / Bluetooth tethering	Card with an orange antenna icon and the heading "USB / Bluetooth tethering". On the right a grey chip labelled "Inactive" is shown. Below it reads: "Used automatically as soon as a phone shares its connection via USB or Bluetooth." A black button with orange text "Open tethering settings" leads to the Android tethering settings.
DrainQ cloud account	Card with an orange cloud icon, the heading "DrainQ cloud account", and the subtitle "Coming soon". A right-arrow chevron is visible on the right.

Offline maps

The Offline maps screen lists all downloaded map files and shows the storage used. From here, regional map packages can be downloaded for offline use without an internet connection.

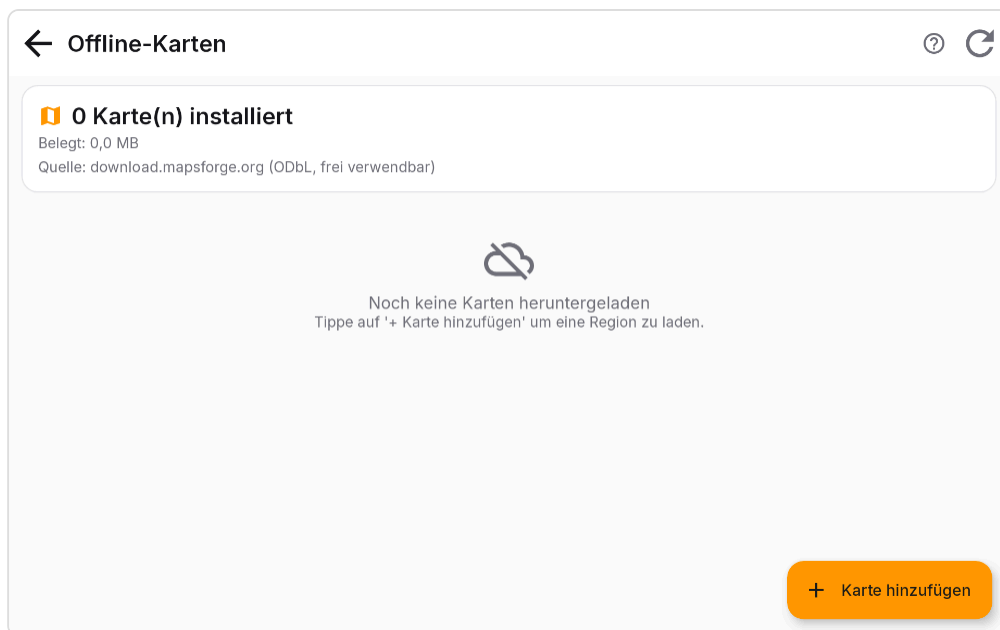

Element	Beschreibung
Back	The back arrow in the top-left corner exits the screen and returns to the previous view.
Offline maps	The title bar shows the name of the current screen.
Refresh	The refresh icon in the top-right corner reloads the list of installed maps to detect any changes on device storage.
0 map(s) installed	The summary card shows the number of currently installed map files along with the storage used and the data source.
Storage used: 0.0 MB	Shows the total storage space occupied by all installed offline map files on the device.
Source: download.mapsforge.org (ODbL, free to use)	States the data source of the map files and the licence under which the map data is provided.
No maps downloaded yet	The crossed-out cloud icon with accompanying text appears when no map file has been installed yet.
Tap '+ Add map' to download a region.	The hint text explains how to download a first map and points to the button in the bottom-right corner.
Add map	The amber-coloured extended action button in the bottom-right corner opens a dialog to select and download a regional map file.

DrainQ cloud account


This screen provides a preview of the upcoming DrainQ Cloud sign-in feature. The form is currently disabled and cannot be used.

Element	Beschreibung
Navigation rail (left)	The left rail shows the DrainQ logo at the top, followed by three navigation entries: Home (house icon), Inspection (video camera icon), and Settings (sliders icon). All entries appear in grey.
Top bar	The top bar contains a back arrow (left) and the title "DrainQ cloud account".
Info card	A card displays an orange cloud icon, below it the heading "Sign in to DrainQ Cloud", and a blue chip labelled "Coming soon".
Email field	A disabled input field with the placeholder label "Email". The field is empty and cannot be edited.
Password field	A disabled input field with the placeholder label "Password". A keyboard icon with a strikethrough is visible on the right side of the field. The field is empty and cannot be edited.
"Sign in" button	A full-width button labelled "Sign in" in pale orange. The button is disabled.

Pairing & Dual Mode

Tablet hotspot

The Tablet hotspot screen allows the DrainQ ONE to start a dedicated Wi-Fi hotspot so a tablet can connect directly without office Wi-Fi. The screenshot shows the hotspot in its deactivated state.

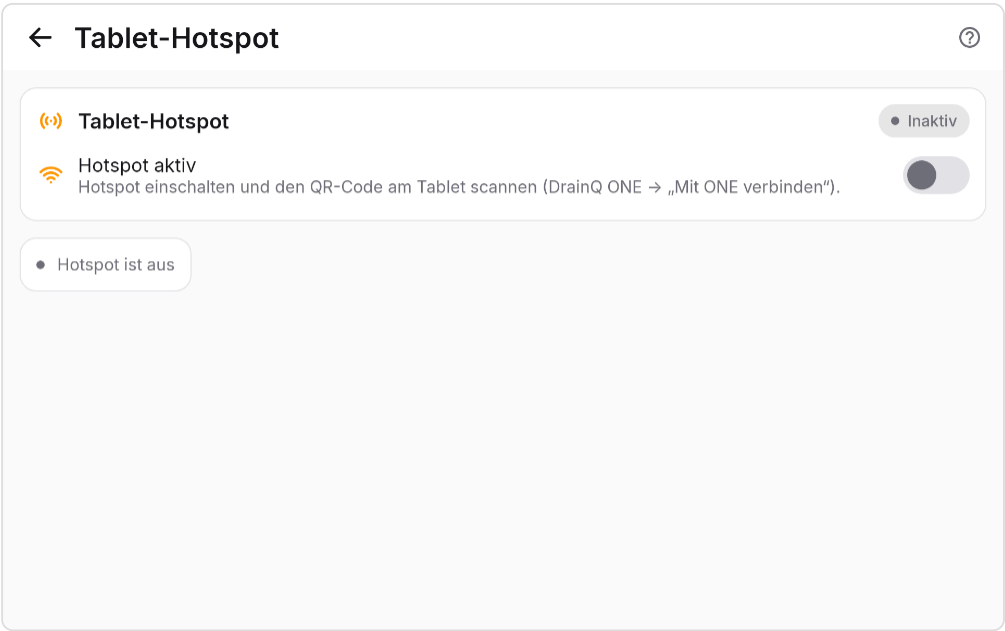


Element	Beschreibung
←	Back arrow button in the top bar. Tapping returns to the previous screen.
Tablet hotspot	Page title in the top bar. Displays the name of the current screen.
Tablet hotspot	Card heading with access-point icon. Groups the hotspot controls.
Inactive	Status chip in the top-right of the card. Indicates that the hotspot is currently not running.
Hotspot on	Setting row with Wi-Fi icon and description text. The toggle on the right switches the hotspot on or off; the subtitle explains the next step (scan the QR code on the tablet).
Hotspot on	Toggle at the right edge of the setting row. When grey the hotspot is off; switching it on starts the Wi-Fi hotspot on the ONE and displays a QR code for tablet pairing.
Hotspot is off	Status information below the card. Confirms that the hotspot is currently disabled.

Appendix

Home

The Home screen is the app's start page and displays an overview of projects, device storage, and provides quick access to start an inspection.

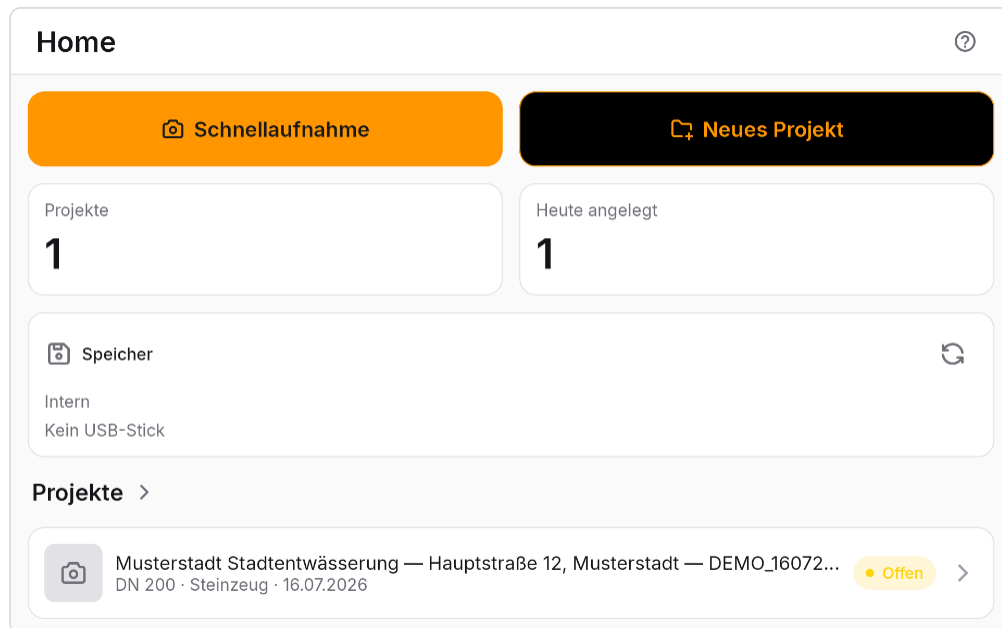

Element	Beschreibung
Home	The Home entry in the left navigation rail is currently selected and marks the active area of the app.
Inspection	Navigates to the Inspection screen with live video stream and damage recording.
Settings	Navigates to the Settings area of the app.
Home	Page title of the Home screen.
Quick capture	Immediately starts an inspection without prior project assignment; the video stream opens directly.
New project	Opens the form to create a new inspection project with address, material, and other master data.
Project	Displays the total number of all projects stored on the device (here: 19).

Element	Beschreibung
Created today	Shows how many projects were created today (here: 3).
Storage	Card showing the current storage status of the device; displays internal storage and USB drive.
Refresh	Button (refresh icon) to manually refresh the storage display.
Internal	Label for the internal device storage.
53.6 GB free of 56.9 GB	Fill-level bar and text display of available internal storage; the bar turns orange or red when free space is low.
No USB drive	Indicates that no USB drive is connected; once a USB stick is plugged in, its fill-level bar appears instead.
Project	Clickable heading that navigates to the full project list.

Element	Beschreibung
Page 1 / 4	Shows the current page and total number of pages in the paginated project list.
1 2 3 4	Page navigation with forward/back arrows and direct page numbers; page 1 is highlighted in orange.
Musterstadt Stadtentwässerung — Hauptstraße 12, Musterstadt — DEMO_160726_0900_01	Project row showing client, location address, and project number; below are nominal diameter (DN 200), material (Steinzeug), and date (16.07.2026) plus the status Open.
Quick capture_160726	Quick capture project row without project number; date 16.07.2026 and status Open.

Element	Beschreibung
Schnellaufnahme_160726	Another quick capture project row; date 16.07.2026 and status Open (row partially visible at the bottom edge).