Part Number Guide

Neutrik[®] Part Number Guide

AH1-0-X		
→ Shell:	В	Black shell, gold contacts
	BAG	Black shell, silver contacts
Retention:	w/o	Latch Lock
	-0	Retention Spring
Grounding:	0	Separate ground contact connected to shell, male only
	1	Pin 1 & Panel & Shell connected, no separate ground contact
	2	Separate ground contact connected to shell & panel, separate Pin
	E	Additional ground contacts
	w/o number	No ground / Shell contact (except 4 / 5 pole), female only
Termination:	Н	Horizontal PCB mount
	HL	Laterial left PCB mount
	HR	Laterial right PCB mount
	L	Solder Cups
	V	Verticale PCB mount
	Υ	IDC for wires (no ground)
	M3	Mounting holes with M3 thread
	M25	Mounting holes with M2.5 thread
	-	Not applicable
Series:	A, AA, B, BA, D,	DL, DLX, MPR, P, X, XX
Gender:	F	Female
	M	Male
Number of Contac	ts: 3, 4, 5, 6, 7, 8, 1	2
Connector Type:	Α	Adapter
	AC	PowerCon [®]
	В	BNC
	C	Connector
	E	RJ45
	F	RCA / CINCH
	J (MJ, RJ, SJ)	Jack
	K	Cable Assemblies
	L	Loudspeaker
	M	Modules
	0	Fiber Connector
	P	Plugs
	PP	Patch Panel
	R	Circular Connector
	Т	Transformer



XLR Connectors



Content Page

Cable Connectors.	
XX Series	
EMC-XLR Series	9
RX Series	10
XX-HE	1(
X Series	1
X-HD Series	1
XCC Series	12
FXS Series	12
FX-SPEC Series	12
Technical Data	13
Ordering Information	14

neceptacies.	
A Series	15
AA Series	15
B Series	16
BA Series	16
A/B Series 5 pole switch	17
D Series	17
DL Series	18
DLX Series	18
EMC	19
MPR-HD Series	19
P Series	20
Combo	20
Accessories	21
Technical Data	22
Ordering Information A / AA Series	23
Ordering Information B/BA Series	24
Ordering Information D / DL / P/Combo Series	25
Panel Cutouts Assembly Tools	26

Introduction

The XLR connector series is probably together with the Speakon® series Neutrik's most known product range and has due to the simple but striking concept been one of the most important keys to our great success.

We introduced the first XLR version more than 25 years ago, meanwhile it became the worldwide accepted standard.

XLR connectors are widely used in various applications of the professional audio world. Whether as microphone connector, on lighting applications or any kind of sound equipment, the XLR is all over the entertainment industry.

Keyfeatures are:

Receptacles:

- Reliable and robust
- Easy to assemble, simple to use
- Excellent cable protection and retention
- Colour coding
- Available in 3 to 7 pole

The reason for the outstanding success of the series is in accompany with these features a constant and peerless quality.










XX Series




- The next generation of the worldwide accepted standard
- Unique cage type female contact increases conductivity
- Female contact with "solder stop" for ease soldering
- Male connector without locking "window" more stringent housing, increases durability
- Improved chuck type strain relief increases retention force and makes assembly easier and faster
- New ground contact excellent contact integrity between chassis and cable connector
- Customized branding using translucent ring
- Sleek and ergonomic design valuable and handy

NC*FXX



NC*MXX




* ... 3 - 7 contacts

EMC-XLR Series




NC3FXX-EMC

- 3-pole male / female XLR cable connector with integrated capacitive shield to shell connection to avoid RF-interference and LF-noise
- 360° shield contact on female connector ensures best possible shielding and chassis contact
- Patent pending

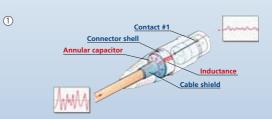


- 1 Design guarantees a continuous RF-shield connection but avoids ground loops (no LF-shield connection)
- 2) Circular capacitor enables low-inductive shield connection to connector housing
- 3 Cable shield PIN 1 connection includes EMI suppression bead (blocks high frequencies)



u n








NEW



XX-HE Series

RX Series







NC3FXX-HE

NC3MXX-HE

- Right angle version of the XX Series only 20 mm wide
- Extra slim right-angle connector
- Neutrik chuck type strain relief
- 5 selectable cable outlet positions

- Exclusive version of standard XX Series
- Valuable velour chromium plating
- Extra high temperature resistant insulator material
- Machined female contacts

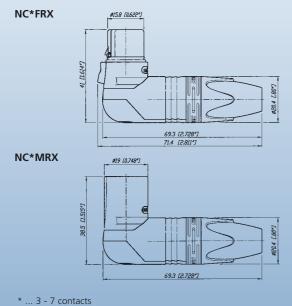

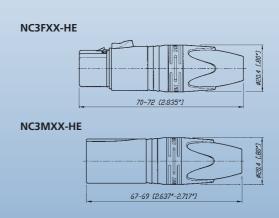









X Series




- The worldwide accepted XLR connector standard
- Rugged diecast shell
- Compact design (shortest available XLR cable connector)
- Time saving assembly 4 parts only, no screws
- Neutrik unique chuck type strain relief
- Gold or silver plated contacts
- **%** UL Recognized components
- Available in 3 7 pin configuration

X-HD Series



- "Heavy duty" cable connectors for outdoor use
- All metal design, male stainless steel
- NC*FX-HD mates with NC*MPR-HD chassis connector and NC*MX-HD
- Dust and water protected according IP 65 in mated condition
- Available in 3 5 pin configuration

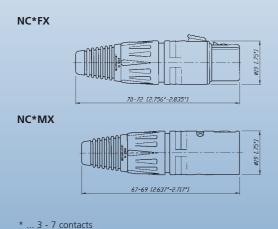

NC*FX-HD

NC*MX-HD

10-72 (2.756'-2835'1)

NC*MX-HD

* ... 3 - 5 contacts

to identify the origina







XCC Series

FXS Series

FX-SPEC Series



NC3FXCC




NC3FXS




NC3FX-SPEC

- 3 pole cable connector with a circumferential shield contact for best EMI protection
- Featuring a coaxial ground spring and coaxial hex crimp ferrule at the cable entrance for proper and reliable transition of the cable shield to the shell
- Zebra coding ring to indicate digital AES signals included
- FX connector with noiseless ON-OFF switch short-circuiting contacts 2 + 3
- For use on a microphone without switch
- Solid female cable connector with locking ring for highest security of connection
- Uninterrupted EMI protection
- Protect against accidental disconnects
- Thief-prove, grub screw secure connector onto microphone or gooseneck
- Avoids movements and noises


NC3FXCC




NC3MXCC



NC3FXS



NC3FX-SPEC



Quality Thinking

Technical Data

Specification		XX	EMC	Х	XCC	X-HD	FXS	XX-HE	FX-SPEC	RX
		Series	Series	Series	Series	Series	Series	Series	Series	Series
Electrical										
Number of contacts		3 - 7	3	3 - 7	3	3 - 5	3	3	3	3 - 7
Contact resistance	≤ 3 mΩ	•	•	•	•	•	•	•	•	•
Insulation resistance - initial:	> 2 GΩ	•	•	•	•	•	•	•	•	•
- after damp heat test:	> 1 GΩ	•	•	•	•	•	•	•	•	•
Dielectric strength	1500 V dc	•	•	•	•	•	•	•	•	•
Cable shield-shell connection	choosable	•	-	•	-	•	-	•	•	•
	determined	-	capacitive	-	crimp	-	-	-	-	-
Shielding effectiveness	> 55 dB @ 1.3 GHz	-	•	-	•	-	-	-	-	-
Lossy ferrite bead on PIN 1		-	•	-	-	-	-	-	-	-
Rated current per contact @ 35°C										
3 pole:		•	5 A	•	•	•	•	•	•	•
4 pole:	10 A	•	-	•	-	•	-	-	-	•
5, 6 pole:	7.5 A	•	-	•	-	•	-	-	-	•
7 pole:	5 A	•	-	•	-	-	-	-	-	•
Capacitance between contacts										
3 pole:		•	•	•	•	•	•	•	•	•
4, 5, 6 pole:	≤ 7 pF	•	-	•	-	•	-	-	-	•
7 pole:	≤ 9 pF	•	-	•	-	-	-	-	-	•
Rated Voltage	50 V ac	•	•	•	•	•	•	•	•	•
Mechanical										
Lifetime > 1`000 cycles		•	•	•	•	•	•	•	•	•
Insertion / withdrawal force ≤ 20 N		•	•	•	•	•	•	•	•	•
Cable O.D. range	3.5 - 8.0 mm	•	-		5.4 - 6.2 mm		•	•	•	•
9	2.5 mm ² / AWG 14	•	AWG 20	•	•	•	•	•	•	•
	1.5 mm ² / AWG 16	•	-	•	-	•	-		_	•
	1.0 mm ² / AWG 18	•	_	•	_	•	_	_	_	•
Crimp tool: 6.5 mm Hex die (size "E" acc		-	-	-	•	-	-	-	-	-
Material										
Shell	Zinc diecast (ZnAl4Cu1)			_		-			_	
Sileli	(gal Ni or black Cr)	•	e al Ni	•	•	black Cr	•	•	•	•
	,	•	gal Ni -	•	•			•		•
Insert	Stainless steel	- D -		-	-	•	-	-	-	-
	Polyamide PA 6.6 30% G		•	•	•	•	•	•	•	•
Contacts - female 3 pole:		•	-	•	•	-	•	•	-	•
- female 4 - 7 pole & male: Contact surface Silver		•		•	•	•	-	•	-	•
	gal 2 µm Ag	•	Au 2 Ni	•	•	Au	•	•	•	•
	gal 0.2 μm Au hard allo	y over .	z µm Ni	_	_	_	_		_	
Latch lock St3K32 (latch) / Ck 67 (sp		-	-	•	•	•	•	-	•	-
Ctrain relief clarer	Zinc diecast (ZnAl4Cu1)	•	•	-	-	-	-	•	-	•
Strain-relief clamp Bushing	POM	•	•	•	•	•	•	•	•	•
RUSDING	PA / PU	1	•	•	•	PU	PU	•	•	•
		- k	•	-	•	-	-	-	-	-
Circumferential ground spring	Bronze (CuSn6), Ni plated	_								_
Circumferential ground spring Crimp ferrule	Brass (CuZn39Pb3), Ni plate		-	-	•	-	-	-	-	
Circumferential ground spring Crimp ferrule Coding ring	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR		-	-	•	-	-	-	-	-
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM	\ - -	-	-	• -	-	- -	- -	-	-
Circumferential ground spring Crimp ferrule Coding ring	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR		-	-	•	-	-	-	-	- - -
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM Brass (CuZn39Pb3)	\ - -	-	-	• -	-	- -	- -	-	
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket Securing ring Environmental Operating temperature	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM	\ - -	-	-	• -	-	- -	- -	-	
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket Securing ring Environmental	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM Brass (CuZn39Pb3)	- - -	-	-	• - -	- •	-	-	-	-
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket Securing ring Environmental Operating temperature Flammability Protection class	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM Brass (CuZn39Pb3) -30°C to +80°C UL 94 HB IP 40	- - -		-	• - -	- • -	- - -	-	•	•
Circumferential ground spring Crimp ferrule Coding ring Sealing jacket Securing ring Environmental Operating temperature Flammability	Brass (CuZn39Pb3), Ni plate Polyamide PA 6 15% GR EPDM Brass (CuZn39Pb3) -30°C to +80°C UL 94 HB IP 40	- - -			-	-	- - -		•	•

Ordering Information for Cable Connectors

Female	Male	Shell Cor	ntact - plating	3 pole	4 pole	5 pole	6 pole	7 pole
XX Series								
NC*FXX	NC*MXX	Nickel	Silver	•	•	•	•	•
NC*FXX-B	NC*MXX-B	Black Cr	Gold	•	•	•	•	•
NC*FXX-BAG	NC*MXX-BAG	Black Cr	Silver	•	•	•	•	•
NC3FXX-**-D1	NC3MXX-**-D1	Nickel / Black Cr	Silver / Gold	•	-	-	-	-
XX-EMC Seri	e s							
NC3FXX-EMC	NC3MXX-EMC	Nickel	Gold	•	-	-	-	-
NC3FXX-EMC-B	-	Black Cr	Gold	•	-	-	-	-
X Series								
NC*FX	NC*MX	Nickel	Silver	•	•	•	•	•
NC*FX-B	NC*MX-B	Black Cr	Gold	•	•	•	•	•
NC*FX-BAG	NC*MX-BAG	Black Cr	Silver	•	•	•	•	•
NC3FX-**-D1	NC3MX-**-D1	Nickel / Black Cr	Silver / Gold	•	-	-	-	-
NC6FSX ²	NC6MSX ²	Nickel	Silver	-	-	-	•	-
NC6FSX-B ²	NC6MSX-B ²	Black Cr	Gold	-	-	-	•	-
NC6FSX-BAG ²	NC6MSX-BAG ²	Black Cr	Silver	-	-	-	•	-
RX Series								
NC*FRX	NC*MRX	Nickel	Silver	•	•	•	•	•
NC*FRX-B	NC*MRX-B	Black Cr	Gold	•	•	•	•	•
NC*FRX-BAG	NC*MRX-BAG	Black Cr	Silver	•	•	•	•	•
XX-HE Series	;							
NC3FXX-HE	NC3MXX-HE	Velour Chromium	Gold	•	-	-	-	-
FXS Series								
		NO. 1 . 1						
NC3FXS	-	Nickel	Gold	•	-	-	-	-
NC3FXS-B	-	Black Cr	Gold	•	-	-	-	-
FX-SPEC Seri	e s							
NC3FX-SPEC	-	Black Cr	Silver	•	-	-	-	-
XCC Series								
NC3FXCC	NC3MXCC	Nickel	Gold	•	-	-	-	-
X-HD Series								
NC*FX-HD	NC*MX-HD	Nickel	Gold	•	•	•	_	-
NC3FX-HD-B	NC3MX-HD-B	Metal Black	Gold	•	-	-	-	-
		cta. Didek	20.0					

Accessories and Assembly Tools

Detailed information on page 21 and 26.

* Number of Contacts

** Nickel or Black

 $-D^1\;\;\; Bulk$ packed, to be ordered in multiples of 100 pcs.

² Switchcraft Equivalent

Look for the Logo



XLR Chassis Connectors










A Series



NC3FAH1

NC3MAHR

- Smallest XLR receptacles, highest packing density
- Plastic housing, steel retention lug
- Fork type female contacts
- Polished contact areas and hard gold plating
- Various grounding options

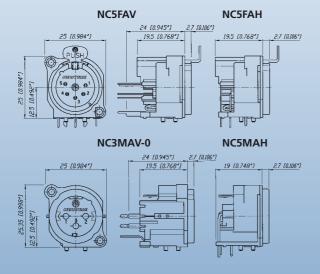

AA Series






NC3FAAV2

NC3MAAH-1

- Front panel cutout and PCB layout 100% compatible to the A Series
- Most cost-effective series
- "Tulip" type female contact design with high contact pressure
- Selective gold plated contact and PCB termination area for best conductivity and solderability
- Plastic housing flammability UL 94 HB

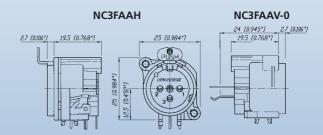

Grounding Options (A / AA / B / BA Series):

- 1 ... Pin 1 & Panel & Shell connected, no separate ground contact
- 2 ... Separate ground contact connected to shell & panel, separate Pin 1 w/o number: No ground / Shell contact (except 4 / 5 pole)

n n

Connectors

















NC3FBV NC3MBV

BA Series







NC3FBAV2

NC3MBAH

- Same as A Series with exception of a metal mounting flange enabling continuous circumferential ground contact to chassis for best EMC and RF protection
- Fastening with B-screw


- More economical version of B Series with modified metal
- Fastening with A-screw
- 3, 4 and 5 pole version

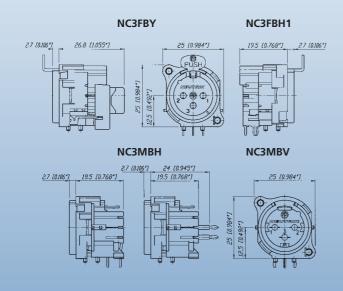

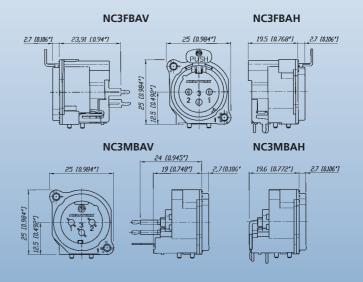

u a

XLR Chassis Connectors











A/B Series 5-pole switch





NC5MAV-SW

D Series






NC3FD-V NC3MDM3-V


- A and B Series 5 pole connector with additional switch
- Normally open, normally closed (NO NC) contact
- Switch activated by mating XLR cable connector
- Available in 5 pole, 3 or 4 pole on request

NC5FAV-SW


- "D" Shape metal shell
 - Optimal RF protection using 3 shield contacts
 - Horizontal and vertical PCB mount with separate ground contact
 - Mounting holes with M3 threads available
 - 2 piece connector, insert is removable from shell
 - Front locked / unlocked insert
 - Special version with screw termination

Inserting (Schematic): NC NO MATING CONNECTOR



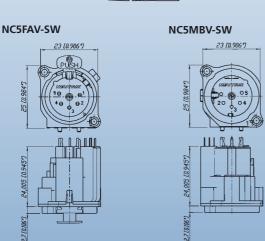

NC3FD-V / NC3FD-H

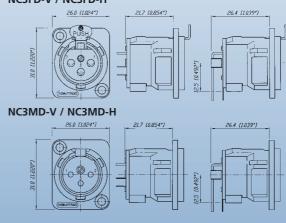

D u a n









DL Series

71





NC3FD-L-1

NC4MDM3-H

DLX Series





NC3FD-LX


NC3MD-LX

- Unified "D" metal shell
- Solder cups on 3 7 pole version
- Additional PCB mount on 4 and 5 pole
- Front and rear mountable
- contacts, temperature resistant insulator and valuable
- High End "-HE" version available with machined female velour chromium plating
 - NC3FD-L-1 NC*FDM3-H 25.6 [1.008] 26.0 [1.024*] 21.7 [0.854*]


NC3MD-L-1







- Next generation of the popular DL Series with greater functionality
- All metal housing works in combination with a new duplex ground contact yielding the best RF protection and ground conductivity in a chassis mount XLR
- Male connector's retention bar replaces plastic design with all metal version
- Unique cage type female contacts on 3 pole version for increased conductivity
- Machined male and female contacts on four to seven pin
- D-style housing provides installation compatibility with industry standard D mounting dimensions

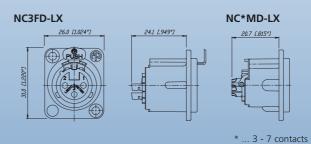

Q u





EMC




NC3FDX-EMC-SPEC

INC3FDA-EIVIC-3FEV


• 3-pole female XLR chassis connector with integrated

- capacitive shield to shell connection to avoid RF-interference and LF-noise
- 360° shield contact on female connector ensures best possible shielding and chassis contact
- D flange chassis for panel mount applications
- Includes the locking nut of the NC3FX-SPEC for secure fastening of a gooseneck for instance
- Special flange for large openings available
- Patent pending

Detailed information of RF-shielding see page 9 - EMC cable-connector.



26.0 [1.02*]



MPR-HD Series






NC3MPR-HD


NC5MPR-HD

- IP 65 in combination with NC*FX-HD cable connectors
- Perfect for outdoor applications
- Sealing gasket for water tight panel mount
- Gold plated contacts



NC3MPR-HD





* ... 3 - 5 contacts

XLR Chassis Connectors


















Combo Series







NCJ9FI-V

NCJ10FI-S


- Smallest available hard wiring receptacles with large solder cups
- Short female receptacle
- Compatible with Switchcraft DxM, DxF; Cannon XLRx31, XLRx32
- 6 pole version available with Switchcraft contact arrangement (NC6FSP-1, NC6MSP)
- Combined XLR receptacle and 1/4" phone jack
- Attractive "front end" design
- Saves rack space by combining 2 connectors in one housing
- Horizontal or vertical PCB mounting or hard wire soldering
- Fully normalled
- Stereo or mono version
- Very low conductor capacitance, therefore suitable for
- Fastening: Self-tapping Plastite® screws with thread 2.9 x 1.06 and tri-rondular configuration (A screw)
- Front dimension: 30 x 27 mm


NC3FP-1






NC3MP





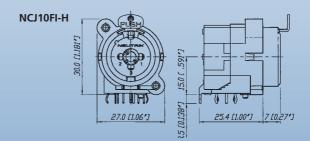

Accessories

	Colour Co	d e	d A	СС	e s s	o r	i e s				
Part No.	Description	Black 0	Brown 1	Red 2	Orange 3	Yellow 4	Green 5	Blue 6	Violet 7	Grey 8	White 9
XLR Ca	ble Connectors										
BSX-*	Coloured bushing for X Series										
BXX-*	Coloured bushing for XX Series									6	6
XCR-*	Coloured coding ring for X Series	0	0	0	0	0	0	0	0	0	0
XXR-*	Coloured coding ring for XX Series	0	0	0	0	0	0	0	0	0	0
XLR Ch	assis Connectors										
ACRF-*	Coloured ring for female 4 + 5 pole A Series and 3 pole BA Series	\mathcal{O}									
ACRM-*	Coloured ring for male 4 + 5 pole A Series and 3 pole BA Series	\mathcal{O}	Ø	Ø	0	Ø	Ø	Ø	Ø	Ø	Ø
DSS-*	Lettering plate for D Series										

Accessories

XLR Ca	able Connectors				
XXCR	Translucent coding ring for XX Series	0		8	Example
XCCR	Coding ring for X Series digital signals	0			
XLR CI	nassis Connectors				
DBA	Dummy-plate for D Series panel cut outs				
SCD*	Rubber sealing cover for female and male D Series	3	SCDF	3	SCDM
SC*	Rubber sealing cap for female and male XLR receptacles		SCF		SCM
SFAV	Rubber frame for A / B Series to mount between front plate and rear vertical print		SFAV		Example
	3 Plastite® screw 2.9 x 8** 3 TAPTITE® screw 2.5 x 8*	44	A Screw	90	B Screw
** Minimum	order quantity of 1000 pcs.				

Technical Data


Specification		A Series	AA Series	B Series	BA Series	D Series	DL/DLX Series	MPR-HD Series	P Series	Combo Series
		Jenes	361163	361163	361163	Jenes	Jerres	361163	361163	Jerres
Electrical										
Number of contacts		3 - 5	3	3 - 5	3	3	3 - 7	3 - 5	3 - 7 (6**)	5 - 10
Contact resistance	≤ 5 m $Ω$	•	\leq 8 m Ω	•	•	•	•	•	•	\leq 10 m Ω
Insulation resistance - initial:		•	•	•	•	•	•	•	•	•
- after damp heat test:		•	•	•	•	•	•	•	•	> 500 MΩ
Dielectric strength Rated voltage	1500 V dc 50 V ac	•	•	•	•	•	•	•	•	•
Rated current per contact	ou v ac	•	•	•	•	•	•	•	•	•
3 pole:	6 A	•	•	•	•	•	16 A	16 A	16 A	-
4 pole:		•	-	•	-	-	10 A	10 A	10 A	_
5, 6 pole:		•	-	•	-	-	7.5 A	7.5 A	7.5 A	-
7 pole:		-	-	-	-	-	•	-	•	-
Combo XLR + Jack contact	7.5 A	-	-	-	-	-	-	-	-	•
Capacitance between contacts										
3 pole:		•	•	•	•	-	≤ 4 pF	≤ 4 pF	≤ 4 pF	≤ 2 pF
4, 5, 6 pole:		•	-	•	-	-	•	•	•	-
7 pole:	≤ 9 pF	-	-	-	-	-	•	-	•	-
Mechanical										
Lifetime > 1`000 mating cycles		•	•	•	•	•	•	•	•	•
Insertion / withdrawal force	≤20 N	•	•	•	•	•	•	•	•	● 25 N
Retention method	-2011				•		<u> </u>			2511
- standard:	latch lock	•	•	•	•	•	•	•	•	• (XLR)
- "0" Version:	≥ 20 N separating force	•	•	•	•	•	•	•	•	● 25 N
Material										
	PA 6.6 30% GR	•	•	•	•	•	•	•	•	•
Shell Zinc diecast		-	-	-	-	•	•	•	•	-
	(gal Ni or black Cr plated	d) -	-	-	-	•	•	Ni plated	•	-
Ring Zinc diecast		-	-	•	•	-	-	-	-	-
Contacts - female 3 pole:		•	•	•	•	•	•	-	•	•
	Bronze CuSn6	•	-	•	-	-	-	-	-	-
	Brass CuZn39Pb3 Brass CuZn35Pb2	•	•	•	•	•	•	-	•	-
	over 2 µm NiP15 (Tribor®)		•	•	•	-	-	-	-	•
gal 2 µm Ag or gal 0.2 µm A			-	-	-	•	•	Au	•	-
Latch lock & spring	Ck 67 steel, treated	•	•	•	•	•	•	-	•	•
Environmental										
Operating temperature	-30°C to +80°C	•	•	•	•	•	•	•	•	•
Protection class	IP 40	•	•	•	•	•	•	IP 65	•	•
Flammability	UL 94 HB	• 2 nolo	•	O mala	•	•	•	•	•	•
Soldorability complies with IEC 69		3 pole	-	3 pole	-	-	-	-	-	-
Solderability complies with IEC 68-	2-20	Φ Λ	•		•	-	• -	•	-	•
Mounting screw Colour coding		A ACR-*	A -	1)	A ACR-*	DSS	DSS	-	-	A -
Colour County		5 pole on			ACIT-	033	<i>D</i> 33			
1) B Series 3 pole connectors > B-se			-							
** P Series male 3 - 6 pole	· ·									

Quality Thinking

Ordering Information for Receptacles

Female	Male	Shell	Contact	3 pole	4 pole	5 pole	Female	Male	Shell	Contact	3 pole
A Series	S						AA Seri	e s			
NC*FAH-D		Black Pla	astic Gold	-	•	•	NC3FAAH	NC3MAAH	Black Plastic	Gold	•
	NC*MAH	Black Pla	astic Gold	•	•	•	NC3FAAH-0		Black Plastic	Gold	•
NC*FAH-0		Black Pla	astic Gold	•	•	•	NC3FAAH1	NC3MAAH-1	Black Plastic	Gold	•
	NC3MAH-0	Black Pla	astic Gold	•	-	-	NC3FAAH1-0		Black Plastic	Gold	•
NC3FAHL-0		Black Pla	astic Gold	•	-	-		NC3MAAH-0	Black Plastic	Gold	•
NC3FAHR-0		Black Pla	astic Gold	•	-	-	NC3FAAH2		Black Plastic	Gold	•
NC3FAH1-D	NC3MAH-1	Black Pla	astic Gold	•	-	-	NC3AAH2-0		Black Plastic	Gold	•
NC3FAH1-0		Black Pla	astic Gold	•	-	-	NC3FAAV	NC3MAAV	Black Plastic	Gold	•
NC3FAHL1-D		Black Pla	astic Gold	•	-	-	NC3FAAV-0		Black Plastic	Gold	•
	NC3MAHL	Black Pla	astic Gold	•	-	-	NC3FAAV1	NC3MAAV-1	Black Plastic	Gold	•
NC3FAHL1-0		Black Pla	astic Gold	•	-	-	NC3AAV1-0		Black Plastic	Gold	•
NC3FAHR1-D		Black Pla	astic Gold	•	-	-		NC3MAAV-0	Black Plastic	Gold	•
	NC3MAHR	Black Pla	astic Gold	•	-	-	NC3FAAV2		Black Plastic	Gold	•
NC3FAHR1-0		Black Pla	astic Gold	•	-	-	NC3FAAV2-0		Black Plastic	Gold	•
NC3FAH2-D		Black Pla	astic Gold	•	-	-					
NC3FAH2-0		Black Pla	astic Gold	•	-	-					
NC3FAHR2-D		Black Pla	astic Gold	•	-	-					
NC3FAHR2-0		Black Pla	astic Gold	•	-	-					
NC*FAV-D		Black Pla	astic Gold	-	•	•					
	NC*MAV	Black Pla	astic Gold	•	•	•					
NC*FAV-0		Black Pla	astic Gold	•	•	•					
	NC3MAV-0	Black Pla	astic Gold	•	-	-					
NC3FAV1-D	NC3MAV-1	Black Pla	astic Gold	•	-	-	A Series comes	with Push Latch	disassembled, a	assembled Push	n on
NC3FAV1-0		Black Pla	astic Gold	•	-	-	request.				
NC3FAV2-D		Black Pla	astic Gold	•	-	-	AA Series come	es with Push Lato	ch assembled.		
NC3FAV2-0		Black Pla	astic Gold	•	-	-					
NC3FAY-D	NC3MAY	Black Pla	astic Gold	•	-	-					
NC3FAY-0		Black Pla	astic Gold	•	-	-	A / AA Series re	ear mount only,	all PCB mount e	xcept Y version	n = IDC
NC5FAV-SW-D	NC5MAV-SW	Black Pla	astic Gold	-	-	•		,		,	

Grounding Options

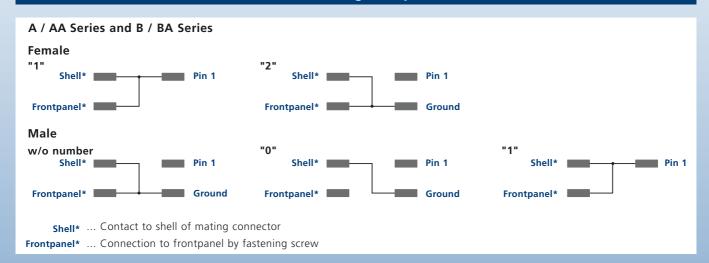

Ordering Information for Receptacles

Female	Male	Flange	Contact	3 pole	4 pole	5 pole	Female	Male	Flange	Contact	3 pole	4 pole	5 pole
B Series	5						BA Seri	e s					
NC*FBH-D		Metal	Gold	-	•	•	NC3FBAH1-D		Metal	Gold	•	-	-
	NC*MBH	Metal	Gold	•	•	•		NC3MBAH	Metal	Gold	•	-	-
NC*FBH-B-D		Black Metal	Gold	-	•	•	NC3FBAH1-0		Metal	Gold	•	-	-
	NC*MBH-B	Black Metal	Gold	•	-	•		NC3MBAH-0	Metal	Gold	•	-	-
NC3FBH1-D		Metal	Gold	•	-	-	NC3FBAH2-D		Metal	Gold	•	-	-
NC3FBH1-B-D		Black Metal	Gold	•	-	-		NC3MBAH-1	Metal	Gold	•	-	-
NC3FBHL1-D		Metal	Gold	•	-	-	NC3FBAH2-0		Metal	Gold	•	-	-
	NC3MBHL	Metal	Gold	•	-	-	NC3FBAV1-D		Metal	Gold	•	-	-
NC3FBHR1-D		Metal	Gold	•	-	-		NC3MBAV	Metal	Gold	•	-	-
NC3FBH2-D		Metal	Gold	•	-	-	NC3FBAV1-0		Metal	Gold	•	-	-
NC3FBH2-B-D		Black Metal	Gold	•	-	-		NC3MBAV-0	Metal	Gold	•	-	-
NC3FBHR2-D		Metal	Gold	•	-	-	NC3FBAV2-D		Metal	Gold	•	-	-
	NC3MBHR	Metal	Gold	•	-	-		NC3MBAV-1	Metal	Gold	•	-	-
NC*FBV-D		Metal	Gold	-	•	•	NC3FBAV2-0		Metal	Gold	•	-	-
	NC*MBV	Metal	Gold	•	•	•							
NC*FBV-B-D		Black Metal	Gold	-	•	•							
	NC*MBV-B	Black Metal	Gold	•	-	•							
NC3FBV1-D		Metal	Gold	•	-	-							
NC3FBV1-B-D		Black Metal	Gold	•	-	-							
NC3FBV2-D		Metal	Gold	•	-	-							
NC3FBV2-B-D		Black Metal	Gold	•	-	-							
NC3FBY-D	NC3MBY	Metal	Gold	•	-	-							
NC3FBY-B-D	NC3MBY-B	Black Metal	Gold	•	-	-							
NC5FBV-SW-D	NC5MBV-SW	Metal	Gold	-	-	•							
NC3FBH1-E-D	NC3MBV-E	Metal	Gold	•	-	-							
NC3FBH2-E-D		Metal	Gold	•	-	-	B / BA Series c	omes with Push	Latch disass	embled, assem	bled	Push	on
	NC3MBH-E	Metal	Gold	•	-	-	request.						
	for 3 pole B-Seri	es with M2.5 m	nounting hole	s (-M	25) or	1	B / BA Series re	ar mount only, a	II PCB mount	except Y version	n = ID	C	
request.													

Quality Thinking

Ordering Information for Receptacle

Female	Male	Shell (Contact			5 6 pole po	5 7 le pole	Female		Male			Sh	ell	Conta				6 7 pole po
D Series								P Serie	S										
NC3FD-V	NC3MD-V	Nickel	Silver	•	-			NC*FP-1					Nic	ckel	Silve	er (•	•	• •
NC3FD-V-B	NC3MD-V-B	Black Cr	Gold	•	-					NC*M	Р		Nic	ckel	Silve	er (•	•	• .
NC3FD-V-BAG	NC3MD-V-BAG	Black Cr	Silver	•	-		-	NC*FP-B-1					Bla	ick Cr	Gol	d (•	•	• (
NC3FDM3-V	NC3MDM3-V	Nickel	Silver	•	-		-			NC*M	P-B		Bla	ick Cr	Gol	d (•	•	• -
NC3FDM3-V-B	NC3MDM3-V-B	Black Cr	Gold	•	-		-	NC*FP-BAG-	1	NC*M	P-BA	G	Bla	ick Cr	Silve	er (•	•	•
NC3FD-H	NC3MD-H	Nickel	Silver	•	-		-												
NC3FD-H-B	NC3MD-H-B	Black Cr	Gold	•															
	NC3MD-H-BAG	Black Cr	Silver	•	-		-												
NC3FDM3-H-D		Nickel	Silver	•	-		-												
	NC3MDM3-H-B	Black Cr		•	-		-												
NC3FDM3-H-BAG-D	NC3MDM3-H-BAG	Black Cr	Gold	•	-		-												
DL Serie	s							MPR-HD)	Seri	e s								
NC*FD-L-1	NC*MD-L-1	Nickel	Silver	•	•	•		-		NC*M	PR-H	D	Nic	kel	Gol	d d		•	
NC*FD-L-B-1	NC*MD-L-B-1	Black Cr		•	•	•	•			110 111			1410	citoi	001	u			
NC*FD-L-BAG-1	NC*MD-L-BAG-1	Black Cr	Silver	•	•	•	-												
NC*FDM3-L-1-D	NC*MDM3-L-1	Nickel	Silver	•	•	• -													
NC3FDM3LBAG-1-D	NC3MDM3LBAG-1	Black Cr	Silver	•	-		-												
NC3FD-L-1-HE	NC3MD-L-1-HE	Velour C	r Gold	•	-		-												
NC*FDM3-H-D	NC*MDM3-H	Nickel	Silver	-	•	• •	-												
NC*FDM3-H-B-D	NC*MDM3-H-B	Nickel	Silver	-	•	• •	-												
	NC*MDM3-H-BAG	Black Cr		-	•	• •	-												
NC3FD-S-1-B	NC3MD-S-1-B	Black Cr	Silver	•	-		-												
DLX Seri	e s							Combo	S	erie	S								
NC*FD-LX	NC*MD-LX	Nickel	Silver	•	•	•	•										5 6	0	10
NC*FD-LX-B	NC*MD-LX-B	Black Cr	Gold	•	•	•	•											e pole	
NC*FD-LX-BAG	NC*MD-LX-BAG	Black Cr	Silver	•	•	•	•												
NC*FD-LX-M3	NC*MD-LX-M3	Nickel	Silver	•	•	• -		NCJ*FI-H				Bla	ck pl	astic	Gol	d d	•	•	•
NC3FD-LX-HE	NC3MD-LX-HE	Velour Cr	Gold	•	-			NCJ*FI-H-0				Bla	ck pl	astic	Gol	d d	•	•	•
								NCJ*FI-S				Bla	ck pl	astic	Gol	b k	•	•	•
								NCJ*FI-S-0					ck pl		Gol		•	•	•
EMC XLR								NCJ*FI-V					ck pl		Gol		•	•	•
								NCJ*FI-V-0				Bla	ck pl	astic	Gol	d d	•	•	•
NC3FDX-EMC-SF	PEC	Black Cr	Gold	•	-														
Accessories								Contact #											
										1	2	3	Т	R		N RI	I SI		
FDR-1			ind panel			_		NCJ5FI-*		Х	Х	Х	Х		Χ			Х	
		with scre	ws for lar	ger p	anel	l cut-	outs	NCJ6FI-*		Х	Х	Х	Х	Х	Х			Х	
								NCJ9FI-*		Х	Χ	Χ	Χ	Χ		(X	Х		
								NCJ10FI-*		X	Χ	Χ	Χ	X	X	< X	Х	Х	X

