



1 Open the Portal

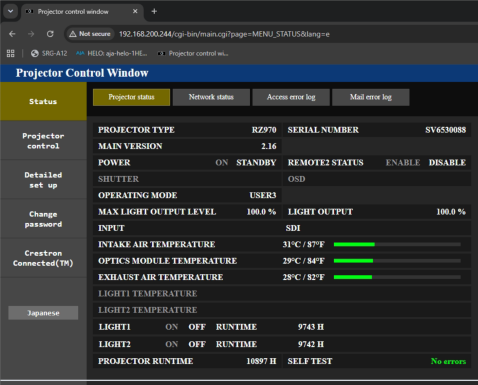

URL:
192.168.200.244
Username: admin
Password: admin

Enter the address above in any browser. Accessible from any computer, iPhone, or tablet connected to the Memo Production network via ethernet or Wi-Fi. Log in with the credentials above. You land on the Status screen showing projector health and lamp runtime.

2 Power On/Off — Mute Video

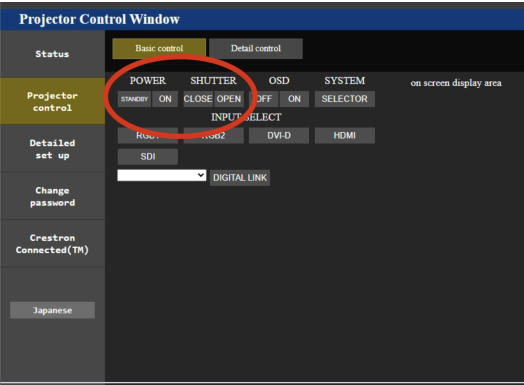

Click Projector control in the left nav, then Basic control tab.

POWER:
STANDBY = off. ON = lamp on. Allow 60 sec warm-up.

SHUTTER (video mute):
CLOSE = image blanked (no picture). OPEN = image live. Use shutter to cut video without powering down the lamp.


3 Access Position, Focus & Zoom



Click Projector control → Detail control tab.

Scroll down and click the LENS button. This opens the lens adjustment screen for shift, focus, and zoom.

4 Adjust Image Position & Size

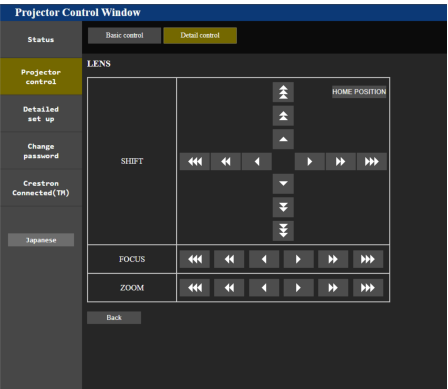

SHIFT:
Move image up/down/left/right on screen.

FOCUS:
Sharpen the image. Use single-step arrows for fine adjustment.

ZOOM:
Resize the image. Click HOME POSITION to reset lens to default.