

-
-
-
-
-

Chapter 6

Packaging Requirements



Introduction To Packaging Requirements

Packaging Requirements provides a complete set of facilities for analysing and reporting of packaging information. This information will help you to produce the packaging statistics that need to be submitted to the appropriate authority. You use the information produced to complete the standard documentation provided by the authorities.

You use Packaging Requirements to enter information about how much of each type of packaging is used when a product is shipped to a domestic customer over a specified period.

Setting up Packaging Requirements

Before you can track the packaging used you need to set up the following:

For each inventory company you need to:

- Set the Packaging Reporting Flag on the Maintain Company Profile screen.
- Set up the Packaging Reporting Country.
- Set the Packaging Reporting Flag on each item you need to track the packaging details.

For each Packaging Reporting Country you need to set up:

- Packaging categories.
- Packaging codes.
- Average packaging details per despatch.
- Default responsibilities.

You also need to set up the packaging details for each item that you are tracking.

Country Details Maintenance



1/INK

Use this procedure to maintain the data and reporting parameters for each country where a packaging report will be submitted. The information you can enter includes:

- Packaging Responsibilities. To apportion the responsibility for each member of the supply chain.
- Default Responsibilities. To define percentage responsibilities when you are tracking responsibilities.



Note: If track responsibilities is not set, the responsibilities can be defined but are not effective until Track responsibilities Processing is switched on.

- Packaging Categories. To define summary groups for the packaging used so totals can be provided by surface area, weight, volume or any other classification.
- Packaging Codes. These could relate to packaging materials, for example, glass, cardboard, wood, or they could relate to individual packaging, for example, glass bottle (25cl), glass bottle (33cl).



Note: Before you set up any of the reporting parameters, you must set the Packing Reporting Flag on the Maintain Company Profile screen.

Maintain Packaging Reporting Countries Selection Screen



Select Country Details (Maintenance).

Use this window to select the Packaging Reporting Country you want to maintain.

Country	Description	Format	Year	Period
DE	Germany		97	01 of 12
GB	United Kingdom		97	01 of 12

2=Amend 4=Delete
F3=Exit F10=Add country F19=Position to

6-3 SA MW KS CL IM DM II STUD140 KB PKH318S1
Ready R:06 C:003 ID:a LU: NUM

Fields:

Untitled

Enter one of the following:

2 - Amend. Enter this option to alter the details for the reporting country.

4 - Delete. Enter this option to delete the details for the country.

Functions:

F10

Add Country. Use this function to define a new reporting country for the current inventory company.

F19

Position to. Use this function to position the screen display to the country selected.



Select **F3=Exit** to leave the screen without making any changes.

Maintain Packaging Reporting Country Screen (Option 2)



To display this screen enter 2 in the untitled field on the Maintain Packaging Reporting Countries Selection screen.

Use this screen to enter new details and change existing details for the selected packaging reporting country.

IN345	Z1 - UK Demonstration Company	User GBJBA1MS	7/10/97 10:37:25
Maintain Packaging Reporting Country			
Country.....	DE	Germany	
Reporting Frequency.....	1	(1=Monthly, 2=Quarterly)	
Reporting Format.....?		Blank, Valid format	
Track Responsibilities.....	1	(0/1)	
Calendar Code.....?	E1		
Current Year.....	97		
Current Period.....	01	of 12	
Reporting Currency.....?	GBP	Pounds Sterling	
Reporting VAT Code.....?	000		
Reporting Address.....	Address		
Target Recovery.....	20.00	%	
Target Recycling.....	40.00	%	
F3=Exit F4=Prompt F8=Update F11=Delete Country F12=Previous F13=Responsibilities F14=Packaging Codes F24=More keys			
6-31	SA	MW	KS CL IM DM II STUD140 KB PKH318S1

Fields:

Country

Enter the country code.

When you are amending country details, this field is for your information only and cannot be amended.



Note: You can only set up one set of packaging reporting details for each country.

Reporting Frequency

Enter how often the report needs to be produced:

1 - Monthly.

2 - Quarterly.

The default value is monthly.

Reporting Format

Enter a valid report format or leave this field blank to use the standard report format.



Note: You can define a report format using the

descriptions file code GDFT.

Track Responsibilities

Enter one of the following:

0 - If you have total responsibility for the packaging.

1 - To track responsibilities throughout the supply chain.



Note: If you are using the German Duales report format, you must set the Track Responsibilities to 0.

Calendar Code

Enter the code for the calendar used by this reporting country.

Current Year

Enter the current year. This defaults to the current year for the Inventory company.

When you are amending the country details this field is for information only.

Current Period

Enter the current period. This defaults to the first period of the current year.

When you are amending the country details this field is for information only.

Reporting Currency

You must enter a reporting currency that is valid within General Ledger.

If you are using the World Trade module, this field defaults to the reporting currency specified for this country.

Reporting VAT Code

You must enter a valid VAT Code.

Reporting Address

You must enter the address where your packaging data needs to be submitted.

Target Recovery and Target Recycling

Enter the Target Recovery and Target Recycling Percentage.

These fields are used when tracking responsibilities to compound with the derived responsibility. For example, if the amount of packaging you must recover is 25Kg, if Recovery is set to 40% and recycling is set to 8%, you must recover 10Kg of packaging and recycle 2Kg of tin in this period.

Functions:

F13

Responsibilities. Use this function to maintain the packaging responsibilities incurred by the members of the supply chain.



Note: Responsibilities are only effective if you have set Track Responsibilities to 1.

F14

Packaging Codes. Use this function to define the packaging codes applicable in this country.

F15

Average Packaging. Use this function to maintain the average packaging details to be included on each despatch line.

F16

Packaging Categories. Use this function to maintain the packaging categories used by the countries to whom the report will be submitted.



Tip: If all the functions are not available, select **F8=Update** to save the information. The rest of the functions will then be available.



Select **F8=Update** to validate and save the information entered. Then select **F12=Previous** to return to the Maintain Packaging Reporting Country Selection screen.

Maintain Responsibilities Window (F13)



To display this window select
F13=Responsibilities on the Maintain
Packaging Reporting Country screen.

Use this window to change the packaging responsibilities for the members of the supply chain.

IN345 Z1 - UK Demonstration Company User: GBJBA1MS 7/10/97
11:32:18

Maintain Packaging Reporting Country

Maintain Responsibilities

Country	GB	United Kingdom
Rep		
Tra		
Cal		
Cur		
Cur		
Rep		
Rep		
Rep		

Resp	Responsibility %	Dft
1 Extractor	.00	1
2 Manufacturer	.00	1
3 Filler	.00	1
4 Retailer	.00	1
5 Consumer	.00	1

1=Select 4=Delete

? - .00 -

Tar F4=Prompt F8=Update F12=Previous
Target Recycling..... 40.00 %

F3=Exit F4=Prompt F8=Update F11=Delete Country F12=Previous
F13=Responsibilities F14=Packaging Codes F24=More keys

Fields:

Untitled

Enter one of the following:

1 - Select, to select the item. The item is transferred to the fields at the bottom of the window so you can change the Responsibility % and default.

4 - Delete, to remove the current item. You cannot delete the item if you have set responsibility overrides.

Responsibility %

Enter the percentage responsibility for each member of the supply channel.

The total responsibility cannot exceed 100% for either recycling or recovery.



*Note: If the total responsibility does not equal 100%, , you get a warning message when you select **F8=Update**. Clear the message and then select **F8=Update** again to validate and save the changes.*

DFT

Enter one of the following:

0 - To exclude this responsibility code from calculations.

1 - To include this responsibility code in calculations.



Select **F8=Update** to validate and save the information entered. Then select **F12=Previous** to return to the Maintain Packaging Reporting Country screen.

Packaging Details Screen (F14)



To display this screen select **F14=Packaging Codes** on the Maintain Packaging Reporting Country screen.

Use this screen to define the packaging codes used for the current country.

IN351	Z1 - UK Demonstration Company	User GBJBA1MS	7/10/97
			11:47:58
Packaging Details			
Country DE Germany			
Pack	Packaging	UoM	Fees
Code	Description	Category	VAT
A1	CARDBOARD BOXES	VOLUME BASED	M3 000
A2	SHRINKWRAP	SURFACE AREA	CM 000
			1.500000
			.250000
2=Amend 4=Delete			
F3=Exit F6=Add F12=Previous			

Fields:

Untitled

Enter one of the following:

- 2 - Amend, to alter the packaging code definition.
- 4 - Delete, to remove the packaging code definition.

Functions:

F6

Add. Use this function to add new packaging code definitions.



Select an option.

Amend Packaging Details Window (Option 2)



To display this window enter 2 - Amend in the Untitled field on the Packaging Details screen.

Use this window to alter the details of the selected packaging details.

IN351	Z1 - UK Demonstration Company	User GBJBAIMS	7/10/97 10:41:14
Packaging Details			
Country	DE	Germany	
Pack Code	Packaging Description	Category	UoM VAT Fees
No packaging details have been defined for this country.			
Add Packaging Details			
Packaging Code.....	01	CARDBOARD BOXES	
Category.....?	3	VOLUME BASED	M3
VAT Code.....?	000		
Fee.....		1.500000	
F4=Prompt F8=Update F12=Previous			
F3=Exit F6=Add F12=Previous			

Fields:

Packaging Code

Enter a packaging code that is unique within this country. Enter a description for the packaging code.



Note: If you are amending the packaging code definition you cannot change the packaging code but you can change the description.

Category

Enter the category of the packaging. The categories can be user defined, see Maintain Packaging Categories for more information.

VAT Code

Enter the VAT Code for the packaging. This is only required in Germany.

Fee

Enter the fee for the packaging. This is only required in Germany.



Press **Enter** and then select **F8=Update** to validate and save the information entered. Then select **F12=Previous** to return to the Packaging Details screen.

Add Packaging Details Window (F6)

 To display this window select **F6=Add** on the Packaging Details screen.

Use this window to add new packaging details.

For more information, see Amend Packaging Details Window (Option 2).

 Press **Enter** and then select **F8=Update** to validate and save the information entered. Then select **F12=Previous** to return to the Packaging Details screen.

Average Packaging Details per Despatch Screen (F15)



To display this screen select **F15=Average Packaging** on the Maintain Packaging Reporting Country screen.

Use this screen to select average packaging details per despatch.



Tip: This panel can be used to represent packaging used in small quantities on every despatch, for example, Shrink-wrap.

IN344		Z1 - UK Demonstration Company		User GBJBAIMS		7/10/97 12:21:11	
Average Packaging Details per Despatch							
Country		DE Germany					
Pack	Packaging	Category	UoM	Units Per	M		
Code	Description			Despatch	D		
A1	CARDBOARD BOXES	VOLUME BASED	M3	3.000000	1		
A2	SHRINKWRAP	SURFACE AREA	CM	2.000000	0		
2=Amend 4=Delete F3=Exit F6=Add F12=Previous							

Fields:

Untitled

Enter one of the following:

2 - Amend, to alter the average packaging details for the packaging code.

4 - Delete, to delete the average packaging details for the packaging code.

Functions:

F6

Add. Use this function to add average despatch packaging details.



Select **F12=Previous** to return to the Maintain Packaging Reporting Country screen.

Add Average Packaging Details Window (Option 2)



To display this window enter 2 in the Untitled field on the Packaging Details screen.

Use this window to amend the selected average packaging details per despatch.

IN344		Z1 - UK Demonstration Company		User	GBJBA1MS	7/10/97
						12:20:16
Average Packaging Details per Despatch						
Country	DE	Germany				
Pack	Packaging	Category	UoM	Units Per	M	
Code	Description			Despatch	D	
_ A1	CARDBOARD BOXES	VOLUME BASED	M3	3.000000	1	

Add Average Packaging Details	
Packaging Code.....?	
Category.....	
Units per Despatch.....	.000000
Multiply or Divide.....	0 Multiply
F4=Prompt F12=Previous	

2=Amend 4=Delete
F3=Exit F6=Add F12=Previous

Fields:

Packaging Code

Enter the packaging code.

Units Per Despatch

Enter the average number of units of packaging that are used for each despatch.

Multiply Or Divide

Enter one of the following:

0 - To multiply the despatch quantity by the units per despatch to get the total units used.

1 - To divide the despatch quantity by the units per despatch to get the total units used.



Press **Enter** to validate the information, then select **F8=Update** to save. Select **F12=Previous** to display the Packaging Details screen.

Add Average Packaging Details Window (F6)



Select **F6=Add** on the Packaging Details screen to display the Add Average Packaging Details Window.

Use this window to add average packaging details per despatch.

For more information, see Add Average Packaging Details Window (Option 2).



Press **Enter** to validate the information, then select **F8=Update** to save. Select **F12=Previous** to display the Packaging Details screen

Maintain Packaging Categories Window(F16)



To display this window select **F16=Packaging Category** on the Maintain Packaging Country screen.

Use this window to maintain the packaging categories for the selected packaging reporting country.

```

IN345                Z1 - UK Demonstration Company    User GBUBAIMS    7/10/97
                                      10:37:58

Maintain Packaging Reporting Country
Country.. Country DE Germany
Reportin
Reportin
Track Re
Calendar
Current
Current
Reportin
Reportin
Reportin

  Country      DE  Germany
  Category     Description      Unit
  Code
  1            WEIGHT BASED      KG

  1=Select.. 4=Delete

  2            SURFACE AREA      ? PC

  F4=Prompt 12=Previous

Target Recovery..... 20.00 %
Target Recycling..... 40.00 %

F15=Average Packaging F16=Packaging Categories F24=More keys

  9-15  SA  MW  KS  CL  IM  DM  II  STUD140  KB  PKH318S1
  
```

Fields:

Untitled

Enter one of the following:

1 - Select, to select the packaging category. It is transferred to the fields at the bottom of the screen so you can amend the details.

4 - Delete, to remove the packaging category.

Description

Enter a description for the packaging category.

Unit

Optionally, enter the unit of measure for the selected packaging category.

Add Packaging Categories

To add a new packaging category, at the bottom left of the window, enter a new unique Category Code. Then enter a Description and Unit. To accept and validate the information press **Enter**.



Press **Enter** to validate the data, then select **F12=Previous** to display the Maintain Packaging Country screen.

Maintain Packaging Reporting Country Screen (F10)



To display this screen select **F10=Add Country** on the Maintain Packaging Reporting Countries Selection screen.

Use this screen to add new packaging reporting countries.

For more information, see Maintain Packaging Reporting Country screen (Option 2).



Select **F8=Update** to validate and save the information. Then select **F12=Previous** to return to the Maintain Packaging Reporting Country Selection screen.

Item Details Maintenance



2/INK

Use this procedure to define country specific information about the packaging required for each item. You can condition the packaging definition for an item dependent on the quantity despatched. For example:

Beer:

Per litre = 50 grams aluminium.

Per 10 litres = 500 grams aluminium + 2 grams plastic + 4 grams cardboard.

Per 100 litres = 5000 grams aluminium + 20 grams plastic + 40 grams cardboard + 1 kg wood pallet.



Note: Before you can define the packaging information you need to set the Packaging Reporting Flag in the Item Maintenance screen.

Country Item Packing Details Selection Screen



Select Item Details (Maintenance).

Use this screen to select the item whose packing details you want to maintain.

IN352	Z1 - UK Demonstration Company	User GBJBA1MS	8/10/97 9:10:38
Country Item Packaging Details			
Item....?. AHIGDI			
Country.?. ____		(leave blank for all)	
F3=Exit F4=Prompt			

Fields:

Item

Enter the Item code.

Country

Enter the country you are defining the packaging for.



Tip: If you leave this field blank and press **Enter**, a list of all the available packaging countries is displayed. Select the country you require.



*Note: If no packaging details are defined, display the Enter Item Packaging Window by selecting **F6=Add**, then selecting the country.*

For more information, see Enter Item Packaging Details Window (F6).



Enter an Item Code and a Country Code, then press **Enter** to display the Country Item Packaging Details screen.

Country Item Packaging Details Screen



To display this screen enter an Item Code and Country Code on the Country Item Packaging Details Selection screen, and press **Enter**.

Use this screen to enter or amend the Item Packaging details.

IN352	Z1 - UK Demonstration Company	User GBJBA1MS	8/10/97
			9:11:45
Country Item Packaging Details			
Item.....	AHIGDI	GDI	
Country.....	DE	Germany	
Issue Unit.....	EA	Single of	
Packaging Details per Issue Unit			
Pack Code	Packaging Description	Category	Packing Units M
■ A1	CARDBOARD BOXES	VOLUME BASED	1.500000 0
- A2	SHRINKWRAP	SURFACE AREA	2.300000 1
2=Amend 4=Delete			
F3=Exit F6=Add F8=Update F12=Previous F16=Quantity Breaks			
F17=Responsibilities F18=Select Country			

Fields:

Untitled

Enter one of the following:

2 - Amend, to alter the packaging details.

4 - Delete, to delete the packaging details.

Functions:

F6

Add. Use this function to add new packaging details.

F16

Quantity Breaks. Use this function to add new despatch quantity breaks.

F17

Responsibilities. Use this function to define the recycling and recovery responsibilities of each member of the supply chain.

F18

Select Country. Use this function to select a new country to define packaging information for this item.



Tip: If this function is not available, select **F21=Issue Units** to return to the issue units display.

F21

Issue Units. Use this function to display the Packaging Details per Issue Unit. This function is only available when the packaging details per quantity breaks are displayed.




Select **F8=Update** to validate the information entered. Then select **F12=Previous** to display the Country Item Packaging Details Selection screen.

Enter Item Packaging Details Window (F6)

-  To display this window select **F6=Add** on the Country Item Packaging Details screen .
-  Or: Select **F6=Add** on the Select Additional Packaging Quantity Breaks Window, and enter the quantity break in the New Break field.

Use this window to add and amend the packaging details for the selected item.

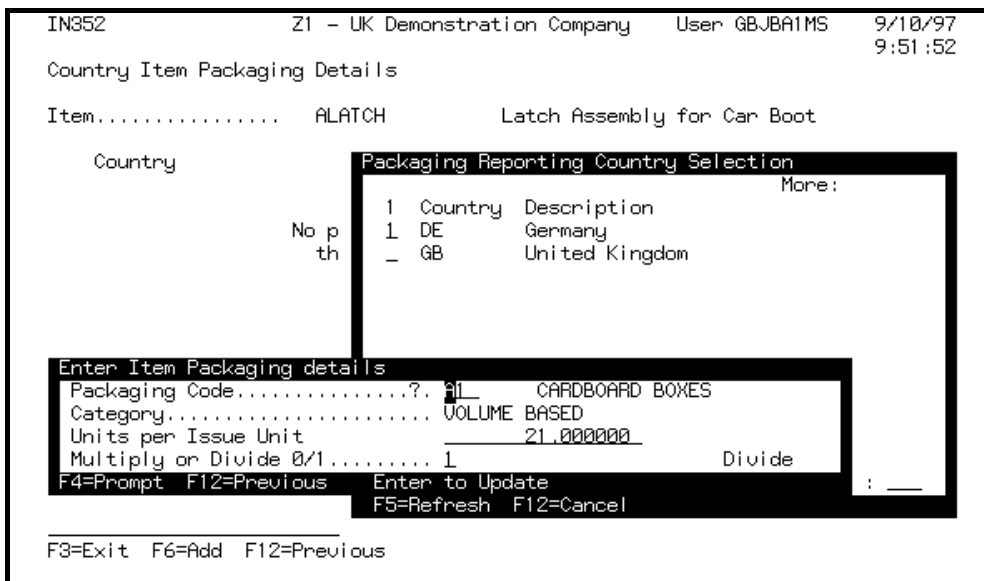

Country	Description
DE	Germany
GB	United Kingdom

Enter Item Packaging details

Packaging Code.....?..... CARDBOARD BOXES

Category..... VOLUME BASED

Units per Issue Unit..... 21.000000

Multiply or Divide 0/1..... 1 Divide

F4=Prompt F12=Previous Enter to Update F5=Refresh F12=Cancel

F3=Exit F6=Add F12=Previous

Fields:

Packaging codes

Enter the item packaging code.



Note: You can only enter packaging details once for each packaging code.

Units per Issue Unit

Enter the number of packaging units per specified number of issue units.

This is per single issue unit unless you are defining packaging details for a quantity break, when it is per quantity specified.

Multiply or Divide

Enter one of the following:

- 0 - To multiply the packaging units by issue units.
- 1 - To divide the packaging units by issue units.



Press **Enter** to validate the data. Then press **Enter** to display the Country Items Packaging Details screen.

Select Additional Packaging Quantity Breaks Window (F16)



To display this window select **F16=Quantity Breaks** on the Country Item Packaging Details screen.

Use this window to select quantity breaks you want to display the packaging details for.

IN352		Z1 - UK Demonstration Company		User GBJBAIMS	8/10/97 9:14:19
Country Item Packaging Details					
Item.....	AHIGDI	GDI			
Country.....	DE	Germany			
Issue Unit.....	EA	Single of			
Packaging Details per Issue Unit					
Pack Code	Packaging Description	Quantity (EA)	More:		M
- A1	CARDBOARD BOXES	- 1			00R D
- A2	SHRINKWRAP	- 20			00 0
					00 1
			New Break	█	
F6=Add F12=Previous					

2=Amend 4=Delete
F3=Exit F6=Add F8=Update F12=Previous F16=Quantity Breaks
F17=Responsibilities F18=Select Country

Fields:

Untitled

1 - Select, to select the quantity break you want to display the item packaging details for. The Country Item Packaging Details screen is displayed showing the packaging details for the specified quantity break.



*Note: Select **F21=Issue Units** to display the Country Item Packaging Details screen for the Issue Unit.*

Functions:

F6

Add. Use this function to add the packaging details for a new quantity break.



To display the Enter Item Packaging Details window, select **F6=Add**, then enter a quantity break figure in the New Break field and press **Enter**.

Override Responsibilities Window (F17)



To display this window select
F17=Responsibilities on the Country Item
Packaging Details screen.

Use this window to override the country default packaging responsibilities at the item level.

```
IN352                Z1 - UK Demonstration Company    User GBJBAIMS    8/10/97
                                           9:16:27

Country Item Packaging Details

Item..... AHIGDI          GDI
Country..... DE            Germany

Issue Unit..... EA          Single of

P  Override Responsibilities
   Item..... AHIGDI          GDI
   Country.... DE            Germany
   More:
   Resp      Responsibility
   1  Extractor             1
   2  Manufacturer           1
   3  Filler                 1
   4  Retailer               1
   5  Consumer               1

2  F8=Update  F12=Previous
F3=Exit  F6=Add  F8=Update  F12=Previous  F16=Quantity Breaks
F17=Responsibilities  F18=Select Country
```

Fields:

Responsibility

Enter one of the following:

0 - To exclude the item from the responsibility calculations.

1 - To include the item in the responsibility calculations.




Select **F8=Update** to display the Country Item
Packaging Details screen.

Packaging Reporting Country Selection Window (F18)

 To display this window select **F18=Select Country** on the Country Item Packaging Details screen.

Use this window to select a new packaging reporting country.

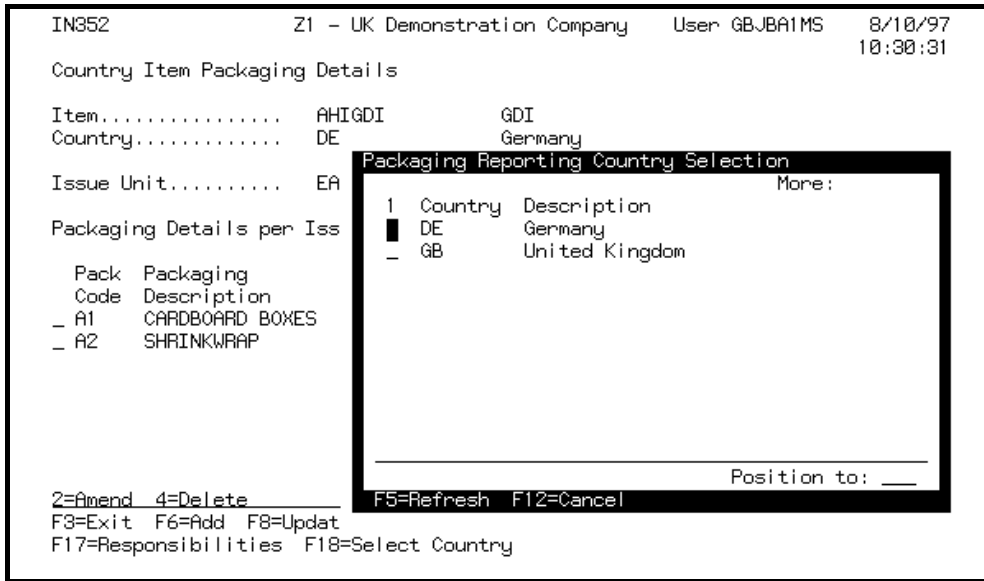

IN352 Z1 - UK Demonstration Company User GBJBA1MS 8/10/97 10:30:31

Country Item Packaging Details

Item..... AHIGDI GDI
Country..... DE Germany
Issue Unit..... EA

Packaging Details per Iss

Pack Code	Packaging Description
_ A1	CARDBOARD BOXES
_ A2	SHRINKWRAP

2=Amend 4=Delete F5=Refresh F12=Cancel
F3=Exit F6=Add F8=Updat
F17=Responsibilities F18=Select Country

Fields:

Untitled

Enter 1 to select the country required.



Note: If you have no Item Packaging details set up for the country selected, the Enter Item Packaging Details Window is displayed.



To display the country item packaging details screen, select the country.

Customer/Item Overrides



3/INK

Use this procedure to override responsibilities for packaging on the customer item. You should use this procedure if a specific customer varies from the norm for the sales channel to which it belongs.

You can specify the delivery sequence that the responsibility override relates to. If you do not specify the delivery sequence then the responsibility override is applied to all delivery points for the customer.



Note: Customer item responsibility overrides are used regardless of the responsibility settings for Sales Channels, Country and Item.

Customer/Item Responsibility Overrides Screen



Select Customer/Item Overrides.

Use this screen to select the customer and item for which you want to enter packaging overrides.

IN354	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 11:25:12
-------	-------------------------------	---------------	----------------------

Customer/Item responsibility overrides

Country..... GB United Kingdom
Item.....?.. ALATCH
Customer.....?..

F3=Exit F4=Prompt F6=Customer scan by item F12=Previous

Fields:

Country

Enter the code for the country.

Item

Enter the item code.

Customer

Enter the customer code and delivery sequence.

Functions:

F6

Customer Scan By Item. Use this function to display a list of all the customers and delivery sequences that apply to the item.




To display the Override Responsibilities Window, enter a Country, Item, Customer Code and Delivery Sequence and then press **Enter**.

Override Responsibilities Window

-  To display this window enter a Country, Item, Customer Code and Delivery Sequence and then press **Enter**.
-  Or: Enter 1 in the Untitled field on the Selection Of Customer To Be Maintained screen.

Use this window to enter packaging responsibilities for the customer and item. These responsibilities override the default responsibilities set up for the packaging country.

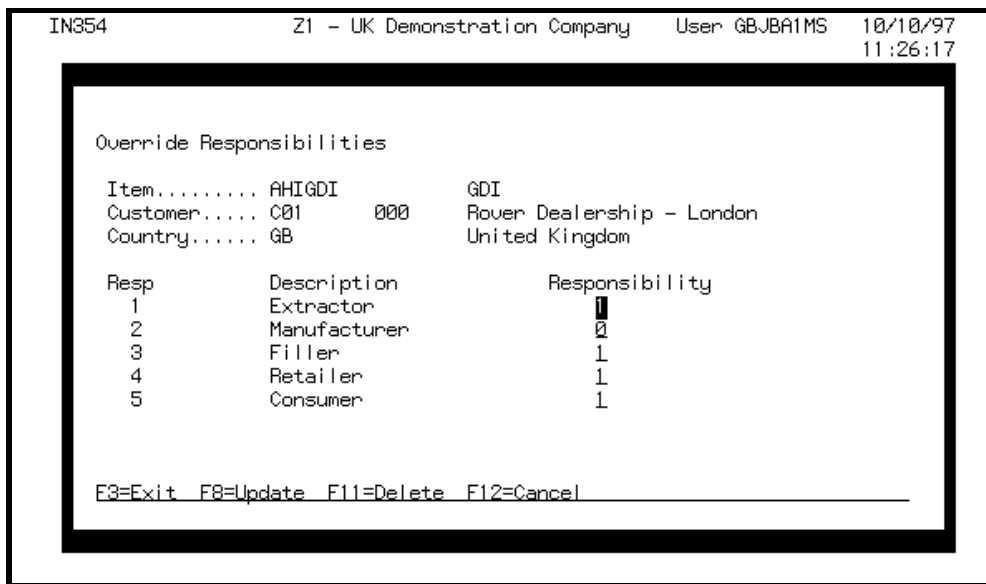

Resp	Description	Responsibility
1	Extractor	0
2	Manufacturer	0
3	Filler	1
4	Retailer	1
5	Consumer	1

Fields:

Responsibility

Enter one of the following:

- 0 - To exclude this item from the responsibility calculations.
- 1 - To include this item in the responsibility calculations.

-  Select **F8=Update** to validate the data and display the Customer/Item Responsibilities Override screen.

Selection Of Customer To Be Maintained Screen (F6)



To display this screen select **F6=Customer Scan By Item** on the Customer/Item Responsibility Overrides.

Use this screen to select the customer overrides you want to maintain.

IN354	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 11:26:17
-------	-------------------------------	---------------	----------------------

Selection of Customer to be Maintained

Item..... AHIGDI GDI

Sel	Customer	Del Seq	Description
☒	C01	000	Rover Dealership - London
☐	MJB1	001	MARK B

1=Select
F3=Exit F12=Cancel

Position to.....

Fields:

Sel

Select. Enter 1 to select the customer and delivery sequence you want to enter responsibility overrides for.

Position To

Use this to position the display to the specified field.



To display the Override Responsibilities Window, enter 1 in the Untitled field on the Selection Of Customer To Be Maintained screen.

Sales Channel Overrides



4/INK

Use this procedure to define packaging responsibilities for a sales channel when they vary from the default for a particular country.



Note: Sales Channel responsibility overrides are used regardless of the responsibility settings for Country and Item, but are overridden by any responsibility overrides defined for the customer.

Sales Channel Responsibility Overrides Screen



Select Sales Channel Overrides.

Use this screen to select the sales channel for which you want to enter responsibility overrides.



Note: If the company does not have sales channels defined then you cannot define Sales Channel Responsibilities overrides.

IN346	Z1 - UK Demonstration Company	User: GBJBA1MS	8/10/97 11:10:01
Sales Channel Responsibility Overrides			
Sales Channel....?.. █			
Country.....?.. █			
F3=Exit F4=Prompt			

Fields:

Sales Channel

Enter the code for the sales channel.

Country

Enter the country.

For more information, see Override Responsibilities Window (Sales Channels).



To display the Override Responsibilities Window, complete the Sales Channel and Country fields and then press **Enter**.

Override Responsibilities Window (Sales Channels)



To display this window complete the Sales Channel and Country fields on the Sales Channel Responsibility Overrides screen and then press **Enter**.

Use this screen to enter the packaging responsibilities for the selected sales channel.

IN346 Z1 - GB Demonstration Company User: GBJBA1MS 3/02/98 13:01:47

Sales Channel Responsibility Overrides

Sales Channel....?.. 2 Europe
Country.....?.. GB United Kingdom ok.

Channel.... 2 Europe
Country.... GB United Kingdom ok.

More:

Resp		Responsibility
1	Extractor	1
2	Manufacturer	0
3	Filler	0
4	Retailer	0

F3=Exit F4=Prompt

16-46 SA MW KS CL IM DM II MARVIN KB PET087S1

Fields:

Responsibility

Enter one of the following:

0 - To exclude this item from the responsibility calculations.

1 - To include this item in the responsibility calculations.



Select **F8=Update** to validate the data and display the Sales Channel Responsibility Overrides screen.

Calendar Maintenance



5/INK

Use this procedure to define and update the calendar profiles used by Packaging Requirements.

Inventory Calendar/Year Maintenance Selection Screen



Select Calendar.

Use this screen to select the calendar you want to maintain or to enter the code for a new calendar profile.

IN850	Z1 - UK Demonstration Company	User GBJBA1MS	8/10/97		
			11:15:20		
Inventory Calendar/Year Maintenance					
Sel	Code	Year	Description	Work days	Yr Start
█	C1	00		200	1/01/97
-	C1	00		200	1/01/98
-	C1	00		200	1/01/99
-	P1	97	Period Calendar for 97	261	1/01/97
Enter Calendar code: Year: Based on Calendar Profile:					
1=Select 6=Print					
F3=Exit					

Fields:

Sel

Select. Enter one of the following:

- 1 - Select, to select the calendar profile you want to change.
- 6 - Print, to print the calendar profile.

Enter Calendar Code

Enter a code for a new calendar profile.

Year

Enter the year for the new calendar profile.

Based on Calendar Profile

If required enter the code and year of the calendar profile the new profile is based upon.



To display the Inventory Calendar/Year Maintenance screen so you can add a new calendar profile, enter a Calendar Code, Year and if required profile and year the calendar should be based upon.



To display the Inventory Calendar/year Maintenance screen so you can amend a calendar profile, enter 1 in the selection field alongside the required calendar profile.

Inventory Calendar/Year Maintenance Screen

1



To display this screen in Amend mode enter 1 in the selection field on the Inventory Calendar/Year Maintenance Selection screen.



Or: To display this screen in Add mode enter a Calendar Code and Year.

Use this screen to enter details for the calendar profile you are maintaining or creating.

IN850	Z1 - UK Demonstration Company	User GBJBA1MS	8/10/97 11:20:25																																				
Inventory Calendar/Year Maintenance																																							
Calendar Code/Year.....		C1 00																																					
Number of Periods per Year...		12																																					
Normal Start Day of Week.....		1	(1=Monday 7=Sunday)																																				
Start Date of the Year.....		1/01/97																																					
<table border="1"><thead><tr><th>Period Name</th><th>Days</th><th>Period Name</th><th>Days</th><th>Period Name</th><th>Days</th></tr></thead><tbody><tr><td>1. jan</td><td>31 23</td><td>2. feb</td><td>28 20</td><td>3. mar</td><td>31 21</td></tr><tr><td>4. apr</td><td>30 22</td><td>5. may</td><td>31 22</td><td>6. jun</td><td>30 21</td></tr><tr><td>7. jul</td><td>31 23</td><td>8. aug</td><td>31 21</td><td>9. sep</td><td>30 22</td></tr><tr><td>10. oct</td><td>31 23</td><td>11. nov</td><td>30 20</td><td>12. dec</td><td>31 23</td></tr><tr><td>13. _____</td><td>—</td><td></td><td></td><td></td><td></td></tr></tbody></table>				Period Name	Days	Period Name	Days	Period Name	Days	1. jan	31 23	2. feb	28 20	3. mar	31 21	4. apr	30 22	5. may	31 22	6. jun	30 21	7. jul	31 23	8. aug	31 21	9. sep	30 22	10. oct	31 23	11. nov	30 20	12. dec	31 23	13. _____	—				
Period Name	Days	Period Name	Days	Period Name	Days																																		
1. jan	31 23	2. feb	28 20	3. mar	31 21																																		
4. apr	30 22	5. may	31 22	6. jun	30 21																																		
7. jul	31 23	8. aug	31 21	9. sep	30 22																																		
10. oct	31 23	11. nov	30 20	12. dec	31 23																																		
13. _____	—																																						
Template type to use..... 1		1=Standard Week 2=Cyclic Weeks 3=Period																																					
F3=Exit F11=Delete F12=Previous																																							

Fields:

Calendar Code/Year

Enter a description for the calendar profile.

Number of Periods per Year

Enter the number of periods in the year, either 12 or 13 as required.

Normal Start Day of Week

Enter one of the following:

- 1 - Monday
- 2 - Tuesday
- 3 - Wednesday
- 4 - Thursday
- 5 - Friday
- 6 - Saturday

7 - Sunday.

Start Date of the Year

Enter the date that the calendar year starts.

Period Names

Enter the name of each period.

Days

Enter the number of days there are in each period.



Note: This includes working and non-working days.

Template Type To Use

Enter one of the following:

- 1 - Standard Week, where you have the same working days each week
- 2 - Cyclic Week, where the working days changes over a number of weeks cycle. You can have up to a five week cycle.
- 3 - Period.



Note: This screen varies depending upon the template type you have selected.

Functions:

F11

Delete. Use this function to delete the selected calendar profile.



Press **Enter** to display the Inventory Calendar/Year Maintenance screen 2.

Inventory Calendar/Year Maintenance Screen 2 (Standard Week)



To display this screen , set the Template Type to 1 - Standard Week, then press **Enter** on the Inventory Calendar/Year Maintenance screen.

Use this screen to enter the working days in a standard week.

IN850	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 11:58:05
Inventory Calendar/Year Maintenance			
Calendar Code/Year.. C3 98 Calendar for 1998			
Standard Weekly Template :			
M T W T F S S			
0 0 0 0 0 0 ("0" for non working day or "1" for working day)			
Enter up to five alternative week templates with effective dates :			
M T W T F S S	From Date	To Date	
- - - - -	_____	_____	
- - - - -	_____	_____	
- - - - -	_____	_____	
- - - - -	_____	_____	
- - - - -	_____	_____	
F3=Exit F12=Previous			

Fields:

Standard Week Template

Set up the Standard Weeks for one or more weeks.

0 - Non-working day.

1 - Working day.



Press **Enter** to validate the data you have entered in the Inventory Calendar/Year Maintenance screen 2. Press **Enter** again to display the Inventory Calendar/Year Maintenance screen 3.

Inventory Calendar/Year Maintenance Screen 2 (Cyclic Week)



To display this screen set the Template Type to 2 - Cyclic Week, then press **Enter** on the Inventory Calendar/Year Maintenance screen.

Use this screen to enter the working and non-working days when the pattern varies over more than one week.

```
IN850                      Z1 - UK Demonstration Company    User GBJBA1MS    10/10/97
                                                                11:58:24

Inventory Calendar/Year Maintenance

Calendar Code/Year.. C3 98 Calenday for 1998

Cyclic Weeks Templates :

   M T W T F S S
1.  1 1 1 1 0 0    ("0" for non working day or "1" for working day)
2.  1 1 1 1 0 0
3.  - - - - -
4.  - - - - -
5.  - - - - -

Number of weeks... 2

-----
F3=Exit  F12=Previous
```

Fields:

Standard Week Template

Set up Standard Weeks for one or more weeks.

0 - Non-working day.

1 - Working day.



Press **Enter** to validate the data you have entered in the Inventory Calendar/Year Maintenance screen 2. Press **Enter** again to display the Inventory Calendar/Year Maintenance screen 3.

Inventory Calendar/Year Maintenance Screen 2 (Period)



To display this screen set the Template Type to 3 - Period, then press **Enter** on the Inventory Calendar/Year Maintenance screen 1.

Use this screen to enter the working and non-working days in a period.

IN850	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 11:57:52
Inventory Calendar/Year Maintenance			
Calendar Code/Year.. C3 98 Calendar for 1998			
Period Template for Period : 1 J			
1 2 3 4 5 6 7 8 9 0 ("0" for non working day or "1" for working day)			
1 1 1 1 1 0 0 0 0 0			
10. 0 0 0 0 0 0 0 0 0 0			
20. 0 0 0 0 0 0 0 0 0 0			
30. 0			
F3=Exit F8=Skip to holidays F12=Previous			

Fields:

Standard Week Template

Set up Standard Weeks for one or more weeks.

0 - Non-working day.

1 - Working day.

Functions:

F8

Skip To Holidays. Select this function to move straight to entering holiday details without having to enter the working day pattern for the period.



Press **Enter** to validate the data you have entered in the Inventory Calendar/Year Maintenance screen 2. Press **Enter** again to display the Inventory Calendar/Year Maintenance screen 3.

Inventory Calendar/Year Maintenance Screen 3

-  To display this screen select **F8=Skip To Holidays** on the Inventory Calendar/Year Maintenance screen 2 (period).
-  Or: Press **Enter** to validate the data you have entered in the Inventory Calendar/Year Maintenance screen 2 and press **Enter** again.

Use this screen to define the dates of any works holidays.

IN850		Z1 - UK Demonstration Company		User GBJBA1MS		10/10/97 11:57:43	
Inventory Calendar/Year Maintenance							
Calendar Code C3 98 Calendar for 1998							
HOLIDAYS							
From		To		From		To	
█							
F3=Exit F8=Update F12=Previous							

Fields:

Holidays From

Enter the start date of the holiday.

Holidays To

Enter the end date of the holiday.

-  Select **F8=Update** to save the information and display the Inventory Calendar/Year Maintenance screen.

Extract Data From Inventory



11/INK

Use this procedure to extract from the Inventory Movements file the details of all issues for the selected period. The information is put in the packaging extract file which is used to create the Packaging Usage Report.



Note: You cannot extract data from closed packaging reporting periods.



```
IN355                Z1 - UK Demonstration Company      User GBJBA1MS      8/10/97
                                                           11:54:10

Data Extract Selection

Country for Extract.....?. GB United Kingdom
Period to be extracted..... 27 01



F3=Exit  F4=Prompt  F8=Submit
```

Country for Extract

Enter the country for which you want to extract the packaging data.

Period/Quarter To Be Extracted

Enter the period/quarter for which you want to extract the packaging data.



Update Period/Quarter



12/INK

Use this procedure to change the current packaging reporting period or quarter and year.



Note: You should perform data extract for the current period before you change the reporting period.

Update Quarter/Year Screen



Select Update Period/Quarter.

Use this screen to select the quarter, period and year that you want to update.

Fields:

Current Quarter/Period

Enter the quarter/period you want to update. This defaults to the current reporting quarter/period.

Current Year

Enter the year. This defaults to the current reporting year.



Select **F8=Update**, to update the quarter or period.

Corrections And Adjustments



13/INK

Use this procedure to enter adjustments related to the periods contained in the packaging report summary. These adjustments are shown on the German Duales Report as period 13 figures.

Corrections And Adjustments Screen 1



Select Corrections And Adjustments.

Use this screen to select the country and period that you want to enter packaging adjustments for.

IN359	Z1 - UK Demonstration Company	User GBJBA1MS	8/10/97 12:00:52
Corrections & Adjustments			
Country.....?.. GB United Kingdom			
Period..... 01			
F3=Exit F4=Prompt			

Fields:

Country

Enter the packaging reporting country for which there are adjustments.

Period

Enter the period for the adjustments.



Enter a Country and Period on the Corrections And Adjustments screen 1 and press **Enter** to display the Corrections And Adjustments screen 2

Corrections And Adjustments Screen 2



To display this screen enter a Country and Period on the Corrections And Adjustments screen 1 and press **Enter**.

Use this screen to select the adjustment details you want to amend or add.

IN359	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 12:20:46
Corrections & Adjustments			
Country..... DE Germany			
Period..... 01			
Packing Code	Responsibility	Category	Adjustment Quantity
■ A1 CARDBOARD BOXES	2 Manufacturer	3 VOLUME BASED	12.000000
2=Amend 4=Delete			
F3=Exit F6=Add F12=Previous			

Fields:

Untitled

Enter one of the following:

2 - Amend to select the correction you want to amend.

4 - Delete to remove the correction.

Functions:

F6

Add. Use this function to add a new correction or adjustment.



Select **F6=Add** to display the Corrections And Adjustments screen 3 in Add mode.



Enter 2 in the untitled field, to display the Corrections And Adjustments screen 3 in Amend mode.

Corrections And Adjustments Screen 3

-  To display this screen in Add mode select **F6=Add** on the second Corrections And Adjustments screen.
-  To display this screen in Amend mode enter 2 in the untitled field on the second Corrections And Adjustments screen.

Use this screen to enter the adjustment details.

IN359	Z1 - UK Demonstration Company	User: GBJBA1MS	8/10/97 12:01:51
Corrections & Adjustments			
Packaging Code.....?	█		
Category.....			
Responsibility.....?	_		
Quantity.....	.000000		
Adjustment Reason.....?	_		
F4=Prompt F12=Previous			

Fields:

Packaging Code

Enter the packaging code for the adjustment.

If you are amending the adjustment this field is for information only.

Responsibility

Enter who has responsibility for the adjustment.

If you are amending the adjustment this field is for information only.

Quantity

Enter the quantity of packaging this adjustment applies to, either a positive or negative value.

Adjustment Reason

Enter the reason for the adjustment.

-  Press **F12=Previous** to return to the previous screen.

Country Details Enquiries



21/INK

Use this procedure to look at the details for the packaging reporting countries.

Packaging Reporting Countries Enquiry Screen

 Select Country Details (Enquiries).

Use this screen to select the packaging reporting country whose details you want to display.

IN362	Z1 - UK Demonstration Company	User: GBJBAIMS	9/10/97
			10:55:52
Packaging Reporting Countries Enquiry			
Country	Description	Format	Year
DE	Germany		97
GB	United Kingdom		97
Period			
01 of 12			
01 of 12			
1=Select			
F3=Exit F19=Position to			

Fields:

Untitled

Enter 1 to select the country whose packaging reporting details you want to view.

Functions:

F19

Position To. Use this to position the cursor at the country code you wish to select.

 Press **Enter**.

Packaging Reporting Country Enquiry Screen 2



To display this screen select the country you wish to view on the Packaging Reporting Countries Enquiry screen and press **Enter**.

Use this screen to view the details for the packaging reporting country. The fields in this screen are the same as in the Maintain Packaging Reporting Country screen.

N362	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97 12:24:12
------	-------------------------------	---------------	----------------------

Packaging Reporting Country Enquiry

Country..... DE Germany
Reporting Frequency..... 1 (1=Monthly, 2=Quarterly, 3=Annually)
Reporting Format.....
Track Responsibilities..... 1 (1=Yes, 0=No)
Calendar Code..... P1
Current Year..... 97
Current Period..... 01 of 12
Reporting Currency..... GBP Pounds Sterling
Reporting VAT Code..... 000
Reporting Address..... Address

Target Recovery..... 20.00 %
Target Recycling..... 40.00 %

F3=Exit F12=Previous F13=Responsibilities F14=Packaging Codes
F15=Average Packaging F16=Packaging Categories

Functions:

F13

Responsibilities. Use this function to display the packaging responsibilities for each section of the supply chain.

F14

Packaging Codes. Use this function to display the defined packaging codes.

F15

Average Packaging. Use this function to display the average packaging used per despatch.

F16

Packaging Categories. Use this function key to display the defined packaging categories.



Press **F3=Exit** to exit the enquiry.

Responsibilities Enquiry Window (F13)

-  To view this window select
F13=Responsibilities on the Packaging
Reporting Enquiry screen 2.

Use this window to view the responsibilities set up for this packaging reporting country.

N362 Z1 - UK Demonstration Company User GBJBAIMS 10/10/97
12:24:12

Packaging Reporting Country Enquiry

Responsibilities Enquiry

Country	DE	Germany			
Rep	Country	DE	Germany		
Rep					
Tra	Resp			Responsibility %	Dft
Cal	1	Extractor		10.00	1
Cur	2	Manufacturer		70.00	1
Cur	3	Filler		20.00	1
Rep	4	Retailer		.00	1
Rep	5	Consumer		.00	1
Rep					

Tar F12=Previous

Target Recycling..... 40.00 %

F3=Exit F12=Previous F13=Responsibilities F14=Packaging Codes
F15=Average Packaging F16=Packaging Categories

-  Select **F3=Exit** to exit the enquiry.

Packaging Details Enquiry Screen (F14)



To display this screen select **F14=Packaging Codes** on the Packaging Reporting Enquiry screen 2.

Use this window to view the packaging codes set up for this packaging reporting country.

N351	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97
			12:25:21
Packaging Details			
Country	DE	Germany	
Pack Code	Packaging Description	Category	UoM VAT Fees
A1	CARDBOARD BOXES	VOLUME BASED	M3 000 1.500000
A2	SHRINKWRAP	SURFACE AREA	CM 000 .250000
F3=Exit F12=Previous			



Select **F3=Exit** to exit the enquiry.

Average Packaging Details per Despatch Enquiry Screen (F15)



To display this screen select **F15=Average Packaging** on the Packaging Reporting Enquiry screen 2.

Use this window to view the responsibilities set up for this packaging reporting country.

N344	Z1 - UK Demonstration Company	User GBJBA1MS	10/10/97
			12:25:39
Average Packaging Details per Despatch			
Country	DE	Germany	
Pack	Packaging		
Code	Description	Category	UoM
A1	CARDBOARD BOXES	VOLUME BASED	M3
A2	SHRINKWRAP	SURFACE AREA	CM
		Units Per	M
		Despatch	D
		3.000000	1
		2.000000	0
F3=Exit F12=Previous			



Select **F3=Exit** to exit the enquiry.

Packaging Categories Enquiry Window (F16)



To display this window select **F16=Packaging Categories** on the Packaging Reporting Enquiry screen 2.

Use this window to view the packaging categories set up for this packaging reporting country.

N362		Z1 - UK Demonstration Company		User GBJBAIMS	9/10/97
					10:58:45
Packaging Reporting Country Enquiry					
Packaging Categories Enquiry					
Country.	Country	DE	Germany		ly)
Reportin	Category	Description		Unit	
Track Re	Code				
Calendar	1	WEIGHT BASED		TO	
Current	2	SURFACE AREA		CM	
Current	3	VOLUME BASED		M3	
Reportin	4	WEIGHT BASED		KG	
Reportin					
Reportin					
F12=Previous					
Target Recovery.....		20.00 %			
Target Recycling.....		40.00 %			
F3=Exit F12=Previous F13=Responsibilities F14=Packaging Codes					
F15=Average Packaging F16=Packaging Categories					



Select **F3=Exit** to exit the enquiry.

Item Details Enquiries



22/INK

Use this procedure to look at the packaging details for the item.

Country Item Packaging Details Enquiry Screen



Select Item Details (Enquiry).

Use this screen to view the packaging details for the item displayed. You can view the details for one issue unit or for the defined quantity breaks.

N360	Z1 - UK Demonstration Company	User GBJBA1MS	9/10/97
			11:00:21
Country Item Packaging Details - Enquiry			
Item.....	ALATCH	Latch Assembly for Car Boot	
Country.....	DE	Germany	
Issue Unit.....	EA	Single of	
Packaging Details per Issue Unit			
Pack Code	Packaging Description	Category	Packing Units M D
A1	CARDBOARD BOXES	VOLUME BASED	12.000000 1
A2	SHRINKWRAP	SURFACE AREA	2.000000 0
F3=Exit F12=Previous F16=Quantity Breaks F18=Select Country			

Fields:

Item

Enter the item for which you want to view packaging details.

Country

Enter the packaging reporting country.

Functions:

F16

Quantity Breaks. Use this function to display the packaging quantity breaks.

F18

Select Country. Use this function to display the packaging details for a different packaging reporting country.



Press **Enter**.

Packaging Payments Reports



31/INK



Select Packaging Payments.

This report details the recommended packaging payments totalled by period, quarter or year. There are also sub-totals for each category and each responsibility.

IN364	Z1 - UK Demonstration Company	User: GBJBA1MS	9/10/97 11:01:48
Packaging Payments Report Selection			
Reporting country.....?. <u>81</u> United Kingdom			
From Period..... <u>97 01</u>			
To Period..... <u>97 01</u>			
F3=Exit F4=Prompt F8=Submit			

Fields:

Reporting Country

Enter the country for the payment report.

From Period/Quarter

Enter the starting period or quarter for the payment report.

To Period

Enter the finishing period or quarter for the payment report.



Select **F8=Submit** to start the report printing.

Packaging Adjustments Reports



32/INK



Select Packaging Adjustments to display the Packaging Adjustment Report screen.

This report shows all the packaging adjustments made for the specified period or quarter.

IN363	Z1 - UK Demonstration Company	User: GBJBA1MS	9/10/97 11:02:28
Packaging Adjustments Report			
Reporting Country.....?.. <u>GB</u> United Kingdom			
Period..... <u>27</u> <u>01</u>			
F3=Exit F4=Prompt F8=Submit			

Fields:

Reporting Country

Enter the country you want to produce the adjustment report for.

Period/Quarter

Enter the period or quarter you require the adjustment report for.



Select **F8=Submit** to start the report printing.

Packaging Usage Reports



33/INK



Select Packaging Usage to display the Packaging Usage Report screen.

This report prints the Packaging Extract file. For more information, see Extract Data From Inventory. You can produce the Packaging Usage Report for a period, quarter or year.

IN366	Z1 - GB Demonstration Company	User GBJBA1MS	3/02/98 13:16:43
Packaging Report			
Reporting Country.....?.. GB United Kingdom ok.			
Current Period..... 97 03			
Advance Period..... 0 (0 or 1)			
Yearly report required.... 0 (0 or 1)			
F3=Exit F8=Submit job			
5-43	SA	MW	KS CL IM DM II MARVIN KB PET087S1

Fields:

Reporting country

Enter the packaging reporting country.

Advance Period

Enter either:

- 0 - Keep the current period open.
- 1 - Close the current period and open a new period.

Yearly Report Required

Enter either:

- 1 - To produce the yearly report.
- 2 - To not produce the yearly report.



Note: If you are producing the yearly report and you set the Advance Period flag, the year is also advanced, as long as an Inventory Data Extract has been run for every period of the year.



Select **F8=Submit Job** to run the report, and where relevant advance the period.

Managing Historical Data.

Use these options to create and delete historical data for the Packaging Extract file.

Delete Historical Data



42/INK

Use this procedure to delete the historical data from the Packaging Extract file. The Packaging Extract file is produced when you run Extract Data From Inventory. For more information, see Extract Data From Inventory.

Delete Historical Data Screen



Select Delete Historical Data.

Use this screen to select the country and period of the data you are deleting.

IN368	Z1 - UK Demonstration Company	User GBJBA1MS	9/10/97 11:03:08
Delete Historical Data			
Country.....?.. <u>GB</u> United Kingdom			
Last period's data to be cleared.. <u>10</u> <u>95</u>			
Period End Date.....			
F3=Exit F4=Prompt			

Fields:

Country

Enter the packaging reporting country.

Last Periods/Quarter Data To Be Erased

Enter the last period or quarter whose data is to be erased.

Period End Date

Enter the end date of the last period to be erased.



Press **Enter** to remove the historical data.

Create Historical Data



43/INK

Use this procedure to create historical data for the specified country and quarter or period.

Create Historical Data Screen



Select Create Historical Data.

Use this screen to specify the packaging country and period or quarter of the data you are creating.

IN368	Z1 - UK Demonstration Company	User: GBJBA1MS	9/10/97 11:03:35
Create Historical Data			
Country.....?.. <u>GB</u> United Kingdom			
Last Quarters Data to be Created.. <u>01</u> <u>96</u>			
Period End Date.....			
F3=Exit F4=Prompt			

Fields:

Country

Enter the packaging reporting country you want to create data for.

Last Periods/Quarter Data To Be Created

Enter the last period or quarter that you want to create data for.

Period End Date

Enter the end date of the last period or quarter.



Press **F3=Exit** to exit the enquiry.