Chapter 5
Workshop Operations

Call Logging

1/WOS

Use this option to create new jobs and maintain existing jobs.

You can create jobs for:

- Pre-booked workshop jobs.
- Non-booked jobs.

To create a job, you need to:

- Identify the customer or equipment and kind of job required.
- Enter the equipment to add to the job. You can also enter a batch number or customer order number and a job type of Book In, to display all items still in Pre-book to confirm receipt.
- Enter the job details.
- If necessary, enter the accessories received with an item.
- If necessary, enter the new stock location.

Note: The order of the screens, and which screens display, depends upon the job type you select.

When you maintain a job, you can only confirm the receipt of pre-booked items and putaway items at Goods In, or returns from the Workshop.

Access

You can access the job you want to set up or maintain in many ways. You can enter just the serial number, or the model, the customer or customer and account, and so on.

Whichever fields you complete on the Job Maintenance Selection Screen, when you press **Enter**, Workshop Management automatically displays lists of missing information so that you can make a selection. So, if you enter just the account number, when you press **Enter** you see a list of addresses for that customer, and have to select one. You then select the machine, and so on.

These selection screens are not included in this documentation, as there are several of them. They are easy to use; they list the addresses, contract types, machines, models, locations, or whatever Workshop Management needs, and you make your selection.

Job Maintenance Selection Screen

To display this screen, select the Call Logging option.

Use this screen to define, or select, the job you want to create, or maintain.

```
WO210                Z1 - UK Demonstration Company    USER GBJBANB4   22/01/98
                          CENTRAL WORKSHOP                            11:06:02
Job Maintenance

    Job entry type...?.. 

And: Serial Number....... ______________ Model............?.. ______________

 Or: Account Number...?.. ________       Account Address..... ___

 Or: Customer Order No... ____________________

 Or: Job Number.......... _______

 Or: Jobs for batch no... _______

 Or: Stock Location...?.. ______


F3=Exit  F4=Prompt  F18=New Customer  F20=Pre-book jobs
```

Fields:

Job Entry Type

To specify the type of job, enter one of the following:

2 - Pre-book job. You must then enter either a model and serial number, or account number and address.

4 - Book in job. You can use any of the search fields except Stock Location to identify the job. Use model and serial number or account number and address to create book in jobs. Use Job number, Customer Order number or Jobs for Batch No. to receive pre-booked jobs.

6 - Warranty Claim job.

Blank - Putaway. You can only use the Stock Location search field to find this job.

Serial Number

Enter the serial number for the machine.

If more than one job line is found for that machine, they all display for selection.

If a job is already outstanding for the machine, it displays so you can update it.

Model

Enter a model.

Tip: If this is all you enter, a list of all machines of this model at all installation sites displays. This list can be lengthy, so avoid using it when taking a new call.

Account Number and Account Address

Enter the customer account and address. If you do not enter an address, a list displays so you can select the correct address.

Set up a call for a customer without an account, by setting them up as a cash customer. To do this, enter an existing account: reserve a special dummy number for this purpose. Then enter a new address code. You then enter the name and address of the new installation, followed by the equipment installed at the site. You can then log the job details.

To position the cursor on the Account Number field when the screen displays, set the Position Cursor field to 1 on System Parameters Maintenance Screen 4.

Customer Order No

Enter the customer order number. This must be on at least one job. Select the job you require from the displayed list of jobs.

To position the cursor on the Customer Order Number field when the screen displays, set the Position Cursor field to 3 on System Parameters Maintenance Screen 4.

Job Number

If you enter a job, it must be an existing job which has not yet been completed through technical reporting. When you press **Enter** you see a list of equipment on this job.

Jobs For Batch Number

Enter the job batch number. This displays a list of jobs for that batch number. Select the job you require.

Stock Location

Enter a stockroom for the new location of the putaway job.

Functions:

F18

New Customer. Use this function to enter a new address for the selected customer. You can use this function and a dummy account number to enter details for cash customers.

F20

Pre-book Jobs. Use this function to display the Pre-book Jobs Enquiry Screen.

To display the next screen, select the job you require and press **Enter**.

Job Header Entry Screen

To display the Job Header Entry Screen, on the Job Maintenance Selection Screen, enter the details for a new job and press **Enter**.

Note: To access this screen so you can add a job, on the Job Maintenance Selection Screen, set the Job Type to either 2 or 4.

To access this screen, so you can update a job, on the Job Maintenance Selection Screen, enter a batch number or customer order number and a job type of 4.

Use this screen to enter the customer order reference and contact, and select the equipment to include on the current job number. You can add new pieces of equipment, not yet recorded on the installation database, for the installation site. For each piece of equipment selected, the first Job Line Details Screen is displayed.

```
WO220                 Z1 - GB Demonstration Company    USER GBJBANB1   23/04/98
                            CENTRAL WORKSHOP                            14:53:21
Job Header Entry
                                                          Last job no.  505222
Customer account.... GC01      000  Reeves Chemist's
                                    J JONES
Customer Ord No..... ____________________  Booked date/time 23/04/98  14:53:20
Job Contact......... ____________________

Enter equipment for repair:           Con/ Est     Crd?
  Model(?)        Serial          Qty  Sym?   Col?         Date of Pur.     CCO
  _______________ _______________  __1 _ ___ _  CT  __ 0      0/00/00        _
n to select                            Customer Ord No. ____________________




1=Add detail 2=Inst.Detail 3=Edit Line 4=Delete line 5=Accessories
_______________________________________________________________________________
F3=Exit  F4=Prompt  F12=Previous  F14=List existing jobs  F16=Equip detail

MA    a                                                                07/023
```

Fields:

Customer Order No

Enter the customer order number.

Job Contact

Enter the name of the person placing the call, or the person to contact.

If you set More Than One Machine Allowed On A Breakdown Call to 1, on the System Parameters Maintenance Screen 4, the contact can cover more than one line.

Model

To add a new model to the list, select the model.

Serial

Enter the serial number.

Qty

Enter the number of pieces of equipment. If you enter a serial number, you must set this to 1.

Con/Sym

Enter the condition and symptom code for this job.

Est

Enter one of the following:

0 - If you do not require an estimate.

1 - If the customer requested an estimate.

2 - If the customer requested a quote.

4 - If you require a quote.

Col

Select the collection method required. Leave blank if the customer will send the goods in themselves.

Crd

Enter one of the following:

0 - If you do not require credit assessment. You cannot set the Est flag to 0.

1 - If you do require credit assessment. You must set the Est flag to 0.

Date of Purchase

Enter the date the equipment was purchased.

CCO

Enter one of the following:

0 - If the customer is not a cash customer. This is the default.

1 - If the customer is a cash customer and requires a proforma.

Tip: To save the new model information, and display the details in the list, press **Enter**.

(Untitled)

Selection field. Enter one of the following:

1 - Add detail. To add the job details for this piece of equipment, using the Job Details Screen.

2 - Inst. Detail. To add the installation information, using the Equipment Detail Maintenance Screen.

3 - Edit Line. To change the model, serial number and condition code details, using the fields near the top of the screen.

4 - Delete Line. To delete this job line and associated header information. You must also enter a reason for the deletion. If the SOP order number is the same as the Job number, Workshop Management also deletes the equipment record.

5 - Accessories. To add accessories to the job line, using the Accessories/Conditions screen.

6 - Receive goods. Use this option to receive previously booked jobs into stores or goods in. You must enter the location for the goods.

Functions:

F14

List Existing Jobs. Use this function to display all the existing jobs for the customer so you can enter the location of the equipment. When you change the location, Workshop Management updates the action automatically.

Note: You cannot change the location of any job that does not have a creation date and time.

F16

Equip. Detail. Use this function to display the Installation Equipment Maintenance Screen, showing the location details of the equipment.

To display the Job Details Screen, select a piece of equipment, by entering 1 - Add detail in the Untitled field.

Job Details Screen (Option 1)

To display this screen, on the Job Header Entry Screen, select a piece of equipment, by entering 1 in the untitled field.

Use this screen to enter the detailed information for the selected job line.

```
WO221                 Z1 - GB Demonstration Company    USER GBJBANB1   23/04/98
Job Line Details            CENTRAL WORKSHOP           UPDATE          14:55:21
Job number...:  505222  Batch.: A0016          Account/loc.: GC01     000
Job status...:                                 Reeves Chemist's
Action.....?.: 01 WORKSHOP TO PICKUP           Cont.type...: *NO
Model number.: PROJECTOR001                                  No user contract
Serial number: ______________                  Warranty exp..:  0/00/00
                   Booked        Received      Configuration.:
Job..........: 23/04/98 14:54  0/00/00   0:00
Response.....:          24:00                 Travel/Labour Chargeable
Target.......: 26/04/98 13:00  0/00/00   0:00 Parts Chargeable
Req.Comp.....:  0/00/00  0:00
Job cat....?.: WOD  Workshop Default           Credit Assessment flag..: 0
Contact......: MR JONES                                     Reason.?: __
Location...?.:                                 Estimate/Quote req......: 0
Condition..?.: 1    CONSTANTLY                 Q.A.required.(0/1)......: 0
Symptom....?.: 110  testing                    Collection req..........: 0
Physical Cond: __                              Team....?.: BTC Reprographics :
Order no.....: G039291                         Engineer..:
Credit no....: 0000000                         Job Duration..:  0:02

F3=Exit   F4=Prompt  F5=Print Acknowledge.  F6=Contract  F7=Job Story
F8=Update  F9=Assign Eng. F10=Messages  F12=Previous  F13=Hist. Enq.
F14=Accessories F15=CompleteCall F16=Message Retrieval F17=Audit F24=More Keys
MA    a                                                                06/017
```

Fields:

Action

If this job is a book-in job, select the action required on this job. This field defaults to different actions, depending upon the type of job chosen.

You cannot maintain this field for pre-book jobs.

Model Number

If required, enter the new model number of the piece of equipment.

Serial Number

If required, enter the new serial number for the piece of equipment.

Note: You can only change the model and serial number for a job with the status of Pre-Book or Book-In.

Job Date And Time - Booked

Enter the date and time you booked the job with the workshop. This defaults to the date and time you created the job.

Job Date And Time - Received

Enter the date and time you received the job in to the workshop.

Response Time

Enter the collection response time in the first field, and the job response time in the second field. The response time format is hh:mm.

Workshop Management uses the response time to calculate the target time for work to be started on the call. The default response time is from the response time hierarchy. This is special serial number data, then contract line (machine), contract header, contract type, then finally branch default time in escalation control maintenance. The 3-D matrix percentages can affect the time unless the response time is set up as a special serial number.

Target Date

This is the Booked or Received time plus response time, with allowance for the Branch Service Window.

Req. Comp

Required Completion. Enter the date by which the workshop job must be completed.

Job Cat

If the Job is at Status 00 (Open), select the new job category.

For all other Job Status, you cannot maintain this field.

Credit Assessment Flag

Enter one of the following:

0 - No credit assessment required.

1 - If you require credit assessment. You must also enter a credit request reason in the reason field. The Estimate/Quote Req field must be 0.

Reason

If you set the Credit Assessment Flag to 1, select the reason you want a credit check.

Contact

Enter the name of the contact for this job line. This defaults from the Job Header Screen.

Location

If this is a book-in job, enter the location of the machine.

You cannot maintain this field if this is a pre-book job.

Estimate/Quote Req

Enter one of the following:

0 - If you do not require an estimate.

1 - If the customer requested an estimate.

2 - If the customer requested a quote.

4 - If you require a quote.

Condition

Enter the condition of the piece of equipment.

QA Required

Enter one of the following:

0 - If you do not need to QA the job.

1 - If you want to QA the job. You cannot despatch this item to the customer, until you manually set a QA Action complete.

Symptom

Select the symptom exhibited by the faulty equipment.

Collection Req

Enter one of the following:

0 - If you deliver to the customer, or the customer is not a cash customer and does not require a proforma.

1 - If the customer collects the job and is a cash customer that requires a proforma to request payment.

Physical Cond

This field is for information only. Enter the physical condition code and description. If required, you can type in a new description for this job and condition code.

Team

Select the workshop team for this job. The default is the team allocated by Workshop Management based on engineer territory, including geocode and field service group, and the installation site's geocode. If no match is found, Workshop Management sets the allocation to *DF: the default team.

Order No

Enter the customer order number.

Engineer

Workshop Management can automatically allocate an engineer to the call, if you have allocated an engineer to the machine on the job line. You can make the engineer field mandatory in the Codes/Parameter File Maintenance option using type VLDN.

Job Duration

Enter the length of time needed to complete the job, in hh:mm format.

Functions:

F5

Print Acknowledgement. Use this function to print a standard acknowledgement letter to let the customer know that the equipment is at the workshop.

F6

Contract. Use this function to access the contract details and charge matrix.

F7

Job Story Text. Use this function to enter text for the whole job.

F9

Assign Eng. Use this function to assign an engineer to this job (if the team is not *DF - default team).

F10

Messages. Use this function to send a machine message.

F13

Hist Enq. Use this function to view the Call History Screen.

F14

Accessories. Use this function to access the Accessories/Condition Screen.

F15

Complete Call. Use this function to complete calls with a job status of 00 (Open).

F16

Message Retrieval. Use this function to view any machine messages.

F17

Audit. Use this function to view the Job Audit Enquiry Window.

F18

Equip. Detail. Use this function to view the Equipment Details Maintenance Screen.

F19

Print discrepancies. Use this function to print any discrepancies with the equipment received.

F20

Assist Eng. Use this function to nominate assisting engineers. The job must be status 01 (Assigned), and have an appointment date and time.

F21

Invoice Text. Use this function to enter the text shown on the final invoice.

F22

Phone Call Reqd. Use this function to change the status of the job line to Phone Call Required.

F23

Name + Address. Use this function to maintain the name and site address.

To save the entered information, and update the system maintained fields, select **F8=Update**.

Call History Window (F13)

To display this window, on the Job Details Screen, select **F13=Hist Enq**.

Use this screen to see the history of calls for this piece of equipment.

```
SS221              Z1 - C&T TEST COMPANY              USER GBJBAJKG    1/03/96
Job Line Details                                                       11:42:50
Job number...:    7338                          UPDATE
    Status...: 00=Open                          Serial number.:
Sub Status...: _                                Model number..: AA-M01
Contract type: B05  S&V Adv                     Configuration.:
Customer.....: Jones and Crossland Ltd          Account/loc...: C03      000
Call received: 16/02/96  17:39                  Warranty exp..:  0/00/00
Response time:
Target date..: 30/04/96   8:00                  Travel/Labour Chargeable
Job cat....?.: CAL  Calibration : BS5750        Parts Chargeable
Contact......: JOHN JENSEN                      WARNING -No Charge Matrix exists
Call History
   Call Reception C A Resp   Engr   J   F   M   S   C  V R Labour Meter 1 P E
    Date   Time  H P Time   Code   C   C   S   S   A  T C Hours Only   F C
 _ 16/02/96 17:44 0 0   0:00       CAL                        0:00 000000   0
 _ 16/02/96 17:39 0 0   0:00       CAL                        0:00 000000   0
 _ 16/02/96 17:32 0 0   0:00       PSV                        0:00 000000   0
 _ 23/11/95  9:02 0 0   0:00       PSV                     0 0  0:00 000000 0 0
 _  4/08/95 15:04 0 0   0:02 JOHN  JC1 ELE         RPU 0     3:00 005000 1 0

 Enter=Continue
F9=Assign Eng. F10=Messages  F12=Previous   F13=Hist. Enq.    F14=Peripherals

      16-04      SA        MW        KS        IM       II  KENB20A  PED129S1
```

Fields:

Unnamed

Selection field. To review a previous call, enter 1 against it.

Note: All other fields are display only.

C H

Credit Hold. Entries are:

0 - The call has not been on credit hold.

1 - The call has been on credit hold.

A P

Appointment. Entries are:

0 - There was no appointment date and time for the call.

1 - There was an appointment date and time for the call.

J C

Job category first included in the technical report for the job line.

F C

This is the fault code for the job line.

M S

The machine section repaired.

S S

The machine sub-section repaired.

C A

The corrective action taken by the engineer.

V T

Visit Type. Entries are:

0 - Contract maintenance visit type.

1 - Service visit type.

R C

Return call reason code. Entries are

0 - Return visit not required.

1 - Return visit on parts required.

2 - Return visit on knowledge required.

3 - Return visit required at end of day - customer.

4 - Return visit required at end of day - engineer.

5 - Return visit required for personal reasons.

6 - Engineer could not gain access to machine.

7 - Call stopped by despatching.

P F

Parts Fitted. Entries are:

0 - Parts not fitted.

1 - Parts fitted.

E C

Emergency code. Entries are:

0 - No emergency code.

1 - Emergency code. You set the call target time to the call reception date and time.

Press **Enter** to maintain the full Job Line Details Screen.

Accessories/Condition Screen

To display this screen, either on the Job Header Entry Screen, select a piece of equipment, by entering 5 in the untitled field, or,

On the Job Details Screen, select **F14=Accessories**.

Use this screen to record the details and condition of any accessories received with the equipment.

```
WO222              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                          12:08:43
Accessories / Condition                                ADDITION
Job number...: 0509789
Model no.....: DENMODEL1                Con  Remarks
Serial no....:                          _   ____________________________
Location.....:
                                            Qty
Accessory        Description        Reqd Req Rec   Condition
PLUG             Plug                  1   1 ___ _ ____________________________
600D200          LEG                   0   2 ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
_______________                        _     ___ _ ____________________________
                                                                        Bottom
_____________________________________________________________________________
F4=Prompt  F7=Text          F8=Update  F12=Previous
```

Fields:

Con

Select the condition of the equipment.

Remarks

Enter text to describe the equipment's condition. This defaults to the description of the selected condition.

Accessory

Enter the accessory received.

Reqd

Required. Enter the quantity of accessory required for this piece of equipment.

Tip: Workshop Management automatically displays a list of the accessories defined to this piece of equipment. For this list you only need to enter the quantity received and the condition. However you can add more accessories, when you need to define the accessory and the

quantity required.

Qty Rec

Quantity Received. Enter the number of the specified accessory received.

(Untitled)

Select the condition of the accessory.

Condition

Enter text to describe the equipment's condition. This defaults to the description of the selected condition.

Functions:

F7

Text. Use this function to add text to this record.

To save the information and return to the previous screen, select **F8=Update**.

Job Audit Enquiry Window (F17)

To display this windows, on the Job Detail Screen, select **F17=Audit**.

This window displays all changes made to a job line, with the most recent change first.

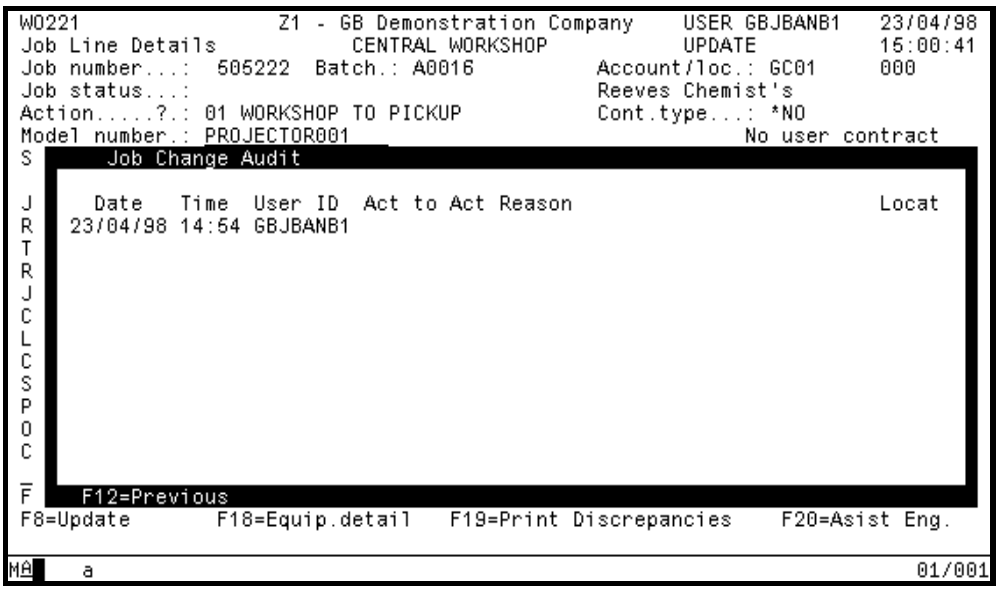

To return to the Job Details Screen, select **F12=Previous**.

Assisting Engineer Maintenance Screen (F20)

To display this window, on the Job Details Screen, select **F20=Assist Eng**.

Use this screen to assign, and unassign, any assisting engineers required on a job.

Note: The call must have the prime engineer assigned and an appointment date and time set, before you can assign any assisting engineers.

```
SS060              Z1 - C&T TEST COMPANY                USER GBJBAJKG    6/03/96
                          BIRMINGHAM BRANCH                            11:27:40
 Assisting Engineer Maintenance

   Prime Engineer..... A-03   A.CRANFIELD          Job Number.... 0006096
   Appointment Date... 15/03/96  Time.... 10:00    Job Duration..     2

         Assisting Engineer.....?.. A-01

X  Assisting Engineer            Reason for Unassignment




  4-Delete
F3=Exit     F4=Prompt     F8=Update     F12=Previous

      08-38      SR        MW        KS        IM       II  KENB20A  PED129S1
```

Fields:

Assisting Engineer

Enter an engineer to assist the prime engineer.

X

Selection field. Enter 4 to cancel the allocation of an assisting engineer to the job.

Assisting Engineer

Displays the details for each assisting engineer allocated to the job.

Reason For Unassignment

This field displays the reason Automatic Call Assignment cannot schedule the assisting engineer.

To return to the Job Details Screen and save any changes, select **F8=Update**.

Job Line Details Screen (F23)

To display the Job Line Details screen, on the Job Details Screen, select **F23=Name and Address**.

Use this screen to amend the customer address for this call only. If the call is a repeat call (that is a call-back to the same piece of equipment within a predefined number of days or machine cycles), this displays the last five calls.

Note: This does not update the customer address in Accounts Receivable.

```
SS221              Z1 - C&T TEST COMPANY                USER GBJBAJKG    1/03/96
                            BIRMINGHAM BRANCH                            11:45:48

Job Line Details
                                                        Job number.......:    6086
Machine.........: ANS01            / JKG001             ANS MODEL #01
Customer number.: C01        005
Customer name...: Keith Pugh Delivery Point 5            Currency customer 1
Customer address: Bristol                                Currency code..?. GBP
                  ____________________________________   Curr rate code.?. PERD
                  ____________________________________   VAT code.......?. 001
                  ____________________________
                  ____________________________    ____  ____
Machine location: ____________________________________
Contact person..: ____________________    Geo code....: FD1   ____
Telephone number: ____________________    Fax number..: ____________________
Opening hours...:  Mon     Tue     Wed     Thur    Fri     Sat     Sun
          From..:  8:00    8:00    8:00    8:00    8:00    ____    ____
          Until.: 17:00   17:00   17:00   17:00   17:00    ____    ____
          From..:  ____    ____    ____    ____    ____    ____
          Until.:  ____    ____    ____    ____    ____    ____    ____

F3=Exit   F4=Prompt   F8=Update   F12=Previous

      18-68     SA        MW        KS        IM        II  KENB20A  PED129S1
```

Fields:

Customer Name

Enter the new customer name.

Customer Address

Enter the new address.

Currency Customer

Enter one of the following:

0 - If this is not a currency customer.

1 - If this is a currency customer.

Currency Code

Enter the currency for this customer.

Curr Rate Code

Enter the currency rate for this customer.

VAT Code

Enter the VAT code for this customer.

Note: Tax codes on the charge matrix override this value.

Machine Location

Enter the exact location of the item selected for service.

Contact Person

Enter the contact for this piece of equipment. If you change the name, Workshop Management only updates this machine.

If you did not enter a job contact on the Job Header Screen, this name defaults to the Job Detail Screen for each machine included in the job.

Geo Code

Enter the customer geocode.

The geocode, or territory, directly influences the team Workshop Management selects for the call.

Telephone Number

Enter the telephone number for the customer.

Note: Do not change a 20 figure telephone number because Workshop Management loses the last five characters, since the override address only holds 15 numbers.

Fax Number

Enter the fax number for the customer.

Opening Hours

Enter the opening hours for the customer.

To save the information and return to the Job Details Screen, select **F8=Update**.

Work Control

1... 2... 2/WOS

Use this option to control all jobs, once you have received the items using the job creation function.

Description

You use the selection screen to select one of a number of different methods of displaying the outstanding jobs.

Enter a single engineer to view only those jobs assigned to this engineer.

Enter a team to display all the jobs for the team.

Enter a branch to display all jobs for the workshop branch.

You can also display jobs of a certain status or type, for a specific batch, division, model and so on.

A list of all job lines matching the entered selection parameters displays. Amongst other things, you can override the work allocation, and assign a job status.

You can also enter engineer and team messages. There is no facility to receive engineer messages in Work Control.

Work Control Selection Screen

To display the Work Control Selection Screen, select the Work Control option.

Use this screen to select the engineer, team or branch and job you want to maintain work control details for.

```
W0240            Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                        12:37:33
Work Control
Jobs for an Engineer..............?.:  ____
OR
Jobs for a Team...................?.:  ___
OR
Jobs for the Branch (1)...........:  0

Action............................?.:  __ (Blank=All)
Status Ranges.....................?.:  00 to 04

Jobs for Batch number.............:  _______
Jobs for Job Number...............:  _______
Jobs for Model Number.............?.:  _______________
Jobs for Order Number.............:  ____________________
Status of Job for Serial Number......:  _______________
All Jobs for Account No./Location..?.:  _______ ___
Jobs for Job Category.............?.:  ___
Jobs for Division/Model Group .....?.:  __ ___
Jobs for Model Sub-group..........?.:  ___
F3=Exit  F4=Prompt  F6=Work Control Screen  F8=Message Entry  F10=Diary

   4-42      SA      MW      KS  CL  IM  DM  II      EDN400A    KB    PKH318S1
```

Fields:

Note: To select a job, complete just one of the Jobs For Selection fields, and, if required, the Action and Status Fields.

Jobs For An Engineer

Select an engineer for which you want to display the jobs.

Any outstanding engineer messages (to the engineer, to the team, or to the branch) display before the job list.

Jobs For A Team

Select the team for which you want to display the jobs.

Any outstanding team messages display before the job list.

Jobs For The Branch

Enter one of the following:

0 - This is the default. Enter 0 if you have entered either a team or engineer.

1 - To display the jobs for the branch.

Messages for the branch do not display prior to the job list; to check branch messages, select the Engineer Messages menu option.

Action

Select the action for which you want to display jobs. Leave this field blank to display jobs for all actions.

Status Ranges

Enter the status range for which you want to display jobs.

To display jobs for just one status, enter the same status in the From and To fields.

Jobs For Batch Number

Enter the batch number you want to display jobs for.

Jobs For Job Number

Enter the job number you want to display jobs for.

Jobs For Model Number

Select the model you want to display jobs for.

Jobs for Order Number

Enter the order number you want to display jobs for.

Status Of Jobs For Serial Number

Enter the serial number you want to display jobs for.

All Jobs for Account No/Location

Select the customer and address you want to display all the jobs for.

Jobs For Job Category

Select the job category you want to display jobs for.

Jobs For Division/Model Group

Select the division and model group you want to display jobs for.

Jobs For Model Sub-Group

Select the model sub-group you want to display jobs for.

Functions:

F6

Work Control Screen. Use this function to display the Scheduled/Appointment Calls Screen.

F8

Message Entry. Use this function to enter engineer messages.

F10

Engineer Diary. Use this function to display the diary for the engineer or team.

Scheduled/Appointment Calls Screen (F6)

Select **F6=Work Control Screen** from the Work Control Selection Screen to display the Scheduled/Appointment Calls Screen.

Note: The display uses colour: avoid monochrome screens if you can.

The screen displays scheduled and unscheduled jobs in graphical format, with colours representing the time remaining to target.

Engineers are represented by their code number. This represents up to twenty engineers in two rows.

Tip: Place the cursor on an engineer code and press **Enter** to display his work queue.

Tip: Place the cursor on the unscheduled calls line and press **Enter**; select the job category required, or leave blank, and press **Enter** - the Engineer Work Allocation Screen is displayed, and you can then select the required job.

The blocks below each engineer are the calls to schedule to that engineer, and are in the preferred order of completion. This only displays 4 jobs for an engineer. If more than four jobs are allocated to the job queue, the subsequent jobs are no longer Unscheduled, but are not displayed as Scheduled.

The colour of each block represents the job's time from target, as follows:

Red & Flashing **** - Within 0:30 hrs:mins of target time.

Red - Within 0:30 and 2:30 hrs:mins of target time.

Amber - Within 2:30 and 4:30 hrs:mins of target time.

Green - Within 4:30 and 6:30 hrs:mins of target time.

Blue - Within 6:30 and 8:30 hrs:mins of target time.

White - More than 8:30 hrs:mins from target time.

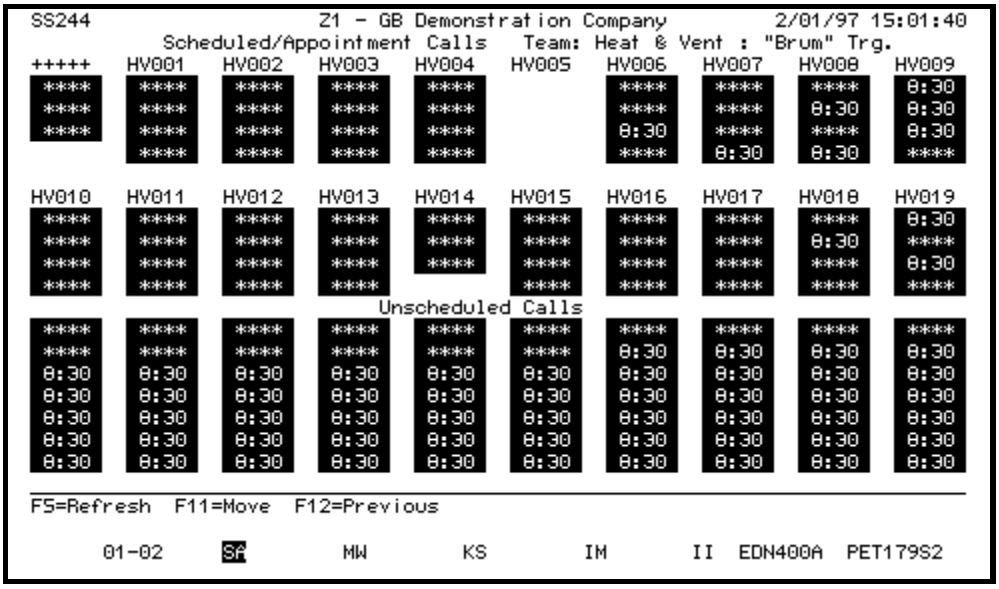

Functions:

F11

Move. Place the cursor on a job block and select **F11=Move**, to move the job to an engineer queue and schedule the job. You can insert the job as job 1, 2, 3 or 4 on the engineer's queue, if there are four jobs already scheduled. Position the cursor on the job before which the new job is to be scheduled, and press **Enter**. If the call cannot be scheduled, an error message is displayed. You can override some errors using **F14**.

To return to the previous screen, select **F12=Previous**.

Work Control Diary Screen (F10)

To display this screen, from the Work Control Selection Screen, select **F10=Diary**.

Five days are displayed, starting with the current system date. Select an engineer to make best use of the diary. If you select a team, the completion date, completion time and absence code are not available. You can enter non-machine-related jobs (holidays, sickness), as well as displaying appointment jobs. These entries are used by job scheduling.

Tip: To amend any detail, delete the existing one and add another.

```
WO831                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
                           CENTRAL WORKSHOP                            09:06:12
 Team Number....:  P01

   Friday          Saturday        Sunday          Tuesday         Friday
     1/05/98         2/05/98         3/05/98         5/05/98         8/05/98

                                                 _ ENG01 505224
                                                    0:09   0:02
                                                 _ 3RD P 505225
                                                    0:09   0:02
                                                                              +
 1=Select    4=Delete    6=Details
 F10=Add Activity  F12=Previous  F14=Move To Date  F16=Next Day  F18=Prev Day
MA    a                                                                 08/050
```

Fields:

(Untitled)

Selection field. Enter one of the following:

1 - Select. To review and amend the activity.

4 - Delete. To delete the activity.

6 - Details. To display the Job Line Detail Enquiry Screen.

Functions:

F10

Add Activity. Use this function to add an activity using the Non-Job Activity Maintenance Window.

F14

Move To Date. Use this function to move the activity to a new date.

F16

Next Day. Use this function to move the diary forward one day.

F18

Prev Day. Use this function to move the diary back one day.

Select **F12=Previous** to return to the previous screen.

Non-Job Activity Maintenance Window (F10)

To display this window, select **F10=Add Activity** on the Work Control Engineer Diary Screen.

Use this window to add non-job activities such as annual leave.

```
WO831                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
                           CENTRAL WORKSHOP                            09:06:12
 Team Number....:  P01

   Friday          Saturday        Sunday          Tuesday         Friday
     1/05/98         2/05/98         3/05/98         5/05/98         8/05/98

                                                 _ ENG01 505224
                                                    0:09   0:02
                                                 _ 3RD P 505225
                                                    0:09   0:02

                          Non-Job Activity Maintenance    ADDITION
                           Job category.:  ___
                           Start date...:  ________   Time...: _____
                           Duration.....:  ______

                          F4=Prompt  F8=Update  F12=Previous
 1=Select    4=Delete    6=Details
 F10=Add Activity  F12=Previous  F14=Move To Date  F16=Next Day  F18=Prev Day
MA    a                                                                16/052
```

Fields:

Job Category

Enter the category of the activity. You can set up the job categories in Job Category Maintenance.

Start Date

Enter the date on which the appointment starts.

Time

Enter the start time of the appointment.

Duration

If the duration is less than a working day, enter the duration in hours and minutes.

If the duration is longer than a working day, leave duration blank and set the completion date and time to make sure there is a job entry in each working day affected.

Complet Date

Enter the date on which the appointment will finish.

This field does not display when you are adding or updating an activity for a team.

Time

Enter the completion time of the appointment.

This field does not display when you are adding or updating an activity for a team.

Absence Code

Select a code. If you enter an absence code, it updates the Absent code on the Engineer Master file with immediate effect - not just for the diary dates.

Tip: To amend the absence code you must delete the existing entry and add a new one.

This field does not display when you are adding an activity for a team.

Note: Use Engineer Master File Maintenance to reset the Absent codes amended by engineer diary.

Select **F8=Update** to save the activity and return to the Work Control Diary Screen.

Work Control Job Lines Screen

To display this screen, enter the selection criteria on the Work Control Selection Screen and press **Enter**.

This screen displays the job details, including job number, status, model, action, and target date for each job.

If you display this for a team, a job with assisting engineers only displays for the assigned engineer. If you display this for an engineer, jobs where he is assisting are displayed with *AST* in the Engr. column, instead of the normal code.

```
WO240                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
                            CENTRAL WORKSHOP                             9:03:17
Work Control
Jobs for Team.................: P01 Testing Team 1

     Job                                                  Target
?n  Number  Model Number     Sta  Act Batch   Gds P  Date  Cust        Location
__  505081  TV13             SCH      B0019    P  0  14/02 PL Testing
__  505093  TV13             SCH               P  0   1/03 PL Testing
__  505224  UNSPECIFIED      SCH               P      5/05 PL Testing
__  505225  UNSPECIFIED      SCH               P      5/05 PL Testing
__  505084  TV13             ASS  03  B0022    P  0  14/02 PL Testing  BOOKIN
__  505090  TV13             OPN  03  B0024    P  0  21/02 PL Testing  BOOKIN
__  505091  TV13             OPN  03  B0025    P  0  21/02             BOOKIN
__  505212  TV13             OPN  03  B0027    P  0  12/04 PL Testing  BOOKIN
__  505217  TV13             OPN  03  B0031    P  0  12/04 PL Testing  BOOKIN
__  505201  TV13             ASS               P  0  12/04 PL Testing
__  505202  TV13             ASS               P  0  12/04 PL Testing
__  505203  TV13             ASS      B0026    P  0  12/04 PL Testing        +


F3=Exit  F4=Prompt F5=Refresh F6=Work Ctl  F8=Message  F10=Diary F24=More Keys

MA    a                                                                08/002
```

Fields:

N

Selection field. To change the job status enter a 2 numeric code. Enter ? and select **F4=Prompt** to display the available job statuses.

Calls allocated to a team in call logging are status 00 (Open).

Some of the screens displayed by selecting these options are documented else where in this section of this product guide.

Note: When you select an engineer to see jobs assigned to that engineer, this screen displays any unassigned urgent jobs. These are jobs for the branch which have a target response date and time of the jobs assigned to that particular engineer.

Functions:

F6

Work Ctl. Use this function to display the Scheduled/Appointment Calls Screen. This function does not display if you are displaying jobs for the branch.

F8

Message. Use this function to enter a message using the Send A Message Screen.

F10

Diary. Use this function to display the Work Control Diary Screen. This function does not display if you are displaying jobs for the branch.

F13

Fold/Truncate. Use this function to toggle the display between showing one and two lines of details.

Select **F12=Previous** to return to the previous screen.

Assign Engineer Window (Option 01)

Enter 01 against a job line on the Work Control Job Lines Screen to display the Assign Engineer Window.

Use this window to assign a job to an engineer.

```
SS240              Z1 - C&T TEST COMPANY                USER GBJBAJKG   26/04/96
                          BIRMINGHAM BRANCH                             15:39:14
Engineer Work Allocation

            ALL JOBS FOR TEAM BRN Birmingham Nuts & Bolts
                        Target        ETA     E C
 n Sta Engr. Pos Tx  Date/Time   Date/Time  M I Cat Model          Geo Code
01 ASS A-02    0 00 26/04 10:27 99/99 99:99 0 2 CSR AA-M02         GB
                          Assign Engineer

                          Job  :    7244  Model : AA-M02
                                           Serial:

                          From Engineer.....: A-02  A.BERTIE

                          To Engineer.....?.: A-02

                          F4=Prompt  F8=Update  F12=Previous
00-Open        01-Assign            dule     03-Despatch     04-WIP
05-Telephone   06-Parts       08-Com
24-Call engu.  25-Call maint. 26-Close/Ret.  98-Cancel       99-Tech.Rep.
F3=Exit  F6=Work Ctl  F8=Messages  F10=Diary  F12=Previous     F24=More Keys
      16-52      SF        MW        KS        IM       II  KENB20A  PED129S1
```

Fields:

To Engineer

Select an engineer. This displays the job's skill requirements and the engineers in the team with these skills.

By re-setting the status range on the parameter screen, only jobs within the selected status range are displayed. Settings on the job line status parameter code determine if the status allows technical report entry and whether escalation should include jobs at this status. The detail is set on parameter type JLST on the Codes/Parameter File Maintenance option.

Select **F8=Update** to assign the call to the selected engineer.

*Note: You can override warnings on skills, team membership and absence by selecting **F14**, or **F8=Update**, as displayed in the Warning Windows.*

Assign Queue Position Window (Option 02)

Enter 02 against a job line on the Work Control Job Lines Screen to display this window.

Note: This window is the same as the Assign Engineer Window except for the extra field, Position In Queue.

Use this window to schedule the selected job.

```
SS240              Z1 - C&T TEST COMPANY                USER GBJBAJKG   26/04/96
                          BIRMINGHAM BRANCH                             15:39:14
Engineer Work Allocation

            ALL JOBS FOR TEAM BRN Birmingham Nuts & Bolts
                        Target        ETA     E C
 n Sta Engr. Pos Tx  Date/Time   Date/Time  M I Cat Model          Geo Code
02 ASS A-02    0 00 26/04 10:27 99/99 99:99 0 2 CSR AA-M02         GB
                          Assign Engineer

                          Job  :    7244  Model : AA-M02
                                           Serial:

                          From Engineer.....: A-02  A.BERTIE

                          To Engineer.....?.: A-02

                          Position in queue : __0

                          F4=Prompt  F8=Update  F12=Previous
00-Open        01-Assign            dule    03-Despatch    04-WIP
05-Telephone   06-Parts       08-Com
24-Call engu.  25-Call maint. 26-Close/Ret.  98-Cancel      99-Tech.Rep.
F3=Exit  F6=Work Ctl  F8=Messages  F10=Diary  F12=Previous     F24=More Keys
      16-52      SA        MW        KS        IM       II  KENB20A  PED129S1
```

Fields:

To Engineer

Select an engineer. This displays the job's skill requirements and the engineers in the team with their skills.

Position In Queue

Enter the position in the queue. You can use this to add a job after jobs already scheduled, or to insert a job ahead of an existing one. If this affects another job's target date and time, a warning is displayed. You can override this warning with **F14**.

Select **F8=Update** to schedule the job.

Action Entry Window (Option 11)

To display this window, enter option 11 against a job line on the Work Control Job Lines Screen.

Use this screen to assign an action to a job.

```
WO240                 Z1 - UK Demonstration Company    USER GBJBANB4   11/02/98
                            CENTRAL WORKSHOP                           11:42:15
Work Control
Jobs for Team..................: *DF DEFAULT TEAMN

     Job                                                  Target
?n  Number  Model Number     Sta  Act Batch   Gds P  Date  Cust       Location
        14  LITESHOW500      OPN               C  0   4/02 Collection
__      15  LITESHOW500      OPN               C  0   4/02 Collection
11      19  LITESHOW500      OPN  03           C  0   5/02 Collection
     Action Entry
      Action code.......?.: _
      F4=Prompt  F8=Update  F12=Previous

F3=Exit  F4=Prompt F5=Refresh F6=Work Ctl  F8=Message  F10=Diary F24=More Keys
```

Fields:

Action code

Select the action code to assign to this job.

Workshop Management checks that this action is valid for this customer, job status and current action assigned to the job.

For some actions some of the following fields are then displayed:

Despatch Method

Enter the despatch method. This must be defined to the Codes/Parameter file under type DSPM. This defaults to the despatch method attached to the action.

Reason Code

Enter the reason for this action. This must be defined to the Codes/Parameters file under type REAS.

Text Required

Enter any text you want to associate with the action.

RMA Number

This field only displays if you set the RMA Number required flag for the action to 1.

Enter the return material authorisation number.

Transfer Stockroom

Enter the stockroom to transfer the material to or from. The direction of the stock movement depends upon the setting of the Transfer Stock Movement Flag on the Action record.

Account Override

Enter the new customer details.

Select **F8=Update** to assign this action code and where necessary perform any workflow updates.

Cancel Job Line Reason Window (Option 98)

Enter option 98 against a job line on the Work Control Job Lines Screen to display the Cancel Job Line Reason Window.

Use this window to cancel the selected job line and enter a reason for the cancellation.

```
SS240              Z1 - C&T TEST COMPANY                USER GBJBAJKG   26/04/96
                              BIRMINGHAM BRANCH                          15:39:14
Engineer Work Allocation

            ALL JOBS FOR TEAM BRN Birmingham Nuts & Bolts
                         Target        ETA     E C
 n Sta Engr. Pos Tx  Date/Time   Date/Time  M I Cat Model           Geo Code
98 SCH A-01    1 00 26/04 10:27 26/04 16:46 0 2 CSR AA-M02          GB
                                            Cancel Job Line Reason

                                             Enter Reason Code
                                             __

                                            F4=Prompt F8=Update F12=Previous

00-Open        01-Assign      02-Schedule    03-Despatch    04-WIP
05-Telephone   06-Parts       08-Complete    22-Ch Jb Dur   23-Story
24-Call engu.  25-Call maint. 26-Close/Ret.  98-Cancel      99-Tech.Rep.
F3=Exit  F6=Work Ctl  F8=Messages  F10=Diary  F12=Previous     F24=More Keys
      12-49     SR        MW        KS        IM       II  KENB20A  PED129S1
```

Fields:

Enter Reason Code

Enter a reason. You set up reason codes in the Codes/Parameters File Maintenance option under parameter type CREA.

Select **F8=Update** to cancel the job.

Engineer Technical Reporting (Option 99)

Use this option to:

- Record the details of work done (labour hours, parts used, miscellaneous costs incurred) by engineers in completing jobs.
- Place orders for spares required to complete a job, provided that the DRP libraries are included in the Workshop Management library list.

Concepts

A technical report must have a unique number, which is the job number to report plus a 2 digit suffix. A technical report relates to a job on a specific date by a specific engineer for a specific customer. It can only include one job number on it, but the job could include more than one piece of equipment.

Description

To enter a new technical report (or update an existing report), enter 99 against the job line in Work Control. This displays the Call Reporting Screen.

Implications

The data recorded from technical reports is used to:

- Maintain historical details of work carried out by engineers.
- Facilitate automatic pricing and invoicing of service jobs.
- Generate stock transactions for the parts used from engineers' vans.

You can only purchase, stock and issue serially-numbered spares in singles (often coded EA). You can purchase, stock and issue batch and lot controlled spares in units other than singles.

You can only complete a job line if the prime engineer and any assisting engineers have reported finishing with **F9** or **F10**. Until then, the call's status is 09=Partial Report.

Job Reporting Details Screen

To document a call on this screen, enter 99 on the appropriate job line on the Work Control job Lines Screen.

Use this screen to enter the basic visit details. You can record parts and miscellaneous costs and charges on other screens accessed from this screen.

You must log all entries against a job category code, which together with the type of contract covering the equipment when the job was raised, determines whether to bill the customer. Workshop Management uses a billing indicator of 100% for chargeable and 0% for non-chargeable, but you can change this.

If you reported a job for the wrong piece of equipment, you can change it to another existing model or serial number at the customer site; or you can add a new model or serial number.

```
WO280              Z1 - Demonstration Company          USER GBJBANB4   11/02/98
Job Reporting               CENTRAL WORKSHOP           Team: CWA       15:30:06
Job Number.......:       19 00                     Report type Technical
Engineer.........: CW001 JOHN BROWN                C01       000
Model............: LITESHOW500                     Collection document slv31125
Serial Number....: JKJKLJ

Job Category...?.: ABR Arival at door       Job Received.....: 15:50   3/02/98
Start Time/Date..: 0:00 11/02/98            Cust./Eng.Travel.: 0:00   0:00
Labour Time......: :00  BASE

Action.........?.: 03   BOOK IN
Location.......?.: ______                   QA required...: 0
IRIS Condition.?.: 1    CONSTANTLY
IRIS Symptom...?.: 111  ******************************
IRIS Section...?.: ___
IRIS Defect....?.: _                        IRIS Repair..: _

Return Visit 0/1.: 0                        Ref. No......: 000001900
Dist. Travelled..: __________               Charge Labour: 100%
Charge Km/Mls....: 1                        Cust. Ord. No: KJJKJKJH
F4=Prompt                  F8=Update    F9=Not Complete    F11=Messages
F12=Previous  F15=Parts  F16=Misc. Charges  F22=Invoice  F24=More Keys

  9-21      SA      MW      KS  CL  IM  DM  II      EDN400A    KB    PKH318S1
```

Fields:

Job Category

The current job category is displayed. You can enter another category, if the default is incorrect for the work done.

Start Time/Date

Enter the date and time the engineer started the job.

Cust/Eng Travel Time

Enter the travel time, in hours and minutes, to charge the customer.

Enter the actual time, in hours and minutes, the engineer spent travelling to the customer.

Labour Time

Labour Hour Type Codes are held on the codes/parameter file under parameter type LHTY: the code IDs provide up to four column headings; the records hold the factors by which to increase the standard hourly labour rates. Set up the number of labour types you require on the codes/parameter file, up to a maximum of four.

Enter the engineer's labour time in hours and minutes for each labour type in this job category.

If you require zero labour hours, enter 0; otherwise, Workshop Management uses the field with the value of (system date and time; engineer's arrival date and time): this is relevant to users who need real-time technical reporting of engineers' time.

Note: You can enter additional hours for other job categories for the job line, by selecting ***F23=Additional Job Lines****.*

Action

Enter the corrective action carried out during this job. This defaults to the action entered on the job line.

Location

Enter a location to put the item away in. The store person can then enter this location on the Job Maintenance Selection Screen to display all the items at this location.

QA Required

Enter one of the following:

0 - If this job does not need to be checked.

1 - If this job needs to be checked. You cannot despatch this item if this flag is set to 1. You need to manually bring these jobs to the attention of the QA department.

IRIS Condition

Enter the condition of the code. This defaults to the condition on the job line.

IRIS Symptom

Enter the symptom exhibited by the machine. This defaults to the symptoms entered on the job line.

IRIS Section

Enter the section of the machine which was faulty. This defaults to the section entered on the job line.

IRIS Defect

Enter the defect found.

IRIS Repair

Enter the repair. This must be a valid repair for the defect entered.

Return Visit

Enter one of the following:

0 - If this job does not require a return visit.

1 - If this job does require a return visit. When you close the job, a window displays selection parameters so you can generate a new job.

If a return visit on parts is required and DRP is attached, you can order the parts using the displayed DRP order entry screens.

New Job Required

Enter one of the following:

0 - No new job is created.

1 - To display the Job Header screen so you can create a new job for the return visit.

This field is displayed only if the Allow New Job At Technical Reporting field is set to 1 in the System Parameters File option.

Reference Field

The field defaults to the same value as the job number, plus the report suffix. If the report is updated, entries to add new reports increment the report suffix.

You can enter an alternative reference for the job; for example: a pre-printed service report number.

Dist. Travelled

Enter the distance travelled by the engineer. The maximum entry is limited to 99999.

If Actual Distance Driven is the basis for chargeable travel for the site, you must enter a positive number. That number will be multiplied by the site charge per distance at job pricing.

Charge Labour

The default value, a percentage, is extracted from the contract type/job category charge matrix.

If chargeable, the value is set to 100; If non-chargeable, it is set to 0.

You can change the value to any percentage value between 0 and 100.

Charge Km/Mils

The default value is set by the call's contract type/job category charge matrix for mileage: 0 - No Charge and 1 - Charge. You can change the value: for example, the charge may be set to 1 for one of the machines, but to 0 for any other machines included in the site visit.

If the setting is 1 - Charge, the charge miles or kms type defined on the customer additional service details file, or on the company profile file, is applied to this technical report suffix number at job pricing.

Charge miles/kms types are:

- Standard Distance Value: a flat rate for the site;
- Actual Distance Driven: site charge per mile/km;
- Zone Code to Charge: code charge, by branch, set in the zone charges file.

Customer Order Number

Enter the customer order number. This defaults to the order number on the job line.

Functions:

F5

Order Parts. Use this function to access the Distribution Order Entry Screens to order spare parts. This function only displays if DRP libraries are included in the Workshop Management library list. This function is also disabled for third party engineers.

F6

Pricing. Use this function to display a window showing all priced lines for the job. You can use the window to price the job interactively. If the price is accepted, it is written to the pending invoice file and then closes the job. You cannot enter any more reports for the job-line and machine combination.

F7

Job Story. Use this function to enter and maintain text for the job.

F9

Not Complete. Use this function to submit this job if it is an estimate or a quotation. You can use the technical reporting option to record details of estimates or quotations. They will be priced in the same manner as normal jobs but are not posted to the ledgers.

F10

Invoice. Use this function to complete a job line. This sets its status to complete, preventing any further technical report entries, and enabling it to be prepared for invoicing, through the Price Jobs option. This also completes the report line. You can now invoice this job line for all the technical reports it has been added to.

Parts are sent through to Inventory Management, if attached. The parts used will be updated in the engineer's stockroom and the appropriate stock movement records generated. The parts cost is extracted from Inventory Management at this stage, and is stored on the technical report.

F11

Messages. Use this function to send or retrieve machine messages.

F15

Parts. Use this function to access the Technical Report Parts Screen to maintain parts for this job line.

F16

Misc. Charges. Use this function to maintain miscellaneous charges for this job line.

F17

Serial Number Maintenance. Use this function to display the Call Reporting Serial Number Maintenance Screen, to maintain the machine serial number and movement history.

F18

Model Maintenance. Use this function to display the Call Reporting Model Maintenance Screen, to amend incorrect numbers and move previous service history. The function is only available until the technical report on the original machine is entered: thereafter, you cannot make a change.

F19

Name and address. Use this function to change the owner's name and address.

F20

Peripherals. Use this function to display the peripherals attached to the machine

F21

Text. Use this function to maintain the text associated with the call.

F22

Job Detail. Use this function to display the Job Detail Enquiry for the piece of equipment on this Job line.

F23

Additional Job Lines. Use this function to enter additional job line hours.

Select **F8=Update** to save the information.

Interactive Pricing Charges Window (F6)

Select **F6=Pricing** from any of the Job Reporting Screens to display the Interactive Pricing Charges Window.

Interactive job pricing works in the same way as selecting **F10=Complete Job Line** from the Engineer Technical Reporting Screen and then running Job Pricing.

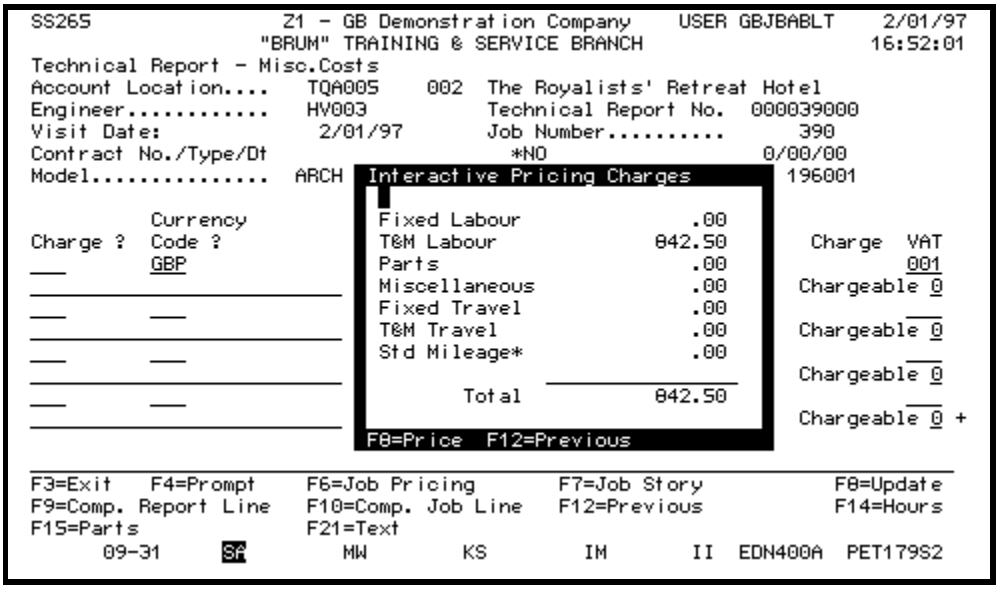

Select **F8=Price** to price the job. A job price audit report is produced for the job line. You can invoice the job line without including it in the batch run to price jobs.

Job Reporting Parts Used Screen (F15)

Select **F15=Parts** from any of the Job Reporting Screens to display the Job Reporting Parts Used Screen.

```
WO264                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
                            CENTRAL WORKSHOP                            9:17:40
Technical Report - Parts                                Report type Technical
Account Location....  PLCUS001  000   PL Testing Company
Engineer............  ENG01           Technical Report No.  050508100
Visit Date:           24/04/98        Job Number..........   505081

Model...............  TV13            Serial Number.......  S5081
                                         IRIS..?..
Part..?.. 1 ?.. .?.Job Category......... Sec D R M  Qty Used/Rtnd Srce Sts Chg
_______________ WOD Workshop Default      ___ _ _ _ _____________ _____ 0   0%
                                        050508100   Bin 1          Bin 2
_______________ ___                       ___ _ _ _ _____________ _____ 0   0%
                                        050508100   Bin 1          Bin 2
_______________ ___                       ___ _ _ _ _____________ _____ 0   0%
                                        050508100   Bin 1          Bin 2
_______________ ___                       ___ _ _ _ _____________ _____ 0   0%
                                        050508100   Bin 1          Bin 2
_______________ ___                       ___ _ _ _ _____________ _____ 0   0%
                                        050508100   Bin 1          Bin 2     +

F4=Prompt                F6=Job Price  F7=Job Stry  F8=Update   F9=Not Complete
F12=Previous  F14=Hours  F16=Misc.Chrg  F21=Text                F22=Invoice
MA    a                                                                10/012
```

Fields:

Part Number

Enter a part number that is on the Inventory item master file and on the item stockroom details file for the engineer's stock location.

*Note: If the part is subject to batch, lot or serial number control on item master (BATC35), a window to enter the batch details is displayed when you select **F8=Update**, **F9=Comp Rep Line** or **F10=Comp Job Line**.*

Job Category

Enter a job category on the job category file.

IRIS SEC

Enter the section that is faulty.

IRIS D

Enter the defect.

IRIS R

Enter the repair carried out.

IRIS M

Enter the major fault flag. This must be defined on the Codes/Parameters file under type MAJF.

Quantity Used/Returned

Enter a positive number to show parts used; this reduces the available stock in the engineer's stock location.

Enter a negative number to show parts returned; this increases the amount of frozen stock in the engineer's stock location.

You cannot enter decimals.

Both of these transactions are reflected in Inventory stock movement records.

*Note: If the item used or returned is defined in the Item Master file as either lot, batch or serial number controlled, a window is displayed for the entry of the appropriate lot, batch or serial number at **F8=Update**, **F9=Comp.Rep.Line** or **F10=Comp. Job Line.***

Call reporting, where a DRP order for parts is involved, displays the Parts Screen automatically, regardless of the status of the DRP order. Parts are transferred into the engineer's stock location immediately after confirmation of despatch from the supply stockroom.

Once the parts are available in the engineer's stock location, the DRP order quantities are displayed on the Parts Screen. If usage equals or exceeds the order quantities, the stocks will be reduced; if usage is less than the DRP order, the actual amount used is taken off the stocks and the unused order amount is added to them.

Source of Part

Enter an engineer if the part has been sourced from another engineer in the same country.

The part sourced is transferred from the supplying to the fitting engineer's stockroom, before usage is updated by this technical report.

Note: World Trade or multi-currency bars sourcing from a different country.

STS

Stockroom Status. Enter the status of returned stock.

This field only displays if you set the flag on the Company Profile to state that engineers can determine the status of returned stock.

Charge %

The default value (retrieved when a part number is entered) is set in the call's cover type/job category charge matrix for parts: 0% - Non-Chargeable, 100% - Chargeable.

Enter the charge percentage between 0 and 100%. The override is effective even if the type of part is 0 on the charge matrix.

Whatever the charge % on a negative value, parts returned record, there will be no charge on the pricing audit report, nor on the job invoice. The cost of the

frozen stock will be increased by the normal cost held on the item/stockroom record.

Functions:

F5

Order Parts. Use this function to access the Distribution Order Entry Screens to order spare parts. This function only displays if DRP libraries are included in the Workshop Management library list. This function is also disabled for third party engineers.

F6

Pricing. Use this function to display a window showing all priced lines for the job. You can use the window to price the job interactively. If the price is accepted, it is written to the pending invoice file and the job is then closed. You cannot then enter any more reports for the job-line and machine combination.

F7

Job Story. Use this function to enter and maintain text for the job.

F9

Comp.Rep.Line. Use this function to complete a single report line. Parts are sent through to Inventory Management, if attached. The parts used will be updated in the engineer's stockroom and the appropriate stock movement records generated. The parts cost is extracted from Inventory Management at this stage, and is stored on the technical report.

Parts are sent through to Inventory Management, if attached. The parts used will be updated in the engineer's stockroom and the appropriate stock movement records generated. The parts cost is extracted from Inventory Management at this stage, and is stored on the technical report.

F14

Hours. Use this function to display the Call Reporting Hours/Details Screen.

F16

Misc. Charges. Use this function to maintain miscellaneous charges for this job line.

F21

Text. Use this function to maintain the text associated with the call.

F22

Invoice. Use this function to complete a job line. This sets its status to complete, preventing any further technical report entries, and enabling it to be prepared for invoicing, through the Price Jobs option. This also completes the report line. You can now invoice this job line for all the technical reports it has been added to.

Select **F8=Update** to save any changes and leave this screen.

Job Reporting Miscellaneous Charges Screen (F16)

Select **F16=Miscellaneous Charges** from various Job Reporting Screens to display the Job Reporting Miscellaneous Charges Screen.

Use this screen to enter the details of any miscellaneous charges incurred whilst completing the job.

```
SS265                 Z1 - GB Demonstration Company    USER GBJBABLT    2/01/97
                    "BRUM" TRAINING & SERVICE BRANCH                    17:05:44
Technical Report - Misc.Costs
Account Location....   TQA005    011  The Pilchard Inn
Engineer............   HV011          Technical Report No.  000030000
Visit Date:             2/01/97       Job Number..........      300
Contract No./Type/Dt                    *NO                  0/00/00
Model...............  25-TCLR         Serial Number.......  M:25T-S0031

          Currency         Job
Charge ?  Code ?           Cat ?          Cost  % uplft          Charge  VAT
HTL       GBP              INS 45.00000         20      54              001
Crown Hotel                    Installation                    Chargeable 1
__        ___              ___ _______________ _______ _______________ ___
_______________________________                                Chargeable 0
___       ___              ___ _______________ _______ _______________ ___
_______________________________                                Chargeable 0
___       ___              ___ _______________ _______ _______________ ___
_______________________________                                Chargeable 0 +

F3=Exit    F4=Prompt    F6=Job Pricing       F7=Job Story          F8=Update
F9=Comp. Report Line    F10=Comp. Job Line   F12=Previous          F14=Hours
F15=Parts               F21=Text
      14-02      SA        MW        KS        IM        II  EDN400A  PET179S2
```

Fields:

Charge Type code

Enter the kind of cost or charge incurred. These are defined to the codes file under code type CHGT.

Charge Description

Where required change the displayed description. By default this displays the description of the charge type code (parameter type CHGT).

If an Invoice is produced, it shows the entered text, instead of the charge code description.

Currency Code

Enter the currency for this cost or charge. The first line defaults from the customer additional service details file.

Job Category Code

Enter a job category defined on the job category file.

Cost

Enter the cost of the item being entered, at the rate for the currency in the previous field. The cost will be recorded on the job file for use in reporting, but will be converted to base currency value, if multi-currency is in operation.

% Uplift

If entered, this percentage will be applied to the cost to calculate the charge value.

% uplifts are from 100.00 to 999.99; 0 indicates no uplift; you cannot leave the field blank.

If you do not enter this and enter an actual charge, the % uplift will be calculated from the cost compared to the actual charge.

Charge

If required, enter the charge.

If you leave this blank, it is calculated from the cost and uplift %.

VAT Code

Enter a VAT code defined to General Ledger. This defaults from the Additional Service Details file, or from the Installed Equipment file if the machine is subject to a non-standard rate prompted by the VAT indicator.

Chargeable

Enter one of the following:

0 - If this cost is not chargeable.

1 - If this cost is chargeable.

The default value is set by the call's cover type/job category charge matrix for Miscellaneous.

Functions:

F6

Pricing. Use this function to display a window showing all priced lines for the job. You can use the window to price the job interactively. If the price is accepted, it is written to the pending invoice file and the job is closed. You cannot then enter any more reports for the job-line and machine combination.

F7

Job Story. Use this function to enter and maintain text for the job.

F9

Not Complete. Use this function to complete a single report line. Parts are sent through to Inventory Management, if attached. The parts used will be updated in the engineer's stockroom and the appropriate stock movement records generated. The parts cost is extracted from Inventory Management at this stage, and is stored on the technical report.

F14

Hours. Use this function to display the Call Reporting Hours/Details Screen.

F15

Parts. Use this function to access the Technical Report Parts Screen so you can maintain parts for this job line.

F21

Text. Use this function to maintain the text associated with the call.

F22

Invoice. Use this function to complete a job line. This sets its status to complete, preventing any further technical report entries, and enabling it to be prepared for invoicing, through the Price Jobs option. This also completes the report line. You can now invoice this job line for all the technical reports it has been added to.

Parts are sent through to Inventory Management, if attached. The parts used will be updated in the engineer's stockroom and the appropriate stock movement records generated. The parts cost is extracted from Inventory Management at this stage, and is stored on the technical report.

Select **F8=Update** to save the details and leave this screen.

Job Reporting Serial Number Maintenance Screen (F17)

Select **F17=Serial Number Maintenance** from the Job Reporting Hours/Details Screen to display the Job Reporting Serial Number Maintenance Screen.

Use this screen to change or correct the serial number on the job.

You may not change to a serial number which already exists on the equipment file: use **F18=Model Maintenance** for such a change.

```
SS077        Demonstration Company                USER BRERETM        30/11/93
                        CENTRAL BRANCH                                 15:08:20
Serial Number Maintenance

Account Number......    C03        Account Address.....   000
Account Name........    CENTRAL BRANCH

Present   Model.....   WA10             Serial....  W920100


Enter Serial Numbers

Serial           History              Serial           History
W920110            1

F3=Exit             F12=Previous
```

Fields:

Serial Number

Enter a new serial number. This is to correct a serial number for an existing piece of equipment, or to insert one where none previously existed. You may enter individual serial numbers in line with the quantity of equipment shown.

Note: The change of serial number is only effective once the day end routine has been run.

History

Enter 1 against the serial number that will hold all the previous job history in future.

Where there is more than one serial number, at least one must have 1 entered against it.

Press **Enter** to save the information, then select **F12=Previous** to return to the previous screen.

Job Reporting Model Maintenance Screen (F18)

Select **F18=Model Maintenance** from the Job Reporting Hours/Details Screen to display the Job Reporting Model Maintenance Screen.

Use this screen to change a model and serial number for a machine on the site. The machines and serial numbers listed are from the Installed Equipment records for the site.

Note: The function is not available after completing a technical report against the original machine on the job.

```
SS079        Demonstration Company                USER BRERETM        30/11/93
                        CENTRAL BRANCH                                15:08:41
Change Model/Serial No.                           Job/Report No.    501134  00

Account Number......    C03        Account Address.....   000
Account Name........    Jones and Crossland Ltd.

Model.....   WA10            Serial....  W920100
Quantity            1

    Model               Serial              Quantity
_   WA10                W930001                    1
_   WA10                22581038                   1




1=Select
F3=Exit  F8=Update  F12=Previous  F14=Amend Machine
```

Fields:

Untitled

Selection field. Enter 1 against the machine to which the job record must now be moved.

*Note: You can use **F14=Amend Machine** to add a machine not previously recorded in Workshop Management, to the site's installed equipment records, and to amend the job record.*

Functions:

F14

Amend machine. Use this to add a new model and serial number and amend the job record.

Select **F8=Update** to update the records. If you have amended a model and the model and serial number is unique, the job record is amended, and a new installed equipment record set up.

Job Reporting Additional Job Line Hours Window (F23)

Select **F23=Additional Job Lines** from the Job Reporting Screen to display the Job Reporting Additional Job Line Hours Window.

Use this screen to add additional job lines to the current job.

```
WO280                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
Job Reporting                CENTRAL WORKSHOP           Team: P01        9:25:23
Job Number.......:  505093 00                     Report type Technical
Engineer.........: ENG01 LOUIS ADAMS              PLCUS001 000
Model............: TV13                           PL Testing Company
Serial Number....: SERIAL

         ory...?.: WOD Workshop Defaul      Job Received.....: 20:11  27/02/98
Start Time/Date..:  0:00 24/04/98           Cust./Eng.Travel.:  0:00   0:00
Labour Time......:   :00  BASE                :00 THRD   :00 HALF   :00 DBLE

Action.........?.: 61     Job line hours
Location.......?.: FIN
IRIS Condition.?.: A      Con Sym Sec Def Rep  BASE   THRD   HALF   DBLE  Chg%
IRIS Symptom...?.: 111     _   ___ ___  _   _   :00   :00   :00   :00   ___
IRIS Section...?.: ___     _   ___ ___  _   _   :00   :00   :00   :00   ___
IRIS Defect....?.: _       _   ___ ___  _   _   :00   :00   :00   :00   ___
                           _   ___ ___  _   _   :00   :00   :00   :00   ___
Return Visit 0/1.: 0       _   ___ ___  _   _   :00   :00   :00   :00   ___
Dist. Travelled..: ___                                                   More..
Charge Km/Mls....: 1      F4=Prompt   F12=Previous

F4=Prompt                 F8=Update   F9=Not Complete   F11=Messages
F12=Previous  F15=Parts  F16=Misc. Charges  F22=Invoice  F24=More Keys
MA    a                                                            15/028
```

Fields:

Fault code

Enter the fault reported. This defaults to the fault reported by the customer.

Job category

Select a job category, for the additional job line hours.

Machine section

Select a machine section to indicate the main faulty section of the machine.

Machine sub-section

Select a machine sub-section which was faulty.

Activity code

Select an activity. This records the corrective action taken by the engineer to remedy the fault. Corrective action codes are defined on the codes file (CORA).

Labour time

Enter the labour hours and minutes spent by the engineer at the appropriate rate as defined on the Codes file (Parameter Type LHTY).

Charge %

If the job category for the line is chargeable, this defaults to 100%; if it is non-chargeable, it defaults to 0%.

Enter a value between 0 and 100, and the variable labour will be charged accordingly.

Note: This value has no effect on fixed labour charges retrieved from the cover type/job category file.

Press **Enter** to save the information, and then select **F12=Previous** to return to the previous screen.

Job Reporting Return Visits Window (F10)

To display this window, close a report which needs a return visit, using **F10=Comp Job Line**.

*Note: It is not displayed if you take **F8=Update** or **F9=Comp Rep Line**.*

Use this window to enter the reasons why a return visit is required.

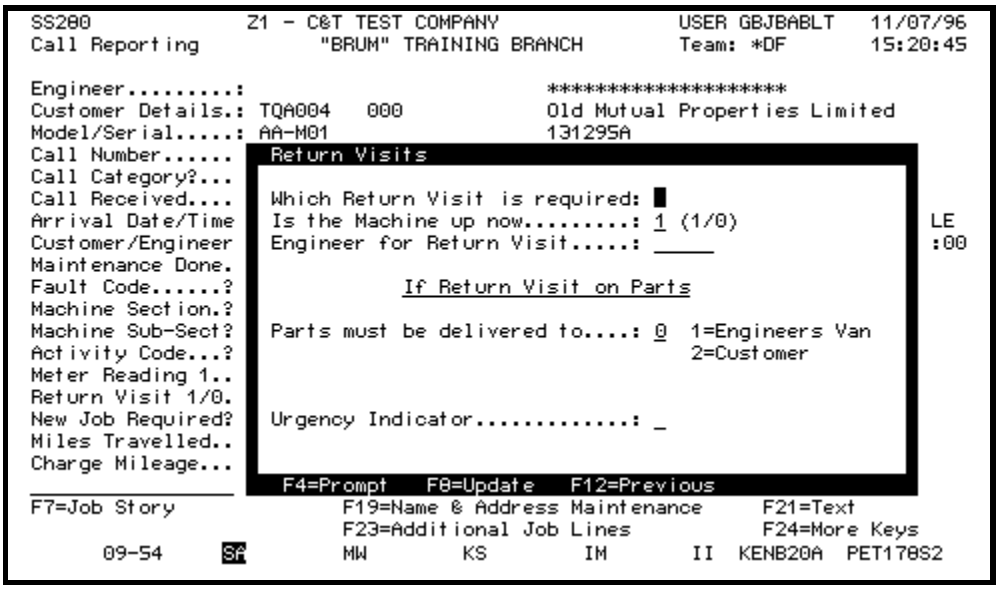

Fields:

Return Visit Code

Enter one of the following:

0 - Return visit not required.

1 - Return visit on parts required. If DRP is linked to Workshop, when you select **F8=Update**, the DRP order entry screens display so you can order spare parts. (See further detail in Job Reporting - Parts Ordering).

2 - Return visit on knowledge required.

3 - Return visit required at end of day - customer.

4 - Return visit required at end of day - engineer.

5 - Return visit required for personal reasons.

6 - Engineer could not gain access to machine.

7 - Call stopped by despatching.

Is The Machine Up Now

Enter one of the following:

0 - No, the machine is not up.

1 - Yes, the machine is up.

Engineer For Return Visit

Enter the engineer to make the return visit. This defaults to the engineer who carried out the job just completed and reported.

Parts Must Be Delivered To

This is for memo purposes only. Enter one of the following:

0 - If parts are not required.

1 - If the parts should be delivered to the engineer's van.

2 - If parts should be delivered to the customer.

Urgency Indicator

Leave blank, unless the Return Visit Code is 1 - Parts.

If the Return Visit Code is 1 - Parts, enter an urgency code, set up in the Inventory Management Descriptions file option, under major type SPED.

Select **F8=Update**. Workshop Management creates the return job, assigned to the engineer selected in the window.

Job Reporting Parts Ordering

Use this option to order spare parts to complete an existing job or a return job.

When you are in the Technical Report - Parts Used Screen, this prompts for the parts shipped for the job.

Description

You can access the Distribution Order Entry Screens from:

1. The return job window, if the reason for the return job is to fit parts;
2. The technical reporting hours or parts screens, using a function.

The order entry screens are standard parts of the DRP application. Refer to the DRP product information for more information.

Workshop Management keeps track of the order for the job number. When you next enter a technical report, the parts automatically display on the Parts Used screen, to prompt you to enter their usage. Where parts are shipped but not used on the job, the available stock in the engineer's stockroom is updated.

Implications

You must include the Distribution Requirements Planning (DRP) libraries in the Workshop Management library list to make use of these functions.

You must set up the service stockroom, supply stockroom and central warehouse in a DRP network if you want to run DRP net change processing. If no network is set up, the net change triggers are not set.

DRP Orders

The sequence of operations to set up a DRP network covering Workshop, supply and central stockrooms is as follows:

- Set up the calendar for the current year in the Calendars option in DRP.
- Set up periods for the central and supply stockrooms using the Periods option in DRP.
- Set up the central and supply stockrooms using the Stockrooms option in DRP.
- Set up customers for the central, supply and service stockrooms using the Customers option in DRP. The internal customer has to be set up in Accounts Receivable, using the Names And Addresses option.
- Create the network using the Networks option in DRP, giving the service network a code linked to the central stockroom.
- Set up the planners using the Planners option in DRP. Use the central stockroom with user defined detail for the planner, and set up a planner linked to the supply stockroom.
- Set up items using the Distribution Item Master option in DRP.
  - For the central stockroom the source of supply should be set to 1, the order policy should be A, and the local stockroom should be the central stockroom.
  - For the supply stockroom the source of supply should be set to 2, the order policy should be A, and the local stockroom should be the supply stockroom. Use the central stockroom for the centre.

The sequence of operations for a DRP order for Workshop parts is as follows:

- Amend the delivery name and address, if necessary; press **Enter** to fill in details of order lines, and select **F8=Update** to complete the DRP order.
- Manually allocate the DRP order, using the Order Amend (Transcriptional) option in SOP.
- Print one pick note at a time, using the Picking Notes option in SOP. Make sure that the From and To order numbers are the same.
- Confirm despatch from the DRP order lines, despatch date and despatch method only, using the Allocation By Order option in SOP. No charges data is relevant.
- Confirm the shipment receipt using the Record Transfer Out option in DRP. Then revert to Workshop Management and technical reporting.

Credit Call Maintenance

1...
2...

4/WOS

Use this option to cancel or release calls whose status is credit hold.

Concepts

If a customer on credit stop places a call, you can log the call; however, Workshop Management filters the call out of the engineer workload until you authorise the call. The decision to advise the customer of an account problem is yours.

Description

You can view calls recorded as status 07 - credit hold, by selecting the status for engineer, branch or team in Engineer Work Allocation.

You can review any of the company's held calls, unless Credit Call Maintenance is limited to branch. You set up branch credit control in System Parameters File Maintenance, if you set the Credit Control By Branch field on. If you need to carry out credit control across the company, leave the field set off.

Workshop Management only checks the credit stop flag when you log the call. If you clear an account on credit hold, you must manually release jobs already logged.

Credit Call Maintenance Selection Screen

To display this screen, select the Credit Call Maintenance option.

Use this screen to select the calls for which you want to maintain the credit status.

```
SS230            Demonstration Company              USER BRERETM    30/11/93
                          CENTRAL BRANCH                            17:40:25

 Credit Call Maintenance


 Account No.......?. C03
 Location........... 001

 Or

 Serial Number...... ______________
 Model Number.....?. ______________

 Or

 Job Number......... ______

F3 = Exit      F4 = Prompt
```

Fields:

Tip: To see all orders on credit hold, leave all fields blank and press **Enter**.

Account No

Enter an existing customer.

Location

Enter the location for the customer.

Tip: Complete the Account No field and not the Location field, to display a list of all the locations for the selected customer

Or

Serial Number

Enter the serial number of an installed piece of equipment.

Model Number

Enter a model.

Tip: Enter only the model number, and press **Enter**, to display a list of all the models, so you can select the model required.

Or

Job Number

Enter an outstanding job number.

To display the Credit Call Maintenance Detail Screen, enter the selection criteria and press **Enter**.

Credit Call Maintenance Detail Screen

To display this screen, on the Credit Call Maintenance Selection Screen, enter an account number and a location code.

Use this screen to view and maintain the details for calls on credit hold.

```
SS230            Demonstration Company              USER BRERETM    26/01/94
                          CENTRAL BRANCH                            12:41:42

 Credit Call Maintenance
 Account...... C03      / 001   Jones & Crossland (Northern) Ltd


X Account  No/Locn Site Name                         Target     Call Date Txt Resp
_ C03       / 001   Jones & Crossland (Northern) L  29/11/93  26/11/93      IM
  Contact: MIKE JONES             Tel:                          Call Recp: BRERETM
  Serial Number 911001            Model: WA10                Cat: WTY Job No. 0501136









1-Cancel     3-Release     5-Text     7-Job Enquiry     9-Ledger Enquiry
F3 = Exit    F12 = Previous     F13 = Fold/Truncate
```

Fields:

X

Selection. Enter one of the following:

1 - To cancel the call. Use the displayed window to enter a reason. You maintain call cancellation reason codes under parameter type CREA in the Codes/Parameter File Maintenance option.

3 - To release the call from credit hold. Use the displayed window to enter a reason. You maintain credit release reason codes under parameter type RRES in the Codes/Parameter File Maintenance option.

5 - To enter text associated with the job line text. This is also available from the Call screen in Engineer Work Allocation.

7 - To access the Job Line Detail Screen for the job.

9 - To access the standard Accounts Receivable Enquiry.

Functions:

F13

Fold/Truncate. Use this function to display additional information for each call.

To return to the menu, select **F3=Exit**.

Load Planned Maintenance Jobs

10/WOS

This option converts planned maintenance schedules into actual workshop jobs, with engineers assigned, for specified workshop periods in advance.

Select this option after running the Period End Routines option, when you have added contracts during a service period. This option converts all planned maintenance visits generated for the selected periods, including the new visits extended by the latest Period End Routine run, to actual jobs.

Note: You must have exclusive use of the Workshop company in order to run this routine.

Workshop Management creates the planned maintenance schedules within Contract Maintenance, at equipment line level. You must select this option to convert these schedules into actual jobs.

Description

This process assigns a job number and engineer (if possible) to all scheduled maintenance visits for the selected periods and adds the job to the list of outstanding open jobs.

If you set the Customer Refs For Contracts field to 1, in the customer additional service details, the customer order number from the contract header is included in each job.

This routine generates either single line or multi-line jobs, depending on the setting of the company profile field One Machine Per PM Job.

- If you set the field to 1, each piece of equipment due a planned maintenance visit in a service period has its own job number.
- If you set the field to 0, the routine assigns one job number to each group of equipment on the same contract, at the same customer site, due a planned maintenance visit in the same service period. Each piece of equipment forms a job line within the single job.

Load Planned Maintenance Jobs Screen

To display the Load Planned Maintenance Jobs Screen, select the Load Planned Maintenance Jobs option.

Use this screen to select the periods for which you want to create the planned maintenance jobs.

```
SS250P          Demonstration Company              USER BRERETM    30/11/93
                          CENTRAL BRANCH                            17:41:20
Load Planned Maintenance Jobs


    Enter a period with the format YYPP in both fields

                 From Period:      9346

                 Until  Period:    9347




F3=Exit   F8=Submit Job
```

Fields:

From Period

Enter the service period (in YYPP format) to begin the load of planned maintenance jobs from.

You can maintain the significant calendar fields and current period in the Calendar File Control Maintenance and Daily Calendar File Maintenance options.

Until Period

Enter the service period (in YYPP format) up to which you want to plan the maintenance jobs for. This must be no more than six periods ahead of the current period.

To submit a job to perform the load, select **F8=Submit Job**. This does not produce a report, but the Engineer Work Allocation option displays the results when the batch job finishes.

Automatic Call Assignment

20, 21/WOS

Automatic Call Assignment (ACA) processes open jobs selected for a team and schedules them for an engineer within the team based on skill profile. This sets an estimated time of arrival, within the target time for the call.

Concepts

This option assists in the management of work scheduling by automatically selecting the most available engineer to assign to a call, based on the workload of the team, and to schedule the call.

Description

Workshop Management can allocate jobs to engineers automatically. Automatic Call Assignment runs when the Workshop Management sub-system is active.

ACA is a sleeper program which runs periodically according to the interval set up in the System Parameter File Maintenance option. On each run it selects those jobs available for inclusion in call assignment (as defined by their job category), and attempts to assign and schedule them to engineers available for automatic call assignment (as defined in the Engineer Master File Maintenance option).

It also takes account of engineer availability from the engineer's absent field. You can set this within the engineer diary.

The run only includes the number of jobs for the time period defined in the System Parameter File Maintenance option.

Automatic Call Assignment rejects jobs it cannot assign, within the target time, with the appropriate reason code recorded on the job detail.

ACA gives assigned jobs an estimated time, an engineer and a job position in the engineer's work queue.

To schedule calls, a job must have a duration. Workshop Management calculates this from the job fix time (defined on the model).

Implications

You must define engineers to teams. If Workshop Management cannot find a team with the necessary skills when you log a call, it allocates the call to a default team *DF. You must then manually reallocate the call to an actual team.

For AS/400's:

You must start the Workshop Management sub-system and tailor the sub-system library list to take account of:

- The use of consolidated file libraries, in place of IN, OE, SL and GL file libraries.
- The version of System 21 in use, for adjusting the four IPG libraries.

Tip: If you are using an AS/400 and Version 3 of System 21, to display the subsystem library list, enter CHGJOBD and select **F4=Prompt**. Enter

OSLSSP in the Job Description field, and
OSLS2P3 in the Library field. Then select
F10=Additional Parameters and page down.

You must make appropriate settings on the system parameters, model, job category and engineer files, so you do not inadvertently limit the automatic call assignment operation.

Start Auto Call Assignment Screen

To display the Start Auto Call Assignment Screen, select Start Automatic Call Assignment.

Use this screen to submit the Automatic Call Allocation Sleeper program.

```
SS840P          Demonstration Company              USER BRERETM    30/11/93
                         CENTRAL BRANCH                             17:37:05
Start Auto Call Assignment



        You have requested to submit the Automatic Call Allocation
            Sleeper program. To proceed and submit the program,
          press F8 now. If you do not wish to submit the program
              at this stage, press F3 to return to the menu.



F3=Exit  F8=Submit
```

Functions:

F8

Submit. Use this function to start automatic call allocation.

To start automatic call allocation, select **F8=Submit**.

Stop Auto Call Assignment Screen

To display the Stop Auto Call Assignment Screen, select Stop Automatic Call Assignment.

Use this screen to stop the Automatic Call Allocation Sleeper program.

```
SS840E          Demonstration Company              USER BRERETM    20/01/94
                        CENTRAL BRANCH                             13:55:42
Stop Auto Call Assignment

      You have requested to terminate the Automatic Call Allocation
            Sleeper program. To proceed and end the program,
          press F8 now. If you do not wish to end the program
             at this stage, press F3 to return to the menu.

F3=Exit  F8=Terminate
```

Functions:

F8

Submit. Use this function to terminate automatic call allocation.

To stop automatic call allocation, select **F8=Submit**.

Re-Assign Calls For A Team

22/WOS

Use this option to completely reorganise the workload for a team on demand, as long as Automatic Call Assignment is inactive.

Description

During normal running of the Automatic Call Assignment Sleeper Program, Workshop Management attempts to shuffle the jobs already loaded, to schedule new work within target times.

With this option you can remove all jobs except despatched or appointment jobs for a selected team, and reload the team, based on the current availability. Use this when engineers are unavailable for work *after* you have assigned calls to them, and you need a full refresh of the team workload.

Implications

This procedure does not reassign jobs with an appointment, or despatched jobs; if you want to reassign these jobs, you must do it manually.

Note: The workshop sub-system must be active and the Automatic Call Assignment Sleeper Program inactive.

Re-Assign Calls For A Team Screen

To display the Re-Assign Calls For A Team Screen, select the Reassign Calls For A Team option.

Use this screen to select the team for which you want to reassign calls.

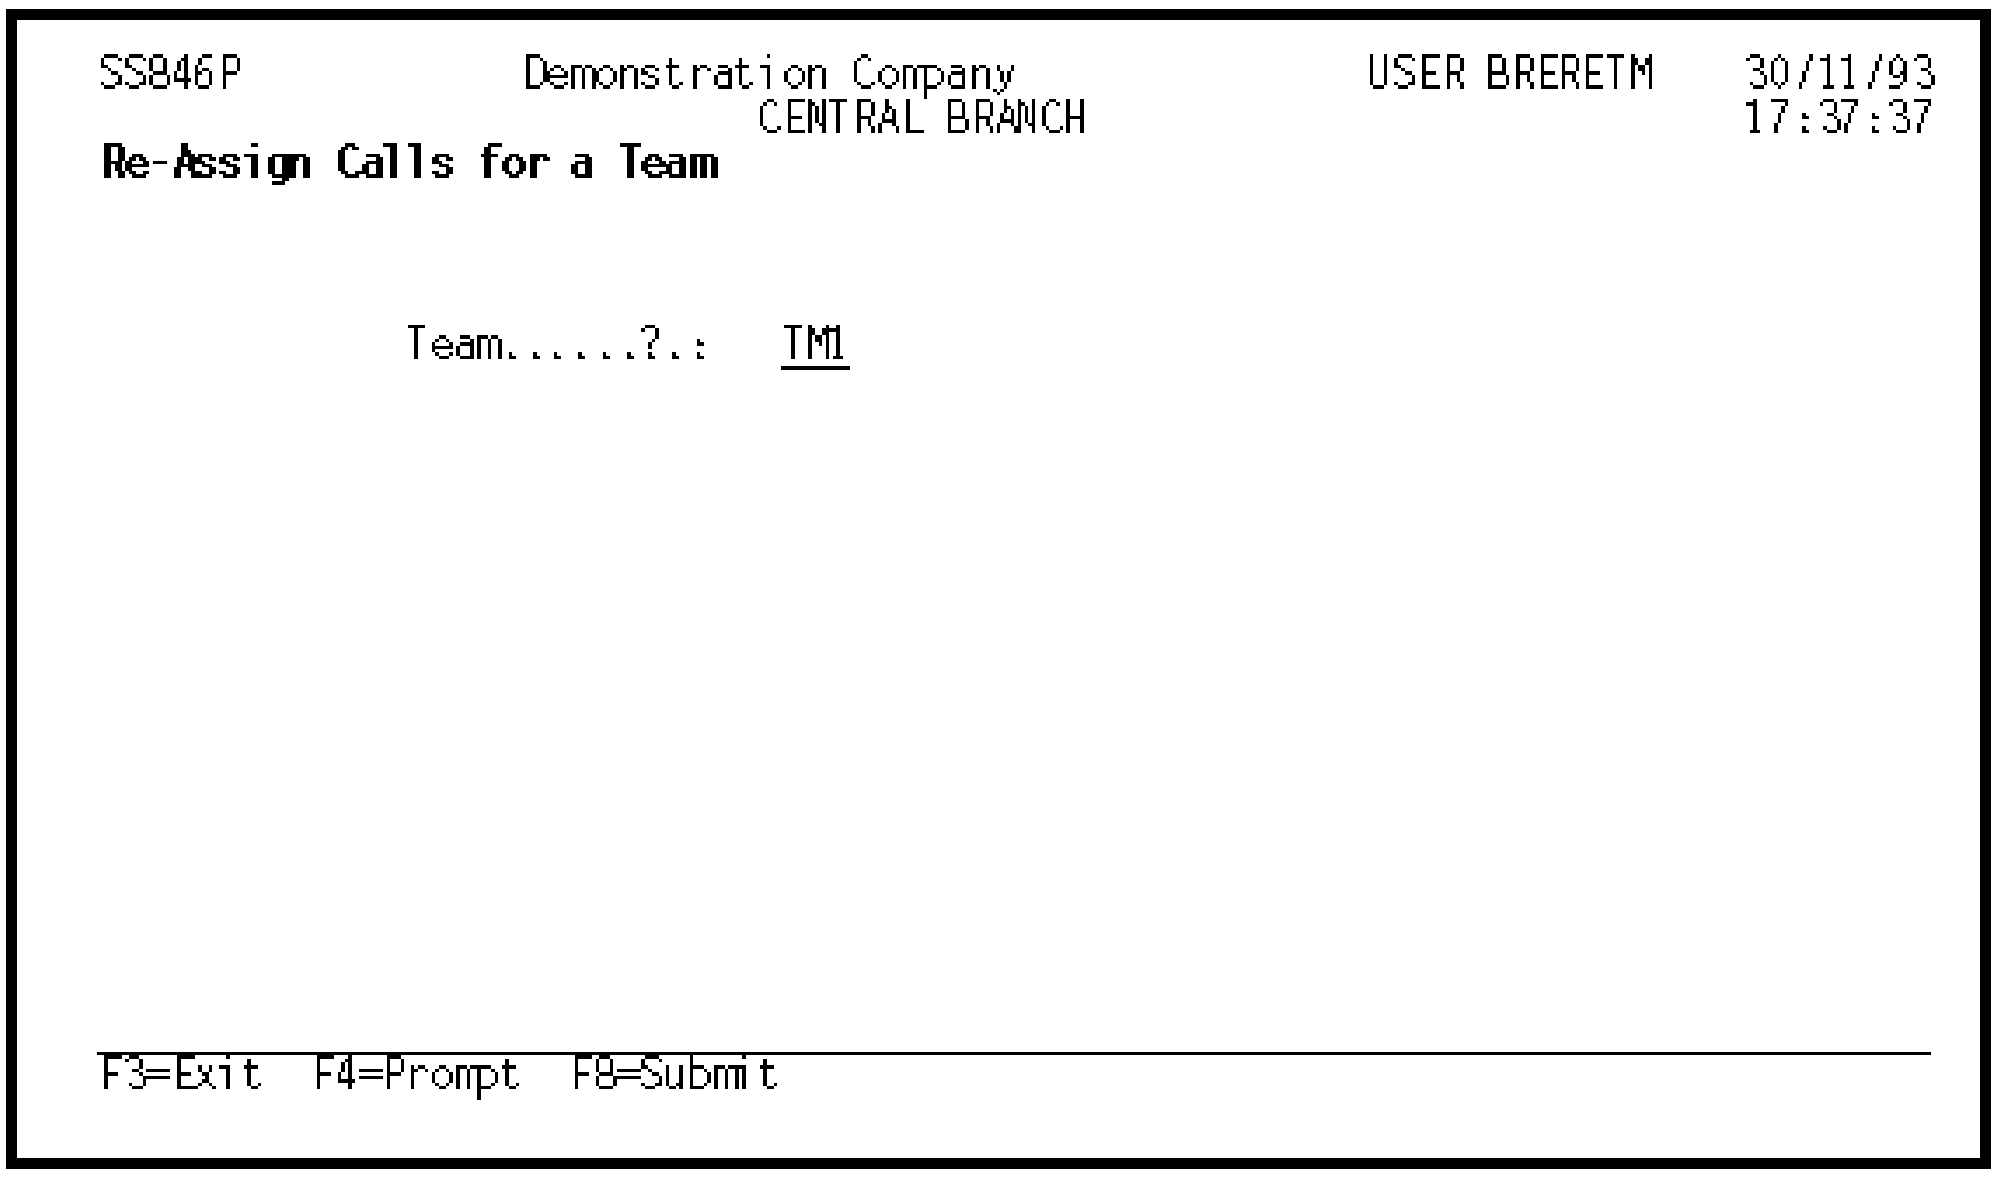

Fields:

Team

Select an existing a team.

Workshop Management removes from the engineers in the team all calls, except despatched and appointment calls, and reallocates them.

To reassign all the jobs for the selected team, select **F8=Submit**.

Reassign Undespatched Calls

23/WOS

Use this option to completely reorganise the workload for all teams on demand, so long as Automatic Call Assignment is inactive.

Note: This is also run as part of the day end procedure.

Description

The option removes all jobs, except despatched or appointment jobs, for all teams and reloads them, based on the current settings of the engineers' availability flags.

This is useful as an end of day option (and is run as part of the day end procedure), after you have updated engineer availability for the next working day.

It also checks each engineer's diary for all activities with end dates, such as holidays. If an end date has been passed, Workshop Management resets the Absent flag on the Engineer Master file to blank.

Implications

This procedure does not reassign jobs with an appointment, or despatched jobs. You must reassign these jobs manually.

Note: You must stop Automatic Call Assignment while running this reassignment and the workshop sub-system must be active.

Re-Assign Undespatched Calls Screen

To display the Re-Assign Undespatched Calls Screen, select the Reassign Undespatched Calls option.

Use this screen to submit the call reassignment routine.

```
SS845P          Demonstration Company              USER BRERETM    30/11/93
                          CENTRAL BRANCH                            17:37:54
Re-assign Undespatched Calls



          You have requested to submit the Automatic Call Allocation
           Overnight Re-Assignment Routine. To continue and submit
          the program press F8 now. If you do not wish to submit the
            program at this stage, press F3 to return to the menu.



F3=Exit  F8=Submit
```

To reassign all undespatched calls, select **F8=Submit**.

Job History Enquiry

30/WOS

Use this option to enquire on the details of both current and completed jobs against a piece of equipment, in order to obtain the equipment's service history.

This enquiry displays the following details:

- Job header.
- Job line.
- Hours.
- Parts.
- Miscellaneous charges.
- Free format text.

Note: You can also access this enquiry from Call Logging.

Job History Initial Screen

To display this screen, select the Job History option.

Use this screen to enter the information required to select the correct job.

```
SS442              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                          WORKSHOP BRANCH                              14:12:51
Job History Enquiry

    Serial Number....... _______________ Model.............?. _______________

Or: Account Number....?. _______        Account Address..... ___

Or: Contract Number..... _______        Contract Type.....?. ___

Or: Customer Order No... ____________________

Or: Job Number.......... _______

Or: Batch Number........ _______

Or: Original account..?. _______        Original address.... ___


F3=Exit  F4=Prompt
```

Fields:

Serial Number

If you entered a model number, enter a serial number.

Note: The model and serial combination must exist on the Installation file.

Model

Enter the model for which you want to display the details.

To display a list of all the equipment of this model at all sites, only enter the model number. This list can be lengthy and therefore we do not recommend this method.

Account Number

Enter a workshop customer.

Account Address

If you entered a workshop customer, enter the account address.

Contract Number

Enter the contract number. If the contract has expired, no records are displayed.

Contract Type

If you entered a contract number, enter the contract type.

Customer Order No.

Enter a customer order number that is assigned to a job.

Job Number

Enter a job which has not been completed through technical reporting.

Tip: If you enter the job number, the Job Header Enquiry screen displays showing all the pieces of equipment included on the job number.

Batch Number

Enter the job batch number.

Original Account

Enter the customer you originally booked the job to.

Original Address

If you entered an original customer, enter the address to which you booked the job.

To display the Job History Selection Screen, enter the selection criteria required and press **Enter**.

Job History Selection Screen

To display this screen, on the Job History Initial Screen, enter the selection criteria and press **Enter**.

Use this screen to select the job for which you want to display the job history details.

```
SS448              Demonstration Company              USER BRERETM    26/11/93
                              CENTRAL BRANCH                          12:54:52
Job History - Job Selection       ACCOUNT

Account Number......   C03                Account Address..... 000
Account Name........   Jones and Crossland Ltd.

1  Job No  Model number     Serial number    Jb cat  Flt  Date      Time
_   501133 WA10             W930001           WTY    ELE  26/11/93   9:48
_   501128 WA10             W930001           WTY    ELE  25/11/93  14:38
_   501135 WA10             22581038          CSR    NSY  26/11/93   9:49
I   501130 WA10             22581038          CSR    DED  25/11/93  18:24
_   501134 WA10             W920100           CSR    DED  26/11/93   9:48
_   501115 WA10             101000            WTY    ELE   4/10/93  12:26

F3=Exit  F12=Previous
```

Fields:

1

Selection. Enter 1 alongside the job to display more details.

To display the Job History Line Selection Screen, select a job with option 1.

Job History Line Selection Screen

To display this screen, either on the Job History Selection Screen, select a job.

OR On the Job History Initial Screen, enter a job number and press **Enter**.

This screen displays the details for the selected job. These details include the account details, contact details, and for each model, the serial number, condition and action details.

```
SS443              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                            14:14:15
Job History - Line Selection                         Job Number  509272

Account Location....  DENMOR    000  DenMor Test

Customer Order No...  ON07171220              Contact date  17/07/97
Job Contact.........  JC07171220              Contact time  12:21

  Sts  Model.....      Serial....      Action................           Jb.Cat
 ▌ 00  DENMODEL1       T07171220                                          WTY
   DEN MODEL ONE                   IRIS A  111
   Engineer                             Original Eng.       Locn BOOKIN Pty
 _ 00  DENMODEL1       T07171220                                          WTY
   DEN MODEL ONE                   IRIS A  111
   Engineer                             Original Eng.       Locn BOOKIN Pty
 _ 00  DENMODEL1       T07171220                                          WTY
   DEN MODEL ONE                   IRIS A  111
   Engineer                             Original Eng.       Locn BOOKIN Pty

1=Select  2=Document History
F3=Exit              F7=Job Story            F12=Previous
F13=Fold/Truncate    F21=Text
```

Fields:

Untitled

Selection. Enter one of the following:

1 - To display the Job History Line Detail Screen.

2 - To display the Document History Window.

Functions:

F7

Job Story. Use this function to display the text for the job.

F13

Fold/Truncate. Use this function to display more details for each job line.

F21

Text. Use this function to display the text for the job header.

To leave the enquiry, select **F3=Exit**.

Job History Line Detail Screen (Option 1)

To display this screen, on the Job History Line Selection Screen, select a job line using option 1.

This screen displays the job details for the selected job line. These details include: response job and target times, condition and symptom codes, and account details. For details of each field's functionality, refer to the Call Logging Maintenance section.

```
WO444                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
Job Line Details            CENTRAL WORKSHOP                           9:47:10
Job number...:  505022  Batch.:                  Account/loc.: PLCUS001 000
Job status...: 00=Open                           PL Testing Company
Action.......: 10 ACCESSORIES REQUIRED (LET      Cont.type...: *NO
Model number.: PROJECTOR001                                 No user contract
Serial number: S5022                             Warranty equip: 0  Parts : 0
                  Booked        Received         Configuration.:
Job..........:  3/02/98 20:43  3/02/98  20:44
Response.....:          24:00           32:00    Travel/Labour Chargeable
Target.......:  6/02/98 14:00  7/02/98   6:00    Parts Chargeable
Req.Comp.....:  0/00/00  0:00
Job cat......: CSR  Customer Service Req         Credit Assessment flag..: 0
Contact......:                                                Reason..:
Location.....: BOOKIN                            Estimate/Quote req......: 0
Condition....: 1    CONSTANTLY                   Q.A.required.(0/1)......: 0
Symptom......: 110  testing                      Collection req..........: 0
Physical Cond:                                   Team......: *DF Default Branch T
Order no.....: 5022                              Engineer..:
Credit no....: 0000000                           Job Duration..:  0:02

F3=Exit  F5=Equip Enquiry   F6=Contract   F7=Job Story           F12=Previous
F14=Accessories   F15=Hours               F16=Parts Used    F17=Misc. Costs
F18=Equip.Detail  F19=Audit                       F21=Text  F23=Name & Address
MA    a                                                                01/001
```

Functions:

F5

Equip Enquiry. Use this function to display the Equipment Detail Enquiry screen.

F6

Contract. Use this function to display the contract and charge matrix.

F7

Job Story. Use this function to display text for the whole job.

F14

Accessories. Use this function to display the Accessories/Condition Enquiry screen.

F15

Hours. Use this function to display the Job History Labour Hours screen.

F16

Parts Used. Use this function to display the Job History Parts Used screen.

F17

Misc. Costs. Use this function to display the Job History Miscellaneous Charges screen.

F18

Equip. Detail. Use this function to display the Equipment Detail Enquiry screen.

F19

Audit. Use this function to display the Job Audit Enquiry Window, which lists any changes made to the job line, with the most recent change at the top of the list.

F20

Assisting engineer. Use this function to display the assisting engineer assigned to an appointment call. This only displays if you have assigned an assisting engineer to this job.

F21

Text. Use this function to display the text for the job line.

F23

Name & Address. Use this function to display a window showing the name and address for the customer.

To leave the enquiry, select **F3=Exit**.

Accessories/Condition Enquiry Screen (F14)

To display this screen, on the Job History Line Detail Screen, select **F14=Accessories**.

This screen displays the accessories for the piece of equipment. The details displayed include the condition, number received and number required of the accessories.

```
WO594              Z1 - Demonstration Company          User GBJBATDO    9/01/98
                  WORKSHOP BRANCH                          ENQUIRY       14:18:52
 Accessories / Condition
 Job Number...:  509272
 Model No.....: DENMODEL1                 Con  Remarks
 Serial No....: T07171220                 SC   Scratched
 Location.....: BOOKIN

                                                 Qty
 Accessory                                Reqd Req Rec   Condition

 PLUG              Plug                     1    1
 600D200           LEG                      0    2

F12=Previous

   1-1      SA      MW      KS  CL  IM  DM  II      EDN400A    KB   PKH318S1
```

To return to the previous screen, select **F12=Previous**.

Job History Labour Hours Screen (F15)

To display this screen, select **F15=Hours** from other Job History Enquiry Screens.

This screen shows, for each job: the number of hours taken, the category, the symptom, condition and the date.

```
SS446              Z1 - Demonstration Company              GBJBATDO    9/01/98
                              WORKSHOP BRANCH                          14:19:23
 Job History - Labour Hours
 Job Number..........  509272
 Model............... DENMODEL1       Serial Number....... T07171220
 Account Number...... DENMOR          Account Address..... 000
 Contract Number.....                 Contract Type....... *NO
  Report
   Date     Job Category...........  IRIS Cond/Symptom.......    Eng. No  Hours

 F3=Exit  F7=Job Story                                F12=Previous
 F13=Fold/Truncate  F16=Parts Used  F17=Misc. Costs  F21=Text
```

Functions:

F7

Job story. Use this function to display the job text.

F13

Fold/Truncate. Use this function to display more details.

F16

Parts Used. Use this function to display the Job History Parts Used screen.

F17

Misc. Costs. Use this function to display the Job History Miscellaneous Charges screen.

F21

Text. Use this function to display the text for the job line.

To return to the previous screen, select **F3=Exit**.

Job History Parts Used Screen (F16)

To display this screen, select **F16=Parts Used** from other Job History Enquiry screens.

This screen displays, for each job, the date, part used and the engineer that fitted the part.

```
SS447              Z1 - Demonstration Company              GBJBATDO    9/01/98
                              WORKSHOP BRANCH                            14:20:16
Job History - Parts Used
Job Number..........  509272
Model............... DENMODEL1        Serial Number....... T07171220
Account Number...... DENMOR           Account Address..... 000
Contract Number.....                  Contract Type....... *NO
 Report
  Date     Part................                                  Engineer

F3=Exit  F7=Job Story  F12=Previous
F13=Fold/Truncate  F15=Hours  F17=Misc. Costs  F21=Text
```

Functions:

F7

Job story. Use this function to display the job text.

F13

Fold/Truncate. Use this function to display more details.

F15

Hours. Use this function to display the Job History Labour Hours screen.

F17

Misc. Costs. Use this function to display the Job History Miscellaneous Charges screen.

F21

Text. Use this function to display the text for the job line.

To return to the previous screen, select **F12=Previous**.

Job History Miscellaneous Charges Screen (F17)

To display this screen, select **F17=Misc. Costs** from other Job History Enquiry screens.

This screen displays, for each job, the date, charge type, cost and amount of each miscellaneous charge incurred.

```
SS445              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                          14:20:55
Job History - Misc. Charges
Job Number..........  509272
Model............... DENMODEL1        Serial Number....... T07171220
Account Number...... DENMOR           Account Address..... 000
Contract Number.....                  Contract Type....... *NO
 Report
  Date        Charge Type.........  Job Category........              Amount

F3=Exit  F7=Job Story                          F12=Previous
F13=Fold/Truncate  F15=Hours  F16=Parts Used  F21=Text
```

Functions:

F7

Job story. Use this function to display the job text.

F13

Fold/Truncate. Use this function to display more details.

F15

Hours. Use this function to display the Job History Labour Hours screen.

F16

Parts Used. Use this function to display the Job History Parts Used screen.

F21

Text. Use this function to display the text for the job line.

To return to the previous screen, select **F12=Previous**.

Document History Window (Option 2)

To display this window, on the Job History Line Selection Screen, select a job with option 2.

This screen displays the document history of the job. These details include: the reference number, the print date and time.

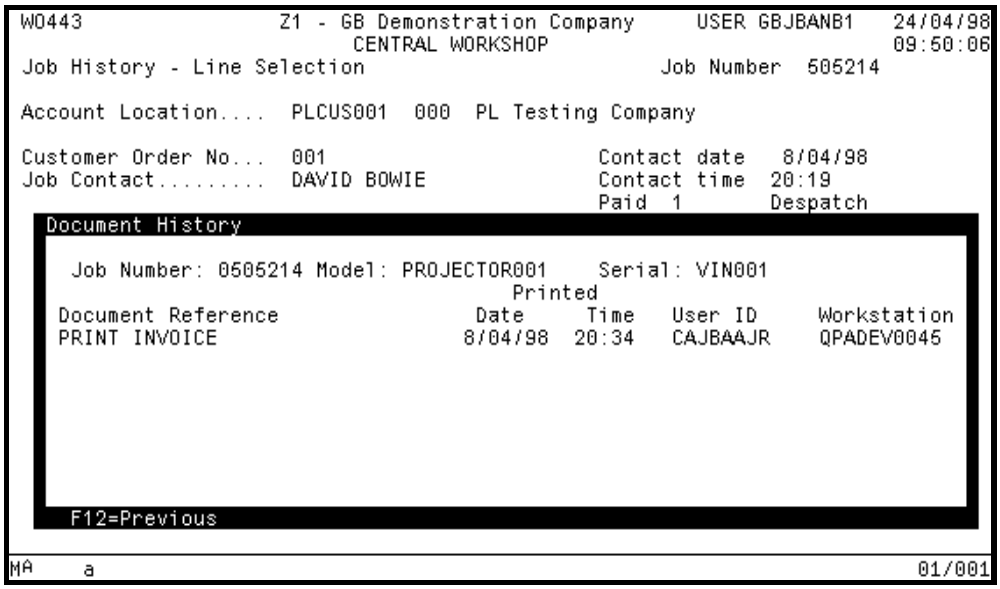

To return to the previous screen, select **F12=Previous**.

Escalation Enquiry

31/WOS

Use this option to enquire on outstanding workshop jobs close to, or exceeding, their response time guarantee.

Use this enquiry frequently to monitor and take action on jobs approaching a critical status.

Concepts

Workshop Management alerts you to any outstanding jobs approaching their designated response time. Job escalation runs whenever the Workshop Management sub-system is active.

In the job escalation enquiry, each job is stamped with a target response date and time.

For unscheduled jobs, the target date and time is the date and time the call was logged, (or the appointment date and time if entered), plus the response hours from the Call Logging screen (from the contract), taking into account the service window defined on the company profile, and the working and non-working days defined on the Daily Calendar file.

For scheduled jobs, the target date is the last working day of the service period in which the visit is due, and the target time is the start time of the service window.

A continuous batch job runs within the application, which regularly recalculates the escalation step of all jobs within the escalation time fence with a status of eligible for escalation. The step is calculated as:

(target time - current time) / reporting interval for escalation

rounded up to the nearest integer. This means that the escalation step moves from high to low value as a job moves towards its target time. Step 00 means that the job has either reached or gone beyond its target time.

Note: Workshop Management assumes a seven day working week. For example if you do not work one weekend, Workshop still escalates Monday's jobs on Sunday, not on the preceding Friday.

Escalation Enquiry Selection Screen

To display this screen, select the Escalation (Enquiries) option.

Use this screen to select the job you want to see the details for.

```
WO852                 Z1 - GB Demonstration Company    USER GBJBANB1   24/04/98
                            CENTRAL WORKSHOP                            9:52:41
Escalation Enquiry

Jobs Assigned To Engineer............?. _____
OR
Jobs For A Team......................?. ___
OR
All Jobs For The Branch (1)............ 0

Planned Jobs (1) Or Callouts (2)....... 2     (Leave blank for all)
Contracted Responses Only? (1/0)....... 0
Escalation Step........................ 00    (Leave blank for all)

Status Range........................... 00 to 01

00=Open            01=Assigned        02=Scheduled        03=Despatched
04=Work in Progres 05=Telephone       06=Parts            07=Credit Hold
08=Complete (Not D 09=Partial Report  10=SOP Job


F3=Exit  F4=Prompt

MA    a                                                              05/042
```

Fields:

Note: You must enter either an engineer or a team or set All Jobs For The Branch to 1.

Jobs Assigned To Engineer

Enter an engineer. This displays a list of all job lines currently assigned to this engineer, irrespective of the job line branch, which satisfy the other selection criteria.

Jobs For A Team

Enter a team. This displays a list of all job lines currently assigned to this team, irrespective of the job line branch, which satisfy the other selection criteria.

All Jobs For The Branch

Enter one of the following:

0 - You must use this if you entered either an engineer or team.

1 - To display a list of all job lines belonging to the current branch, which satisfy the other selection criteria.

Scheduled PM Or Callout Or Both

Enter one of the following:

1 - To display only planned maintenance job lines that satisfy the other selection criteria.

2 - To display only breakdown job lines that satisfy the other selection criteria.

Blank - To display all job lines, irrespective of whether they are breakdown calls or planned maintenance jobs that satisfy the other selection criteria.

Contracted Responses Only

Enter one of the following:

0 - To select all jobs, whether they are covered by a contract or not.

1 - To select only jobs for pieces of equipment covered by contract, and therefore having a contracted response time.

Escalation Step

Enter the escalation step, between 00 and 98, for which you want to display jobs lines.

Leave blank to display all job lines.

Status Range

Enter the status range for which you want to display job lines.

To display the Escalation Enquiry Detail screen, enter the selection criteria and press **Enter**.

Escalation Enquiry Detail Screen

To display this screen, on the Escalation Enquiry Selection screen, enter the required selection criteria and press **Enter**.

This screen shows the jobs that meet the entered selection criteria. You can select any of the jobs to display more details.

The details displayed for each job include: the customer details, equipment details, fault, job number, status and category, the target date and time, and the escalation step.

```
SS852          Demonstration Company                USER BRERETM    26/11/93
                         CENTRAL BRANCH                              8:01:20
Escalation Enquiry

Engineer        E0001  JOHN SMITH                 Radio Page No.:
Last Contact    26/11/93   7:45   Location   ON WAY TO JOB 501131

n Account name              Pcde Model           Flt Cat   Job   St Target Stp
_ Jones & Crossland (Northe PR1  WA10            ELE CSR  501131 DES  8:00 00
  Unit 5                         Qty:          1     Target Date 26/11/93
  Fault Electrical fault    ARCING BEHIND FILTER     Service Period  9311
_ Jones & Crossland (Northe PR1  WA10            NSY WTY  501132 SCH 11:00 03
  Unit 5                         W930001             Target Date 26/11/93
  Fault Noisy               SECONDARY DRIVE RATTL    Service Period  9311

                                                                          +

1=Job Details
F3=Exit  F5=Refresh  F12=Previous  F13=Fold/Truncate  F21=Text
```

Fields:

Select Option

Enter 1 to display the Job History Line Detail screen for the job line.

Functions:

F13

Fold/Truncate. Use this function to display extra details for each job line.

F21

Text. Use this function to display the text associated with the job.

To display the Job History Line Detail screen, select a job line with an option 1.

Branch Workload Enquiry

1...
2... **32/WOS**

Use this option to display the projected workload for the next 16 working hours, based on the duration of jobs and the available engineers' working hours.

Description

The workload program displays the workload in two-hour time slots, starting from the current time. It only displays working hours, as derived from the service window.

The calculation is based on the total job duration of calls, with a target time falling within the two-hour slot, divided by the total available engineer hours for the slot. The result is multiplied by 100, to express the load as a percentage.

Implications

The Workload program includes jobs in two-hour slots, based on their target time; it takes no account of job duration, which falls outside that two-hour slot.

Branch Workload Enquiry Detail Screen

To display this screen, select the Branch Workload Enquiry option.

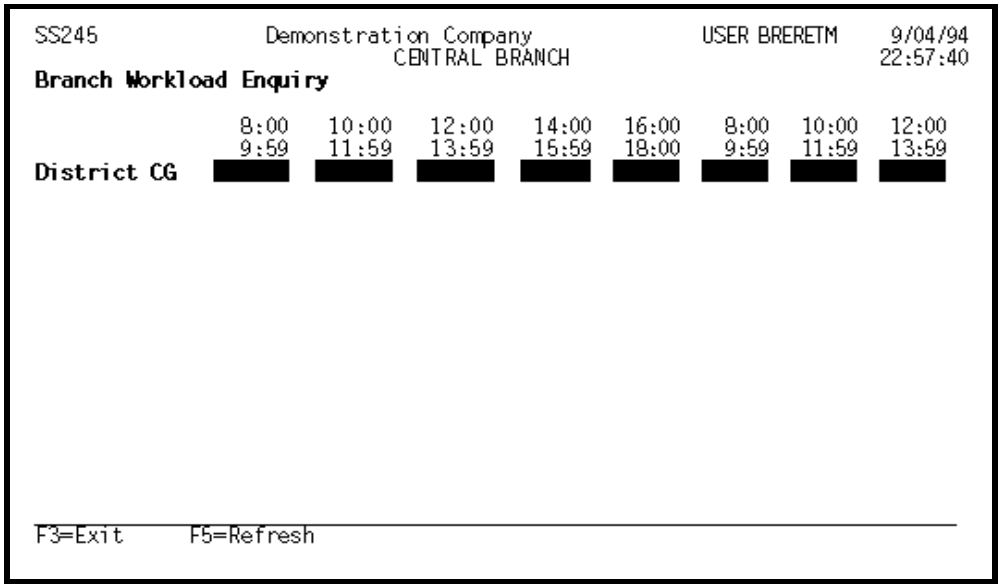

The screen displays the loading on a district (a team, or group of teams). The two-hour periods show the comparison between the available engineer time and the time already allocated to jobs, with the result expressed as the colour-coded percentage load.

The colour of the block represents the percentage load as follows:

- Red - Flashing = >125%.
- Red = 110 - 125%.
- Pink = 100 - 109%.
- Yellow = 90 - 99%.
- Green = 75 - 89%.
- Blue = 50 - 74%.
- White = <50%.

To leave the enquiry, select **F3=Exit**.

Outstanding DRP Order Enquiry

1...
2... **33/WOS**

Use this option to enquire on outstanding DRP orders and their associated Service Management jobs.

Only DRP orders which have been raised in association with a Service Management job are visible within this enquiry.

Outstanding DRP Order Enquiry Screen

To display this screen, select Outstanding DRP Order Enquiry.

```
WO656                  Z1 - GB Demonstration Company   USER GBJBANB1   28/05/98
                            CENTRAL WORKSHOP                           09:14:08

Outstanding DRP Order Enquiry

      DRP Order Number......: _______

Or    Job Number............: ________

Or    Engineer's Stockroom..: __

Or    Engineer Number.....?.: _____

F3=Exit   F4=Prompt
```

Fields:

Tip: Leave all four fields blank to see a list of all outstanding DRP orders for the current company and branch.

Note: Only complete one field.

DRP Order Number

Enter the DRP order you want to enquire on.

Job Number

Enter the job associated with the DRP order you want to enquire on.

Engineer's Stockroom

Enter the stockroom associated with the DRP order you want to enquire on.

Engineer Number

Enter the engineer associated with the DRP order you want to enquire on.

When you have entered your selection, press **Enter**.

If you did not specify an order or job, then the Outstanding Parts Orders Enquiry Screen 1 is displayed.

If you selected an order or a job, then the Outstanding Parts Orders Enquiry Screen 2 is

displayed.

Outstanding Parts Orders Enquiry Screen 1

To display this screen do not specify an order or job on the Outstanding DRP Order Enquiry screen and press **Enter**.

This screen lists the outstanding orders for the stockroom, engineer or current company and branch, depending on the selection you made on the Outstanding DRP Order Enquiry screen.

Fields:

N

Selection field. Enter one of the following:

1 - See the job detail for this order. This displays the Job Line Detail screen.

2 - See the order detail for this order. This displays the Outstanding Parts Orders Enquiry screen 2.

Press **Enter** when you have made your selection. If you enter 2 against an order the Outstanding Parts Orders Enquiry Screen 2 is displayed.

Outstanding Parts Orders Enquiry Screen 2

To display this screen specify an order or job on the Outstanding DRP Order Enquiry screen, and press **Enter**.

Or: Enter 2 against an order on the Outstanding Parts Orders Enquiry screen 1.

All the items for the order are listed, with the item description, quantity ordered and quantity despatched.

Engineer Messages

40/WOS

Use this option when you want to send messages, or review messages sent, between engineers and teams within a workshop branch. You can send messages to any engineer or team in any branch.

You can enter, store and retrieve messages, for engineers and teams.

Description

You can enter a three line (195 character) message and the sender's code (for example, engineer number). Workshop Management calculates the message expiry date: it adds the current date to the default expiry days for messages, set up on the System Parameters file.

Engineer Work Allocation also displays engineer and team messages before displaying the job list for the selected engineer or team.

Note: You can only review branch messages using this option.

Implications

You must define the message sender to Workshop Management as an engineer.

If you do not require a sender, you can use the same engineer or team as both the sender and the recipient.

Engineer Message Maintenance Screen

To display this screen, select the Engineer Messages option.

Use this screen to enter selection criteria for the message you want to maintain.

```
SS122              Demonstration Company              USER BRERETM     1/12/93
                            CENTRAL BRANCH                            10:17:12
Engineer Message Maintenance

Message type to maintain...... 1    1=Engineer
                                    2=Team
                                    3=All

If types 1 or 2:

         Engineer..........?.. E0001   (Leave blank for all)

         Team..............?.. ___     (Leave blank for all)

Leave selection fields blank to list all outstanding messages.

F3=Exit    F4=Prompt    F10=Message entry
```

Fields:

Message Type To Maintain

Enter one of the following:

1 - Engineer. To maintain an engineer message.

2 - Team. To maintain a team message.

3 - All messages. To maintain all types of messages.

Engineer

Select the engineer to send the message to.

Team

Select the team to send the message to.

Functions:

F10

Message Entry. Use this function to send an engineer message.

To display the Engineer Message Maintenance Selection Screen, complete the fields and press **Enter**.

Send an Engineer Message Screen (F10)

To display this screen, select **F10=Message Entry** from the Engineer Message Maintenance Initial Screen.

Use this screen to define a new engineer message.

```
SS121              Demonstration Company              USER BRERETM     1/12/93
                              CENTRAL BRANCH                           10:21:11
Send an Engineer Message

Message from..?. E0002      PETER JONES

Expiry date..... 4/12/93

Message.. An engineer message Peter

Send to (specify ONE of the following):

    Engineer....?.. E0001  JOHN SMITH
    Team........?..
    All engineers.. 0      (0=No,1=Yes)

F3=Exit  F4=Prompt  F8=Send message  F12=Previous
```

Fields:

Message From

Select the engineer who originated the message.

Expiry Date

Enter the expiry date. This defaults to the current system date plus the default expiry days for messages (defined in System Parameters File Maintenance).

Message

Enter the message, in up to 3 lines of 65 alphanumerics each.

Send To: Engineer

Select the engineer to send the message to.

Send To: Team

Select the team to send the message to.

Send To: All Engineers

Enter 1 to transmit the message to all engineers defined to the branch.

To send the message, select **F8=Send Message**.

Engineer Message Maintenance Selection Screen

To display this screen, on the Engineer Message Maintenance Initial screen, enter the selection criteria and press **Enter**.

This screen displays all the engineer messages that match the entered criteria.

```
SS122              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                          14:32:25
Engineer Message Maintenance

All Messages Selected

   Sent   Date    Expiry
1    By   Sent     Date   Message

 LAURA  3/07/97  6/07/97 Cannot replicate symptom on machine 230
_ FRED  25/03/97 28/03/97 Fred absent all day Friday




1=Select
F3=Exit   F10=Message entry   F12=Previous
```

Fields:

1

Selection field. Enter 1 to display the Engineer Message window so you can maintain the selected message.

Functions:

F10

Message Entry. Use this function to access the Send An Engineer Message screen, to define a new message.

To return to the menu, select **F3=Exit**.

Engineer Message Window (Option 1)

To display this window, on the Engineer Message Maintenance Selection screen, select a message with option 1.

This window displays the sender, message ID, date and time the message was sent.

```
SS122              Z1 - Demonstration Company          USER GBJBATDO    9/01/98
                              WORKSHOP BRANCH                          14:34:23
Engineer Message Maintenance

All Messages Selected

   Sent   Date    Expiry
1    By   Sent     Date   Message


1 NICK   9/01/98 12/01/98 Your parts have arrived.


Message from.. NICK       NICK TAYLOR            Message ID...        34
Expiry date... 12/01/98   Date sent..  9/01/98   Time sent.... 14:34

Message. Your parts have arrived.
```

Fields:

Expiry Date

Enter the new expiry date for the message.

Message

Enter the new message, using up to three lines, or 195 characters.

To return to the previous screen, select **F12=Previous**.

Machine Messages

1... 2... 41/WOS

Use this option to store messages for machines, on an individual or generic basis, to retrieve when you log or despatch a job.

Description

You can specify a message type, which determines whether to record the message for a specified model and serial number, a serial number range, a model type, or a model sub-group.

Leave the model and serial fields blank, to retrieve outstanding messages.

If you enter a model or serial number, you can define a three line (195 character) message, and enter the sender's code (for example, engineer number). Workshop Management assumes a message expiry date of 99/99/99, but you can amend this as required.

Machine Message Maintenance Screen

To display this screen, select the Machine Messages option.

Use this screen to select the machine for which you want to define a message.

```
SS125              Demonstration Company              USER BRERETM     1/12/93
                            CENTRAL BRANCH                             11:19:36
Machine Message Maintenance

Message type to maintain...... 3    1=Model / Serial
                                    2=Model / Serial number range
                                    3=Model
                                    4=Model Sub-group

Specify which to list, or leave blank for all:

        Model.............?.. WA10
    and/or
        Serial............?.. _______________  to  _______________

        Division / Model Group / Sub-group....?..  __ / ___ / ___

Leave selection fields blank to list all outstanding messages.

F3=Exit   F4=Prompt   F10=Message entry
```

Fields:

Message Type To Maintain

Enter one of the following:

1 - Enter a message for a model with serial number.

2 - Enter a message for a model within a serial number range.

3 - Enter a message for a model.

4 - Enter a message for a model sub-group.

Model

Enter a model code of up to 15 alphanumerics.

Serial Number

Enter the serial number for the model. The combination of model and serial number must exist on the installation file.

If you are entering a message for a serial number range, enter the start and end of the range. This is inclusive.

Division Code

If the machine message is for a product division, select a division.

The model and serial number fields must be blank.

Model Group Code

If the machine message is for a product division and model group, select a model group.

Model and serial number fields must be blank and you must complete the Division Code field.

Model Sub-Group Code

If the machine message is for a product division, model group and model sub-group, select a model sub-group code.

Model and serial number fields must be blank and you must complete the Division Code and Model Group Code fields.

Functions:

F10

Message Entry. Use this function to display the Send A Machine Message screen.

Enter the selection criteria and then press **Enter** to display the Machine Message Maintenance Selection screen.

Send a Machine Message Screen (F10)

To display this screen, select **F10=Message Entry** from the Machine Message Maintenance Initial screen or the Machine Message Maintenance Selection screen.

```
SS124              Demonstration Company              USER BRERETM     1/12/93
                              CENTRAL BRANCH                           11:16:44
Send a Machine Message

Message from.... __________

Expiry date..... 99/99/99

Message.. All model WA10 manufactured after 10/09/93 to be checked for
          incorrect fuse rating:
          F1 may be 5A quick blow   Correct rating 5A delay

Send to:

    Model............?.. WA10
  and/or
    Serial...........?.. ______________  to  ______________

Or
    Division / Model group / Sub-group...?..  __ / ___ / ___

F3=Exit  F4=Prompt  F8=Send message  F12=Previous
```

Fields:

Message From

Enter up to 10 alphanumerics, to identify the sender by name, by job title or by user defined code.

Expiry Date

Enter the expiry date for the message (DDMMYY).

The default (99/99/99) means a machine message does not expire, and is not subject to the default number of days for message expiry set in System Parameters Maintenance.

Message

Enter a maximum of 3 x 65 character lines, of free form detail.

Send to:

Model

Select the model to send the message to.

The model code defaults from the model you entered on the Machine Message Maintenance Initial Screen.

Serial Number

Enter the serial number for the model. The combination of model and serial number must exist on the Installation file.

If you are entering a message for a serial number range, enter the start and end of the range. This is inclusive.

This defaults from the Machine Message Maintenance Initial screen.

*Note: If the message is for a machine with no serial number, enter the model number and field exit through the serial number field before you select **F8=Send Message**.*

Division Code

If the machine message is for a product division, select the division.

The model and serial number fields must be blank.

Model Group Code

If the machine message is for a product division and model group, select the model group.

The model and serial number fields must be blank and you must enter a division.

Model Sub-Group Code

If the machine message is for a product division, model group and model sub-group, select a model sub-group.

The model and serial number fields must be blank and you must enter a division and model.

Select **F8=Send Message** to send the message.

Machine Message Maintenance Selection Screen

To display this screen, enter the selection criteria on the Machine Message Maintenance Initial screen and press **Enter**.

Use this screen to select the machine message you want to maintain.

```
W0125                Z1 - UK Demonstration Company    USER GBJBANB4    6/02/98
                          CENTRAL WORKSHOP                            14:42:11
Machine Message Maintenance

All Messages Selected

    Sent        Date    Expiry
1    By         Sent     Date   Message

_ NICK        6/02/98 99/99/99 This machine has known problem with fuses


1=Select
F3=Exit   F10=Message entry   F12=Previous
```

Fields:

1

Selection field. Enter 1 to display the Amend Message window so you can maintain the selected machine message.

Select **F3=Exit** to leave this screen.

Amend Machine Message Window (Option 1)

To display this window, select a message on the Machine Message Maintenance Selection screen, with option 1.

Use this window to change the message details.

```
WO125                Z1 - UK Demonstration Company    USER GBJBANB4    6/02/98
                          CENTRAL WORKSHOP                            14:42:11
Machine Message Maintenance

All Messages Selected

    Sent        Date    Expiry
1    By         Sent     Date   Message

1 NICK         6/02/98 99/99/99 This machine has known problem with fuses


Amend Message
 Model......... LITESHOW500
 Message from.. NICK                          Message ID.        25
 Expiry date... 99/99/99  Date sent..  6/02/98  Time sent.. 14:42

 Message. This machine has known problem with fuses
          ____________________________________________________________
          ____________________________________________________________
F8=Update  F11=Delete  F12=Previous
```

Fields:

Expiry Date

Enter the expiry date for the message (DDMMYY).

The default (99/99/99) means a machine message does not expire, and is not subject to the default number of days for message expiry set in System Parameters Maintenance.

Message

Enter a maximum of 3 x 65 character lines, of free form detail.

To leave this window, select **F12=Previous**.

Progress Chasing

50/WOS

Use this batch job to detect job lines which have a particular action for too long.

This batch job only includes actions where you have a specified number of progress chasing days.

The batch job finds all jobs with the Progress Number Of Days greater than 0, and if the status is less than 08, the process retrieves the job and prints a letter for each job line.

The batch job also sets a flag to make sure the letter is not reprinted until the date is today's date plus the progress chasing days again.

To submit the batch job, select Progress Chasing. Then select **F8=Confirm Submit** to start the batch job running.

Tip: You can also run this batch job as part of the day end procedure.

Stock Check Exception

51/WOS

Use this batch job to find and print all storeroom locations where the actual items found and the application information are not the same.

Note: To run this stock check correctly, you need a bar code enabled download program.

The information printed is branch specific.

This batch job reports on:

- Invalid job numbers - if the item is found but not on an active job.
- Incorrect location - if an item is physically at a different location to that recorded on the Installation details.
- Items not found - items that should be in the workshop, according to the data, but cannot be physically found.

To submit the batch job, select Stock Check Exception. Then select **F8=Confirm Submit** to start the batch job running.