

- 
- 
- 
- 
- 

## Chapter 2

### Route/BOM Maintenance



# Standard Operations



**1/P1R**

Use this option to create a group of operations that is not linked to one particular style and route. For example, you can define a generic production process for making skirts.

Once you have created a group of standard operations, you can copy the operations over into individual style routes. This saves you from re-entering the operations for each style.

You can copy a standard operation to a route as a primary operation or as a variant operation. The standard operations that you create may have variant operations that you can also copy over.

## **Specification ID**

The Specification ID field is an optional identifier that is unique for each standard operation. With this identifier, you can retain a link to the style routes in which you incorporate the standard operation.

Therefore, while the Specification ID is unique on the standard operation, there can be many style route operations with the same Specification ID.

You can use these links to globally update any style routes in which you have incorporated the standard operation.

---

# Standard Operations Maintenance Screen 1



To display Standard Operations Maintenance screen 1, select Standard Operations from the menu.

Use this screen to enter the operation group that you wish to create or update.

## Fields:

### Operation Group

Enter a one character, alphanumeric code to create or maintain.

### Group Description

If you are creating a new group of standard operations, enter a meaningful description.



**Warning:** *When you enter an existing Operation Group, the Group Description does not display automatically.*

## Functions:

### F21

Text. Opens the Text Maintenance screen.



*Note: Extended text descriptions are essential for complex or commercially sensitive processes.*



To display Standard Operations Maintenance screen 2, press **Enter**.



To display Select Operation Group window 1, type ? in the Operation Group field and press **F4=Prompt**.

## Select Operation Group window 1(F4)



To display this window, type ? in the Operation Group field on Standard Operations Maintenance screen 1 and select **F4=Prompt**.

Use this window to select an operation group. The window lists the Standard Operation Groups that you have set up already.

To arrange to display a list of operation groups with specific Specification IDs, you can enter part of a Specification ID and a wildcard. You can narrow down your selection further by selecting a Specification ID with a wildcard and an operation group.

DS130 ST - Style Test & QA Company USER QASTYLE 12/06/98 09:37:01

Standard Operations Maintenance

Operation Group.....?..

Group Description.....

Select Operation group

More: +

- A aaaaaaaaaaaaaaaaaa
- B bbbbbbbbbbbbbbbbbb
- C Cut
- D dddddddddddddddd
- E STUARTS GROUP D
- F STUARTS NEW GRP
- G Stuarts Group 2
- J jockey reseq
- N 6210/wast+effda
- O Standard Ops
- P 6210/no var ops

1 = Select Position to: - (generic\*)

OR Specification ID: CUT\*

F12=Previous

F3=Exit F4=Prompt F11=Delete Entire Group F21=Text

MA a 21/056

### Fields:

#### Position To

If the list is very long, position the display to begin at a specified operation group.

#### Specification ID

Select one standard operation by entering a specification ID.

Alternatively, include \* as a wildcard to display a list of standard operations with matching IDs. For example, to list all standard operations with specification IDs prefixed by BUNDLE, enter BUNDLE\* .

#### (Untitled)

Select. To display a list of the standard operations in one operation group, enter 1.



To display Standard Operations Maintenance screen 2, type in a string containing a wildcard in the Specification ID field and press **Enter**.



## Standard Operations Maintenance Screen 2

This screen has four modes:

- No Operations Exist mode. This mode displays when you are creating a new operation group.
- Single Operation mode. The screen lists one operation with a specific Specification ID.
- Single Operation Group mode. The screen lists all the operations attached to the selected operation group.
- Multiple Operation Group mode. The screen lists all operations with matching Specification IDs.

### No Operations Exist Mode



To display this screen in No Operations Exist mode, type in a new Operation Group on Standard Operations Maintenance screen 1 and press **Enter**.

Style displays the following message: There are no operations for this group, take **F17** to copy from group.

Continue as follows:

- Either select **F17=Copy from Std. Operations** and choose an existing operation group from which to copy operations. Select Operation Group window 2 opens.
- Or, press **Enter** to start keying in an operation group from scratch, starting at operation 10. Standard Operations Maintenance screen 3 displays in Add mode.

### Single Operation Mode



To display this screen in Single Operation mode, type in a Specification ID on Select Operation Group window 1 and press **Enter**.

Use the screen in this mode to maintain a single standard operation.

In this mode, not all the options and functions are available.

### Single Operation Group Mode



To display this screen in Single Operation Group mode, type in an existing Operation Group on Standard Operations Maintenance screen 1 and press **Enter**.



To display this screen in Single Operation Group mode, enter 1 in the Select field against a standard operation on Select Operation Group window 1.

### Multiple Operation Group Mode



To display this screen in Multiple Operation Group mode, enter a string containing a wildcard in the Specification ID field on Select Operation Group window 1 and press **Enter**.

In this mode, not all the options and functions are available.

|                                                                                  |                              |      |              |                      |
|----------------------------------------------------------------------------------|------------------------------|------|--------------|----------------------|
| DS153                                                                            | ST - Style Test & QA Company |      | USER QASTYLE | 24/02/98<br>13:38:46 |
| Standard Operations Maintenance                                                  |                              |      |              |                      |
| Group: W 6210/Cut ops 2                                                          |                              |      |              |                      |
| 0                                                                                | G                            | Opsq | OpCode       | Description          |
|                                                                                  |                              |      |              | Labour               |
|                                                                                  |                              |      |              | Specification ID.    |
| █                                                                                | W                            | 10   | 10           | Cutting Machine 1    |
|                                                                                  | W                            | 20   | 20           | Cutting Machine 2    |
|                                                                                  | W                            | 30   | 30           | Cutting Machine 3    |
|                                                                                  | W                            | 40   | 40           | Cutting Machine 4    |
|                                                                                  |                              |      |              | 1.0000               |
|                                                                                  |                              |      |              | 100.0000             |
|                                                                                  |                              |      |              | .5000                |
|                                                                                  |                              |      |              | 10.0000              |
| 1=Maintain 2=Add Oper before 3=Add Oper after 4=Delete                           |                              |      |              |                      |
| F3=Exit F8=Update F12=Prev F13=Pos.to F23=More Opt. F24=More Keys                |                              |      |              |                      |
| <hr/> 6-2    SA    MW    KS    CL    IM    DM    II    STUD140    KB    PED201S1 |                              |      |              |                      |

### Fields:

Additional options and functions other than those listed on the Options and Functions line are available. The STDO type parameter on the parameter file enables you to define options and functions in addition to those supplied as standard. This manual describes those options and functions which can be found upon installation only.

#### O

Option. Enter one of the following:

- 1 - Maintain. Update the selected operation. Displays Standard Operations Maintenance screen 3 in Update mode.
- 2 - Add Oper before. Add a new operation before the current operation. Displays Standard Operations Maintenance screen 3 in Add mode.
- 3 - Add Oper after. Add an operation following the current operation. Displays Standard Operations Maintenance screen 3 in Add mode.
- 4 - Delete. Delete an operation. Style displays the operation details along with a deletion confirmation window.



Tip: To add to or update more than one operation, make as many of your selections as possible before pressing **Enter**.



*Note: Options 2 and 3 are only available in Single Operation Group mode, where the list contains all the standard operations in one operation group.*

## **G**

Group. This field displays the operation group code for this group of standard operations.

### **Specification ID**

The Specification ID is an optional identifier that is unique to each standard operation.

## **Functions:**

### **F8**

Update. Update operation group details. If any of the operations that you have updated are linked to style route operations, then the Standard Operations Maintenance Mass Update screen displays.

### **F13**

Position To Operation. Enter an operation sequence number from which to start the display. Opens the Position To window.

### **F17**

Copy from Standard Operations. Copy operations from another operation group. Opens Select Operation Group window 2.



*Note: This function is available in Single Operation Group mode only, where the list contains all the standard operations in one operation group.*

### **F18**

Resequence. Resequence operations following insertion or deletion. Resequences operations in standard increments of 10.



*Note: This function is available in Single Operation Group mode only, where the list contains all the standard operations in one operation group.*

### **F23**

More Options. Open an Options window listing all options available in the Option field.



*Note: This function is available in Single Operation Group mode only, where the list contains all the standard operations in one operation group.*

### **F24**



More Keys. Open a Functions window listing all available functions. You can select functions directly from this Function window.



*Note: This function is available in Single Operation Group mode only, where the list contains all the standard operations in one operation group.*



To display Standard Operations Maintenance screen 3 in Add mode, press **Enter** on this screen in No Operations Exist mode.

## Standard Operations Maintenance Screen 3 (Options 1, 2, 3)

-  To display this screen in Update mode, enter 1 in the Option field on Standard Operations Maintenance screen 2.
-  To display this screen in Add mode, enter 2 or 3 in the Option field on Standard Operations Maintenance screen 2.
-  If you are adding a new operation group, press **Enter** on Standard Operations Maintenance screen 2 to display Standard Operations Maintenance screen 3 in Add mode.

This screen is similar to Style Route Maintenance Operations screen 1, described under the Style Route/Bill Of Material option.

|                                                           |                              |                        |                                   |
|-----------------------------------------------------------|------------------------------|------------------------|-----------------------------------|
| DS154                                                     | ST - Style Test & QA Company | USER QASTYLE           | 4/03/98<br>10:39:54               |
| Standard Operations Maintenance                           |                              | <b>UPDATE</b>          |                                   |
| Group..... N                                              |                              |                        |                                   |
| Operation Sequence.... 10                                 |                              |                        |                                   |
| Operations Code.....                                      | 40                           | Std Lot Size.....      | 1.000                             |
| Operation Description..                                   | cut                          | Machine Quantity... 1  |                                   |
| Machine.....?                                             | 61CT1 6150 Cutting M/C 1     |                        |                                   |
| Work Centre.....?                                         |                              |                        |                                   |
| Bundle Ticket Type.?                                      |                              |                        |                                   |
| Reporting Type.....?                                      | 0 Count Point Type A         |                        |                                   |
| Reporting Level....?                                      | 3 Style/Colour/Size          |                        |                                   |
| Key Operation.....?                                       |                              |                        |                                   |
| <b>DURATION</b> Labour : Time                             | 3.0000                       | Mins/lot               | Formula Code?...                  |
| Machine: Time                                             | .2000                        | Mins/lot               | Formula Code?...                  |
| Team Size..                                               | 1.00                         | Lab Profile...?        |                                   |
| Move Days.....                                            | .00000                       |                        |                                   |
| Wastage %.....                                            | .2                           | Specification id ..... | DIANE76                           |
| F4=Prompt F11=Delete F12=Previous F15=User pgm            |                              |                        |                                   |
| F21=Op. Text F22=Additional Parms <b>F23=Variant Opn.</b> |                              |                        |                                   |
| 8-26                                                      | <b>SA</b>                    | MW                     | KS CL IM DM II MARVIN KB PED201S1 |

-  To return to Standard Operations Maintenance screen 2, press **Enter**.

## Standard Operations Maintenance Mass Update Screen (F8)



To display this screen, press **F8=Update** from Standard Operations Maintenance screen 2.

Use this screen to perform a mass update on any style route operations that are linked via the Specification ID to the standard operations you are updating. You can also choose to bypass the update.

The screen displays once for each updated standard primary or variant operation that links to one or more style route operations via the Specification ID.

For each style route operation with a link, the screen lists the following information:

- Style.
- Route.
- Operation sequence.
- Alternate Sequence. Whether the operation is a primary operation or a variant operation.
- Operation description.
- Labour Time.



*A mass update only updates those fields defined on the MASU parameter. For further details, refer to the Maintain Parameter File option.*

### **Time Calculations**

A mass update also performs user-defined time calculations on labour, machine and set-up times, according to formula codes defined under the ALLW parameter. For changes to take effect, you need to set the Labour Time, Machine Time and SET-UP fields, together with the appropriate Formula Code fields, to either 1 or 2 under the MASU parameter.

To find out more about parameters, refer to the Maintain Parameter File option.

|                                               |                              |                           |                                   |
|-----------------------------------------------|------------------------------|---------------------------|-----------------------------------|
| DS211                                         | ST - Style Test & QA Company | USER QASTYLE              | 2/03/98<br>12:51:58               |
| Standard Operations Maintenance - Mass Update |                              |                           |                                   |
| Group: Q                                      | Specification ID: DIANE71    | Labour:                   | 1.2000                            |
| Operation:                                    | 20 Prime 20                  | Cut 2 Primary No Variants |                                   |
| Style                                         | Rte Opsq Alsq OpCode         | Description               | Labour                            |
| 1 6210/DS51                                   | 8 15 Prime 20                | cut 2                     | .0000                             |
| 1 6210/DS51                                   | 8 20 Prime 20                | Cut 2 Primary No Variants | .0000                             |
| 1=Update without Text 2=Update with Text      |                              |                           |                                   |
| F8=Update F10=Bypass                          |                              |                           |                                   |
| 7-2                                           | SR                           | MW                        | KS CL IM DM II MARVIN KB PED201S1 |

## Fields:

### (Untitled)

Options. Enter one of the following:

- 1 - Update without Text. Do not copy across standard operation text with the update.
- 2 - Update with Text. Copy across standard operation text with the update.

## Functions:

### F8

Update. Perform a mass update on all the style route primary and variant operations listed on the screen.



*Note: The mass update only updates those fields that you have set to 1 or 2 under the MASU parameter. For more details, refer to the Maintain Parameter File option.*

### F10

Bypass. Do not update any of the style route operations listed.

## Position To Window (F13)



To display this window, select **F13=Position To** from Standard Operations Maintenance screen 2.

Use this window to position the display at a nominated operation.

| DS153                                                                                                                                                                                                                                                                         |   | ST - Style Test & QA Company |        | USER QASTYLE      | 24/02/98<br>16:00:33     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------|--------|-------------------|--------------------------|
| Standard Operations Maintenance                                                                                                                                                                                                                                               |   |                              |        |                   |                          |
| Specification ID: DIANE*                                                                                                                                                                                                                                                      |   |                              |        |                   |                          |
| 0                                                                                                                                                                                                                                                                             | G | Opsq                         | OpCode | Description       | Labour Specification ID. |
| -                                                                                                                                                                                                                                                                             | N | 10                           | 10     | cut               | 3.0000 DIANE76           |
| -                                                                                                                                                                                                                                                                             | N | 20                           | 20     | sew               |                          |
| -                                                                                                                                                                                                                                                                             | N | 30                           | 30     | finish            |                          |
| -                                                                                                                                                                                                                                                                             | P | 10                           | 10     | CUTTING 1         |                          |
| -                                                                                                                                                                                                                                                                             | P | 20                           | 20     | CUTTING 2         |                          |
| -                                                                                                                                                                                                                                                                             | Q | 10                           | 10     | cut 1             |                          |
| -                                                                                                                                                                                                                                                                             | Q | 20                           | 20     | cut 2             |                          |
| -                                                                                                                                                                                                                                                                             | Q | 30                           | 30     | cut 3             |                          |
| -                                                                                                                                                                                                                                                                             | T | 10                           | 10     | cut               |                          |
| -                                                                                                                                                                                                                                                                             | T | 20                           | 20     | sew               |                          |
| -                                                                                                                                                                                                                                                                             | T | 30                           | 30     | finish            |                          |
| -                                                                                                                                                                                                                                                                             | T | 40                           | 40     | Package           |                          |
| -                                                                                                                                                                                                                                                                             | U | 10                           | 10     | Cutting Machine 3 |                          |
| -                                                                                                                                                                                                                                                                             | X | 10                           | 10     | Cutting machine 1 |                          |
| -                                                                                                                                                                                                                                                                             | X | 20                           | 20     | Cutting Machine 2 |                          |
| -                                                                                                                                                                                                                                                                             | X | 30                           | 30     | Cutting Machine 3 |                          |
| -                                                                                                                                                                                                                                                                             | X | 40                           | 40     | Cutting Machine 4 |                          |
| 1=Maintain 4=Delete                                                                                                                                                                                                                                                           |   |                              |        |                   |                          |
| F3=Exit F8=Update F12=Previous F13=Pos. to                                                                                                                                                                                                                                    |   |                              |        |                   |                          |
| <div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>Position To</b><br/>           Enter:<br/>           Operation Sequence <input type="text"/><br/>           Operation Group .. <input type="text"/><br/>           F12=Previous         </div> |   |                              |        |                   |                          |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 1.0000 DIANE71           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 1.5000 DIANE72           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 4.0000 DIANE51           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | .9000 DIANE52            |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | .0000 DIANE53            |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | .0000 DIANE54            |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 1.0000 DIANE64           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 1.2000 DIANE04           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 4.0000 DIANE05           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 1.0000 DIANE06           |
|                                                                                                                                                                                                                                                                               |   |                              |        |                   | 10.0000 DIANE07 +        |
| 9-73 SA MW KS CL IM DM II STUD140 KB PED201S1                                                                                                                                                                                                                                 |   |                              |        |                   |                          |

### Fields:

#### Operation Sequence

Enter the operation sequence number from which you wish to start the display.

#### Operation Group

If the screen is displaying more than one standard operation group, you can enter the operation group from which you wish to start the display.



*Note: If you invoked Standard Operations Maintenance screen 2 by selecting one operation group only, then this field does not display.*



Press **Enter** to return to Standard Operations Maintenance screen 2, with the cursor pointing at the line containing your selected operation sequence or group.

## Select Operation Group Window 2 (F17)



To display this window, select **F17=Copy from Standard Operations** on Standard Operations Maintenance screen 2.

This window lists the Standard Operation Groups that you have set up already.

The window is very similar to Select Operation Group window 1. However, this window displays only when you have already selected an operation group to create and maintain.

Use this window to select a second operation group from which you can copy standard operations into your first operation group. You can copy over standard operations as variants of an existing operation. Or you can insert new primary operations, with variant operations also if you wish, into the first operation group's operation sequence.

You can display a list of operation groups with matching Specification IDs, by entering part of a Specification ID. You can narrow down your selection further by selecting a Specification ID with a wildcard and an operation group.

|       |                              |              |                     |
|-------|------------------------------|--------------|---------------------|
| DS153 | ST - Style Test & QA Company | USER QASTYLE | 25/02/98<br>9:01:45 |
|-------|------------------------------|--------------|---------------------|

Standard Operations Maintenance

Group: W 6210/Cut ops 2

| O | G | Opsq | OpCode | Descr |
|---|---|------|--------|-------|
| - | W | 10   | 10     | Cutti |
| - | W | 20   | 20     | Cutti |
| - | W | 30   | 30     | Cutti |
| - | W | 40   | 40     | Cutti |

Select Operation group

More: -

- U 6210/skintops3
- V 6210/COPY T
- W 6210/Cut ops 2
- 1 X 6210/CuttingOps
- 2 6210/skint ops2
- 1 Skirts
- 6 Comp Ops Short
- 7 AFI WC Ops
- 8 AFI MC Ops
- 

---

1 = Select                      Position to: \_

OR Specification ID: \_\_\_\_\_ (generic\*)

Include at Operation Number: 50

F12=Previous

1=Maintain 2=Add Oper before 3=Add Oper after 4=Delete  
F3=Exit F8=Update F12=Prev F13=Pos.to F23=More Opt. F24=More Keys

|       |    |    |    |    |    |    |    |         |    |          |
|-------|----|----|----|----|----|----|----|---------|----|----------|
| 11-30 | SA | MW | KS | CL | IM | DM | II | STUD140 | KB | PE0201S1 |
|-------|----|----|----|----|----|----|----|---------|----|----------|

### Fields:

#### Position To

If the list is very long, position the display to begin at a specified operation group.

#### Specification ID

Select one standard operation by entering a specification ID. This displays the Copy Operation Group screen.

Alternatively, include \* as a wildcard to display a list of matching operations. For example, to list all standard operations with specification IDs prefixed by BUNDLE, enter **BUNDLE\***. This displays the Copy From Selected Std. Operations screen.

### **Include At Operation Number**

Enter the sequence number at which point you wish Style to insert the operations you intend to copy over. This field is mandatory.

You can enter an existing sequence number, in which case Style inserts the first standard operation as a variant of the existing operation. Any subsequent operations you wish to add are inserted between this existing operation and the next existing operation.

Otherwise, you can enter a new sequence number, either within the sequence or at the beginning or end. In this case, Style adds the standard operations as primary operations at the point indicated by the sequence number.

### **(Untitled)**

Select. To display a list of all the standard operations in one operation group, enter 1 against an operation group.



To display the Copy Operation Group screen, select one standard operation group and press **Enter**.



To display the Copy Operation Group screen, type in a full Specification ID and press **Enter**.



To display the Copy From Selected Std. Operations screen, enter part of a Specification ID with a wildcard and press **Enter**.

## Copy Operation Group Screen

-  To display this screen, select one standard operation group on Select Operation Group window 2.
-  To display this screen, enter a full Specification ID on Select Operation Group window 2.

Use this screen to select one or more standard operations to copy into the current standard operation group. If any of the selected operations has variant operations, then these get copied across also.

This screen is described elsewhere. For a description, refer to the Copy Operation Group screen described under the Style Route/Bill Of Materials option.

|                      |   |                              |      |                          |                   |
|----------------------|---|------------------------------|------|--------------------------|-------------------|
| DS178                |   | ST - Style Test & QA Company |      | USER QASTYLE             | 25/02/98          |
| Copy Operation Group |   |                              |      |                          | 9:55:10           |
| Group: X             |   | 6210/CuttingOps              |      |                          |                   |
| Seq.                 | P | G                            | OpSq | OpCode                   | Description       |
| 1                    | - | X                            | 10   | 10                       | Cutting machine 1 |
| 2                    | - | X                            | 20   | 20                       | Cutting Machine 2 |
| 3                    | - | X                            | 30   | 30                       | Cutting Machine 3 |
| 4                    | - | X                            | 40   | 40                       | Cutting Machine 4 |
| 5                    | - | X                            | 60   | 60                       | Cutting Room      |
|                      |   |                              |      | Labour Specification ID. |                   |
|                      |   |                              |      | 1.2000                   | DIANE04           |
|                      |   |                              |      | 4.0000                   | DIANE05           |
|                      |   |                              |      | 1.0000                   | DIANE06           |
|                      |   |                              |      | 10.0000                  | DIANE07           |
|                      |   |                              |      | 4.0000                   | DIANE21           |

|                                                                  |    |         |              |          |    |
|------------------------------------------------------------------|----|---------|--------------|----------|----|
| Enter Operation to copy, from: ____ to ____ OR Position to: ____ |    |         |              |          |    |
| F3=Exit                                                          |    |         | F12=Previous |          |    |
| 5-2                                                              | SA | MW      | KS           | CL       | IM |
| DM                                                               | II | STUD140 | KB           | PED201S1 |    |



## Copy From Selected Std. Operations Screen



To display this screen, enter part of a Specification ID and a wildcard on Select Operation Group window 2.

Use this screen to select one or more standard operations to copy into the current standard operation group. If any of the selected operations has variant operations, then these get copied across also.

This screen is described elsewhere. For a description, refer to the Copy From Selected Std. Operations screen described under the Style Route/Bill Of Materials option.

| DS178                             |     | ST - Style Test & QA Company |          | USER QASTYLE      | 25/02/98                 |
|-----------------------------------|-----|------------------------------|----------|-------------------|--------------------------|
| Copy from selected Std.Operations |     | Specification ID: DIANE*     |          |                   | 9:56:55                  |
| Seq.                              | P G | OpSq                         | OpCode   | Description       | Labour Specification ID. |
| 1                                 | - X | 10                           | 10       | Cutting machine 1 | 1.2000 DIANE04           |
| 2                                 | - X | 20                           | 20       | Cutting Machine 2 | 4.0000 DIANE05           |
| 3                                 | - X | 30                           | 30       | Cutting Machine 3 | 1.0000 DIANE06           |
| 4                                 | - X | 40                           | 40       | Cutting Machine 4 | 10.0000 DIANE07          |
| 5                                 | - Z | 5                            | 5        | Layout            | 5.0000 DIANE15           |
| 6                                 | - Z | 10                           | 10       | Cutting           | 1.0000 DIANE16           |
| 7                                 | - Z | 20                           | 20       | Sewing 1          | 2.0000 DIANE17           |
| 8                                 | - Z | 30                           | 30       | Sewing 2          | 5.0000 DIANE18           |
| 9                                 | - Z | 40                           | 40       | Finish            | 2.5000 DIANE19           |
| 10                                | - Z | 50                           | 50       | Packing           | 3.0000 DIANE20           |
| 11                                | - X | 60                           | 60       | Cutting Room      | 4.0000 DIANE21           |
| 12                                | - T | 10                           | 10       | cut               | 4.0000 DIANE51           |
| 13                                | - T | 20                           | 20       | sew               | .9000 DIANE52            |
| 14                                | - T | 30                           | 30       | finish            | .0000 DIANE53            |
| 15                                | - T | 40                           | 40       | Package           | .0000 DIANE54            |
|                                   |     |                              |          |                   | +                        |
| F3=Exit F12=Previous              |     |                              |          |                   |                          |
| 5-2                               | SA  | MW                           | KS       | CL                | IM DM II                 |
| STUD140                           |     | KB                           | PED201S1 |                   |                          |

## Routes And Bills Of Material

A Style route combines a series of operations (route) with a list of materials (bill of materials). You link each material to a specific operation, so that MRP can schedule for when you need the material.

You can vary the quantities of material required on one route by, size or size/fit.

You can define up to 36 alternative routes for one style, enabling you to create different routes for costing, rough cut capacity planning, design and so on.

There are three options that allow you to create and maintain routes and bills of material for your styles:

- **Style Route/Bill Of Material.** Use this option to create and maintain standard production planning routes.
- **Model Route/Bill Of Material.** Use this option to create and maintain model planning routes.
- **Maintain Capacity Bill.** This option belongs to Style Master Production Scheduling. Use this option in capacity planning to create a summary capacity route for a style. You can link each operation to a machine representing the total capacity of a group of similar resources.

## Model Route/Bill Of Material

**4/P1R**

Use this option to create and maintain a model planning route.

Subsequently, you can copy the model planning route to a live production route.

To copy a live production route to a model planning route, use the Copy Production Route To Model option. When you have finished making changes to the model route, use the Copy Model Route To Production option to copy the route back to a live production route.

This option is similar to the Style Route/Bill Of Materials option.



Tip: Model planning routes can provide system managers with a certain degree of flexibility. You can authorise users to copy to and maintain model planning routes but not live production routes.



***Warning: Before you can create a model planning route, you must add the route under the VMDR parameter. For more information, refer to the Maintain Parameter File option.***

## Maintain Capacity Bill



**21/P2M**

Use capacity bills to obtain a summary of the load imposed by producing each style.

During the MPS run, you can use capacity bills to calculate the load in individual resources by each production order. To review the resulting calculations, use the Capacity Review option.

The format of a capacity bill is identical to the standard route/bill of material (BOM). However, you would use capacity bills to carry out long term planning of resource availability, rather than the medium term planning activity of adjusting availability and load to match each other.


Any MPS run can generate load based on the planning route of each style (which may be different for each style) or for a fixed planning route. It is the latter type of run which accesses capacity bills. Therefore, all loads which are to be reviewed against each other should quote the same route code. For example, if you are at the long term planning stage for a given season, then it is the usual practice to use the same route code on each style to be produced during the season.

This option is similar to the Style Route/Bill Of Materials option.

## Style Route/Bill Of Material

**1...** **2/P1R**

Use this option to create or maintain a route for producing a style.

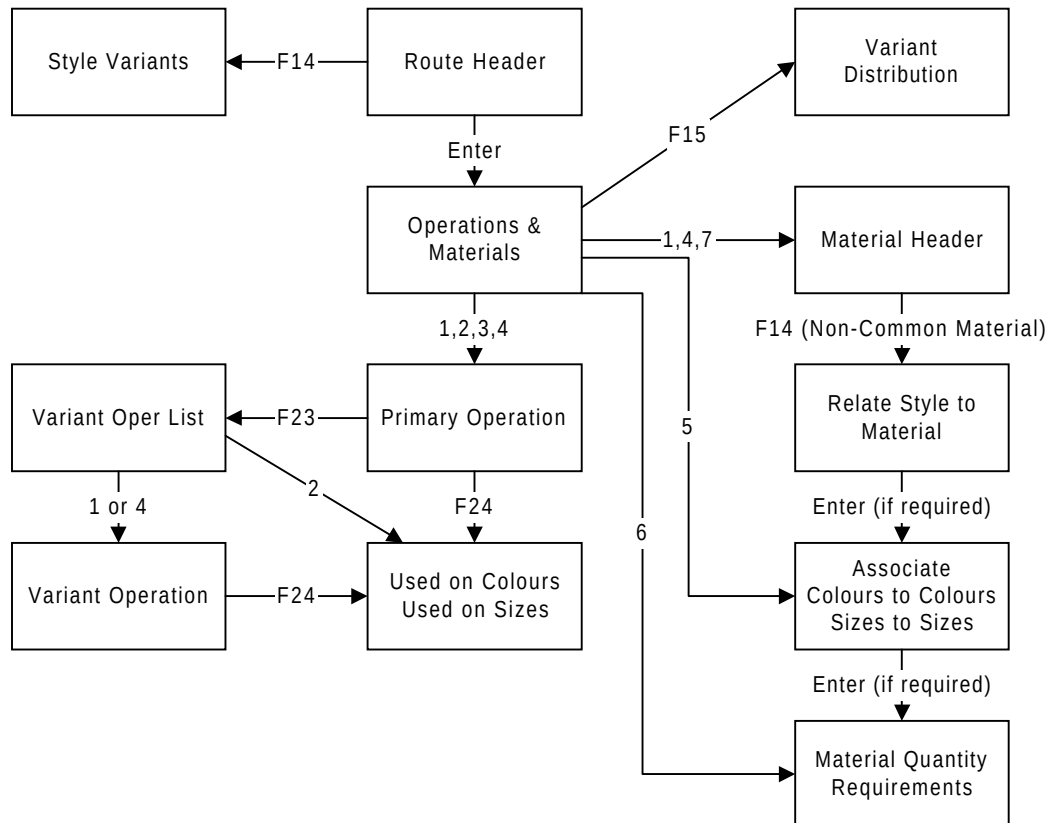

The above figure provides a route map to the various screens and windows available within Route/BOM Maintenance:

- The boxes indicate the relevant function.
- Fn indicates a numbered function key available on the calling screen.
- Enter indicates that the **Enter** key needs to be pressed.
- N on a line indicates the Option number which may be entered against a displayed line.

You can remove the capability of adding operations from within this option, by removing the following records from the STYL parameter under the Maintain Parameter File option:

| Code ( 10 ) | Description          |
|-------------|----------------------|
| 0224DS153   | Add Operation Before |
| 0224DS179   | Add Operation Before |
| 0324DS153   | Add Operation After  |

0324DS179                      Add Operation After

### **Audit Report**

All updates to bills of materials are printed automatically on a control report to provide a complete audit of changes made.

### **Prerequisites**

You need to set up one or both of the following:

- Machines.
- Work centres.

In addition, you may require the following:

- Standard operation groups.
- Resource Codes.
- Bundle ticket type.
- Labour profile.
- Costing analysis code.
- Operation type.
- Materials for input to routes.
- Subcontract supplier(s).

### **Multiplant**

Define separate routes for each of the plants or lines that you intend to use to manufacture styles.

## Routes/Structures Maintenance Screen



To display the Routes/Structures Maintenance screen, select Style Route/Bill of Material from the menu.

Use this screen to specify the production route you wish to create or maintain.



*Note: To create or maintain a model planning route, use the Model Route/Bill Of Material option.*

```
DB130                ZS - Style Demonstration Co.          USER GBJBAMS      29/02/96
                                                           16:35:50
Routes/Structures Maintenance

Style .....?.. █
Route .....?.. _

F3=Exit  F4=Prompt  F16=Item Search

06-25    █      MW      KS      IM      II  KENB20A  PET166S2
```

### Fields:

## Style

Enter a style that you have set up under the Style/Material Details option.

In Style/Material Details, you are likely to have set the Item Type to M (production). If the Item Type is not M, then Style displays a message stating that the style is not a production item. In this case, press **F14** to continue.

## Route

Enter one alphanumeric character.



*Note: If this is a model planning route, make sure you have added the route under the VMDBR parameter. If this is a live production route, the route should not be defined under the VMDBR parameter. For more information, refer to the Maintain Parameter File option.*



*Note: If you are defining one or two routes only, make sure they match the planning and/or costing route(s) that you entered for the style*

*under the Style/Material Details option.*

 Tip: To help easy identification, define a numbering convention for routes.

For example, use:

- Numeric codes for production routes.
- Alpha codes for model routes.

## Functions:

### F16

Item Search. Use Item Master Scan window 1 to scroll through current styles.

 Press **Enter** on the Routes/Structures Maintenance screen to display the Style Route Header Maintenance screen.



## Item Master Scan Window 1 (F16)



To display this window, select **F16=Item Search** from the Routes/Structures Maintenance screen.

Use this window to select a style or material.

To specify a place from which to begin scrolling through styles and materials, enter search criteria.

### Fields:

#### Search Type

Use this field to scan on a particular characteristic of the style or material. Enter one of the following:

- 1 - Item Reference. Scan on the code that you use to identify the style or material, using Item Master Scan Window 2. This is the code that you enter in the Style field on Product Maintenance screen 1 under the Style/Material Details option.
- 2 - Inventory Description. Scan on an inventory search word, using Item Master Scan Window 2. Search words are set up on the Inventory Item Search Words window under the Style/Material Details option.
- 3 - Purchasing Description. If you have also installed Purchase Management, scan on the description that you use for purchasing from Item Master Scan Window 2.
- 4 - Alternate Reference. Scan on an Alternative Reference, as set up on Bar Code/Alternative Item Reference Maintenance Screen 1 in Style Inventory Management. Item Master Scan Window 3 opens.

5 - Search Characteristics. Scan on a search family set up under the Search Family Codes option in Style Inventory Management. Item Master Scan Window 4 opens.

? - Prompt. Opens Item Master Scan window 6 from which you can enter search for a style or material by inventory description, purchasing description, search family or style/material code.



*Note: If you enter 1, 2, 3, 4 or 5 in this field, enter search criteria in the Search Criteria field also.*

## Matrix Style

### Search Criteria

Use this field to enter search criteria, appropriate to what you enter in the Search Type field:

| Search Type            | Enter:                                               |
|------------------------|------------------------------------------------------|
| Item Reference         | All or part of a style or material code.             |
| Inventory Description  | All or part of an inventory search word.             |
| Purchasing Description | All or part of a purchasing description.             |
| Alternate Reference    | All or part of an alternative reference.             |
| Search Characteristics | A complete search family (no abbreviations allowed). |
| Prompt                 | -                                                    |



If one style or material only meets your search criteria, then Style returns you to the Routes/Structures Maintenance screen and inserts the selected style.

### Item Master Scan Window 2 (Options 1, 2, 3)



To display this window, enter 1, 2 or 3 in the Search Type field on Item Master Scan window 1 and press **Enter**.

This window lists styles and materials. Use the window to select a style or material.

```

DB130                               ST - Style Test & QA Company       USER QASTYLE       24/03/98
                                      Routes/Structures Maintenance    11:30:07

Style .....?.. _____

Item Master Scan
Select Item Reference      Description      More: +
  S/C/S                    Brand New Style
  S/SITEM1                 safety stock- s
  S/SITEM2                 S/stock item 2
  S/SITEM3                 S/Stock item3
  S/SITEM4                 S/Stock Item 4
  S/SITEM5                 S/Stock Item 5
  SAM/BF1                  B/Flush Material
  SAM/CAP01                SMB Capacity Test
  SAM/CAP02                test2
  SAM/CAP11                SMB Capacity Test
  SAM/COLSZ                colour & sizes
1=Select, 2=Matrix, 3=Carton

F12=Previous

```

**Fields:**

**Select**

Enter one of the following against a style or material:

- 1 - Select. Select a style or material.
- 2 - Matrix. Select a variant.
- 3 - Carton.



## Item Master Scan Window 4 (Option 5)



To display this window, enter 5 in the Search Type field on Item Master Scan window 1 and press **Enter**.

Use this window to enter a range of colours and sizes that you would like to list for styles and materials within your chosen search family.

DB130

ST - Style Test & QA Company

USER QASTYLE

24/03/98  
12:34:52

Routes/Structures Maintenance

Style .....?.. \_\_\_\_\_

Item Master Scan

Search family - 001 Colour/Size

Attribute

COLOUR

SIZE

From Code

To Code

F12=Previous

10-29SA MWKS CL IM DM II MARVIN KB PED201S1

**Fields:**

**From/To Code**

Enter a range of colours and/or sizes.



To display Item Master Scan Window 5, press **Enter**.

## Item Master Scan Window 5



To display this window, press **Enter** from Item Master Scan window 4.

This window lists the colours and sizes selected on Item Master Scan window 4 for your chosen search family.

Use the window to select a style or material.

```

DB130                      HI - RELAY CLOTHING                      USER GBJBARUC             24/03/98
                                                                    15:45:28

Routes/Structures Maintenance

Style .....?.. _____
Item Master Scan
Select Item Reference      Description                               More: +
  TS003      RD3L          T Shirt                      Baby Pink      large
  TS003      RD3M          T Shirt                      Baby Pink      Med
  TS003      RD3S          T Shirt                      Baby Pink      Small
  TS003      RD3X          T Shirt                      Baby Pink      Xlar
  BU001      BLKB          Buttons - Shirt           Black          Short
  BU001      BLKM          Buttons - Shirt           Black          Med
  BU001      BLKS          Buttons - Shirt           Black          Small
  BU001      BL1B          Buttons - Shirt           Blue           Short
  BU001      BL1M          Buttons - Shirt           Blue           Med
  BU001      BL1S          Buttons - Shirt           Blue           Small
  SH003      BL1L          Unisex Shirt             Blue           large
1=Select, 2=Matrix, 3=Carton
F12=Previous
  
```

**Fields:**

## Select

Enter 1 against the style or material you wish to select.

# Item Master Scan Window 6 (Option ?)



To display this window, enter ? in the Search Type field on Item Master Scan window 1 and press **Enter**.

Use this window to search for a style or material by inventory search word, purchasing description, search family or style/material code.

DB130ST - Style Test & QA CompanyUSER QASTYLE24/03/9812:47:58

Routes/Structures Maintenance

Style .....?..

Item Master Scan

Either Enter up to 6 words for scan on description,  
Name: \_\_\_\_\_  
Enter a '1' to scan on Purchasing rather than Inventory text.: \_  
  
Or Enter alternative item reference,  
Reference: \_\_\_\_\_  
  
Or Enter search group  
Search group: \_\_\_\_\_  
  
Or Enter item reference at which to start scan:  
BUTTON \_\_\_\_\_  
F4=Prompt F12=Previous

19-10SRMWKSCLIMDMIIIMARVINKBPED20IS1

## Fields:

### Name

Enter all or part of an inventory search word. These are set up on the Inventory Item Search Words window under the Style/Material Details option.

Alternatively, if you have also installed Purchase Management, enter all or part of the description that you use for purchasing. In this case, set the next field to 1.

In either case, Item Master Scan window 2 opens.

### Enter A '1' To Scan On Purchasing Rather Than Inventory Text

Enter one of the following:

0 or blank - Inventory. Search on inventory search words.

1 - Purchasing. Search on purchasing descriptions.

### Reference

To open Item Master Scan Window 3, enter all or part of an External Reference set up on Bar Code/Alternative Item Reference Maintenance Screen 1. Item Master Scan window 3 opens.

### Search Group

This field sub-divides into 2 sub-fields.

In the first sub-field, enter a search family set up under the Search Family Codes option in Style Inventory Management.

In the second sub-field (optionally), enter all or part of a colour code.

Opens Item Master Scan window 4.

**(Untitled)**

Item Reference. Enter all or part of a code that you use to identify the style or material. This is the code that you enter in the Style field on Product Maintenance screen 1 under the Style/Material Details option. Item Master Scan window 2 opens.



## Style Route Header Maintenance Screen



Press **Enter** on the Routes/Structures Maintenance screen to display the Style Route Header Maintenance screen.

This screen includes fields that relate to the production of all variants of the style for the selected route. That is, anything you enter here applies to all colour/size combinations.

On this screen, the following fields are the most critical:

- Planning Route.
- Standard Lot Size.

### New Routes

If you are creating a new route, there are four windows that may open automatically in turn when you press **Enter** from this screen. Whether or not they do display depends upon:

- The style dimensions.
- The setting of the relevant display characteristic under the CALL parameter on Maintain Parameter File screen 2.

The windows and the appropriate CALL display characteristics are listed below:

| WINDOW                              | CALL code |
|-------------------------------------|-----------|
| Qty per Rules window                | QPER      |
| Product Selection window            | ITMSEL    |
| Variant Spread window               | PRDDST    |
| Enter Material Usage Factors window | MTLUSG    |

You can call up these windows at a later stage during the route creation program.

However, you may set up the CALL parameter to prevent Qty per Rules window maintenance from anywhere within the Style Route/Bill Of Material option.

|                                                                                                                                                  |                              |                             |                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------|------------------------------------|
| DS151                                                                                                                                            | ST - Style Test & QA Company | USER QASTYLE                | 17/10/97<br>17:02:51               |
| Style Route Header Maintenance                                                                                                                   |                              |                             |                                    |
| Parent Item.....                                                                                                                                 | SKIRT01                      | Pleated Skirt               |                                    |
| Route.....                                                                                                                                       | 1                            | Costing & Planning route    |                                    |
| Receiving Stockroom.....?                                                                                                                        | SA                           | Planning Route... 1 (1=Yes) |                                    |
| Unit Of Measure.....                                                                                                                             | EA                           |                             |                                    |
| Standard Lot Size.....                                                                                                                           | 1                            |                             |                                    |
| Economic Order Quantity.....                                                                                                                     | 1                            |                             |                                    |
| Effective From Date.....                                                                                                                         | 0/00/00                      |                             |                                    |
| Effective To Date.....                                                                                                                           | 99/99/99                     |                             |                                    |
| Reference.....                                                                                                                                   |                              |                             |                                    |
| Average Costing Colour.....?                                                                                                                     |                              |                             |                                    |
| Average Costing Size.....?                                                                                                                       |                              |                             |                                    |
| F3=Exit F4=Prompt F8=Update+Lead Time F11=Delete Entire Route F12=Previous<br>F14=Variants F15=Route Overrides F16=Style Resources F24=More Keys |                              |                             |                                    |
| 8-40                                                                                                                                             | SR                           | MW                          | KS CL IM DM II STUD140 KB PED201S1 |

## Fields:

### Receiving Stockroom

Enter the stockroom in which you intend to store the style following completion via this route. By default, this field displays the stockroom entered for this style in the Sourcing W'house field on Product Maintenance Screen 5 under the Style/Material Details option.

If you are running multi-plant MPS planning, this field is of particular significance since it indicates the receiving stockroom used by one particular plant. The Receiving Stockroom that you enter here should also be entered for one specific plant under the Maintain Model Stockrooms option. From this information, Style determines which plant uses which planning route.



*Note: When you book finished goods into the stockroom, you can override the receiving stockroom for style variants.*

### Planning Route

In a multi-plant environment, you need to define a separate planning route for each plant (or line) that you use to manufacture styles.

Enter one of the following:

0 or blank - No. This route is not the planning route for a particular plant.

1 - Yes. In a multi-plant environment, nominate this route as the planning route for a particular plant.



*Note: If this route is the planning route, make sure that it matches the Planning Route set up under Production Details in the Style/Material Details option.*



*Note: You can have one planning route only per stockroom.*



*Note: Each plant can have one planning route only.*

### Unit Of Measure

Enter the unit of measure (UoM) in which this style is generally produced. This field displays as a default the UoM that you entered in the Issue Unit field for this style on the Inventory Details screen of the Style/Material Details option.

### Standard Lot Size

Define a batch size. Use this field if you wish Style to assume that the quantities of material you enter when defining operation details for each operation in the route are the quantities required to make the standard lot size.

Enter a numeric value of up to 11 characters, including 3 decimal places.

This setting is critical for backflushed materials, as quantities will be based on requirements to make this batch size.



*Note: If you have set the Quantity Per Basis field under the Company Profile option to 1, then the Standard Lot Size displays 1, which you cannot amend.*

### Economic Order Quantity

Enter an economic order quantity (EOQ) for the style when it is produced using this route. This quantity is used as a default when ordering quantities and making enquiries.

To use the economic order quantity to amortise any fixed costs, set the Fixed Cost Amortisation Basis flag on the Company Profile to 1 (EOQ). If the flag is set to 0 (lot size) costs, Style amortises costs over the standard lot size.

### Effective From/To Date

Enter the dates when this route is operational. If the route can be used on all dates, leave these fields set to 0/00/00 and 99/99/99.

### Reference

If you are using the route for a particular purpose (for example, development), enter some explanatory text in upper case.

Subsequently, the reference displays as a description for the route in prompt windows.

### Average Costing Colour

To base average costs on a particular colour, enter a colour variant. Style then calculates the average cost for the style/route on the size variants for that colour.



*Note: If you select a colour variant in this field, you can enter cost weightings for the different sizes produced in the selected colour. Style assumes that you wish size variants produced in other colours to adopt the same cost weightings. (To enter cost weightings for size variants, refer to the Variant Weighting option.)*

### Average Costing Size

To base average costs on a particular size, enter a size variant. Style then calculates the average cost for the style/route on the colour variants for that size.



*Note: If you select a size variant in this field, you can enter cost weightings for the different colours produced in the selected size. Style assumes that you wish colour variants produced in other sizes to adopt the same cost weightings. (To enter cost weightings for colour variants, refer to the Variant Weighting option.)*

## Functions:

### F7

Update route details but do not recalculate lead time. Returns you to the Routes/Structures Maintenance screen.



*Note: If you are creating a new route, this function does not appear initially.*

### F8

Update+Lead Time. Update route details in line with amendments made and recalculate lead time.



*Note: If you are creating a new route, this function does not appear initially.*

### F11

Delete Entire Route. Delete the route.



*Note: If you are creating a new route, this function does not appear initially.*

### F14

Variants. Open the Product Selection window, enabling you to specify which variants of the style to make via this route.



*Note: If you are creating a new route, this function does not appear initially.*

### F15

Route Overrides. Display the Style/Route Override Maintenance screen, from which you can define different MPS and MRP rules for this route.



*Note: If you are creating a new route, this function does not appear initially.*



*Note: This function activates for planning routes only.*

### F16

Style Resources. Display the Style/Route Resources Maintenance screen, from which you can maintain critical resources for multi-plant planning.



*Note: If you are creating a new route, this function does not appear initially.*



*Note: This function activates for planning routes only.*

## F21

Text. Display the Text Maintenance screen, from which you can enter additional descriptive text for the route. If text exists already, the function displays in reverse video.



*Note: If you are creating a new route, this function does not appear initially.*

## F22

Qty Per Rules. Open the Qty Per Rules window.



*Note: If you are creating a new route, this function does not appear initially.*

## F24

More Keys. Toggle display of functions.



*Note: If you are creating a new route, this function does not appear initially.*



If you are creating a new route and QPER is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** on the Style Route Header Maintenance screen to display the Qty Per Rules window.



If you are maintaining an existing route, press **Enter** to display the Route Maintenance Operations And Materials screen.

## Product Selection Window (F14)

-  If you are creating a new route and ITMSEL is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** on the Qty Per Rules window.
-  If you are maintaining an existing route, select **F14=Variants** on the Style Route Header Maintenance screen to display the Product Selection window.

Use this window to specify which particular style variants you wish this route to produce.

Style prompts for the dimensions set up in the style's Search Family under Inventory Details in the Style/Material Details option. For 4 dimensions, Style displays the 3rd and 4th dimensions along the top of the matrix.

-  Tip: Use this window to remove those style variants that you do not wish to manufacture in this particular route.
-  Tip: Use this window to create a route for a sample by selecting a single style variant.
-  Note: You cannot use this window to indicate the quantities of each style variant you wish to produce. To do this, use the Variant Spread window.

|                                |      |                              |       |              |       |          |      |
|--------------------------------|------|------------------------------|-------|--------------|-------|----------|------|
| DS151                          |      | ZS - Style Demonstration Co. |       | USER GBJBAMS |       | 29/02/96 |      |
|                                |      |                              |       |              |       | 16:38:44 |      |
| Style Route Header Maintenance |      |                              |       |              |       |          |      |
| Parent Item.....               |      | ELF BOOTS                    |       | Elfin Boots  |       |          |      |
| Product Selection              |      | Page: 1:1                    |       |              |       |          |      |
| Colour                         | Size | 6                            | 1 1/2 | 7            | 7 1/2 | 8        | More |
| Beige                          | 1    | 1                            | 1     | 1            | 1     | 1        |      |
| Black                          | 1    | 1                            | 1     | 1            | 1     | 1        |      |
| Blue                           | 1    | 1                            | 1     | 1            | 1     | 1        |      |
| Brown                          | 1    | 1                            | 1     | 1            | 1     | 1        |      |
| Burgundy                       | 1    | 1                            | 1     | 1            | 1     | 1        |      |

F12=Previous F19=Window Left F20=Window Right F21=Select All

F3=Exit F4=Prompt F7=Update F8=Update+lead time F11=Delete Entire Route  
F14=Variants F12=Previous F21=Text F22=Qty Per Rules

09-18 SF MW KS IM II KENB20A PET166S2

### Fields:

#### Untitled

Select. Enter 1 to include a style variant in the Route/BOM.

**Functions:****F19**

Window Left. Scroll left on a multi window display.

**F20**

Window Right. Scroll right on a multi window display.

**F21**

Select All. Select all style variants by entering 1 in the Select field of every variant.



If you are creating a new route and ITMSEL is enabled under the CALL parameter on Maintain Parameter File screen 2, enter 1 in one or more of the Select fields to display the Variant Spread window.



If you are maintaining an existing route, press **Enter** to return to the Style Route Header screen.

## Style/Route Override Maintenance Screen 1 (F15)



If the route is a live production route, select **F15=Route Overrides** on the Style Route Header Maintenance screen to display this screen.

Use this screen to define different MPS and MRP rules for a planning route. Enter an effectivity date range to limit the changes to a particular period.

This is a useful multiplant facility. For example, you can have different order policies for different plants.



*Note: Style/Route overrides do not apply to model planning routes.*



*Note: If you have not overridden MPS and MRP rules for this route, then this screen displays a message informing you that Style has found no details to display. In this case, select **F10=Add**.*

|                                  |                                 |                   |                           |
|----------------------------------|---------------------------------|-------------------|---------------------------|
| DB091                            | Style Distribution Demo Company | USER QASTYLE      | 18/09/96<br>11:22:43      |
| Style/Route Override Maintenance |                                 |                   |                           |
| Style.....: GOLD                 |                                 | GOLD              |                           |
| Route.....: 1                    |                                 |                   |                           |
| Stockroom.: FG finished goods    |                                 |                   |                           |
| Sel                              | Effective From Date             | Effective To Date | Description               |
| -                                | 0/00/00                         | 99/99/99          | Route default             |
|                                  |                                 |                   | Bottom                    |
| 1=Select                         |                                 |                   |                           |
| F3=Exit                          | F10=Add                         | F12=Previous      |                           |
| 11-04                            | SA                              | ML                | KS IM II KENB20A PET166S2 |

### Fields:

#### Select

Enter 1 to maintain a set of overrides previously defined against an effectivity date range. Displays Style/Route Override Maintenance screen 2.

### Functions:

#### F10

Add. Add a new override. Displays Style/Route Override Maintenance screen 2.



## Style/Route Override Maintenance Screen 2 (Option 1, F10)

-  Enter 1 in the Select field on Style/Route Override Maintenance screen 1 to display Style/Route Override Maintenance screen 2.
-  Select **F10=Add** on Style/Route Override Maintenance screen 1 to display Style/Route Override Maintenance screen 2.

Use this screen to override, for this particular route only, the MPS and MRP fields that you set up for the style under Production Details in the Style/Material Details option.

Once you have made updates at the Style level, you can override these fields for individual style variants.

|                                                                   |                                 |                                  |                                 |
|-------------------------------------------------------------------|---------------------------------|----------------------------------|---------------------------------|
| DB091                                                             | Style Distribution Demo Company | USER QASTYLE                     | 18/09/96<br>11:29:00            |
| Style/Route Override Maintenance                                  |                                 |                                  |                                 |
| Style.....:                                                       | GOLD                            | GOLD                             |                                 |
| Route.....:                                                       | 1                               |                                  |                                 |
| Stockroom.:                                                       | FG                              | finished goods                   |                                 |
| Effective From: <u>00/00/00</u> To: <u>99/99/99</u> Route default |                                 |                                  |                                 |
| Item Type.....?: <u>M</u> Manufactured                            |                                 |                                  |                                 |
| Planner.....?: <u>STP01</u> Style Test Planner                    |                                 |                                  |                                 |
| Min Order Qty....                                                 |                                 | Demand Policy.....?:             | <u>5</u> Total Dmnd (F/C+Sales+ |
| Max Order Qty....                                                 |                                 |                                  |                                 |
| Mult Order Qty...                                                 |                                 |                                  |                                 |
| Fixed Order Qty..                                                 |                                 | Smoothing Policy...?:            | <u>0</u> No Levelling           |
| Safety Stock.....                                                 |                                 |                                  |                                 |
| Order Policy...?: <u>A</u> Discrete                               |                                 | No. of Days Supply.. <u>    </u> |                                 |
| F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous F16=Variants  |                                 |                                  |                                 |
| 09-18                                                             | <b>SP</b>                       | <b>MK</b>                        | KS IM II KENB20A PET166S2       |

### Fields:

#### Effective From/To

Enter the effectivity dates that apply to the overrides that you enter on this screen.

#### Untitled

Description. Enter a meaningful description of up to 35 alphanumeric characters.

#### Item Type

This parameter provides a general classification of use for this style or material. Enter one of the following:

M - Production items. These may be styles (finished goods) or intermediates used in the production of a style.

P - Purchased items (materials). For example: lace, leather, cotton, silk, nylon, linings.

B - Bought out items. For example: buttons, zips, hangers, suit covers, and packaging materials such as: boxes and laces.

T - Consumable tools. For example: knitting needles, blades and pins.

Codes are defined on the parameter file, against type PITP.

### Planner

Use the Planner code to organise items into categories for management and planning. For example, you can use the Planner code to designate the production planner or buyer responsible for controlling the item.

Style uses the Planner code to sort Production Scheduling and Material Planning reports, and as a selection parameter on planning enquiries. Therefore, a planner can have fast access to schedules for items under his/her control.

Codes are defined on the parameter file, against type PLAN.

### Min Order Qty

Minimum Order Quantity. This value is used with ordering policies B (discrete above minimum) and H (multiples above minimum) in MPS and MRP to set the minimum quantity for a suggested supply order.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### Demand Policy

This field controls the method Style uses to compare the following types of demand in order to arrive at the adjusted or net demand that drives MPS and MRP:

- Sales demand.
- Forecast demand.
- Dependent demand.

The method used to calculate forecast demand is controlled by the Consume Forecast flag on the Company Profile, and affects those policies which utilise Planning or external forecasts. The Consume Forecast flag allows you to adopt either a discrete comparison or a cumulative consumption.

Codes are defined on the parameter file, against type MPFF. Enter one of the following codes:

| Demand Policies |                     |                                                               |
|-----------------|---------------------|---------------------------------------------------------------|
| Code            | Description         | Demand Definition                                             |
| 0 or blank      | Total actual demand | Sum of sales orders <i>plus</i> dependent demand; no forecast |

|   |                                                   |                                                                                      |
|---|---------------------------------------------------|--------------------------------------------------------------------------------------|
| 1 | Forecasts compared with independent demand        | Greater of (forecast <i>or</i> sales orders) <i>plus</i> dependent demand            |
| 2 | Forecasts compared with total demand              | Greater of (sales orders <i>plus</i> dependent demand) <i>or</i> forecasts           |
| 3 | Independent demand compared with dependent demand | Greater of sales orders <i>or</i> dependent demand; no forecast                      |
| 5 | Make to forecast                                  | Equal to forecast only; no sales orders or dependent demand                          |
| 6 | Total demand                                      | Total demand: sum of forecasts <i>plus</i> sales orders <i>plus</i> dependent demand |

### Max Order Qty

Maximum Order Quantity This value is the maximum supply order quantity which should normally be provisioned.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### Mult Order Qty

Multiple Order Quantity. The value entered is used in conjunction with order policy code H (multiples above minimum). The effect is to increase the suggested order value in increments of the multiple above minimum order quantity, to meet the demand.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### Fixed Order Qty

Fixed Order Quantity. This is the quantity used by MPS and MRP to generate suggested supply orders using order policy D (fixed quantity). If the requirement is greater than the fixed quantity, additional batches of the fixed quantity will be generated until the requirement is met.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### Safety Stock

Where there is a requirement to retain a safety or buffer stock, a quantity should be entered in this field. This figure will be the target inventory level maintained by MPS and MRP.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### Order Policy

MPS and MRP use this field to decide what quantities to suggest to order from suppliers. Enter one of the following:

A - Discrete (lot for lot). This policy produces a suggested order quantity equal to the demand quantity.

B - Discrete above minimum. This policy generates a suggested order quantity to meet the requirement that will be at least as large as the stipulated minimum order quantity. If the requirement is less than the minimum, the suggested order will be equal to the minimum order quantity.

D - Fixed quantity. This policy creates one or more orders of a fixed quantity (same due date), until the requirement is met.

G - Number of days supply (period cover). This policy accumulates forward requirements over the specified number of days and generates a single order to satisfy the total demand.

H - Multiples above minimum. This policy generates the minimum order quantity. The policy then uses increments of the defined multiple order quantity to meet any unsatisfied requirement.



*Note: If you have defined the standard style to use Order Policy I, set the Order Policy to H for the variants.*

I - Multiples up to a maximum. This policy compares the total of the style variants with the multiple and maximum order quantities defined for the style. If this total exceeds the maximum order quantity, then this policy splits the order into two or more separate orders. If the total is not divisible by the multiple, then this policy brings back later supply until the next multiple is reached.



*Note: Use Order Policy I at style level only. Define an Order Policy of H for the style variants. For the multiple order quantity, use either the same value you enter at style level or a direct division of the style multiple.*

Codes are defined on the parameter file, against type POPC.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

### No. of Days Supply

MRP can look forward a number of days to determine the requirements to be covered by a suggested order. Use this field in conjunction with Order Policy code G.



*Note: Once you have made updates at Style level, press **F16=Variants** to modify this field at style variant level.*

## Functions:

### F16

Variants. Define order policies at style variant level when actioned from a relevant field. Opens a window displaying a matrix, from which you can select the variants.



*Note: This function does not display until you have pressed **F8=Update** to make updates at the Style level.*



Press **Enter** to display Style/Route Override Maintenance screen 3.

## Style/Route Override Maintenance Screen 3



Press **Enter** on Style/Route Override Maintenance screen 2 to display Style/Route Override Maintenance screen 3.

Use this screen to define different MPS and MRP rules for this particular route only. In addition, you can apply special conditions to the rescheduling policy during MPS and MRP processing.

|                                                             |                                 |                |                      |
|-------------------------------------------------------------|---------------------------------|----------------|----------------------|
| DB091                                                       | Style Distribution Demo Company | USER QASTYLE   | 18/09/96<br>16:23:51 |
| Style/Route Override Maintenance                            |                                 |                |                      |
| Style.....:                                                 | GOLD                            | GOLD           |                      |
| Route.....:                                                 | 1                               |                |                      |
| Stockroom..:                                                | FG                              | finished goods |                      |
| MPS/MRP Filter.....?                                        | 1                               |                |                      |
| Production Lead Time...                                     | .00                             |                |                      |
| Cumulative Lead Time...                                     | .00                             |                |                      |
| Major Sequence.....                                         |                                 |                |                      |
| Minor Sequence.....                                         |                                 |                |                      |
| <hr/>                                                       |                                 |                |                      |
| F3=Exit F4=Prompt F11=Delete F12=Previous                   |                                 |                |                      |
| F19=Calc.Production Lead Time F20=Calc.Cumulative Lead Time |                                 |                |                      |
| 09-26 SF MW KS IM II KENB20A PET166S2                       |                                 |                |                      |

### Fields:

#### MPS/MRP Filter

For this route only, this field overrides the default rescheduling policy during MPS and MRP processing that you set up for the style under Production Details in the Style/Material Details option. The rescheduling policy:

- Determines whether production orders at a particular status can be rescheduled.
- Determines whether the order quantity can be increased or decreased.
- Allows the exclusion of recommendations for insignificant or unworkable changes to the quantity or due date of the supply order.

The MPS/MRP filter forms the 3rd character of the codes set up under the WTYP parameter on Maintain Parameter File screen 2.

#### Production Lead Time

For this route only, this field overrides the production lead time you set up for the style under Production Details in the Style/Material Details option.

This lead time represents the time in days required to produce the style from its raw materials.

If, when running MPS and MRP, you select the Use Item Time Fence option in preference to the default global option, Style uses the production lead time to establish the frozen schedule time fence for the style.

### **Cumulative Lead Time**

For this route only, this field overrides the cumulative lead time you set up for the style under Production Details in the Style/Material Details option.

The cumulative lead time represents the total time required in days to produce the item based on a full explosion of its planning route. This includes any low level production items included on the route, and the purchasing lead time of materials and any bought out components.

The time is calculated from the longest leg or critical path of the production and procurement process.

If, when running MPS and MRP, you select the Use Item Time Fence option in preference to the default global option, Style uses the production lead time to establish the planning horizon for the item. For non-production items, the calculation returns the purchasing lead time.

### **Major Sequence**

For this route only, this field overrides the major sequence you set up for the style on the Additional Parameters window in the Style/Material Details option.

Items may be grouped under a common heading so that they might be planned and scheduled together, in the order set by the minor sequence defined on the Maintenance screen.

Entries made will be validated against type PRSQ on Maintain Parameter File screen 1. This is a user-defined parameter.

### **Minor Sequence**

For this route only, enter up to 6 characters to override the minor sequence you set up for the style under Production Details in the Style/Material Details option.

Use this field to determine the sequence in which items are processed at a machine. This field has several uses. For example:

- If you have a mixing process, where products range in colour from light to dark, you can sequence light coloured items ahead of dark coloured items.
- You can sequence items with a long set up time ahead of or following items with short set up times.
- You can sequence high quality output ahead of low quality output.

Use this field in conjunction with the Major Sequence field to group similar items for planning and scheduling together. The Minor Sequence code sequences the processing of items within the group.

### **Functions:**

#### **F19**

Calc. Production Lead Time. Calculate production lead time.

#### **F20**

Calc. Cumulative Lead Time. Calculate cumulative lead time.





If you have multiple plants, use this screen to define critical resource requirements for style routes for multiplant planning. This must be done to ensure that the critical resource capacity is consumed; otherwise only the primary route will ever be used.

[illegible]

**4=Del**

Seq

**Effective From/To Date**

## Resource Code

## Production Rate

Resource consumption. Indicates how many UOMs of resource are required to make the standard lot quantity of the style; an entry must be numeric and may include up to 3 decimal places.

### **UOM**

Unit of Measure. This is a system maintained field, displaying the capacity unit of measure from the critical resource definition.

### **Functions:**

#### **F8**

Update. Save all entered details.

# Text Maintenance screen

- ➡ Select **F21=Op.** Text on Style Route Maintenance Operations screen 1 to display the Text Maintenance screen.
- ➡ Select **F21=Text** on the Style Route Header Maintenance screen to display the Text Maintenance screen.

Use this screen to enter additional descriptive text.

TX002

ST - Style Test & QA Company

USER QASTYLE

28/11/97

Text Maintenance

Last Change Date:

14:37:58

Key: SKIRT01

1

Type: BILL - RT1 -

MINOR : Bill of Matl (or Metho

1

10

20

30

40

50

60

70

Line

1

2

3

4

5

6

7

8

9

10

11

12

Position at line no \_\_\_\_

Insert \_\_\_\_ lines after line no. \_\_\_\_

Delete lines - from \_\_\_\_ to \_\_\_\_

F12=Previous

F8=Return & Update Text

7-10

SA

MW

KS

CL

IM

DM

II

STUD140

KB

PED201S1

## Qty Per Rules Window (F22)



If you are creating a new route and QPER is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** on the Style Route Header Maintenance screen.



If you are maintaining an existing route, select **F22=Qty Per Rules** on the Style Route Header Maintenance screen to display the Qty Per Rules window in enquiry mode only.

Use this window to define the Style matrix that will appear on the Material Quantity Requirements window. Later on in this option, you can use the Material Quantity Requirements window to specify the different quantities of material that style variants may require.

Depending upon how you set up the style under the Style/Material Details option, this window prompts you to include one or both of the following dimensions:

- Colour. This dimension refers to the colour code that you set up on the Colour Code Selection screen.
- Size. This dimension refers to the size masks (up to two) that you set up on the Size Mask Selection screen. If you have set up two size masks, for example size and fit, then you can vary material quantities for each size/fit variant.

### **Example**

If you are making leather shoes, then the quantity of leather required to make a pair of adult size 15 shoes is much greater than that required to make a child's size 3 shoe on the same route. In this case, you would include Size on the matrix, but you might not include Colour.



*Note: This window is not available for styles with one dimension only.*

|                                                                                                                                                                                 |                              |              |                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------|----------------------|
| DS151                                                                                                                                                                           | ZS - Style Demonstration Co. | USER GBJBAMS | 29/02/96<br>16:41:33 |
| Style Route Header Maintenance                                                                                                                                                  |                              |              |                      |
| Parent Item.....                                                                                                                                                                | ELF_BOOTS                    | Elfin Boots  |                      |
| Route.....                                                                                                                                                                      | 9 Costing & Planning route   |              |                      |
| Receiving Stockroom.....?                                                                                                                                                       | FG                           |              |                      |
| Unit Of Measure.....                                                                                                                                                            | EA                           |              |                      |
| Standard Lot Size.....                                                                                                                                                          | 1.                           |              |                      |
| Economic Order Quantity.....                                                                                                                                                    | 25.                          |              |                      |
| Effective From Date.....                                                                                                                                                        | 12/07/95                     |              |                      |
| Effective To Date.....                                                                                                                                                          | 3/02/96                      |              |                      |
| Reference.....                                                                                                                                                                  | COST&PLAN NEW                |              |                      |
| * Header Text Exists                                                                                                                                                            |                              |              |                      |
| F3=Exit F4=Prompt F7=Update F8=Update+lead time F11=Delete Entire Route<br>F14=Variants F12=Previous F21=Text F22=Qty Per Rules<br>00-40 <b>SE</b> MW KS IM II KENB20A PET166S2 |                              |              |                      |

## Fields:

### Qty Per

Enter one of the following against Colour and Size:

0 - Not selected.

1 - Selected Y dimension. Provides the Y axis on the left side of the matrix.

2 - Selected X dimension. Provides the X axis, with the dimension's characteristics running across the top of the matrix. Enter 2 if you have already entered 1.

The following table shows how the Enter Material Usage Factors window matrix displays according to what you enter here.

| Colour | Size | Matrix                                                |
|--------|------|-------------------------------------------------------|
| 1      | 0    | Displays Colour only.                                 |
| 0      | 1    | Displays Size only.                                   |
| 1      | 2    | Displays Colour on the Y axis and Size on the X axis. |
| 2      | 1    | Displays Size on the Y axis and Colour on the X axis. |



If you are creating a new route and ITMSEL is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** to display the Product Selection window.

## Variant Spread Window (F15)



If you are creating a new route and PRDDST is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** from the Product Selection window.



To display the Variant Spread window, select **F15=Variant Spread** from the following screens:

- Style Route Maintenance Operations and Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.
- Single Product Operations and Materials screen.

This window displays the style variants that you selected for this route from the Product Selection window.

Use the window to specify how you want to spread the demand down to style variant level when making the style via this route.



*Note: If this is a planning route, Style uses the quantities that you enter here, where appropriate, to spread forecasts down to full product level.*

| Variant Spread |      | Page: 1:1 |       |   |       |   |      |
|----------------|------|-----------|-------|---|-------|---|------|
| Colour         | Size | 6         | 6 1/2 | 7 | 7 1/2 | 8 | More |
| Beige          |      | 1         | 1     | 1 | 1     | 1 |      |
| Black          |      | 1         | 1     | 1 | 1     | 1 | F    |
| Blue           |      | 1         | 1     | 1 | 1     | 1 |      |
| Brown          |      | 1         | 1     | 1 | 1     | 1 |      |
| Burgundy       |      | 1         | 1     | 1 | 1     | 1 |      |

F19=Window Left F20=Window Right F22=Copy for All - Colour

1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material  
F3=Exit F7=Update F8=Lead Time F12=Prev F13=Pos. to F23=More Opt. F24=More Keys  
09-16 09 MW KS IM II KENB20A PET166S2

### Fields:

#### Untitled

Variant Quantity. Enter a quantity for each style variant produced.



*Note: The Matrix Type specified for this style on Inventory Details screen 2 under the Style Materials option places the following constraints upon what you enter here:*

- *The number of columns that the matrix can include.*
- *The quantities you can enter.*

## Functions:

### F19

Window Left. Scroll left on a multi page display.

### F20

Window Right. Scroll right on a multi page display.

### F22

Copy for All - Colour. Copy quantities entered on the top line to all lines.



If you are creating a new route and MTLUSG is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** to display the Enter Material Usage Factors window.

## Enter Material Usage Factors Window (F14)



If you are creating a new route and MTLUSG is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** from the Variant Spread window.



To display the Enter Material Usage Factors window, select **F14=Material Usage Factors** from the following screens:

- Style Route Maintenance Operations and Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.
- Single Product Operations and Materials screen.

Use this window if you wish to vary the quantities of material used for various style variants. This window is useful for materials such as yarn and thread. This information enables Style to calculate the quantity per of fabric required to make each variant of the parent style.

Style displays characteristics of the dimensions that you selected from the Qty Per Rules window. Otherwise, the characteristics are imposed by the CALL type parameter on Maintain Parameter File screen 2.



***Warning: If, subsequently, you change the material usage factors, Style does not recalculate the quantity pers. Therefore, you should delete the ratio-based materials and create them again.***

### **Ratio-Based Materials**

To make a material ratio-based, set the Material Usage Policy on the Additional Parameters window to 1 under the Style/Material Details option. To display Material Usage Policy, call up the Material Maintenance window within this option.

### **Procedure**

Use the following procedure:

1. Select **F24=Select Primary** to designate a primary variant.
2. To identify the mid-point factor, enter a primary factor against this primary variant.
3. Enter a non-decimal factor against each characteristic to identify how the material quantities vary from the mid-point factor.



|                                                     |                              |               |                      |
|-----------------------------------------------------|------------------------------|---------------|----------------------|
| DS151                                               | ST - Style Test & QA Company | USER QASTYLE  | 11/12/97<br>16:58:46 |
| Style Route Header Maintenance                      |                              |               |                      |
| Parent Item..... SKIRT01                            |                              | Pleated Skirt |                      |
| Enter Material Usage Factors                        |                              | Page: 1:1     |                      |
| SIZE                                                | More                         |               |                      |
| Siz08                                               | 80                           |               |                      |
| Siz10                                               | 90                           |               |                      |
| Siz12                                               | 100                          |               |                      |
| Siz14                                               | 110                          |               |                      |
| Siz16                                               | 120                          |               |                      |
| F19=Window Left F20=Window Right F24=Select Primary |                              |               |                      |
| F3=Exit F4=Prompt                                   |                              | F12=Previous  |                      |
| 9-16 SR MW KS CL IM DM II STUD140 KB PED201S1       |                              |               |                      |

## Fields:

### Untitled

Factor. Enter a factor (for example 100) against the primary style variant you have selected using **F24=Select Primary**. For the non-primary style variants, enter ratios against the primary (for example 120). Do not enter decimal factors.

For example, for jacket sizes of Small, Medium, Large, Extra Large and Extra Extra Large, you could select Large as the primary and define the following factors:

| Size              | Factor | Indicating a material usage of: |
|-------------------|--------|---------------------------------|
| Small             | 80     | .8                              |
| Medium            | 90     | .9                              |
| Large             | 100    | 1                               |
| Extra Large       | 110    | 1.1                             |
| Extra Extra Large | 120    | 1.2                             |

Initially, Style places 1 in each field, implying that there is no material requirement difference between the size variants.

## Functions:

### F19

Window Left. Enables you to scroll left on a multi window display.

### F20

Window Right. Enables you to scroll right on a multi window display.

### F24

Select Primary. Select primary size to which the factors relate. The window highlights the selected primary in reverse video.



If you are creating a new route, press **Enter** on the Enter Material Usage Factors window to display the Style Route Maintenance Operations and Materials screen.

## Style Route Maintenance Operations And Materials Screen (F21)

This screen displays in two modes, depending upon whether you have already created any operations for the route.



**Warning:** *When you have finished with this screen, make sure you select F7=Update or F8=Update&Lead Time. Otherwise, you lose your additions and updates.*



**Note:** *Use this screen to attach primary operations to a route. To attach variant operations, refer to the Maintain Variant Operations window.*

### Route Without Operations



If you are creating a new route and MTLUSG is enabled under the CALL parameter on Maintain Parameter File screen 2, press **Enter** on the Enter Material Usage Factors window to display the Style Route Maintenance Operations And Materials screen.

When you first create a new route, but have yet to add operations and materials, this screen displays the following message: There are no Operations for this Style. Press ENTER to create an Operation. Press F16 to Copy Style Route Or F17 to Copy Standard Operations

You can create a sequence of operations for the new route in one of the following ways:

- Key in operations from scratch (press Enter).
- Copy the operations from another route for either the same style or a different style (select **F16=Copy Style Route**).
- Copy a set of standard operations to the new route (select **F17=Copy Standard Operations**).

|                                                                                                                                                                  |                              |                                  |                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------------|------------------------------------|
| DS179                                                                                                                                                            | ST - Style Test & QA Company | USER QASTYLE                     | 17/11/97<br>10:31:42               |
| Style Route Maintenance - Operations & Materials                                                                                                                 |                              |                                  |                                    |
| Style: SKIRT01                                                                                                                                                   |                              | Pleated Skirt                    |                                    |
| 0 Opsq Insq Material Opcode ST Description                                                                                                                       |                              | Route: A<br>Quantity per UM Wst% |                                    |
| <p>There are no Operations for this Style</p> <p>Press ENTER to create an Operation</p> <p>Press F16 to Copy Style Route Or F17 to Copy Standard Operations</p>  |                              |                                  |                                    |
| <p>1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material</p> <p>F3=Exit F7=Update F8=Update&amp;Lead Time F12=Prev F23=More Opt. F24=More Keys</p> |                              |                                  |                                    |
| 1-1                                                                                                                                                              | SR                           | MW                               | KS CL IM DM II STUD140 KB PED201S1 |

### Route With Operations

-  If you are creating a new route, press **Enter** on the Enter Material Usage Factors window to display the Style Route Maintenance Operations And Materials screen.
-  If you are maintaining an existing route, press **Enter** on the Style Route Header Maintenance screen to display the Style Route Maintenance Operations And Materials screen.
-  To display the Style Route Maintenance Operations And Materials screen, select **F21=Operations and Materials List** from the following screens:
  - Style Route Maintenance Materials screen.
  - Style Route Maintenance Operations screen 2.

When you have already created at least one operation for the route, this screen lists all the operations and materials attached to the route.

If you are using the same material characteristic for every style variant (for example, every variant uses blue thread), the screen lists that characteristic as follows:

- The code for the characteristic (for example BL1) appears after the material code.
- The description for the characteristic (for example, Midnight Blue) appears after the material description.

The screen is very similar to three others:

- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.

- Single Product Operations and Materials screen.

These four screens are base screens, from which you can access many route maintenance functions. You can use function keys to switch between the three base screens.



*Note: The setting of the STYL parameter on Maintain Parameter File screen 2 determines what functions and options are available from this screen.*

|                                                                            |                              |              |                                   |
|----------------------------------------------------------------------------|------------------------------|--------------|-----------------------------------|
| DS179                                                                      | ST - Style Test & QA Company | USER QASTYLE | 10/03/98                          |
|                                                                            |                              |              | 15:08:27                          |
| Style Route Maintenance - Operations & Materials                           |                              |              |                                   |
| Style: 6210/DS51 Silk skirt                                                |                              |              |                                   |
| Route: A                                                                   |                              |              |                                   |
| 0                                                                          | Opsq                         | Insq         | Material                          |
| 10                                                                         |                              | 10           | 060 RM                            |
|                                                                            |                              |              | Cut                               |
| 20                                                                         |                              | 20           | sew                               |
|                                                                            |                              |              | RM thread for skirts              |
| 25                                                                         |                              | 25           | sew 2                             |
| 30                                                                         |                              | 30           | Finish                            |
| 40                                                                         |                              | 40           | Finish 2                          |
| 50                                                                         |                              | 50           | Packaging                         |
|                                                                            | 10                           | 6210/DS6     | TARM RM polythene bag transpaMED  |
|                                                                            |                              |              |                                   |
| 1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material        |                              |              |                                   |
| F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys |                              |              |                                   |
| 6-2                                                                        | SA                           | MW           | KS CL IM DM II MARVIN KB PED201S1 |

## Route Without Operations

### Fields:

If you have not yet attached operations to the route, the screen does not display any fields.

### Functions:

#### F16

Copy Style Route. Copy the operations from another route for either the same style or a different style. Opens the Copy From Route window.

#### F17

Copy Standard Operations. Copy a set of standard operations to the new route. Opens the Select Operation Group window.



If you are adding a new route, press **Enter** on the Style Route Maintenance Operations and Materials screen to display Style Route Maintenance Operations screen 1.

## Route With Operations

### Fields:

## O

Option. Enter one of the following:

- 1 - Maintain. Maintain an existing operation. Opens Style Route Maintenance Operations screen 1 in Update mode.
- 2 - Add Opn before. Add a new operation before the current operation. Opens Style Route Maintenance Operations screen 1 in Add mode.
- 3 - Add opn after. Add an operation following the current operation. Opens Style Route Maintenance Operations screen 1 in Add mode.
- 4 - Delete. Delete an operation. Style displays the operation details along with a deletion confirmation window.
- 5 - Associate Style/Material. Enter 5 against a material only. Opens the Associate window, from which you can associate individual style variants with the material characteristics.
- 6 - Material Quantity Requirements. Enter 6 against a material only. Opens the Material Quantity Requirements window, from which you can specify different quantities of the material required to produce each style variant.
- 7 - Add Material. Add a material to an operation. Opens the Material Maintenance window.



Tip: You can maintain and/or delete multiple detail lines by selecting more than one item.

## Functions:

### F7

Update. Update operation details but do not recalculate lead time.

### F8

Lead Time. Update operation details and recalculate lead time.

### F13

Position To Operation. Enter an operation sequence number at which to start the display. Opens the Position To window.

### F14

Material Usage Factors. Opens the Enter Material Usage Factors window, from which you can specify how quantities of material are distributed amongst style variants.

### F15

Variant Spread. Opens the Variant Spread window, from which you can specify how you wish Style to distribute quantities for each of the style's variants when creating a production order.

### F16

Copy From Route. Opens the Copy from Route window, from which you can copy operation(s) from an existing route.

### F17

**Copy From Standard Operations.** Opens the Select Operation Group window, from which you can copy operations from an existing operation group.

**F18**

**Resequence.** Resequence operations and materials following insertion or deletion. Operations and materials will be resequenced in standard increments of 10.

**F19**

**Materials only List.** Displays the Style Route Maintenance Materials screen.

**F20**

**Operations only List.** Displays Style Route Maintenance Operations screen 2.

**F21**

**Operations and Materials List.** Displays the Style Route Maintenance Operations and Materials screen.

**F22**

**Selective View of Route.** Opens the Item Selection window, from which you can request a selective view of the route for one specific style variant.

**F23**

**Style Route Options.** Opens an Available Options window that lists all the options available in the Options field.

**F24**

**Style Route F-Keys.** Opens an Available Function Keys window that lists all available functions. You can use function keys from this window.



Tip: Select available functions, irrespective of whether or not they are displayed on the Function line. Also, select a function directly from the Available Function Keys window.

## Style Route Maintenance Operations Screen 1 (Options 1, 2, 3)



For a new route, press **Enter** on the Style Route Maintenance Operations And Materials screen to display Style Route Maintenance Operations screen 1 in Add mode.



For an existing route, enter 2 or 3 in the Option field on the Style Route Maintenance Operations and Materials screen to display Style Route Maintenance Operations Screen 1 in Add mode.

Use this screen to maintain the primary operations on the route. Primary operations are the default operations that you use on the route to make the style variants.

Style uses primary operations to calculate costs at style level. Therefore, for the primary operation, you should select the average details. For example, if you are defining operations for Small, Medium and Large sizes, you should relate the primary operation definition to the Medium size.

The screen displays in two modes:

- Add mode. Key in a new primary operation.
- Update mode. Maintain an existing primary operation.

### **Field Protection**

You can protect any of the fields on this screen through the MASU parameter. For more details, refer to the Maintain Parameter File option.

### **Variant Operations**

You can set up a variant operation to produce one or more style variants in a different way to the primary operation. To set up variant operations for specific style variants, select **F23=Variant Opn.** to open the Maintain Variant Operations window.

Variant operations are assigned a variant sequence number, within the sequence number for the primary operation.

For example, consider the following production matrix:

| Colour | Size |    |    |
|--------|------|----|----|
|        | 6    | 17 | 28 |
| Red    | 1    | 1  | 1  |
| Blue   | 1    | 1  | 1  |
| Green  | 1    | 1  | 1  |

At operation 10, say, the time taken to make a size 28 is significantly longer than that taken to make a size 17 and considerably shorter than to make a size 6. Therefore, you could define variant operations as follows:



1. Define the primary operation to produce a size 17.
2. Define a variant operation (0010) for size 6.
3. Define a variant operation (0020) for size 28.
4. Select **F24=Characteristics** from this screen to display the Operation Characteristics Values window and select size 17.
5. Select **F23=Variant Opn** from this screen to display the Maintain Variant Operations window. Enter 2 against variant operations 0010 and 0020 and select sizes 6 and 28 respectively.

### **Subcontracted Operations**

You can define primary operations and variant operations as subcontracted operations.

If a route is to include one or more subcontracted operations, make sure that the route satisfies the following conditions:

- The first and last operations on the route must be in-house operations. However, you can create a dummy count point operation at which to register the work-in-progress to ship.
- Both the subcontracted operation and a prior operation must be designated count points.
- The last operation on the route must be designated as a count point.
- The previous operation must not be a backflushed operation.

In addition:

- Any materials required by the subcontractor to complete the operation should have a Material Control Policy of 1 (backflushed). Set up the Material Control Policy under the Production Details Screen under the Style/Material Details option.
- Since scheduling routines do not use this time, you must record the expected duration time of the subcontracted work by entering the default move days. Move days is the time that WIP takes to move from the previous operation to the subcontractor and to be received back to the designated subcontracted operation.
- You can define consecutive subcontracted operations and use Style to monitor progress at each progressive operation. Alternatively, you can separate subcontracted operations with on-site operations, including intervening backflushed operations if required.



***Warning: Do not attach a cost centre to the machine on a subcontract operation.***

To subcontract an operation, do the following:

1. Set the Key Operation field to 2 or 3.
2. Select **F22=Addit. Parameters** and set up the following fields on the Additional Operation Values window:
  - Sub-Contract.

- Sub-Contract Cost.
- Sub-Contract Supplier.

### **Bundling Up Point**

To create bundle tickets for an operation, you need to define the previous operation as a bundling-up point.

You can either identify an existing operation as a bundling-up point or add a new operation for bundling-up only. For example, you could add a bundling-up point between the cutting and sewing operations.

To make an operation into a bundling-up point:

1. Select **F22=Addit. Parameters**.
2. From the Additional Operation Values window, set the Operation Type to 9.

### **Critical Fields**

The following fields are the most critical:

- Operations Code.
- Machine or Work Centre.
- Bundle Ticket Type.
- Reporting Type.
- Reporting Level.
- Key Operation.
- Duration Labour Time.
- Team Size.
- Duration Machine Time.
- Labour Profile.
- Move Days.
- Wastage %.

### **Prerequisites**

Before using this screen, ensure that you have defined suitable codes for machines and/or work centres. In addition, if you wish to include the following fields, you need to have set them up previously:

- Labour profile.
- Bundle ticket type.
- Operation type.
- Costing analysis .
- Subcontract supplier(s).

### **Formula Codes**

Use Formula Codes to point to user-defined programs containing calculations. You need to set up the Formula Codes under the ALLW parameter under the

Maintain Parameter File option. To use formula codes to recalculate Labour Time and Machine Time, select **F16=Time Calcs** from this screen. This can also recalculate the SET-UP Labour Time on the Additional Operation Values window.

If you choose to use Formula Codes, adopt one of the following methods only:

- From this screen, use **F16=Time Calcs** on individual style route operations. In this case, set Formula Codes to 0 under the MASU parameter.
- Alternatively, perform recalculations via a mass update from the Standard Operations Maintenance Mass Update screen. In this case, set Formula Codes to 2 under the MASU parameter.

For more information about the MASU parameter, refer to the Maintain Parameter File option.

### **Add Mode**

Use Add Mode to key in a new primary operation for a new route or an existing route.

Style displays the word ADD at the top of the screen.

When you key in operations, Style begins the sequence at operation 10 and increments by 10 each time you add an operation. You can change the increment.

|                                                |                              |                        |                                   |
|------------------------------------------------|------------------------------|------------------------|-----------------------------------|
| DS154                                          | ST - Style Test & QA Company | USER QASTYLE           | 26/02/98<br>09:37:59              |
| Style Route Maintenance - Operations ADD       |                              |                        |                                   |
| Style.....                                     | 6210/DS51                    | Route.....             | 9                                 |
| Operation Sequence....                         | 50                           | Std Lot Size.....      | 1.000                             |
| Operations Code.....                           |                              | Machine Quantity...    | 1                                 |
| Operation Description..                        |                              |                        |                                   |
| Machine.....?                                  |                              |                        |                                   |
| Work Centre.....?                              |                              |                        |                                   |
| Bundle Ticket Type.?                           |                              |                        |                                   |
| Reporting Type.....?                           |                              |                        |                                   |
| Reporting Level.....?                          | 3 Style/Colour/Size          |                        |                                   |
| Key Operation.....?                            |                              |                        |                                   |
| <b>DURATION</b> Labour : Time                  | .0000                        | Mins/lot               | Formula Code.?                    |
| Machine: Time                                  | .0000                        | Mins/lot               | Formula Code.?                    |
| Team Size..                                    | 1.00                         |                        | Lab Profile.?                     |
| Move Days.....                                 | .00000                       |                        |                                   |
| Wastage %.....                                 | .0                           | Specification id ..... |                                   |
| F4=Prompt F12=End Line addition F16=Time calcs |                              |                        |                                   |
| F21=Op. Text F22=Additional Parms              |                              |                        |                                   |
| 8-25                                           | SA                           | MW                     | KS CL IM DM II MARVIN KB PED201S1 |

### **Update Mode**

Use Update Mode to maintain an existing primary operation.

Style displays the word UPDATE at the top of the screen.

|                                                                                                                                        |                                 |                                |                                   |
|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------|-----------------------------------|
| DS154                                                                                                                                  | ST - Style Test & QA Company    | USER QASTYLE                   | 26/02/98<br>09:17:54              |
| Style Route Maintenance - Operations                                                                                                   |                                 | <b>UPDATE</b>                  |                                   |
| Style.....                                                                                                                             | 6210/DS51                       | Route.....                     | 9                                 |
| Operation Sequence....                                                                                                                 | 10                              | Std Lot Size.....              | 1.000                             |
| Operations Code.....                                                                                                                   | 20                              | Machine Quantity...            | 1                                 |
| Operation Description.. <u>Cutting Machine 2</u>                                                                                       |                                 |                                |                                   |
| Machine.....?                                                                                                                          | 61C12 6150 Cutting M/C 2        |                                |                                   |
| Work Centre.....?                                                                                                                      |                                 |                                |                                   |
| Bundle Ticket Type.?                                                                                                                   |                                 |                                |                                   |
| Reporting Type.....?                                                                                                                   | 0 Count Point Type A            |                                |                                   |
| Reporting Level.....?                                                                                                                  | 3 Style/Colour/Size             |                                |                                   |
| Key Operation.....?                                                                                                                    | 0 Display operation selectively |                                |                                   |
| <b>DURATION</b> Labour : Time                                                                                                          | 4.0000                          | Mins/batch Formula Code.?      |                                   |
| Machine: Time                                                                                                                          | 3.1250                          | Mins/batch Formula Code.?      |                                   |
| Team Size..                                                                                                                            | 2.00                            | Lab Profile...?                | B2                                |
| Move Days.....                                                                                                                         | 25000                           | Two skills (CF & CP in HMCUT2) |                                   |
| Wastage %.....                                                                                                                         | 1.5                             | Specification id .....         | DIANE05                           |
| F4=Prompt F11=Delete F12=Previous F15=User pgm F16=Time calcs<br>F21=Op. Text F22=Additional Parm F23=Variant Opn. F24=Characteristics |                                 |                                |                                   |
| 8-25                                                                                                                                   | SA                              | MW                             | KS CL IM DM II MARVIN KB PED201S1 |

## Fields:

### Style

The style for which you are creating or maintaining a route. This field displays for your information only.

### Operation Sequence

The number of the operation you are creating or maintaining. This field displays for your information only.

### Route

The route that you are creating or maintaining. This field displays for your information only.

### Std Lot Size

The standard lot size entered on the Style Route Header Maintenance screen. This field displays for your information only.

### Operations Code

Enter a meaningful identifying code that will help identify the operation (for example, Layout). The Operations Code appears on:

- The style route list.
- The bundle tickets.
- Most enquiries and reports that include the operation.
- Any variant operations of this primary operation.

### Machine Quantity

Indicates the number of machines that may be used to perform work on the operation. Style uses this value to determine the operation lead time.

For example, if the operation requires 10 hours work, that would imply a 10 hour lead time on one machine; however, if 5 machines were available, and the work could be shared and scheduled at the same time, then a much reduced lead time of  $(10/5)=2$  hours would be required.



*Note: If you enter a machine with a default shift profile in the Machine field, enter a Machine Quantity that does not exceed the Standard Capacity Factor defined for the machine in the Shift/Capacity Profile Maintenance window under the Machines option.*



*Note: If you enter a machine without a default shift profile in the Machine field, enter a Machine Quantity that does not exceed  $(Std\ Capacity \div Std\ Length)$ . You can define Std Capacity and Std Length on Machine Maintenance Screen 2 under the Machines option.*



*Note: If you do not enter a machine in the Machine field, enter a Machine Quantity that does not exceed the value accumulated (as above) for all machines in the work centre specified in the Work Centre field.*

### Operation Description

Enter a short description to appear on the style route list (mandatory). To add further details, use **F21=Op. Text**. Style uses this description for any variant operations that you define for this primary operation.

### Machine

Enter a standard machine at which this operation may take place. Style uses the information that you have entered for this machine under the Machines option for planning and costing purposes. This information includes costs (rates and values), shift lengths and capacities, queue time and standard efficiency.

If the machine belongs to more than one work centre, by entering a work centre in the Work Centre field, you may limit the types of analysis available.



*Note: If you specify a work centre in the Work Centre field, you can leave the Machine field blank.*



*Note: If you enter a machine here, and a work centre in the Work Centre field, then the machine must be a member of the work centre.*

### Work Centre

For the purposes of performance and capacity analysis, enter the work centre where the work on this operation is to take place.

If you do not enter a machine in the Machine field, Style selects the first machine in the work centre sequence to calculate capacity loading and costing. If, subsequently, you change the work centre definition, Style still uses this machine for this operation.



*Note: If you specify a machine in the Machine field, then you can leave the Work Centre field blank.*

### Bundle Ticket Type

To associate this operation with a bundle ticket, enter a bundle ticket type that you have set up under the Bundle Ticket Types option. This ticket is used as the standard bundle ticket for planning purposes.

When bundle tickets are printed for a production order, the tickets include all the operations that you have associated with the bundle ticket.



*Note: The bundle ticket's Search Family must match the Search Family set up for the style.*



*Note: If you enter a bundle ticket type for a primary operation, then you must also enter a bundle ticket type for all variant operations.*



*Note: For bundle tickets to print, you must have defined a bundling-up operation earlier in the route sequence.*



*Note: You cannot record a bundle ticket type against an operation defined as a bundling-up operation (see Operation Type).*

### Reporting Type

This field indicates whether the operation is a count point or a backflushed operation.

0 - Count point type A (default).

1 - Count point type B.

2 - Backflushed operation type A.

3 - Backflushed operation type B.



*Note: A complete short/over operation must be a count point. (To mark an operation as complete short/over, set the Operation Type to 8 on the Additional Operation Values window.)*



*Note: A bundle up operation must be a count point.*



*Note: The last operation must be a count point.*



*Note: There is no functional difference between types 0-1 (count point) and 2-3 (non count point). You can apply more meaningful descriptions to these codes if you want to distinguish between two types of count points and/or backflushed operations.*

Codes are maintained on the parameter file, against type RPNT.

### Reporting Level

This field indicates the level of detail at which Style will report the operation when booking and backflushing work at this operation.

Enter one of the following:

- 0 - Style.
- 1 - Style/colour.
- 2 - Style/size.
- 3 - Style/colour/size.

Throughout the production process, you can report on different operations at different reporting levels.

However, once the production process has reached a certain reporting level, it is not possible to return to a previous level. You can either stay at the same level or progress to the next level.

As an example, assume that you are making shirts to be produced in a range of colours and sizes:

- Report Operation 10 at style level indicating that all the material is laid out ready to work with.
- Report Operation 20 at style/size level as the various sizes are separated.
- Report Operation 30 at style/colour/size level as the finished shirts are dyed.



*Note: You cannot report at both style/colour and style/size levels on the same route.*



*Note: If you are mixing colours within a bundle, as defined on the Characteristic Mix Rules window under the Bundle Ticket Types option, then do not set the Reporting Level to 1. If you are mixing sizes, then do not set the Reporting Level to 2.*



*Note: You must report the last operation on the route at full product detail level. That is, style/colour for styles without sizes; style/colour/size for styles with sizes.*



*Note: If you have set the Operation Type on the Additional Operation Values window to 8 (complete short/over), you must set the Reporting Level to the highest level possible for the number of dimensions for the style.*

### Key Operation

This field is important if you are sub-contracting the operation.



*Note: Key operations can only be defined at count points.*

A route may comprise a large number of operations. Therefore, it makes sense initially to limit the number of operations that appear on enquiries and reports. To select an operation for display, mark the operation as a key operation.

Enter one of the following:

- |   |                                                                                                                |                                                                                                                                                                                                                                                                        |
|---|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Display Operation Selectively                                                                                  | Displays the operation upon request only.                                                                                                                                                                                                                              |
| 1 | Display Operation Always                                                                                       | Displays the operation on all enquiries and reports.                                                                                                                                                                                                                   |
| 2 | Display and raise sub-contract purchase order<br><br>(Use this setting, for sub-contracted operations only.)   | Displays the operation on all enquiries and reports.<br><br>When the order is released, generates a purchase order for subcontracted work automatically.                                                                                                               |
| 3 | Display and raise purchase order and lot                                                                       | Displays the operation on all enquiries and reports.<br><br>When you book the operation, raises a purchase order for subcontracted work and automatically prompts for entry of a WIP lot number. You can make the lot number specific to the subcontractor (supplier). |
| 4 | Display and lot update point<br><br>(Do not use this setting for a subcontracted operation; select 3 instead.) | Displays the operation on all enquiries and reports.<br><br>Prompts you to enter a WIP lot number. At this point, if you are using WIP lot tracking, you can change the tracked WIP lot number.                                                                        |

Codes are defined on the parameter file, against type CROP.

### **Labour Time**

Enter the standard run labour time per lot for this operation in the units defined by the Time Basis Code on the Additional Operation Values window. The operating unit description is shown for reference next to the input field.

Style uses the labour time to calculate the load on labour.

The duration is calculated using the operation quantity, after accounting for wastage at this and all subsequent operations, and the labour rate, and may be



an element of the total lead time for this operation on this route. The Duration Basis field on the Additional Operation Values window determines whether this duration is used when scheduling the operation.

The time is also used to calculate standard costs for the operation.

### Formula Code (Labour)

Enter an Allowance Formula code, as defined on the ALLW parameter under the Maintain Parameter File option. This code should point to a user-defined program that contains a calculation. To use this calculation in recalculating the Labour Time entered above, select **F16=Time Calcs**.

### Machine Time

Enter the standard run machine time per lot for this operation in the units defined by the Time Basis Code on the Additional Operation Values window. The operating unit description is shown for reference next to the input field.

Style uses the machine time to calculate the load on hard resources.

Style calculates the duration of the operation from:

- The operation quantity, after accounting for wastage at this and all subsequent operations.
- The machine rate.

The duration may be an element of the total lead time for this operation on this route. The Duration Basis field on the Additional Operation Values window determines whether this duration is used when scheduling the operation.

This time will also be used to calculate standard costs for the operation.

### Formula Code (Machine)

Enter an Allowance Formula code, as defined on the ALLW parameter under the Maintain Parameter File option. This code should point to a user-defined program that contains a calculation. To use this calculation in recalculating the Machine Time entered above, select **F16=Time Calcs**.

### Team Size

Run labour team size. Enter the standard number of operators assigned to this operation. This field affects capacity.

The elapsed time will not be affected for scheduling purposes, but costing and capacity requirements planning activities will use the value to establish the standard labour requirement for this operation.

A decimal team size may be entered to represent an operator who manages more than one task or machine at this operation.



*Note: If a labour profile is entered, then this field will be overwritten with the number of operators effective in the labour profile.*

### Lab Profile

Enter a labour profile to identify the labour skills required by the operation, and the number of operators needed. The number of operators defined on this labour profile overwrites the value held in the Team Size field.

## Move Days

Enter the move time between operations to aid capacity planning. This value includes the time that the materials sit between machines.

The value is used in scheduling to determine planned operation start and finish dates.

## Wastage %

Operation wastage is the planned rate of product loss from the process at this operation.

For example, if you specify 5% wastage, you would expect on average to achieve an output of 100 units from an initial batch of 105 units. Therefore, to produce 100 units, which is the required output, you must schedule 105 to compensate for the expected loss.

The loss may be endemic to the process, or may be due to processing inefficiencies which you can reduce as time goes on. Style uses the wastage % to calculate the required level of machine, labour and material resource based on the standards you have specified to achieve the desired output.

In addition to operational losses, losses of component materials are also monitored through a wastage percentage associated with each material. This is defined on the style route.



***Warning: The implications of the use of this field are significant. During planning, Style will over provide to compensate for the expected loss.***



***Note: During costing, the parent style will be costed at the inflated operation standards and extended quantity per requirements for material inputs. The resultant extended costs will be spread over the standard lot size for the process to obtain a standard unit cost.***

## Step

Use this field, when adding operations, to increase or decrease the increment for the operation sequence number.

To readjust operations to standard increments of 10, select **F18=Resequencing** on the Style Route Maintenance Operations And Materials screen.



***Note: This field displays in Add mode only.***

## Specification ID

The intention is that you add a Specification ID to a standard operation to provide a link when you incorporate the operation within a style route. Subsequently, you can update style route operations globally with your standard operation updates.

You can also enter or amend the Specification ID if you are maintaining a style route. For example, you may wish to remove the link to a standard operation, in which case you can delete the Specification ID. Alternatively, you may wish to create a link between the current style route operation and a different standard

operation. In this case, you can enter a new Specification ID or edit the existing Specification ID.



*Note: If you are creating or maintaining a standard operation, the Specification ID must be unique. If you are creating or maintaining a style route operation, then you should have allocated the Specification ID to a standard operation already.*

## Functions:

The function descriptions below apply to both Add mode and Update mode. However, not all of these functions are available from both modes.

### F15

User pgm. Call a user developed program defined under the USER parameter in the Maintain Parameter File option and display new field values returned by the program.



*Note: The USER parameter allows you to define a program separately for primary operations and variant operations. The **F15=User pgm** option only displays if you have defined the appropriate user program for this type of operation.*

### F16

Time calcs. This function recalculates the values entered in the Labour Time and Machine Time fields on this screen and the SET-UP Labour Time on the Additional Operation Values window.



*Note: This function is available only if you have defined one or more user programs under the ALLW parameter to perform the recalculation. For more information, refer to the Maintain Parameter File option.*



*Note: If you are maintaining a standard operation, this function is not available.*

### F21

Op. Text. Opens the Text Maintenance screen, from which you can enter additional operation text. You can print this information on production orders. If additional operation text exists already, then the screen displays this function in reverse video.

### F22

Addit. Parameters. Opens the Additional Operation Values window, from which you can input additional operation parameters.

### F23

Variant Opn. Opens the Maintain Variant Operations window, from which you can add a variant operation. This function is not available if the primary operation is an operation that you are currently creating.



*Note: If you have already defined a variant operation, then this function displays in reverse video.*

## **F24**

Characteristics. Open the Operation Characteristics Values window, from which you can specify which of the style's variants will use this operation when in production. This function is not available if the primary operation is an operation that you are currently creating.



*Note: If you are maintaining a standard operation, then this function is not available.*



*Note: If you have already specified style variants for this operation, then this function displays in reverse video.*



To validate the data you have entered, press **Enter**.

## Additional Operation Values Window (F22)



To display the Additional Operation Values window, select **F22=Additional Parameters** from the following screens:

- Style Route Maintenance Operations screen 1.
- Variant Operation Maintenance screen.
- Style Route Enquiry Operations screen (enquiry mode only).

Use this window to enter further details about a primary or variant operation.

Not all fields are open to maintenance; only the following fields can be amended from the primary operation specification.

- Set up labour time.
- Set up team size.
- Labour profile.
- Operation type.
- Studied/estimated times.
- Inbound stock area.
- Outbound stock area.
- Subcontract.
- Subcontract cost.
- Subcontract supplier.

|                                                                       |                                  |                         |                                   |
|-----------------------------------------------------------------------|----------------------------------|-------------------------|-----------------------------------|
| DS154                                                                 | ST - Style Test & QA Company     | USER QASTYLE            | 26/02/98<br>12:44:35              |
| Style Route Maintenance - Operations                                  |                                  | <b>UPDATE</b>           |                                   |
| Style..... 6210/DS51                                                  |                                  |                         |                                   |
| <b>Additional Operation Values</b>                                    |                                  |                         |                                   |
| SET-UP Labour Time....                                                | 0000 Mins                        | Formula Code.?.         |                                   |
| Team Size.....                                                        | 1.00                             | Lab Profile.?.          |                                   |
| Time Basis Code....?                                                  | Time/parent lot                  |                         |                                   |
| Batch Qty.....                                                        | (Basis 6)                        |                         |                                   |
| Duration Basis....?                                                   | 4 Greater of M/C or Lab,+Setting |                         |                                   |
| Costing Analysis...?                                                  | -                                |                         |                                   |
| Operation Type....?                                                   | -                                |                         |                                   |
| Studied/Est Times....                                                 | 1 (1=Studied 2=Est)              |                         |                                   |
| Report Non-Bundle....                                                 | 0 (1=Yes)                        |                         |                                   |
| Inbound Stock Area.?.                                                 |                                  | Outbound Stock Area..?  |                                   |
| Effective Start.....                                                  | 1/01/97                          | End.....                | 31/12/98                          |
| Sub-Contract.....                                                     | (1=Yes)                          | Sub-Contract Cost.....  | 00000                             |
|                                                                       |                                  | Sub-Contract Supplier.? |                                   |
| F4=Prompt F12=Previous                                                |                                  |                         |                                   |
| F4=Prompt F11=Delete F12=Previous F15=User pgm F16=Time calcs         |                                  |                         |                                   |
| F21=Op. Text F22=Additional Parm F23=Variant Opn. F24=Characteristics |                                  |                         |                                   |
| 7-27                                                                  | SA                               | MW                      | KS CL IM DM II MARVIN KB PED201S1 |

## Fields:

### SET-UP Labour Time

Enter the elapsed set up labour time for this operation. This time always contributes to the calculated duration of the operation.



*Note: Set up time is of a fixed duration and does not change for larger or smaller quantities.*

### Formula Code (SET-UP Labour Time)

Enter an Allowance Formula code, as defined on the ALLW parameter under the Maintain Parameter File option. This code should point to a user-defined program that contains a calculation. To use this calculation in recalculating the SET-UP Labour Time entered above, select **F16=Time Calcs** from Style Route Maintenance Operations Screen 1.

### Team Size

Set Up Team Size. Enter the standard number of operators required to perform the set up at this operation. The elapsed time will not be affected for scheduling purposes. Costing and capacity planning use this value to calculate the standard set up labour requirements for the operation.

If you also enter a labour profile in the Lab Profile field, the number of operators on the labour profile overwrites the Team Size field.

### Lab Profile

Labour Profile. Enter a profile to identify the number of operators and the labour skills required to set up the operation.

If you enter a profile, then the number of operators defined on the labour profile overwrites any value you enter in the Team Size field.

### Time Basis Code

This field represents the units you use for labour and machine production rates. The field determines the way in which Style calculates the duration of this operation for capacity planning. Enter one of the following:

0 or Blank - Time/parent lot. This is the time it takes to complete the Standard Lot Size defined on the Style Route Header Maintenance screen.

1 - Time each. This is the time it takes to perform one operation cycle. It implies that there are no advantages to be gained from economies of scale with larger quantities in terms of operation length.

2 - Time per 100. This is the time it takes to complete a quantity of 100.

3 - Time per 1000. This is the time it takes to complete a quantity of 1000.

4 - Quantity per hour. Select this option if you measure production rates by counting the number of operations performed over a specified length of time, which must be translated to a rate per hour.

5 - Fixed time operation. Select this option if time taken is the same, regardless of quantity.

6 - Time per operation batch. Select this option if there is a limit to the quantity that can consume a single fixed time. For example, if a maximum of 100 can be produced in one hour, and 101 must be made, then the fixed time taken to make the complete quantity will be 2 hours. You must define the quantity that can be made in the Batch Qty field. This is used to calculate the number of whole batches required to complete the operation quantity, and hence the duration of the machine and labour operation duration.

Codes are defined on the parameter file, against type TBCD.

Time is expressed in hours or minutes, depending on the setting of the Time Units field under the Maintain Company Profile option.



*Note: If the operation is a variant operation, then this field is for your information only.*

### Batch Qty

Batch Quantity. Use this field with Time Basis Code 6 (time per operation batch) only. Style uses Batch Qty to calculate the number of batches required to make the operation quantity. Style multiplies the Batch Qty by the machine and labour production rates to determine their duration.

For example, if the operation quantity is 100 and the batch quantity 50, and the production rate 1 hour/batch, the number of batches required is 2, and the labour duration will be two hours.

This figure can then be used to calculate the operation duration, depending on the value you enter in the Duration Basis field.



*Note: If the operation is a variant operation, then this field is for your information only.*

### Duration Basis

This field identifies the duration basis to use when calculating operation lead time. This calculation is based on combinations of set up labour, run labour and run machine times.

To use the Duration Calculation Basis set up for the machine on Machine Maintenance screen 2, leave this field blank. If you do not set up a Duration Calculation Basis on this window, Style uses the Duration Calculation Basis set up under the Maintain Company Profile option.

Enter one of the following:

- 0 - Set up labour.
- 1 - Set up labour + run machine.
- 2 - Set up labour + run labour.
- 3 - Set up labour + run labour + run machine.
- 4 - Set up labour + (greater of run labour or run machine).

Codes are defined on Maintain Parameters screen 2 against type DUCT.



*Note: If the operation is a variant operation, then this field displays for your information only.*

### Costing Analysis

This is a reference field, allowing a further analysis of cost.

Codes are defined on the parameter file, against type CSOP.



*Note: If the operation is a variant operation, then this field displays for your information only.*

### Operation Type

Enter one of the following:

- 8 - Complete short/over operation. Where there is a surplus or shortfall, a completed quantity on this operation adjusts subsequent planned production order quantities.
- 9 - Bundle up operation. This operation is a point at which WIP should be bundled up before proceeding to the next operation.

Codes are defined on Maintain Parameter File screen 1 against type ATS1.



*Note: The Maintain Orders option in Style Production Control allows you to override the Operation Type when you create a production order.*



*Note: When you set the Operation Type to 8, you need to ensure that the highest level of detail about the style variants is known, so that Style can change planned quantities for each variant. Therefore, for this operation set the Reporting Level on Style Route Maintenance Operations screen 1 to the highest level possible for the style's dimensions.*



*Note: If you set Operation Type to 8, you need to adjust subsequent bundles manually. To save work, make sure that quantity adjustments take place prior to the creation of bundles.*





*Note: To set the Operation Type to 8, the operation must be a countpoint operation and not a backflush operation. Therefore, set the Reporting Type to 0 or 1 on Style Route Maintenance Operations screen 1.*

### **Studied/Est Times**

Enter one of the following:

- 1 - Time and motion study. Use empirical methods to calculate standard times for this operation.
- 2 - Estimated. Estimate standard times for this operation.

### **Report Non-Bundle**

This field determines how you book in transactions for this operation, if linked to a bundle ticket. Enter one of the following:

0 - No. Use the Manual Timesheet Booking option.

1 - Yes. Use any one of the following options:

- Production Order Booking.
- Operator Booking.
- Manual Timesheet Booking.

### **Inbound Stock Area**

This is a memo field. Use this field to record the WIP location of the previous operation, indicating from where to retrieve WIP.

### **Outbound Stock Area**

This is a memo field. Use this field to record the WIP location associated with this operation. This location is the same as the WIP location of the machine that you nominate for the operation.

### **Effective Start/End**

Enter the dates when this operation is operational. If the route can be used on all dates, leave these fields set to 0/00/00 and 99/99/99.



*Note: For a variant operation, this field is for your information only.*

### **Sub-Contract**

This field indicates whether you are sub-contracting the operation. Enter one of the following:

Blank or 0 - No. Do not sub-contract the operation.

1 - Yes. Sub-contract the operation. Standard labour, machine and set up time may still be entered for a subcontract operation, this will enable the capacity and loading of subcontractors to be analysed. Product costing and scheduling, will both be affected.



*Warning: If you set this field to 1, do not attach the machine used to a cost centre. Otherwise, machine, labour, setting and overheads are*

*costed as an addition to the subcontract cost.*



*Note: The following rules apply to subcontract operations:*

- *The first and last operations on the route must be in-house operations.*
- *The subcontracted operation must be a designated count point, indicated by setting Reporting Type to 0 or 1.*
- *The previous operation must not be a backflushed operation, indicated by setting Reporting Type to 2 or 3.*

*Reporting Type appears on Style Route Maintenance Operations screen 1.*

### **Sub-Contract Cost**

If you set the Sub-Contract field to 1, use this field to enter the standard cost of subcontracting this operation. Enter the cost to a single item. Do not enter the cost to make the number of items specified either in Standard Lot Size on the Style Route Header Maintenance screen or Batch Quantity on this screen.

Style uses this cost to calculate the total cost of this route, as well as the standard cost, in order variance analysis. Actual subcontract charges posted to orders passing through this operation are compared to this cost.

### **Sub-Contract Supplier**

If you have set the Sub-Contract field to 1, enter a valid supplier code to indicate which subcontractor you are using. The supplier name displays for reference beneath the field. Maintain supplier codes via the Accounts Payable (Purchase Ledger) application.



Press **Enter** to validate the data you have entered.

## Maintain Variant Operations Window (F23)



To display the Maintain Variant Operations window, select **F23=Variant Opn.** from the following screens:

- Style Route Maintenance Operations screen 1.
- Style Route Enquiry Operations screen.

Use this window to add a new variant operation to the current primary operation. You can also update an existing variant operation.

A primary operation defines a standard method for processing one part of the route. However, you may wish to vary the operation for one or more style variants.

You might wish to add a variant operation for:

- A style variant requiring a different machine or work centre.
- A style variant requiring more or less time on this operation.

The screen displays in two modes according to whether variant operations already exist for the selected primary operation.



**Warning:** *You are creating a variant operation for one or more style variants. Therefore, make sure you have already removed these style variants from the primary operation, using the Operation Characteristics Values window.*



**Note:** *To view the materials that a single style variant uses, select **F22=Selective View of Route** from one of the following screens:*

- Style Route Maintenance Operations and Materials screen.
- Style Route Maintenance Operations screen 2.

### No Variant Operations

If the selected primary operation does not have any variant operations, then this window displays the following message: No Variant Operations Found.

To add a new variant operation, enter an operation number (for example 1) in the Enter Variant to Maintain field.

|                                                                      |                              |                                    |                                    |
|----------------------------------------------------------------------|------------------------------|------------------------------------|------------------------------------|
| DS154                                                                | ST - Style Test & QA Company | USER QASTYLE                       | 25/11/97<br>10:43:26               |
| Style Route Maintenance - Operations <b>UPDATE</b>                   |                              |                                    |                                    |
| Style.....                                                           | SKIRT01                      | Route.....                         | 1                                  |
| Operation Sequence....                                               | 10                           | Std Lot Size.....                  | 1.000                              |
| Operations Code.....                                                 | LAYUP                        | Machine Quantity...                | 1                                  |
| Operation Description.                                               | Layout                       | <b>Maintain Variant Operations</b> |                                    |
| Machine.....?                                                        |                              | S Variant                          | COLOUR SIZE                        |
| Work Centre.....?                                                    | CROOM Cu                     | PRIMARY                            | *MANY *ALL                         |
| Bundle Ticket Type.?                                                 |                              | No Variant Operations Found.       |                                    |
| Reporting Type.....?                                                 | 0 Count                      | Enter Variant To Maintain: _____   |                                    |
| Level.....?                                                          | 3 Style/                     | 1=Select 2=Values 4=Delete         |                                    |
| Key Operation.....?                                                  | 1 Displa                     | F12=Previous                       |                                    |
| <b>DURATION</b> Labour Time..                                        | 2                            |                                    |                                    |
| Machine Time.                                                        | 2                            |                                    |                                    |
| Move Days.....                                                       | .000                         |                                    |                                    |
| Wastage %.....                                                       | .0                           |                                    |                                    |
| F4=Prompt F11=Delete F12=Previous F21=Op. Text F22=Addit. Parameters |                              |                                    |                                    |
| F23=Variant Opn. <b>F24=Characteristics</b>                          |                              |                                    |                                    |
| 18-64                                                                | <b>SA</b>                    | MW                                 | KS CL IM DM II STUD140 KB PED201S1 |

### Variant Operations Already Exist

If you have already set up at least one variant operation for the current operation, the window lists the operation sequence number and the characteristic values assigned to the variant operation.

From this window, select a variant operation to maintain.

|                                                                      |                              |                                    |                           |
|----------------------------------------------------------------------|------------------------------|------------------------------------|---------------------------|
| DS154                                                                | ZS - Style Demonstration Co. | USER GBJBAMS                       | 29/02/96<br>16:57:35      |
| Style Route Maintenance - Operations <b>UPDATE</b>                   |                              |                                    |                           |
| Style.....                                                           | ELF_BOOTS                    | Route.....                         | 6                         |
| Operation Sequence....                                               | 30                           | Std Lot Size.....                  | 1.000                     |
| Operations Code.....                                                 | CUT                          | Machine Quantity...                | 1                         |
| Operation Description.                                               | Cutting                      | <b>Maintain Variant Operations</b> |                           |
| Machine.....?                                                        | ELF02 Cu                     | S Variant                          | Colour Size               |
| Work Centre.....?                                                    | ELF01                        | PRIMARY                            | *MANY *ALL                |
| Bundle Ticket Type.?                                                 |                              | 0010                               | Brown 6                   |
| Reporting Type.....?                                                 | 0 Count                      | 0020                               | *MANY 7                   |
| Reporting Level.....?                                                | 3 Style/                     | 0030                               | Burgundy *MANY            |
| Key Operation.....?                                                  | 1 Displa                     | Enter Variant To Maintain: _____   |                           |
| <b>DURATION</b> Labour Time..                                        | 3                            | 1=Select 2=Values 4=Delete         |                           |
| Machine Time.                                                        | 2                            | F12=Previous                       |                           |
| Move Days.....                                                       | .000                         |                                    |                           |
| Wastage %.....                                                       | .0                           |                                    |                           |
| * Text Exists.                                                       |                              |                                    |                           |
| F4=Prompt F11=Delete F12=Previous F21=Op. Text F22=Addit. Parameters |                              |                                    |                           |
| F23=Variant Opn. <b>F24=Characteristics</b>                          |                              |                                    |                           |
| 13-36                                                                | <b>SA</b>                    | MW                                 | KS IM II KENB20A PET166S2 |

### Fields:

#### S

Select. Enter one of the following:

1 - Select. Open the Variant Operation Maintenance screen, from which you can make changes to the variant operation.

2 - Values. Open the Operation Characteristics Values window, from which you can select the style variants for which you are creating the variant operation. Make sure you also define the variants that the primary operation produces.

4 - Delete. Delete the operation.



*Note: If you are maintaining a standard operation, option 2 is not available.*

### **Variant**

This field displays the sequence number for the variant operation.

### **Colour**

If the variant operation is to make a single colour, this field displays the colour name.

### **Size**

If the variant operation is to make a single size, this field displays the size.

### **Enter Variant To Maintain:**

To maintain an existing variant operation, enter the appropriate operation number. This is equivalent to selecting a variant operation using the Select field.

To add a new variant operation, enter a new operation number.

## Variant Operation Maintenance Screen (Option 1)

Use this screen to add a variant operation to the route. You can also update an existing variant operation.

This screen is similar to Style Route Maintenance Operations screen 1 which you use to add or update a primary operation. An additional Variant field displays the variant number of this variant operation.

From this screen, you can change the following fields:

- Machine Quantity.
- Machine.
- Work Centre.
- Duration Labour Time.
- Team Size.
- Machine Time.
- Lab Profile.
- Move Days.
- Step (Add mode only).

Otherwise, the fields contain the information you entered for the primary operation.

This screen has two modes.

### **Add Mode**



Enter a new variant operation number in the Enter Variant To Maintain field on the Maintain Variant Operations window to display the Variant Operation Maintenance screen in Add mode.

In Add mode, add a new variant operation.



***Warning: You must select which style variants the new variant operation is going to produce. To do this, select F24=Characteristics to open the Operation Characteristics Values window.***

However, the **F24=Characteristics** function is not available from this screen in Add mode. Therefore, follow the procedure given below:

1. Use this screen in Add mode to enter the variant operation details.
2. When you have finished, press **Enter** to save the information.
3. Press **F12=Previous** to return to the Maintain Variant Operations window.

4. If you have not yet specified the style variants that the primary operation is going to produce, select **F12=Previous** to return to Style Route Maintenance Operations screen 1. Then, to specify style variants for the primary operation, select **F24=Characteristics**.
5. From the Maintain Variant Operations window, select the variant operation and press Enter so that you come back to the Variant Operation Maintenance screen in Update mode.
6. Select **F24=Characteristics** to specify which style variants this variant operation is going to produce.

### Update Mode



Enter 1 in the Select field on the Maintain Variant Operations window to display the Variant Operation Maintenance screen in Update mode.

Use Update mode to update an existing variant operation.

|                                                      |                              |                        |                                   |
|------------------------------------------------------|------------------------------|------------------------|-----------------------------------|
| DS165                                                | ST - Style Test & QA Company | USER QASTYLE           | 26/02/98<br>12:51:25              |
| Variant Operation Maintenance                        |                              | <b>UPDATE</b>          |                                   |
| Parent.....                                          | 6210/DSS1                    | Route.....             | 1                                 |
| Operation Sequence....                               | 15                           | Std Lot Size.....      | 1.000                             |
| Variant.....                                         | 10                           |                        |                                   |
| Operations Code.....                                 | 15                           | Machine Quantity... .. | 1                                 |
| Operation Description.                               | Cutting machine 1            |                        |                                   |
| Machine .....                                        | 61CT1 6150 Cutting M/C 1     |                        |                                   |
| Work Centre.....?                                    |                              |                        |                                   |
| Bundle Ticket Code.?                                 |                              |                        |                                   |
| Reporting Type.....                                  | 1 Count Point Type B         |                        |                                   |
| Reporting Level.....                                 | 3 Style/Colour/Size          |                        |                                   |
| Key Operation.....                                   |                              |                        |                                   |
| <b>DURATION</b> Labour : Time .....                  | 1.2000                       | Mins/lot               | Formula Code.?. ..                |
| Machine: Time .....                                  | .8000                        | Mins/lot               | Formula Code.?. ..                |
| Team Size....                                        | .3.00                        |                        | Lab Profile.?. ..                 |
| Move Days.....                                       | .27500                       |                        |                                   |
| Wastage %.....                                       | .1                           |                        |                                   |
| Specification id .....                               | DIANE4                       |                        |                                   |
| F11=Delete F12=Previous F15=User pgm F16=Time calcs  |                              |                        |                                   |
| F22=Additional Parameters <b>F24=Characteristics</b> |                              |                        |                                   |
| 11-25                                                | SA                           | MW                     | KS CL IM DM II MARVIN KB PED201S1 |

### Fields:

For a description of the majority of the fields on this screen, refer to Style Route Maintenance Operations screen 1.

There are two extra fields that do not appear on Style Route Maintenance Operations screen 1:

#### Variant

An assigned sequence number that you can use to reference the variant operation. This field is for your information only.

#### Step

This field is only prompted when adding operations, and may be used to increase or decrease the increments in which sequence numbers assigned as operations are added.

To readjust operations to standard increments of 10, select **F18=Resequence** on the Style Route Maintenance Operations and Materials screen.

## Functions:

### F15

User Pgm. This function is described under Style Route Maintenance Operations screen 1.

### F16

Time Calcs. This function is described under Style Route Maintenance Operations screen 1.

### F22

Additional Parameters. Opens the Additional Operation Values window, from which you can enter further details about the variant operation.

### F24

Characteristics. Opens the Operation Characteristics Values window, from which you can specify which of the style's variants is to use this operation in production. This field is only available in Update mode.



*Note: If you are maintaining an operation as a variant of a standard primary operation, then this function is not available.*



*Note: If you have already specified style variants for this operation, then this function displays in reverse video.*



Press Enter to validate the data you have entered and redisplay the Variant Operation Maintenance screen so that you can enter data for the next variant operation. To stop entering variant operations, select **F12=Previous**.



## Operation Characteristics Values Window (Option 2, F24)

-  If the current operation is a primary operation, select **F24=Characteristics** from Style Route Maintenance Operations screen 1.
-  If the current operation is a variant operation, select **F24=Characteristics** from the Variant Operation Maintenance screen.
-  If the current operation is a variant operation, enter 2 in the Select field on the Maintain Variant Operations window.
-  When enquiring on a single style variant, select **F24=Characteristics** from the Style Route Enquiry Operations screen.

This window opens up for both primary and variant operations.

Use the window to specify the style dimensions (for example colour, size) whose characteristics you wish to mark as the style variants produced by the current operation. This window opens the Select Values window which displays the characteristics for the selected dimensions.

Your selection enables Style to cost for specific products.



***Warning: If you do not specify which style variants you wish the primary operation to produce, then Style uses the primary operation for all style variants, even if variant operations exist.***

***Therefore, select the style variants that the primary operation produces and then select the style variants that each variant operation produces.***

|                                                                                                                                                       |                              |                                         |                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------|----------------------|
| DS154                                                                                                                                                 | ZS - Style Demonstration Co. | USER GBJBAMS                            | 29/02/96<br>16:58:18 |
| Style Route Maintenance - Operations <b>UPDATE</b>                                                                                                    |                              |                                         |                      |
| Style.....                                                                                                                                            | ELF_BOOTS                    | Route.....                              | 6                    |
| Operation Sequence....                                                                                                                                | 30                           | Std Lot Size.....                       | 1.000                |
| Operations Code.....                                                                                                                                  | CUT                          | Machine Quantity...                     | 1                    |
| Operation Description.                                                                                                                                | Cutting leather              | <b>Operation Characteristics Values</b> |                      |
| Machine.....?                                                                                                                                         | ELF02 Cut, form              | Operation Seq 0030 Variant 0000         |                      |
| Work Centre.....?                                                                                                                                     | ELF01                        | _ Colour *MANY                          |                      |
| Bundle Ticket Type.?                                                                                                                                  |                              | _ Size                                  |                      |
| Reporting Type.....?                                                                                                                                  | 0 Count Point T              | F12=Previous                            |                      |
| Reporting Level....?                                                                                                                                  | 3 Style/Colour/              |                                         |                      |
| Key Operation.....?                                                                                                                                   | 1 Display opera              | Lab Profile.?. _                        |                      |
| DURATION Labour Time..                                                                                                                                | 3.4500                       |                                         |                      |
| Machine Time.                                                                                                                                         | 2.2000                       | Mins/lot                                |                      |
| Move Days.....                                                                                                                                        | .00000                       |                                         |                      |
| Wastage %.....                                                                                                                                        | .0                           |                                         |                      |
| * Text Exists.                                                                                                                                        |                              |                                         |                      |
| F4=Prompt F11=Delete F12=Previous F21=Op. Text F22=Addit. Parameters<br>F23=Variant Opn. F24=Characteristics<br>13-43 SF MW KS IM II KENB20A PET166S2 |                              |                                         |                      |

## Fields:

### Untitled

Select. To select all the characteristics for a dimension, leave the dimension blank. For example, if you leave the colour dimension blank, then Style assumes that this operation will make all the colour variants.

Enter 1 against a dimension to open the Operation Characteristics Values window, from which you can select characteristics for that dimension. For example, enter 1 against Colour and leave Size blank to mark selected colours only.

# Select Values Window (Option 1)

 To display the Select Values window, enter 1 in the Select field on the Operation Characteristics Values window.

Use this window to define which style variants this primary or variant operation is going to produce.

The window displays characteristics of the dimensions that you selected from the Operation Characteristics Values window.

DS154

ZS - Style Demonstration Co.

USER GBJBAMS

29/02/96

Style Route Maintenance - Operations

UPDATE

Style..... ELF\_BOOTS

Operation Sequence.... 30

Route..... 6

Std Lot Size..... 1.000

Operations Code..... CUT

Operation Description. Cutting leather

Machine.....?.. ELF02 Cut, form

Work Centre.....?.. ELF01

Bundle Ticket Type.?..

Reporting Type.....?.. 0 Count Point T

Reporting Level.....?.. 3 Style/Colour/

Key Operation.....?.. 1 Display opera

DURATION Labour Time.. 3.4500

Machine Time.. 2.2000 Mins/lo

Move Days..... .00000

Wastage %..... .0

\* Text Exists.

F4=Prompt F11=Delete F12=Previous F21=0

F23=Variant Opn. F24=Characteristics

11-S1 SA MW KS IM II KENB20A PET166S2

Select Values

Op Seq 0030 Variant 0000

Beige

Black

Blue

Brown

Burgundy

Position to:

F12=Previous

## Fields:

### Select

Enter 1 against each characteristic you wish to select.

### Position To

You may position the display at a particular characteristic. This is useful if there is a large number of characteristics.



*Note: This field is only available if you are viewing the window in Update mode and the material has more than one dimension.*

## Associate Window (Option 5)



To display the Associate window, press **Enter** on the Relate Material To Style Characteristics window.



To display the Associate window, enter 5 in the Option field from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.

Having specified which style dimensions you wish to match to which material dimensions, use this window to associate style variants with material characteristics.

For example, if you selected Colour under Style Characteristics on the Relate Material To Style Characteristics window, you can now define which material colour relates to which style colour.

This window may open more than once, depending upon how many dimensions you selected on the Relate Material To Style Characteristics window.

### **Description Of Window**

This window divides into two parts:

- Left box. Use the left box to enter a colour code or size code against a style colour or a size code against a style size directly.
- Right box. Alternatively, use a matrix to select the required colour.

The left box is designed to save you from having to page across the matrix when there is a large number of colours or sizes. However, you do need to know the colour code or size code since you cannot look these up from this window.

### **Example 1**

On the Relate Material To Style Characteristics window, you might specify that shoe lace colours vary with shoe colours. You would use this window to relate shoe colour to shoe lace colour. For example, you could specify beige laces on beige, black and blue shoes and burgundy laces on brown and burgundy shoes.

### **Example 2**

Use this window to define the shades of yarn required to make different coloured jumpers.

### **Example 3**

Use this window to match fabric colours to shirt colours.

|                                                  |          |                              |        |              |           |              |  |
|--------------------------------------------------|----------|------------------------------|--------|--------------|-----------|--------------|--|
| DS179                                            |          | ST - Style Test & QA Company |        | USER QASTYLE |           | 4/03/98      |  |
|                                                  |          |                              |        |              |           | 11:46:17     |  |
| Style Route Maintenance - Operations & Materials |          |                              |        |              |           |              |  |
| Style: 6210/DS51                                 |          |                              |        | Silk skirt   |           | Route: 1     |  |
| 0 Opsq Insq Material Opcode ST Description       |          |                              |        | Quantity per |           | UM Wst       |  |
| Associate 6210/DS1                               |          |                              |        | silk fabric  |           | Page: 1:1    |  |
| Style                                            | Material | Material                     | Colour | Material     | Colour    | More         |  |
| Colour                                           | Colour   |                              |        |              |           |              |  |
| Emerald                                          | EME      |                              |        | Emerald      | Raspberry | Midnight Blu |  |
| Royal Blue                                       | 026      |                              |        | -            | -         | -            |  |
| Pink                                             | 013      |                              |        | -            | -         | -            |  |
| PURPLE                                           |          |                              |        | -            | -         | -            |  |

F12=Previous F19=Window Left F20=Window Right  
 1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material  
 F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys

12-30 SA MW KS CL IM DM II STUD140 KB PED201S1

## Fields:

### Left Box

#### (Untitled)

Material Colour/Size. Enter the code for the required size or colour of material against each style colour or size.

### Right Box

#### Untitled

Material Colour/Size. Enter one of the following in one field in each row:

0 or blank - Do not associate a material characteristic with the style characteristic on this row.

1 - Associate the style characteristic on this row with this material characteristic.



*Note: Do not leave a line completely blank. If you are not using the material for a style characteristic, enter 0 under one of the material characteristics in the right box.*

## Functions:

### F19

Window Left. Scroll left on a multi window display.

### F20

Window Right. Scroll right on a multi window display.



If you have now associated characteristics for each selected dimension, press **Enter** on the Associate window to display the Material Quantity Requirements window.



If you still have another set of material

characteristics to relate to style characteristics,  
press **Enter** on the Associate window to display  
the Associate window again.

## Material Maintenance Window (Options 1, 7)

Use this window to identify the materials to use at each operation. The screen displays in two modes:

- Add mode. Key in a new material.
- Update mode. Update an existing material.

The top of the window gives you the operation number. Next to this, the window displays the number of the material within the material numbering sequence. Style applies a unique number to each material. The first number is 10. As you add each new material to the one operation, Style increments in steps of 10. To override the value of the increments, use the Sequence field.

The following fields are critical:

- Material.
- Issuing Stockroom.
- Quantity Per Lot.
- Wastage %.

All materials are divided into three types of usage:

- Fabric. Indicates a main material.
- Trim. Indicates a trim or accessory item.
- Packaging. Indicates packaging, boxes and so on.

### **Add Mode**



Enter 7 in the Option field against a material on the Style Route Maintenance Operations And Materials screen to display the Material Maintenance window in Add mode.



Enter 7 in the Option field on the Style Route Maintenance Materials screen to display the Material Maintenance window in Add mode.

Use Add Mode to key in a new material for a new route or an existing route.

Style displays the word ADD at the top of the screen.

| DS179                                            |      | ST - Style Test & QA Company |          | USER QASTYLE  |    | 16/12/97<br>13:20:21 |                      |
|--------------------------------------------------|------|------------------------------|----------|---------------|----|----------------------|----------------------|
| Style Route Maintenance - Operations & Materials |      |                              |          |               |    |                      |                      |
| Style: SKIRT01                                   |      |                              |          | Pleated Skirt |    | Route: 1             |                      |
| 0                                                | Opsq | Insq                         | Material | Opcode        | ST | Description          | Quantity per UM Wst% |
| Z                                                | 10   |                              |          | LAYUP         |    | Layout of material   | .0                   |
| -                                                |      | 10                           | FABRIC02 | RM            | C  |                      |                      |
| -                                                | 20   |                              |          | CUT           | C  |                      |                      |
| -                                                | 30   |                              |          | SEW1          | S  |                      |                      |
| -                                                |      | 2                            | BUT002   | RM            | B  |                      |                      |
| -                                                |      | 3                            | ZIP004   | RM            | S  |                      |                      |
| -                                                |      | 5                            | LABEL001 | RM            | S  |                      |                      |
| -                                                | 40   |                              |          | SEW2          | S  |                      |                      |
| -                                                | 50   |                              |          | P&P           | F  |                      |                      |

**Material Maintenance**

Operation 10 Sequence 5 ADD

Material .....?..

Material Type.....

Issuing Stockroom ..?..

Quantity Per Lot .....

Fixed Quantity Per..... (1=Yes)

Unit of Measure.....

Wastage % .....0

Operation Type use..?..

Change Reference .....

Effective From Date ... 0/00/00

Effective To Date .... 99/99/99

Key Material.....

F4=Prompt F12=Cancel F16=Item search

1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material  
F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys

9-62 **SR** MW KS CL IM DM II STUD140 KB PED201S1

## Update Mode

-  Enter 1 in the Option field against a material on the Style Route Maintenance Materials screen to display the Material Maintenance window in Update mode.
-  Enter 1 in the Option field on the Style Route Maintenance Materials screen to display the Material Maintenance window in Update mode.

Use Update Mode to update an existing material.

Style displays the word UPDATE at the top of the screen.

| DS179                                            |      | ZS - Style Demonstration Co. |          | USER GBJBAMS |    | 29/02/96<br>17:05:05 |                      |
|--------------------------------------------------|------|------------------------------|----------|--------------|----|----------------------|----------------------|
| Style Route Maintenance - Operations & Materials |      |                              |          |              |    |                      |                      |
| Style: ELF_BOOTS                                 |      |                              |          | Elfin Boots  |    | Route: 6             |                      |
| 0                                                | Opsq | Insq                         | Material | Opcode       | ST | Description          | Quantity per UM Wst% |
| -                                                | 10   |                              |          | LAYOUT       |    | Layout of material   | .0                   |
| -                                                | 1    | 10                           | LEATHER  | RM           | L  |                      |                      |
| -                                                | 20   |                              |          | SEPAR        | S  |                      |                      |
| -                                                | 30   |                              |          | CUT          | C  |                      |                      |
| -                                                | 40   | 10                           | CUTTER   | RM           | K  |                      |                      |
| -                                                | 50   |                              |          | FORM         | F  |                      |                      |
| -                                                |      |                              |          | ASSEM        | A  |                      |                      |
| -                                                |      | 10                           | LACES    | RM           | L  |                      |                      |
| -                                                |      | 20                           | SOLES    | RM           | S  |                      |                      |
| -                                                |      | 30                           | EVELETS  | RM           | B  |                      |                      |
| -                                                | 60   |                              |          | FINISH       | F  |                      |                      |
| -                                                | 70   |                              |          | PACK         | P  |                      |                      |
| -                                                |      | 10                           | BOX      | RM           | B  |                      |                      |

**Material Maintenance**

Operation 10 Sequence 10 **UPDATE**

Material..... LEATHER

Material Type..... 3 Main Material

Issuing Stockroom ..?.. RM

Quantity Per Lot ..... 10.000

Fixed Quantity Per..... (1=Yes)

Unit of Measure..... MT

Wastage % .....0

Operation Type use..?..

Change Reference ..... CHNG:900

Effective From Date ... 0/00/00

Effective To Date .... 99/99/99

Material Usage Policy.. 0 Prompt for Va

F4=Prompt F11=Delete F12=Cancel  
F14=Relate Material to Style

1=Maintain 2=Add Opn before 3=Add Opn after 4=Delete 7=Add Material  
F3=Exit F7=Update F8=Lead Time F12=Prev F13=Pos. to F23=More Opt. F24=More Keys

12-62 **SR** MW KS IM II KENB20A PET166S2

## Fields:

### Operation



This field displays the sequence number of the operation to which you are adding a material.

### Sequence

This field displays the unique number applied to a material as it is added at an operation. Style increments this number in steps of 10. This field sometimes displays as the InSq field (input sequence) or Csq field (component sequence).

### Material

Enter a material set up under the Style/Material Details option.



*Note: If the Allow Duplicate Items On Operation flag under the Maintain Company Profile option is set to 1, you can include the same material against different sequence numbers at the same operation. Otherwise, specify each material once only on an operation.*

### Material Type

This field displays the Material Type set up for this material on the Additional Parameters window under the Style/Material Details option. The principle use of Material Types is to identify costs, since Style keeps each Material Type cost in a separate costing element.



*Note: On this window, the field displays for your information only.*

### Issuing Stockroom

Enter the stockroom that is to issue this material. You must have assigned the stockroom to the material already via the Stockroom Select screen of the Style/Material Details option.

If you leave the field blank, Style uses the default stockroom. The default stockroom is the Primary Stockroom for the material, entered via the Production Details screen of the Style/Material Details option.

All material requirements planning using this stockroom place a requirement on the stockroom for the material.

### Quantity Per Lot

Enter the standard quantity of material required at this operation to produce the parent standard lot size. If the parent style is made in lot sizes greater than 1, you should enter the quantity needed per lot. The quantity per should be expressed in terms of the issuing unit of measure of the issuing stockroom. The quantity per lot is used when calculating the cost of the style.

Style uses the Quantity Per Lot field according to how you have set the material's Material Usage Policy on the Additional Parameters window of the Style/Material Details option:

- If set to 0 (qty per based), Style uses Quantity Per Lot as a default for all material variants.
- If set to 1 (ratio based), Style uses Quantity Per Lot as the quantity per for the primary variant. To calculate quantities, Style uses the factors that you set up on the Enter Material Usage Factors window.

### Fixed Quantity Per

Indicates whether or not the quantity per varies per standard lot size.

0 or Blank - The quantity required varies in proportion to the quantity of the parent.

1 - Fixed. The quantity is fixed; the number entered in the Quantity Per field will always be the requirement quantity regardless of the standard lot size of the parent.



*Note: Setting to 1 (fixed) invalidates wastage.*

### Unit Of Measure

System maintained field; displays the UoM for the item in the issuing stockroom.

### Wastage %

If this material is subject to wastage, enter the percentage you expect to lose or waste at this operation. Style uses this figure to increase the quantity per required for the operation. This means that the percentage will be used to plan the correct amount of material to be available to achieve the target quantity. When costing, you can choose to include wastage as part of the standard cost roll up to establish the correct material usage.

The material wastage percentage will be applied after the operation quantity has been revised due to any operational wastage; defined at machine level.



*Note: If the Fixed Quantity Per flag is set to 1 (yes), Style ignores the percentage you enter here.*

### Operation Type use

The Operation Type is set up on the Additional Operation Values Window and has two settings:

8 - Complete short/over operation. Where there is a surplus or shortfall, a completed quantity on this operation adjusts subsequent planned production order quantities.

9 - Bundle up operation. This operation is a point at which WIP should be bundled up before proceeding to the next operation.

Codes are defined on the parameter file against type ATS1.

On this window, this field is for your information only.

### Change Reference

You may wish to enter a reference to group together materials that are amended, deleted, or added as a result of a change in the production process. The system will force entry in upper case characters.

### Effective From/To Date

Enter dates to cover the period for which this material is in use at this operation. If the material can be used on all dates, leave these fields set to 0/00/00 and 99/99/99.

### Material Usage Policy

This field displays, for information only, for those materials that have various characteristics. Set this field up on the Additional Parameters window under Style/Material Details.

### Key Material

This field displays initially when adding a lot-controlled material. The key material is the item on a route whose lot number is used to track work-in-progress and finished goods lots.

Define one effective key material per route only.



*Note: To qualify as a key material, the material must be lot controlled with a Material Control Policy of 3 (issue to floor stock). Set up the Material Control Policy under Production Details under the Style/Material Details option.*

### Functions:

#### F14

Relate Material to Style. Open the Relate Material to Style Characteristics window.



If the material has various characteristics, press **Enter** on the Material Maintenance window in Add mode to display the Relate Material To Style Characteristics window.



If the material has one dimension only, press **Enter** to return to the Style Route Maintenance Operations And Materials screen.

## Relate Material To Style Characteristics Window (F14)



To display this window, press **Enter** on the Material Maintenance window in Add mode.



To display this window, select **F14** on the Material Maintenance window in Update mode.

From this window, specify the style dimensions (for example colour, size) whose characteristics you wish to match with material characteristics. This window then opens the Associate window which displays the characteristics for the selected dimensions.

From the Associate window, open the Material Quantity Requirements window which allows you to vary the quantity of material used per variant for the dimensions you enter here.

The window divides into two:

- Material dimensions (left side). Use this side of the window to specify one material characteristic for all style variants of that characteristic. For example, to tell Style to use a black zip for all style variants, regardless of colour, enter the code for Black under Fixed Attribute(s).
- Style dimensions (right side). More commonly, use this side of the window to tell Style how to vary the material according to the style characteristics.

### Examples

Consider the situation where you are making shoes with coloured laces.

The tables below show possible ways of relating styles to material dimensions:

| Example 1 |       |        |      |
|-----------|-------|--------|------|
| Laces     |       | Style  |      |
| Dimension | Fixed | Colour | Size |
| Colour    |       | 1      |      |
| Length    |       |        | 1    |

Example 1 indicates that:

- Colour of laces depends upon shoe colour.
- Different shoe sizes require different lengths of shoe lace.

| Example 2 |       |        |      |
|-----------|-------|--------|------|
| Laces     |       | Style  |      |
| Dimension | Fixed | Colour | Size |
| Colour    |       | 1      |      |
| Length    | 24    |        |      |

Example 2 indicates that:

- Colour of laces depends on shoe colour.
- All shoe sizes require a 24 inch shoe lace.

| Example 3 |            |        |      |
|-----------|------------|--------|------|
| Laces     |            | Style  |      |
| Dimension | Fixed      | Colour | Size |
| Colour    | <b>BLK</b> |        |      |
| Length    |            |        | 1    |

Example 3 indicates that:

- All shoe colours use black (BLK) shoe laces.
- Different shoe sizes require different lengths of shoe lace.

| Example 4 |            |        |      |
|-----------|------------|--------|------|
| Laces     |            | Style  |      |
| Dimension | Fixed      | Colour | Size |
| Colour    | <b>BLK</b> |        |      |
| Length    | <b>28</b>  |        |      |

Example 4 indicates:

- All shoe colours use that black (BLK) shoe laces.
- All shoe sizes require a 28 inch shoe lace.

DS179 ST - Style Test & QA Company USER QASTYLE 16/12/97 12:30:13

Style Route Maintenance - Operations & Materials

Style: SKIRT01 Pleated Skirt Route: 1

0 0 Relate Material to Style Characteristics

|                                |                       |                                             |
|--------------------------------|-----------------------|---------------------------------------------|
| Material.. ZIP004<br>skirt zip | Fixed<br>Attribute(?) | Style Characteristics<br>COLOUR SIZE<br>1 1 |
| Chars.<br>COLOUR<br>SIZE       | —<br>—                | — 1                                         |

Enter Fixed Attribute on Associate with a Characteristic(1)

F4=Prompt F12=Previous

Change Reference .....  
Effective From Date ... 0/00/00  
Effective To Date .... 99/99/99  
Material Usage Policy..  
Key Material.....  
F4=Prompt F11=Delete F12=Cancel  
F14=Relate Material to Style

1=Maintain 2=Add Opn before 3=Add  
F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys

11-22 SA MW KS CL IM DM II STUD140 KB PED201S1

## Fields:

For each dimension (for example colour, size), select either Fixed Attribute or one of the dimensions listed under Style Characteristics.

### **Fixed Attribute**

Enter a code for the material characteristic (for example black) to be used for all style variants.

### **Style Characteristics**

Enter 1 against each style dimension (for example colour, size) whose characteristics you wish to match with material characteristics. This opens the Associate window.

For example, to specify different material colours for style variants, enter 1 under Colour.



Press **Enter** on this window to display the Associate window.

## Material Quantity Requirements Window (Option 6)

-  To display the Material Quantity Requirements window, press **Enter** on the Associate window.
-  To display the Material Quantity Requirements window, enter 6 in the Option field against a material on the Style Route Maintenance Operations and Materials screen.
-  To display the Material Quantity Requirements window, enter 6 in the Option field on the Style Route Maintenance Materials screen.

Use this window to vary the quantity of material you require to produce each style variant. For example, if the dimension is size, you may wish to specify more material for the Extra Large size. You would then enter an extra amount under Extra Large.

If the material is very expensive, you may want to adjust every quantity to make more effective use of the material.

This window is only relevant to fabric, trim and packaging items that have more than one dimension and are not ratio-based. To make a material non ratio-based, set Material Usage Policy on the Additional Parameters window to 0 under the Style/Material Details option. To display the Material Usage Policy, you can refer to the Material Maintenance window.

The characteristics that this window displays may depend on the dimensions you selected on the Qty Per Rules window. Otherwise, they are imposed by the CALL type parameter on Maintain Parameter File screen 2.

```

DS179                ZS - Style Demonstration Co.        USER GBJBAMS        29/02/96
                                                17:13:15

Style Route Maintenance - Operations & Materials
Style: ELF_BOOTS                Elfin Boots                Route: 6

Material Quantity Requirements                Page :    1:1
Material:LEATHER                Leather (Elfin)

6                10.000
6 1/2
7
7 1/2
8

F12=Previous  F19=Window Left  F20=Window Right

1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material
F3=Exit F7=Update F8=Lead Time F12=Prev F13=Pos. to F23=More Opt. F24=More Keys
09-18  S2  MW  KS  IM  II  KENB20A  PET166S2

```

**Fields:**

## **Untitled**

Quantity. Enter the relevant quantity per for each variant characteristic. Quantities usually vary by size. If this is a new material with more than one dimension, this field defaults to the default quantity you entered in the Qty Per Lot field on the Material Maintenance window.

## **Functions:**

### **F19**

Window Left. Scroll left on a multi window display.

### **F20**

Window Right. Scroll right on a multi window display.



## Position To Window (F13)



To display the Position To window, select **F13=Pos. To** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.
- Single Product Operations and Materials screen.

Use this window to position the display at a particular operation.

This facility can be useful if the route is extensive and you do not wish to page through several screens to identify a particular operation.

|                                                                                 |                              |      |             |              |                         |
|---------------------------------------------------------------------------------|------------------------------|------|-------------|--------------|-------------------------|
| DS179                                                                           | ZS - Style Demonstration Co. |      |             | USER GBJBAMS | 29/02/96                |
|                                                                                 |                              |      |             |              | 16:46:40                |
| Style Route Maintenance - Operations & Materials                                |                              |      |             |              |                         |
| Style: ELF_BOOTS                                                                |                              |      | Elfin Boots |              |                         |
|                                                                                 |                              |      | Route: 9    |              |                         |
| 0                                                                               | Opsq                         | Insq | Material    | Opcode       | ST Description          |
| -                                                                               | 10                           |      |             | LAYOUT       | Layout of material      |
| -                                                                               |                              | 10   | LEATHER     | RM           | Leather (Elfin)         |
| -                                                                               | 20                           |      |             | SEPAR        | Separate mater          |
| -                                                                               | 30                           |      |             | CUT          | Cutting leathe          |
| -                                                                               |                              | 10   | CUTTER      | RM           | Knife (Elfin)           |
| -                                                                               | 40                           |      |             | FORM         | Form material           |
| -                                                                               | 50                           |      |             | ASSEM        | Assemble boots          |
| -                                                                               |                              | 10   | LACES       | RM           | Laces (Elfins)          |
| -                                                                               |                              | 20   | SOLES       | RM           | Soles (Elfins)          |
| -                                                                               |                              | 30   | EYELETS     | RM           | Boot eyelets            |
| -                                                                               | 60                           |      |             | FINISH       | Finishing               |
| -                                                                               | 70                           |      |             | PACK         | Packing and despatching |
| -                                                                               |                              | 10   | BOX         | RM           | Boxes (Elfin)           |
|                                                                                 |                              |      |             | Quantity per | UM Wst%                 |
|                                                                                 |                              |      |             |              | .0                      |
|                                                                                 |                              |      |             | 2.000        | EA .0                   |
|                                                                                 |                              |      |             | 2.000        | EA .0                   |
|                                                                                 |                              |      |             | 8.000        | EA .0                   |
|                                                                                 |                              |      |             |              | .0                      |
|                                                                                 |                              |      |             |              | .0                      |
|                                                                                 |                              |      |             | 1.000        | EA .0                   |
| 1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material             |                              |      |             |              |                         |
| F3=Exit F7=Update F8=Lead Time F12=Prev F13=Pos. to F23=More Opt. F24=More Keys |                              |      |             |              |                         |
| 09-S7  MW KS IM II KENB20A PET166S2                                             |                              |      |             |              |                         |

### Fields:

#### Enter Operation Sequence No

Enter Operation Sequence Number. Enter the sequence number of the first operation you wish to display.



To display operations from your selected operation onwards, press **Enter** on the Position To window.

## Copy From Route Window (F16)

➡ When you first create a new route, select **F16=Copy Style Route** on the Style Route Maintenance Operations And Materials screen to display the Copy From Route window.

➡ To display the Copy From Route window, select **F16=Copy From Route** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Operations screen 2.

Use this window to select a style and route from which to copy one or more operations.

 **Warning: If you are copying operations from another style, the two styles may use different materials. Therefore, Style does not copy over any materials associated with the operations. To add materials, use the Material Maintenance window.**

| DS179                                            |      | ST - Style Test & QA Company |          | USER QASTYLE         |    | 18/11/97          |       |
|--------------------------------------------------|------|------------------------------|----------|----------------------|----|-------------------|-------|
|                                                  |      |                              |          |                      |    | 13:08:40          |       |
| Style Route Maintenance - Operations & Materials |      |                              |          |                      |    |                   |       |
| Style: SKIRT01                                   |      |                              |          | Route: A             |    |                   |       |
| Pleated Skirt                                    |      |                              |          | Quantity per UM Wst% |    |                   |       |
| 0                                                | Opsq | Insq                         | Material | Opcode               | ST | Description       |       |
| -                                                | 20   |                              |          | CUT                  |    | Cutting Operation | .0    |
| -                                                | 30   |                              |          | SEW1                 |    | Sewing Operation  | .0    |
| -                                                |      | 2                            | BUT002   |                      | RM | Black buttons     | EA .0 |
| -                                                |      | 3                            | ZIP004   |                      | RM | skirt zip         | EA .0 |
| -                                                |      | 5                            | LABEL001 |                      | RM | Skirt label       | EA .0 |
| -                                                | 40   |                              |          | SEW2                 |    | Sewing 2          | .0    |
| -                                                | 50   |                              |          | P&P                  |    | Finish            | .0    |

Copy From Route

Include at Operation Sequence Number.

Copy from Style .....?.  Route.?.

1=Main F4=Prompt F12=Previous F16=Item Search  
F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys

20-49 SA MW KS CL IM DM II STUD140 KB PED201S1

### Fields:

Include at Operation Sequence Number

Enter the sequence number at which point you wish Style to insert the operations you intend to copy over. This field is mandatory.

Any subsequent operations you wish to add are inserted between this existing operation and the next existing operation.

You must enter a new sequence number, either within the sequence or at the beginning or end.

### **Copy from Style**

Enter the style whose operations you wish to copy.

### **Route**

Enter the route from the style to be copied.

### **Functions:**

#### **F16**

Item Search.



Press **Enter** on the Copy From Route window to display the Copy Route screen.

## Copy Route Screen

 To display the Copy Route screen, press **Enter** from the Copy From Route window.

Use this screen to copy operations over from an existing route.

Select the operations you require in one of the following ways:

- Enter a range of operation sequences that you wish to copy over.
- Select operations individually by inserting a sequence number against each operation.

You can insert the selected operations at any point in the route you are building or maintaining.

 **Tip:** Remember to change the Reporting Level and Bundle Ticket fields. For the Reporting Level, it is best to start at the final operation and work back.

|                   |   |                              |        |                   |                          |
|-------------------|---|------------------------------|--------|-------------------|--------------------------|
| DS178             |   | ST - Style Test & QA Company |        | USER QASTYLE      | 3/03/98                  |
| Copy Route        |   |                              |        |                   | 14:41:54                 |
| Parent: 6210/DS51 |   | Route 1                      |        |                   |                          |
| Seq.              | R | OpSeq                        | OpCode | Description       | Labour Specification ID. |
| 1                 |   | 15                           | 15     | Cutting Machine 3 | 1.0000 DIANE06           |
| 1                 |   | 20                           | 20     | Sewing 1          | 2.0000                   |
| 1                 |   | 30                           | 30     | Sewing 2          | 5.0000                   |
| 1                 |   | 40                           | 40     | Finish            | 3.0000                   |
| 1                 |   | 50                           | 50     | Packing           | 3.0000                   |

Enter Operation to copy, from: \_\_\_\_ to \_\_\_\_ OR Position to: \_\_\_\_  
 Exclude material details (1=Yes, 0=No) 0

F3=Exit F12=Previous

5-2 SA MW KS CL IM DM II STUD140 KB PED201S1

### Fields:

#### Seq

Sequence. Use this field to specify the standard primary and variant operations to copy over to the sequence of operations you are currently maintaining.

To link together several standard operations for copying across to the same operation as a primary and several variants, enter the same sequence number against the standard operations.

You can enter multiple sequence number sets. Style copies over sets of operations in order, beginning with the lowest sequence number.

The first operation within a sequence number set copies over as the primary operation. Any other operations in the sequence number set copy over as variant

operations of this primary operation. To define a specific standard operation within the sequence number set as the primary operation, use the Primary Operation field.

If you style route operation entered in the Include At Operation Number field on the Select Operation Group window already exists, then all standard operations in the first sequence number set copy over as variants of this operation.

All subsequent sequence number sets of operations are inserted as new operations after the first sequence number set.

Alternatively, enter a range in the Enter Operation To Copy From field and leave this field blank.

## P

**Primary Operation.** To mark a standard operation or one of its variants as the primary operation within a sequence number set, enter 1. If the operation has variants, then the Variant Operation Selection Standard Operation window opens, from which you can choose to copy over a variant operation as the primary operation instead.

To copy over the first standard operation in each sequence number set as the primary operation, leave this field blank.

## Enter Operation to be Copied from/to

Enter a range of operations.



*Note: If you entered an operation number that already exists in the Include At Operation Number field on the Copy From Route window, you cannot enter a range here.*

## OR Position To

Use this field if the list of operations is very long. To scroll to a required operation in the list, enter the operation sequence number.

## Exclude Material Details

Enter one of the following:

0 - No. Copy over materials on the route.

1 - Yes. Do not copy over materials on the route.



To copy over your chosen standard operations, press **Enter**. If any of these operations contains variant operations, the Variant Operation Selection Standard Operation window displays.

# Select Operation Group Window (F17)



To display this window, select **F17=Copy From Standard Operations** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Operations screen 2.

This window lists the Standard Operation Groups that you have set up. Use this window to select an operation group from which you can copy over one or more operations to the route.

You can copy over standard operations as variants of an existing operation. Or you can insert new primary operations, with variant operations also if you wish, into the route's operation sequence.

To arrange to display a list of operation groups with matching Specification IDs, you can enter part of a Specification ID and a wildcard. You can narrow down your selection further by selecting a Specification ID with wildcard and an operation group.



**Warning: If, subsequently, you change any of the standard operations you copy across to a route, Style does not copy the updates to this route.**

DS179ST - Style Test & QA CompanyUSER QASTYLE26/02/9816:19:24

Style Route Maintenance - Operations & Materials

Style: 6210/DS51Silk skirtRoute: 1

| 0 | Opsq | Insq | Material | Op  |
|---|------|------|----------|-----|
| - | 15   |      |          | 15  |
| - | 20   |      |          | 20  |
| - |      | 10   | 6210/DS1 |     |
| - |      | 20   | 6210/DS5 |     |
| - | 30   |      |          | 30  |
| - |      | 10   | 6210/DS3 |     |
| - | 40   |      |          | 40  |
| - | 50   |      |          | 50  |
| - |      | 10   | 6210/DS4 |     |
| - |      | 20   | 6210/DS6 | TRA |

Select Operation group

- Aaaaaaaaaaaaaaaaaa

- Bbbbbbbbbbbbbbbbbb

- C Cut

- D dddddddddddddddd

- E STUARTS GROUP D

- F STUARTS NEW GAP

- N 6210/wast+effda

- O Standard Ops

- P 6210/no var ops

- Q 6210/cut ops 3

- R new op group

1 = SelectPosition to:

OR Specification ID:  (generic\*)

Include at Operation Number:

F12=Previous

1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material  
F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys

19-63SA MW KS CL IM DM II STUD140 KB PKH312S1

## Fields:

### Position To

If the list is very long, position the display to begin at a specified operation group.

---

### Specification ID

Select a standard operation group by entering a specification ID. Displays the Copy Operation Group screen.

Alternatively, include \* as a wildcard to display a list of matching operations. For example, to list all standard operations with specification IDs prefixed by BUNDLE, enter **BUNDLE\***. Displays the Copy From Selected Std. Operations screen.

### Include At Operation Number

Enter the sequence number at which point you wish Style to insert the operations you intend to copy over. This field is mandatory.

You can enter an existing operation sequence number, in which case Style inserts the first standard operation as a variant of the existing operation. Any subsequent operations you wish to add are inserted between this existing operation and the next existing operation.

Otherwise, you can enter a new sequence number, either within the sequence or at the beginning or end. In this case, Style adds the standard operations as primary operations at the point indicated by the sequence number.



*Note: If you enter an existing operation sequence number, you cannot select operations by entering a range from the Copy Operations Group window.*

### Untitled

Select. To display a list of the standard operations in an operation group, enter 1 against an operation group. Displays the Copy Operation Group screen.



To display the Copy Operation Group screen, type in a full Specification ID and press **Enter**.



To display the Copy Operation Group screen, select an operation group and press **Enter**.



To display the Copy From Selected Std. Operations screen, enter part of a Specification ID with a wildcard and press **Enter**.

## Copy Operation Group Screen

 To display this screen, select one standard operation group on the Select Operation Group window and press **Enter**.

 To display this screen, enter a full Specification ID on the Select Operation Group window and press **Enter**.

This screen lists primary operations for the selected operation group or Specification IDs.

Use the screen to select one or more standard operations to copy into the route. If any of the selected operations has variant operations, then these get copied across also.

Both standard primary and variant operations can become either primary or variant operations on the style route.

The way in which the first standard operation gets copied across depends upon what you enter in the Include At Operation Number field on the Select Operation Group window.



*Note: When copying in standard operations, Style executes any programs that you have defined under the USER parameter. For more details, refer to the Maintain Parameter File option.*

|                      |   |                              |      |                          |                   |
|----------------------|---|------------------------------|------|--------------------------|-------------------|
| DS178                |   | ST - Style Test & QA Company |      | USER QASTYLE             | 3/03/98           |
| Copy Operation Group |   |                              |      |                          | 14:18:41          |
| Group: U             |   | 6210/skirtops3               |      |                          |                   |
| Seq.                 | P | G                            | OpSq | OpCode                   | Description       |
| 1                    | - | U                            | 10   | 10                       | Cutting Machine 3 |
| 2                    | - | U                            | 20   | 20                       | Sewing 2          |
| 3                    | - | U                            | 30   | 30                       | finish            |
| 3                    | E | U                            | 40   | 50                       | Packing           |
|                      |   |                              |      | Labour Specification ID. |                   |
|                      |   |                              |      | 1.0000                   | DIANE64           |
|                      |   |                              |      | 5.0000                   | DIANE68           |
|                      |   |                              |      | 10.0000                  | DIANE105          |
|                      |   |                              |      | 3.0000                   | DIANE110          |

Enter Operation to copy, from:  to  OR Position to:

F3=Exit      F12=Previous

21-43    **SR**    MW    KS   CL   IM   DM   II    STUD140   KB   PED201S1

### Fields:

#### Seq

Sequence. Use this field to specify the standard primary and variant operations to copy over to the sequence of operations you are currently maintaining.



To link together several standard operations for copying across to the same operation as a primary and several variants, enter the same sequence number against the standard operations.

You can enter multiple sequence number sets. Style copies over sets of operations in order, beginning with the lowest sequence number.

The first operation within a sequence number set copies over as the primary operation. Any other operations in the sequence number set copy over as variant operations of this primary operation. To define a specific standard operation within the sequence number set as the primary operation, use the Primary Operation field.

If you style route operation entered in the Include At Operation Number field on the Select Operation Group window already exists, then all standard operations in the first sequence number set copy over as variants of this operation.

All subsequent sequence number sets of operations are inserted as new operations after the first sequence number set.

Alternatively, enter a range in the Enter Operation To Copy From field and leave this field blank.

## P

**Primary Operation.** To mark a standard operation or one of its variants as the primary operation within a sequence number set, enter 1. If the operation has variants, then the Variant Operation Selection Standard Operation window opens, from which you can choose to copy over a variant operation as the primary operation instead.

To copy over the first standard operation in each sequence number set as the primary operation, leave this field blank.

## Enter Operation To Copy From

Enter a range of operations.



*Note: If you entered an operation number that already exists in the Include At Operation Number field on the Select Operations Group window, you cannot enter a range here.*



To copy over your chosen standard operations, press **Enter**. If any of these operations contains variant operations, the Variant Operation Selection Standard Operation window displays. Otherwise, you return to the Style Route Maintenance Operations And Materials screen.

## Variant Operation Selection Standard Operation Window

-  To display this window, select a standard primary operation that has variant operations from the Copy Operation Group screen and press **Enter**.
-  To display this window, select a style route primary operation that has variant operations from the Copy Route screen and press **Enter**.

This window opens when you select a primary operation with variant operations to copy to the standard operation group or route that you are currently updating.

Use the window to nominate one standard operation on the list as the primary operation. You can select the primary operation or one of the variant operations as the primary operation to copy over. The other operations on the list copy over as variant operations.

You can also de-select an operation so that it does not copy over.

|                      |   |                              |       |              |                   |
|----------------------|---|------------------------------|-------|--------------|-------------------|
| DS178                |   | ST - Style Test & QA Company |       | USER QASTYLE | 3/03/98           |
| Copy Operation Group |   |                              |       |              | 14:18:41          |
| Group: U             |   | 6210/skintops3               |       |              |                   |
| Seq.                 | P | G                            | OpSeq | OpCode       | Description       |
| 1                    | - | U                            | 10    | 10           | Cutting Machine 3 |
| 2                    | - | U                            | 20    | 20           | Sewing 2          |
| -                    | - | U                            | 30    | 30           | finish            |
| -                    | - | U                            | 40    | 50           | Packing           |

|                                                  |         |                   |                   |                  |         |
|--------------------------------------------------|---------|-------------------|-------------------|------------------|---------|
| Variant Operation Selection - Standard Operation |         |                   |                   |                  |         |
| Group: U                                         |         | 6210/skintops3    |                   |                  |         |
| Seq: 10                                          |         | Cutting Machine 3 |                   |                  |         |
| S                                                | Var     | Seq               | Description       | Specification ID | Labour  |
| 1                                                | Primary |                   | Cutting Machine 3 | DIANE64          | 1.0000  |
| 2                                                | 0010    |                   | Cutting machine 1 | DIANE59          | 1.2000  |
| 2                                                | 0020    |                   | Cutting Machine 2 | DIANE67          | 4.0000  |
| 2                                                | 0030    |                   | Cutting Machine 4 | DIANE67          | 10.0000 |

|         |         |
|---------|---------|
| Machine |         |
| 1.0000  | 15.0000 |

1=Select as Primary    2=Select as Variant

F3=Exit    F12=Previous

13-5    SA    MW    KS    CL    IM    DM    II    STUD140    KB    PED201S1

### Fields:

#### S

Select. Enter one of the following:

0 or blank. Do not copy over this operation.

1 - Select as Primary. Copy over the operation as the primary operation. You can enter 1 against one operation only.

2 - Select as Variant. Copy over the operation as a variant of the primary operation.

#### Var. Seq.

Variant Sequence. This field displays one of the following values for your information only:

Primary - indicates that the operation is a primary operation on the route or in the standard operations group from which you are copying.

Variant sequence number - indicates that the operation is a variant operation on the route or in the standard operations group from which you are copying.



If there are more primary operations containing variant operations to copy over, press **Enter** to display the next Variant Operation Selection Standard Operation window.

## Copy From Selected Std. Operations Screen



To display this screen, enter part of a Specification ID and a wildcard from the Select Operation Group window and press **Enter**.

This screen lists the standard operations that match what you entered in the Specification ID field on the Select Operation Group window.

Use this screen to select one or more of these operations to copy into the current style route. If any of the selected operations has variant operations, then these get copied across also.

Both standard primary and variant operations can become either primary or variant operations on the style route.

The way in which the first standard operation gets copied across depends upon what you enter in the Include At Operation Number field on the Select Operation Group window.



*Note: When copying in standard operations, Style executes any programs that you have defined under the USER parameter. For more details, refer to the Maintain Parameter File option.*

| DS178                             |   | ST - Style Test & QA Company |      | USER QASTYLE | 4/03/98           |                          |
|-----------------------------------|---|------------------------------|------|--------------|-------------------|--------------------------|
| Copy from selected Std.Operations |   |                              |      |              | 15:38:00          |                          |
| Specification ID: DIANE*          |   |                              |      |              |                   |                          |
| Seq.                              | P | G                            | OpSq | OpCode       | Description       | Labour Specification ID. |
| 1                                 | - | X                            | 10   | 10           | Cutting machine 1 | 4.0000 DIANE04           |
| 2                                 | - | X                            | 20   | 20           | Cutting Machine 2 | 2.0000 DIANE05           |
| 3                                 | - | X                            | 30   | 30           | Cutting Machine 3 | 1.0000 DIANE06           |
| 4                                 | - | X                            | 40   | 40           | Cutting Machine 4 | 10.0000 DIANE07          |
| 5                                 | - | U                            | 30   | 30           | finish            | 10.0000 DIANE105         |
| 6                                 | - | U                            | 40   | 50           | Packing           | 3.0000 DIANE110          |
| 7                                 | - | Z                            | 5    | 5            | Layout            | 5.0000 DIANE15           |
| 8                                 | - | Z                            | 10   | 10           | Cutting           | 1.0000 DIANE16           |
| 9                                 | - | Z                            | 20   | 20           | Sewing 1          | 2.0000 DIANE17           |
| 10                                | - | Z                            | 30   | 30           | Sewing 2          | 5.0000 DIANE18           |
| 11                                | - | Z                            | 40   | 40           | Finish            | 2.5000 DIANE19           |
| 12                                | - | Z                            | 50   | 50           | Packing           | 3.0000 DIANE20           |
| 13                                | - | X                            | 60   | 60           | Cutting Room      | 4.0000 DIANE21           |
| 14                                | - | T                            | 10   | 10           | cut               | 4.0000 DIANE51           |
| 15                                | - | T                            | 20   | 20           | sew               | .9000 DIANE52            |

F3=Exit F12=Previous

5-2 SA MW KS CL IM DM II STUD140 KB PED201S1

### Fields:

#### Seq

Sequence. Use this field to specify the standard primary and variant operations to copy over to the sequence of operations you are currently maintaining.

To link together several standard operations for copying across to the same operation as a primary and several variants, enter the same sequence number against the standard operations.

You can enter multiple sequence number sets. Style copies over sets of operations in order, beginning with the lowest sequence number.

The first operation within a sequence number set copies over as the primary operation. Any other operations in the sequence number set copy over as variant operations of this primary operation. To define a specific standard operation within the sequence number set as the primary operation, use the Primary Operation field.

If you style route operation entered in the Include At Operation Number field on the Select Operation Group window already exists, then all standard operations in the first sequence number set copy over as variants of this operation.

All subsequent sequence number sets of operations are inserted as new operations after the first sequence number set.

Alternatively, enter a range in the Enter Operation To Copy From field and leave this field blank.

#### **P**

**Primary Operation.** To mark a standard operation or one of its variants as the primary operation within a sequence number set, enter 1. If the operation has variants, then the Variant Operation Selection Standard Operation window opens, from which you can choose to copy over a variant operation as the primary operation instead.

To copy over the first standard operation in each sequence number set as the primary operation, leave this field blank.



To copy over your chosen standard operations, press **Enter**. If any of these operations contains variant operations, the Variant Operation Selection Standard Operation window displays. Otherwise, you return to the Style Route Maintenance Operations And Materials screen.



5 - Associate Style/Material. Opens the Associate window, from which you can associate individual style variants with the material characteristics.

6 - Material Quantity Requirements. Opens the Material Quantity Requirements window.

7 - Add Material. Add a material to the selected operation. Opens the Material Maintenance window in Add mode.



Tip: You can maintain and/or delete multiple detail lines by selecting more than one item.

### **Functions:**

For a description of the function keys, refer to the Style Route Maintenance Operations And Materials screen.



Enter 1 in the Option field on the Style Route Maintenance Materials screen to display the Material Maintenance window in Update mode.



Enter 7 in the Option field on the Style Route Maintenance Materials screen to display the Material Maintenance window in Add mode.

## Style Route Maintenance Operations Screen 2 (F20)



To display Style Route Maintenance Operations screen 2, select **F20** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Single Product Operations And Materials screen.

This screen lists primary operations and shows run labour time, machine and operation wastage %.

The screen is very similar to three others:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Single Product Operations And Materials screen.

These four screens are base screens, from which you can access many route maintenance functions. You can use function keys to switch between the three base screens.



*Note: To maintain variant operations, use Style Route Maintenance Operations screen 1.*

|                                                                   |                              |              |                                    |
|-------------------------------------------------------------------|------------------------------|--------------|------------------------------------|
| DS153                                                             | ST - Style Test & QA Company | USER QASTYLE | 5/03/98<br>10:03:47                |
| Style Route Maintenance - Operations                              |                              |              |                                    |
| Style: 6210/DS51                                                  |                              |              |                                    |
| 0                                                                 | R                            | Opseq        | OpCode Description                 |
| 8                                                                 | 10                           | 10           | Cutting machine 1                  |
| 8                                                                 | 15                           | 20           | cut 2                              |
| 8                                                                 | 20                           | 20           | Cut 2 Primary No Variants          |
|                                                                   |                              | Labour       | Route: 8<br>Specification ID.      |
|                                                                   |                              | 1.2000       | DIANE04                            |
|                                                                   |                              | .0000        | DIANE71                            |
|                                                                   |                              | .0000        | DIANE71                            |
| 1=Maintain 2=Add Oper before 3=Add Oper after 4=Delete            |                              |              |                                    |
| F3=Exit F8=Update F12=Prev F13=Pos.to F23=More Opt. F24=More Keys |                              |              |                                    |
| 6-2                                                               | SR                           | MW           | KS CL IM DM II STUD140 KB PED201S1 |

### Fields:

O

Option. Enter one of the following:



1 - Maintain.

2 - Add Oper before. Add a new operation before the current operation. Displays the Style Route Maintenance Operations screen 1 in Add mode.

3 - Add Oper after. Add an operation following the current operation. Opens Style Route Maintenance Operations screen 1 in Add mode.

4 - Delete. Delete an operation. Style displays the operation details along with a deletion confirmation window.

**Functions:**

For a description of the function keys, refer to the Style Route Maintenance Operations And Materials screen.

## Item Selection Window (F22)



To display the Item Selection window, select **F22=Selective View of Route** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.

This window allows you to request a selective view of the route for a specific style variant (for example, a particular colour and size).

|                                                                            |                              |                     |                |
|----------------------------------------------------------------------------|------------------------------|---------------------|----------------|
| DS179                                                                      | ST - Style Test & QA Company | USER QASTYLE        | 28/11/97       |
|                                                                            |                              |                     | 14:41:18       |
| Style Route Maintenance - Operations & Materials                           |                              |                     |                |
| Style: SKIRT01                                                             |                              | Pleated Skirt       |                |
| 0 Opsq Insq Material Opcode ST Description                                 |                              | Route: 1            |                |
|                                                                            |                              | Quantity per UM Wst |                |
| Item Selection Page Ref: 1:1                                               |                              |                     |                |
| COLOUR                                                                     | SIZE                         |                     | More           |
|                                                                            | Siz08                        | Siz10               | Siz12          |
|                                                                            | Siz14                        | Siz16               |                |
| Magenta                                                                    | -                            | -                   | -              |
| Pink                                                                       | -                            | -                   | -              |
| Emerald                                                                    | -                            | -                   | -              |
| Black                                                                      | -                            | -                   | -              |
| F12=Previous F19=Window Left F20=Window Right                              |                              |                     |                |
| 1=Maintain 2=Add Opn before 3=Add opn after 4=Delete 7=Add Material        |                              |                     |                |
| F3=Exit F7=Update F8=Update&Lead Time F12=Prev F23=More Opt. F24=More Keys |                              |                     |                |
| 9-16                                                                       | SR                           | MW                  | KS CL IM DM II |
|                                                                            |                              | STUD140             | KB PED201S1    |

## Single Product Operations And Materials Screen (F22)



To display the Single Product Operations And Materials screen, select **F22=Selective View of Route** from the following screens:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.

This screen provides a selective view of the route for one specific style variant.

Where you have defined materials, this screen shows the material variant and actual quantity required for the selected style variant. Operations can also be omitted if they are not required for the selected style variant.

The screen is very similar to three others:

- Style Route Maintenance Operations And Materials screen.
- Style Route Maintenance Materials screen.
- Style Route Maintenance Operations screen 2.

These four screens are base screens, from which you can access many route maintenance functions. You can use function keys to switch between the three base screens.

|                                                                                 |      |                              |          |        |              |                         |          |             |
|---------------------------------------------------------------------------------|------|------------------------------|----------|--------|--------------|-------------------------|----------|-------------|
| DS171                                                                           |      | ZS - Style Demonstration Co. |          |        | USER GBJBAMS |                         | 29/02/96 |             |
|                                                                                 |      |                              |          |        |              |                         | 16:45:49 |             |
| Single Product Operations & Materials                                           |      |                              |          |        |              |                         |          |             |
| Style: ELF_BOOTS                                                                |      | Elfin Boots                  |          | Beige  |              | 6                       |          | Route: 9    |
| 0                                                                               | Opsq | Insq                         | Material | Opcode | ST           | Description             | Quantity | Per UM Wst% |
| █                                                                               | 10   |                              |          | LAYOUT |              | Layout of material      |          | .0          |
| -                                                                               |      | 1005                         | LEATHER  | BEI    | RM           | Leather (Elfins) Beige  | 10.000   | MT .0       |
| -                                                                               | 20   |                              |          | SEPAR  |              | Separate materials      |          | .0          |
| -                                                                               | 40   |                              |          | FORM   |              | Form material           |          | .0          |
| -                                                                               | 50   |                              |          | ASSEM  |              | Assemble boots          |          | .0          |
| -                                                                               |      | 20                           | SOLES    |        | RM           | Soles (Elfins)          | 2.000    | EA .0       |
| -                                                                               |      | 30                           | EYELETS  |        | RM           | Boot eyelets            | 8.000    | EA .0       |
| -                                                                               |      | 1005                         | LACES    | BEI    | RM           | Laces (Elfins) Beige    | 8.000    | EA .0       |
| -                                                                               | 60   |                              |          | FINISH |              | Finishing               |          | .0          |
| -                                                                               | 70   |                              |          | PACK   |              | Packing and despatching |          | .0          |
| -                                                                               |      | 10                           | BOX      |        | RM           | Boxes (Elfin)           | 1.000    | EA .0       |
| 1=Select                                                                        |      |                              |          |        |              |                         |          |             |
| F3=Exit F7=Update F8=Lead Time F12=Prev F13=Pos. to F23=More Opt. F24=More Keys |      |                              |          |        |              |                         |          |             |
| 06-02                                                                           |      | SF                           |          | MW     |              | KS                      |          | IM          |
|                                                                                 |      |                              |          |        |              | II                      |          | KENB20A     |
|                                                                                 |      |                              |          |        |              |                         |          | PET166S2    |

### Fields:

O

Option. Enter the following:

1 - Select. Opens the Style Route Enquiry Operations screen.

## Functions:

### F13

Position To Operation. Enter an operation sequence number at which to start the display. Opens the Position To window.

### F14

Material Usage Factors. Opens the Enter Material Usage Factors window from which you can specify how quantities of material are distributed among style variants.



*Note: After invoking the Enter Material Usage Factors window, Style returns you to the Style/Route Maintenance Operations And Materials screen.*

### F15

Variant Spread. Opens the Variant Spread window from which you can specify how you wish Style to distribute quantities for each of the style's variants when creating a production order.

### F19

Materials only List. Displays the Style Route Maintenance Materials screen.

### F20

Operations only List. Displays Style Route Maintenance Operations screen 2.

### F21

Operations and Materials List. Displays the Style Route Maintenance Operations And Materials screen.

### F22

Selective View of Route. Opens the Item Selection window, from which you can request a selective view of the route for one specific style variant.

### F23

Style Route Options. Opens an Available Options window that lists all the options available in the Options field.

### F24

Style Route F-Keys. Opens an Available Function Keys window that lists all available functions. You can use function keys from this window.

## Style Route Enquiry Operations Screen (Option 1)



Enter 1 in the Option field on the Single Product Operations And Materials screen to display the Style Route Enquiry Operations screen.

Use this screen to enquire on a single style variant.

|                                                           |  |                              |  |                     |  |                  |  |
|-----------------------------------------------------------|--|------------------------------|--|---------------------|--|------------------|--|
| DS654                                                     |  | ST - Style Test & QA Company |  | USER QASTYLE        |  | 4/03/98          |  |
|                                                           |  |                              |  |                     |  | 12:57:57         |  |
| Style Route Enquiry - Operations                          |  |                              |  |                     |  |                  |  |
| Style.....                                                |  | 6210/DS51                    |  | Route.....          |  | 1                |  |
| Operation Sequence....                                    |  | 15                           |  | Std Lot Size.....   |  | 1.000            |  |
| Operations Code.....                                      |  | 15                           |  | Machine Quantity... |  | 1                |  |
| Operation Description.                                    |  | Cutting Machine 3            |  |                     |  |                  |  |
| Machine.....                                              |  | 61CT3 6150 Cutting M/C 3     |  |                     |  |                  |  |
| Work Centre.....                                          |  |                              |  |                     |  |                  |  |
| Bundle Ticket Type....                                    |  |                              |  |                     |  |                  |  |
| Reporting Type.....                                       |  | 1 Count Point Type B         |  |                     |  |                  |  |
| Reporting Level.....                                      |  | 3 Style/Colour/Size          |  |                     |  |                  |  |
| Key Operation.....                                        |  |                              |  |                     |  |                  |  |
| DURATION Labour : Time                                    |  | 1.0000                       |  | Mins                |  | Formula Code.... |  |
| Machine: Time                                             |  | 1.0000                       |  | Mins                |  | Formula Code.... |  |
| Team Size....                                             |  | 2.00                         |  |                     |  | Lab Profile....  |  |
| Move Days.....                                            |  | .20000                       |  |                     |  |                  |  |
| Wastage %.....                                            |  | 1.0                          |  |                     |  |                  |  |
| Specification id .....                                    |  | DIANE06                      |  |                     |  |                  |  |
| F12=Previous F21=Operation Text F22=Additional Parameters |  |                              |  |                     |  |                  |  |
| F23=Variant Operations F24=Characteristics                |  |                              |  |                     |  |                  |  |
| 1-1 SA MW KS CL IM DM II STUD140 KB PED201S1              |  |                              |  |                     |  |                  |  |

### Functions:

#### F21

Operation Text. Displays the Text Maintenance screen, from which you can add or maintain information about the operation.

#### F22

Additional Parameters. Displays the Additional Operation Values window in enquiry mode.

#### F23

Variant Operations. Opens the Variant Operation Enquiry window, from which you can select a variant operation for display in enquiry mode only.

#### F24

Characteristics. Opens the Operation Characteristics Values window

## Variant Operation Enquiry Window (F23)



Select **F23=Variant Operations** on the Style Route Enquiry Operations screen to display the Variant Operation Enquiry window.

Use this window to select the variant operation on which you wish to make an enquiry.

|                                                           |           |                              |                     |              |         |
|-----------------------------------------------------------|-----------|------------------------------|---------------------|--------------|---------|
| DS654                                                     |           | ST - Style Test & QA Company |                     | USER QASTYLE | 5/03/98 |
| 10:06:30                                                  |           |                              |                     |              |         |
| Style Route Enquiry - Operations                          |           |                              |                     |              |         |
| Style.....                                                | 6210/DS51 |                              | Route.....          | 8            |         |
| Operation Sequence....                                    | 20        |                              | Std Lot Size.....   |              | 1.000   |
| Operations Code.....                                      | 20        |                              | Machine Quantity... | 1            |         |
| Operation Description.                                    | Cut 2 Pr  |                              |                     |              |         |
| Machine.....                                              | 61CT1 61  | Variant Operation Enquiry    |                     |              |         |
| Work Centre.....                                          |           | S Var Seq. Colour Size       |                     |              |         |
| Bundle Ticket Type....                                    |           | PRIMARY *ALL *ALL            |                     |              |         |
| Reporting Type.....                                       | 0 Count   | - 0010                       |                     |              |         |
| Reporting Level.....                                      | 3 Style/  | - 0020                       |                     |              |         |
| Key Operation.....                                        |           | - 0030                       |                     |              |         |
| <u>DURATION</u> Labour : Time                             |           | - 0040                       |                     |              |         |
| Machine: Time                                             |           |                              |                     |              |         |
| Team Size....                                             | 1.00      | 1=Select 2=Values            |                     |              |         |
| Move Days.....                                            | .000      | F12=Previous                 |                     |              |         |
| Wastage %.....                                            | .0        |                              |                     |              |         |
| Specification id ....                                     | DIANE71   |                              |                     |              |         |
| F12=Previous F21=Operation Text F22=Additional Parameters |           |                              |                     |              |         |
| F23=Variant Operations F24=Characteristics                |           |                              |                     |              |         |
| 13-36 SA MW KS CL IM DM II STUD140 KB PED201S1            |           |                              |                     |              |         |

### Fields:

#### S

Select. Enter one of the following:

- 1 - Select. Displays the Variant Operation Enquiry screen.
- 2 - Values. Opens the Operation Characteristics Values window

## Variant Operation Enquiry Screen (Option 1)



Enter 1 in the Select field on the Variant Operation Enquiry window to display the Variant Operation Enquiry screen.

This screen displays the information you entered about this variant operation on the Variant Operation Maintenance screen.

|                                                            |                            |                              |       |                  |    |                     |             |
|------------------------------------------------------------|----------------------------|------------------------------|-------|------------------|----|---------------------|-------------|
| DS665                                                      |                            | ST - Style Test & QA Company |       | USER QASTYLE     |    | 5/03/98<br>10:07:29 |             |
| Variant Operation - Enquiry                                |                            |                              |       |                  |    |                     |             |
| Style.....                                                 | 6210/DS51                  | Route.....                   | 8     |                  |    |                     |             |
| Operation Sequence....                                     | 20                         | Std Lot Size.....            | 1.000 |                  |    |                     |             |
| Variant Sequence.....                                      | 10                         |                              |       |                  |    |                     |             |
| Operations Code.....                                       | 20                         | Machine Quantity...          | 1     |                  |    |                     |             |
| Operation Description..                                    | Cut 1 Primary Variants - 2 |                              |       |                  |    |                     |             |
| Machine.....                                               | 61CT2 6150 Cutting M/C 2   |                              |       |                  |    |                     |             |
| Work Centre.....                                           |                            |                              |       |                  |    |                     |             |
| Bundle Ticket Type....                                     |                            |                              |       |                  |    |                     |             |
| Reporting Type.....                                        | 0 Count Point Type A       |                              |       |                  |    |                     |             |
| Reporting Level.....                                       | 3 Style/Colour/Size        |                              |       |                  |    |                     |             |
| Key operation.....                                         |                            |                              |       |                  |    |                     |             |
| <b>DURATION</b> Labour Time..                              | 2.0000                     | Mins/lot                     |       | Formula Code.... |    |                     |             |
| Machine Time..                                             | 1.0000                     | Mins/lot                     |       | Formula Code.... |    |                     |             |
| Labour Team Size.....                                      | 1.00                       |                              |       | Labour Profile.. |    |                     |             |
| Move Days.....                                             | .00000                     |                              |       |                  |    |                     |             |
| Wastage %.....                                             | .0                         |                              |       |                  |    |                     |             |
| Specification ID.....                                      | DIANE73                    |                              |       |                  |    |                     |             |
| F12=Previous F22=Additional Parameters F24=Characteristics |                            |                              |       |                  |    |                     |             |
| 1-1                                                        | SA                         | MW                           | KS    | CL               | IM | DM                  | II          |
|                                                            |                            |                              |       |                  |    | STUD140             | KB PED201S1 |

### Functions:

#### F22

Additional Parameters.

#### F24

Characteristics.

# Material Mass Replace



**3/P1R**

Use this option to maintain bills of materials to reflect changes in design or material specification on a mass update basis. You can:

- Replace materials using effective changeover dates.
- Make materials non-effective.
- Change the quantity per relationship of materials and styles.
- Generally manage BOM material specifications.

The option operates in two modes:

- Review and selection.
- Automatic update.

The option gives you visibility of all occurrences of specified materials in bills of materials, subject to the effectivity selection parameters you supply, and provides an audit report detailing all changes made for traceability.



***Warning: Only common materials can be selected in this process.***



## Mass Replace Materials Screen



To display this screen, select Material Mass Replace from the menu.

|                                                                 |                              |      |         |                        |
|-----------------------------------------------------------------|------------------------------|------|---------|------------------------|
| DB100                                                           | ZS - Style Demonstration Co. | USER | GBJBAMS | 29/02/96               |
| Mass Replace - Materials                                        |                              |      |         | 17:21:10               |
| Material to be Replaced.?..: _____                              |                              |      |         |                        |
| Replacement Material....?..: _____ (blank=immediate qty change) |                              |      |         |                        |
| (item=effectivity change)                                       |                              |      |         |                        |
| (1=replaced Material's values)                                  |                              |      |         |                        |
| Wastage.....: - (blank=set to zero)                             |                              |      |         |                        |
| Issuing stockroom.....: - (?) (blank=new item's primary store)  |                              |      |         |                        |
| (1=from original Material)                                      |                              |      |         |                        |
| (2=entered stockroom)                                           |                              |      |         |                        |
| Fixed quantity per.....: - (blank=from original Material)       |                              |      |         |                        |
| (1=fixed quantity per)                                          |                              |      |         |                        |
| (2=variable quantity per)                                       |                              |      |         |                        |
| Effective Date.....: _____ (blank=today)                        |                              |      |         |                        |
| Replacement expiry date..: _____ (blank=open)                   |                              |      |         |                        |
| Change Reference.....: _____                                    |                              |      |         |                        |
| Quantity per Change Factor _____ 1.000 (1.000=No change)        |                              |      |         |                        |
| F3=Exit F4=Prompt F8=Automatic Update                           |                              |      |         |                        |
| 05-33                                                           | SP                           | MW   | KS      | IM II KENB20A PET166S2 |

### Fields:

#### Material To Be Replaced

Enter the material you wish to replace or update.

#### Replacement Material

Enter the replacement material or enter the replaced material to update. For existing materials, you can change the quantity per relationship or issuing stockroom as at an effective date.

#### Wastage

When replacing a material you can retain the material wastage percentage defined, or set it to zero for the new material.

Blank - Set wastage to zero.

1 - Retain existing wastage.

#### Issuing Stockroom

You can determine which issuing stockroom is to be used for the replacement material.

0 or Blank - Use replacement material primary stockroom.

1 - Retain existing issuing stockroom.

2 - Enter new issuing stockroom for replacement material. The system will check that the requested issuing stockroom is valid for the new material.

#### Stockroom

Enter a stockroom if you have selected 2 in the previous field. This must be valid for the material.

### **Fixed Quantity Per**

This enables you to change how the quantity per for the replacement material will be handled by the application.

Blank - The quantity per for the replacement material should be treated in the same way as for the material to be replaced, that is, variable with standard lot size or fixed regardless of lot size.

1 - Quantity per should be changed to a fixed basis.

2 - Quantity per should be changed to a variable basis.

### **Effective Date**

This date will determine the changeover point of the update. When replacing materials, this date will become the effective stop date of the replaced material and the effective start date of its replacement. For quantity per changes, it will set the stop date of the former quantity per definition and the start date of the new one. The default is the current date which creates an immediate update on the route.

Blank - Current system date.

### **Replacement Expiry Date**

This date determines the stop date of the replacement material's effectivity or the quantity per adjustment.

Blank - The date is left open for unlimited future effectivity.

### **Change Reference**

Enter a reference to flag the replacement or update on all bills of materials specifications where it is applied.

### **Quantity Per Change Factor**

Enter a factor to control the quantity per change that you wish to apply. For example, if you require the quantity per relationship to double enter 2.00. If you wish to halve it, enter 0.50 and so on.

## **Functions:**

### **F8**

Automatic Update. Update style routes automatically without displaying the Material Mass Replace Review Replacement screen.



***Warning: F8=Automatic Update goes straight into an update without displaying an item confirmation screen.***



To display the Material Mass Replace Review Replacement screen, from which you can indicate which style route operations you wish to update with the material details, press **Enter**.

# Material Mass Replace Review Replacement Screen



To display this screen, press **Enter** on the Mass Replace Materials screen.

This screen shows all identified occurrences of the requested material subject to the effectivity parameters supplied. It details each style, route and operation sequence it currently resides at together with the planned effective stop date and the quantity per requirement for each occurrence.

|                                            |                              |              |              |       |           |                  |
|--------------------------------------------|------------------------------|--------------|--------------|-------|-----------|------------------|
| DB100                                      | ZS - Style Demonstration Co. |              | USER GBJBAMS |       | 29/02/96  |                  |
|                                            |                              |              |              |       | 17:21:35  |                  |
| Material Mass Replace - Review Replacement |                              |              |              |       |           |                  |
| Replace 500                                |                              | Label        |              |       |           |                  |
| with MAT001                                |                              | Leather      |              |       |           |                  |
| Effective 29/02/96                         |                              | Qty Per Fact |              | 1.000 |           |                  |
| 1                                          | Parent                       | Route        | Op           | Seq   | Std Batch | Eff Out Qty Per  |
| -                                          | DAPS                         |              | 10           | 10    | 1.000     | 99/99/99 5.000   |
| -                                          | DAPS                         |              | 20           | 10    | 1.000     | 99/99/99 25.000  |
| -                                          | DAPSINGLE                    | A            | 20           | 10    | 144.000   | 99/99/99 25.000  |
| -                                          | 41000                        | C            | 20           | 10    | 1.000     | 99/99/99 12.000  |
| -                                          | 41000                        | D            | 20           | 10    | 1.000     | 99/99/99 12.000  |
| -                                          | 41000                        | E            | 20           | 10    | 1.000     | 99/99/99 12.000  |
| -                                          | 41000                        | L            | 170          | 10    | 1.000     | 99/99/99 37.000  |
| -                                          | 41000                        | P            | 30           | 10    | 1.000     | 99/99/99 550     |
| -                                          | 41000                        | Q            | 30           | 10    | 1.000     | 99/99/99 450     |
| -                                          | 6100                         | Z            | 20           | 10    | 1.000     | 99/99/99 5.0 +   |
| 1 - Select                                 |                              |              |              |       |           |                  |
| F8=Update                                  |                              | F12=Previous |              |       |           |                  |
| 10-05                                      | SE                           | MW           | KS           | IM    | II        | KENB20A PET166S2 |

## Fields:

### (Select)

Enter 1 in this field to flag this particular occurrence of the material for replacement or update.

## Functions:

### F8

Action mass replacement.

# Model Route/Bill Of Material

**1...**  
**2...** **4/P1R**

Use this option to create and maintain model planning routes and bills of material.

This option is the same as the Style Route/Bill Of Material option.

# Copy Production Route To Model



5/P1R



To display the Copy Style Routing: Production To Model screen, select Copy Production Route To Model from the menu.

Use this option to copy a live production route to a model planning route. You can include or exclude materials.

When you have finished making changes to the model planning route, use the Copy Model Route To Production option to copy the route back to a live production route.

DS213ST - Style Test & QA CompanyUSER QASTYLE27/02/9814:05:05

Copy Style Routing: Production to Model

Copy from Production

Style .....?.. 6210/DS51

Route .....?.. 1

Copy to Model

Style.....?.. 6210/DS51

Route .....?.. X

Exclude Materials.... 00=No, 1=Yes

F3=ExitF4=PromptF16=Item Search

18-25SPMWKSCLIMDMIISTUD140KBPED201S1

## Fields:

The description below is generic and applies to the following options:

- Copy Production Route To Model.
- Copy Model Route To Production.
- Copy Model To Model.
- Copy Production Route To Production Route.

### Style (From)

Enter a style that you have set up under the Style/Material Details option.

### Route (From)

Enter the code for an existing route for the style.



*Note: If the route is a model planning route, then the route should be defined on the VMDR parameter. If the route is a live production route,*

*then it cannot be defined on the VMDR parameter. For more details, refer to the Maintain Parameter File option.*

### Style (To)

Enter a style that you have set up under the Style/Material Details option.

### Route (To)

Enter the code for an existing route for the style.



*Note: If the route is a model planning route, then the route should be defined on the VMDR parameter. If the route is a live production route, then it cannot be defined on the VMDR parameter. For more details, refer to the Maintain Parameter File option.*



*Note: If the route is new and the from/to style is different, then the style characteristics must match.*



*Note: If the route already exists, the two routes must produce the same style characteristics.*

### Exclude Materials

Enter one of the following:

0 - No. Copy over materials on the route.

1 - Yes. Do not copy over materials on the route.



To submit a batch job, press **Enter** and then press **F8=Submit**.

### Functions:

#### F16

Item search. Opens Item Master Scan window 1, which you can use to scroll through current styles. For a detailed description of this window, refer to the Style Route/Bill Of Materials option.

# Copy Model Route To Production

1...  
2...

6/P1R



To display the Copy Style Routing: Model To Production screen, select Copy Model Route To Production from the menu.

Use this option to copy a model planning route to a live production route.

This screen is the same as the Copy Style Routing: Production To Model screen described under the Copy Production Route To Model option. However, you do not have the option to include or exclude materials.



*Note: To ensure that material associations get copied over, the From and To styles must be the same.*

DS213

ST - Style Test & QA Company

USER QASTYLE

2/03/98  
10:38:07

Copy Style Routing: Model to Production

Copy from Model

Style .....?.. █

Route .....?.. \_

Copy to Production

Style.....?..

Route .....?.. \_

F3=Exit

F4=Prompt

F16=Item Search

7-25

SA

MW

KS

CL

IM

DM

II

MARVIN

KB

PED201S1

## Copy Model To Model



**7/P1R**



To display the Copy Style Routing: Model To Model screen, select Copy Model To Model from the menu.

Use this option to copy one model planning route to another model planning route. You can include or exclude materials.

This screen is the same as the Copy Style Routing: Production To Model screen described under the Copy Production Route To Model option.

|                                    |                              |              |                                   |
|------------------------------------|------------------------------|--------------|-----------------------------------|
| DS213                              | ST - Style Test & QA Company | USER QASTYLE | 2/03/98<br>10:44:44               |
| Copy Style Routing: Model to Model |                              |              |                                   |
| Copy from Model                    |                              |              |                                   |
| Style .....                        | ?                            | ■            | _____                             |
| Route .....                        | ?                            | ■            | _____                             |
| Copy to Model                      |                              |              |                                   |
| Style.....                         | ?                            | ■            | _____                             |
| Route .....                        | ?                            | ■            | _____                             |
| Exclude Materials....              | 0                            | 0=No, 1=Yes  |                                   |
| F3=Exit F4=Prompt F16=Item Search  |                              |              |                                   |
| 7-25                               | SA                           | MW           | KS CL IM DM II MARVIN KB PED201S1 |



# Copy Production Route To Production Route



8/P1R



To display the Copy Style Routing: Production To Production screen, select Copy Production Route To Production from the menu.

Use this option to copy one model planning route to another model planning route.

This screen is the same as the Copy Style Routing: Production To Model screen described under the Copy Production Route To Model option. However, you do not have the option to include or exclude materials.



*Note: To ensure that material associations get copied over, the From and To styles must be the same.*

DS213

ST - Style Test & QA Company

USER QASTYLE

2/03/98  
10:47:25

Copy Style Routing: Production to Production

Copy from Production

Style .....?.. █

Route .....?.. \_

Copy to Production

Style.....?.. \_\_\_\_\_

Route .....?.. \_

F3=Exit

F4=Prompt

F16=Item Search

7-25

SA

MW

KS

CL

IM

DM

II

MARVIN

KB

PED201S1