

-
-
-
-
-

Chapter 5

Resource Management



Review Machine Load



1/P4L

Use this option to view the capacity and load for a machine, starting at a selected date, and continuing for the next seven working days.



Select Review Machine Load on the menu to display the Machine Loading screen.



```

PC450                ZS - Style Demonstration Co.        USER GBJBAMS        22/03/96
                                                14:57:57

Machine Loading

Start Date..... 22/03/96

Capacity Basis..... 1 (1 - Standard)
                   (2 - Standard x Efficiency)

Select By...:

    Work Centre .....?.. ____
OR
    Machine type .....?.. ____

F3=Exit  F4=Prompt

05-31  S2  MW  KS  IM  II  KENB20A  PET166S2

```


The option is given to enter a work centre or machine.

Machine Load Enquiry Screen 1

This screen displays a barchart. The barchart shows the capacity and load for a work centre, commencing at the specified start date. The first 'time bucket' displayed is the start date selected.



This screen is displayed if a work centre has been entered on the Machine Loading screen.

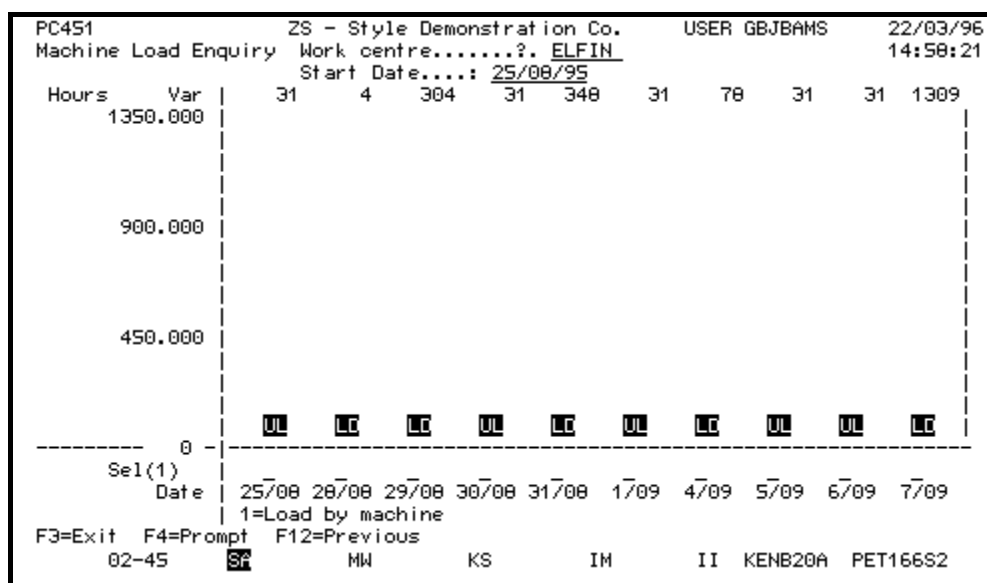

Fields:

Work Centre

Defaults to the work centre selected but can be reselected.

Start Date

Defaults to the start date selected but can be reselected.

(Loading)

The enquiry screens display loading as a series of coloured bars (vertical columns). The degree of loading is reflected by the characters which comprise the bar:

- LD (silver). Indicates load is equal to capacity.
- UL (green). Indicates capacity exceeds load.
- OV (red). Indicates load exceeds capacity.

The characters displayed are user-definable via the Parameter file, CBAR type.

Sel(ect)


Enter 1 against a particular date to display the loading of each machine in the work centre commencing on the specified date.

Machine Load Enquiry Screen 2 (Option 1)

For each machine in the work centre, this screen shows the number of hours of over or under load.



Option 1 at a date on Machine Load Enquiry screen 1.

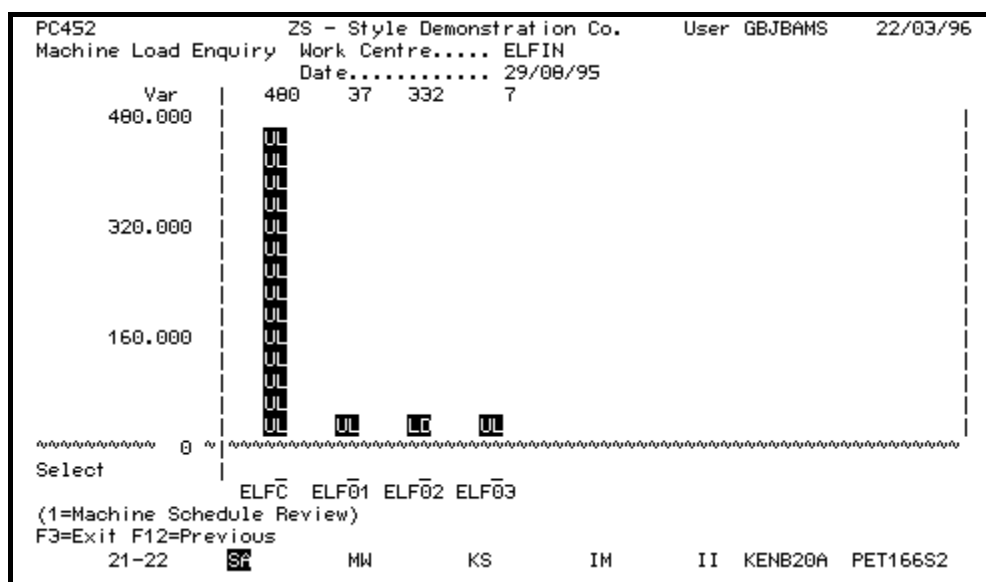

Fields:

(Loading)

The enquiry screens display loading as a series of coloured bars (vertical columns). The degree of loading is reflected by the characters which comprise the bar:

- LD (silver) Indicates load is equal to capacity.
- UL (green) Indicates capacity exceeds load.
- OV (red) Indicates load exceeds capacity.

The characters displayed are user-definable via the Parameter file, CBAR type.

Select


- 1 - Access the Manage Machine Load Maintenance function.

Machine Load Enquiry Screen 3

This screen displays a barchart. The barchart shows the capacity and load for a machine, commencing at the specified start date. The first time 'bucket' displayed is the Start Date selected.



This screen is displayed if a machine has been entered on the Machine Loading screen.

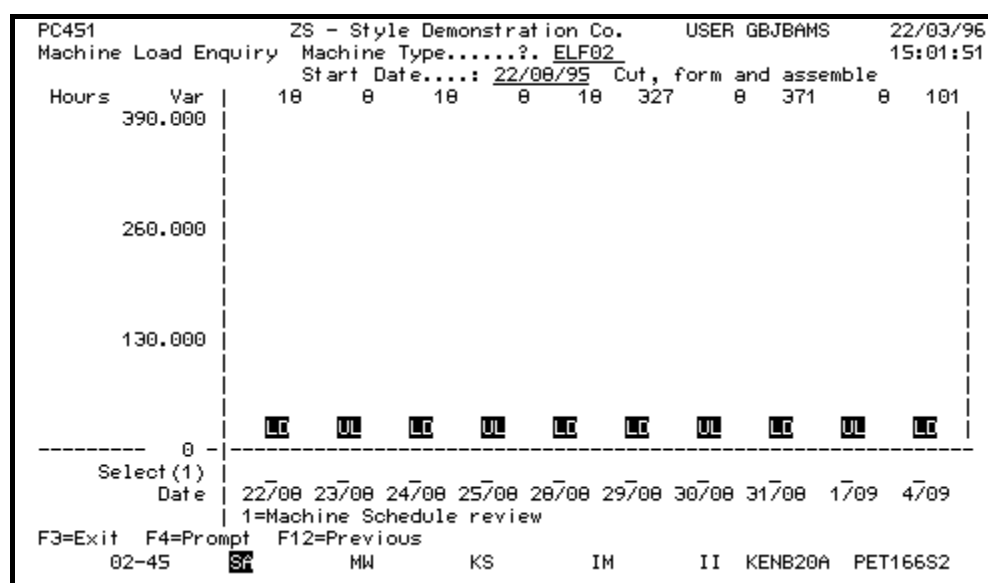

Fields:

Machine

Defaults to that selected but can be reselected.

Start Date

Defaults to that selected but can be reselected.

(Loading)

The enquiry screens display loading as a series of coloured bars (vertical columns). The degree of loading is reflected by the characters which comprise the bar:

- LD (silver) Indicates load is equal to capacity.
- UL (green) Indicates capacity exceeds load.
- OV (red) Indicates load exceeds capacity.

The characters displayed are user-definable via the Parameter file, CBAR type.

Select

1 - Access Manage Machine Load Maintenance.

Manage Machine Load



2/P4L

Use this option to:

- View the production orders, at operation detail level, loaded onto a machine, starting from the selected date.
- Reschedule work.



Select Manage Machine Load on the menu to display Machine Type Schedule Review screen 1.



Enter 1 in the Select field on Machine Load Enquiry screen 1 to display Machine Type Schedule Review screen 1.



Note: This screen with selection parameters completed, may be accessed directly from the Review Machine Load facility, on selection of a specific loading date

Machine Type Schedule Review Screen 1

-  Select Manage Machine Load on the menu to display Machine Type Schedule Review screen 1.
-  Enter 1 in the Select field on Machine Load Enquiry screen 1 to display Machine Type Schedule Review screen 1.

Fields:

Machine

Enter the machine to review.

Org. Model

System maintained field; displays the 'live' organisational model.

Start Date

Enter a start date for the review: defaults to the current date.

-  Press **Enter** on Machine Type Schedule Review screen 1 to display Machine Type Schedule Review Screen 2.

Machine Type Schedule Review Screen 2



Press **Enter** on Machine Type Schedule Review screen 1 to display Machine Type Schedule Review Screen 2.

```

MG503                ZS - Style Demonstration Co.      User GBJBAMS      22/03/96
                                      15:03:30
Machine Type Schedule Review                               Firming End Date
Machine ..?.      BLF02      Cut, form and assemble      29/12/96
Org.Model..... ZS      Style Demonstration Model      More: + -
Start Date..... 22/08/95
Scheduled
Sel   Date   Sequence   Order           Opcode Mach Type   Scheduled
                                Opsq.      Std Hours Quantity  Status
-    22/08/95   _____ W000740           20  SEPAR          .0000          0  1
-    28/08/95   _____ W000761           30  CUT            .0000          0  1
-    29/08/95   _____ W000761           40  FORM            .0000          0  1
-    30/08/95   _____ W000769           20  SEPAR          .0000          0  1
-    _____ W000742           30  CUT            .0000          0  1
-    _____ W000761           40  FORM            .0000          0  1
-    31/08/95   _____ W000769           20  SEPAR          .0000          0  1
-    _____ W000742           30  CUT            .0000          0  1
-    _____ W000761           40  FORM            .0000          0  1
-    4/09/95     _____ W000761           50  ASSEM          .0000          0  1
-    6/09/95     _____ W000769           30  CUT            .0000          0  1
Select
1=Reschedule 2=WIP Stock Status 3=MPS/MRP Inquiry 4=Reschedule Orders
F3=Exit F4=Prompt F12=Previous F14=Machine Type Capacity F8=Update

04-19  S2  MW  KS  IM  II  KENB20A  PET166S2
  
```

Fields:

Machine

Defaults to the selected machine but can be reselected.

Start Date

Defaults to the selected date but can be reselected.

Sel(ect)

2 - Open a window displaying for each WIP location relating to the current operation at which work-in-progress has been booked, the available, held and subcontractor balances.

3 - Display an MPS or MRP enquiry. The enquiry enabled will depend on the setting of the Planning Type flag for the style on the order; this may be 0 (MRP) or 1 (MPS)

4 - Access the Order/Operation Rescheduling window in which you can re-assign the scheduled machine and/or date.

Functions:

F8

Update, save any amendments made to the machine load

F14

Display the capacity profile for the machine



```

MG503                RK - Style Production Company        User GBJBARK                8/10/96
                                                              15:25:42

      type Schedule Review
Machine ..?.         1SEW          Se
Org.Model.....    F1             St
e.....           1/01/95
duled
te      Sequence      Ord

0/96      _____ W0000005
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
0/96      _____ W0000006
_____    _____ W0000006

Select
1=Reschedule  2=WIP Stock Stat
F3=Exit      F4=Prompt  F12=Previous  F14=Machine Type Capacity  F8=Update

04-73      SF      MK      KS      IM      II  KENB20A  PET166S3

```

Display held references for the held WIP balance.

Order/Operation Rescheduling Window (Option 4)

With this screen, you can reschedule an operation on a production order.



Option 4 on Machine Type Schedule Review
screen 2 opens this window.

MG503				RK - Style Production Company		User GBJBARK		8/10/96 15:15:30	
Machine Type Schedule Review									
Machine ...?	1SEW	Se							
Org. Model.....	F1	St							
Start Date.....	1/01/95								
Scheduled									
Sel	Date	Sequence	Ord						
-	7/10/96		W000005						
4	11/10/96		W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
-			W000006						
Select									
1=select 2=insert Setting prior 4=delete									
0/00/00 0 .0000									
F4=Prompt F8=Update F12=Prev. F16=Input Avail.									
F3=Exit F4=Prompt F12=Previous F14=Machine Type Capacity F8=Update									
09-36 SP MK KS IM II KENB20A PET166S3									

Fields:

Sele(ct)

1 - Amend schedule details. The line is displayed for amendment in the fields at the bottom of the window after **Enter** has been pressed.

2 - Enter a set up time. The system displays a prompt line at the bottom of the window with the date and machine of the line against which 2 was placed and a zero quantity, and prompts for entry of a set up time for the machine.

4 - Delete a line. The system prompts with **F11** to confirm deletion.

Date

If a line is being amended this will display the date on which the work is currently due to take place. This date may be overridden.

Machine

Work may be moved to a different machine.

Quantity

Quantities may be overridden.

Time

The time required for the quantity specified will be automatically calculated using the operation details on the standard planning route. If a different duration is required, this may be entered.

Type

System maintained field; displays 0 for set up time; or 1 for operation time.

Functions:

F16

Displays material availability.

Work Station Capacity Window (F14)

The window shows the machine capacity on the working day selected. The capacity denotes the total number of hours available for work at the machine.



Note: Standard capacity may be set to vary on each working day in a week



F14 on Machine Type Schedule Review screen 2 opens this window.

MG503		ZS - Style Demonstration Co.		User	GBJBAMS	22/03/96																														
						15:24:38																														
Machine Type Schedule Review																																				
Machine ..?		ELF03		Packing and despatch		Firming End Date																														
						29/12/96																														
Org.Model.....		Z																																		
Start Date.....		-																																		
Schedul																																				
Sel	Date	Sequ																																		
-	8/09/95	-																																		
Work Station Capacity Date..... 7/09/95 Shift Profile..... 01 Day Shift Length..... 7.50 <table><thead><tr><th>Shift</th><th>Start</th><th>End</th><th>Length</th><th>Std.Capacity</th><th>Max.Capacity</th></tr></thead><tbody><tr><td>1</td><td>8:00</td><td>9:30</td><td>1.50</td><td>1.500</td><td>1.500</td></tr><tr><td>2</td><td>9:45</td><td>12:00</td><td>2.25</td><td>2.250</td><td>2.250</td></tr><tr><td>3</td><td>12:30</td><td>14:30</td><td>2.00</td><td>2.000</td><td>2.000</td></tr><tr><td>4</td><td>14:45</td><td>16:30</td><td>1.75</td><td>1.750</td><td>1.750</td></tr></tbody></table> F12=Previous							Shift	Start	End	Length	Std.Capacity	Max.Capacity	1	8:00	9:30	1.50	1.500	1.500	2	9:45	12:00	2.25	2.250	2.250	3	12:30	14:30	2.00	2.000	2.000	4	14:45	16:30	1.75	1.750	1.750
Shift	Start	End	Length	Std.Capacity	Max.Capacity																															
1	8:00	9:30	1.50	1.500	1.500																															
2	9:45	12:00	2.25	2.250	2.250																															
3	12:30	14:30	2.00	2.000	2.000																															
4	14:45	16:30	1.75	1.750	1.750																															
Select																																				
1=Reschedule 2=WI																																				
F3=Exit F4=Prompt F12=Previous F14=Machine Type Capacity F8=Update																																				
06-23 Sf MW KS IM II KENB20A PET166S2																																				

Review Labour Load



3/P4L

Use this option to view labour loading, starting at a selected date, and continuing for the next nine working days.

The screens display loading as a series of coloured bars (vertical columns). The degree of loading is reflected by the characters which comprise the bar:

- LD (silver) Indicates load is equal to capacity.
- UL (green) Indicates capacity exceeds load.
- OV (red) Indicates load exceeds capacity.

You can redefine the characters displayed via the Parameter file, CBAR type.



Select Review Labour Load on the menu to display the Labour Loading screen.

Labour Loading Screen



Select Review Labour Load on the menu to display the Labour Loading screen.

```

PC453                ZS - Style Demonstration Co.          USER GBJBAMS          29/03/96
                                                           14:47:42

Labour Loading

Start Date..... 29/03/96

Capacity Basis..... 1 (1 - Standard)
                   (2 - Standard x Efficiency)

Select By:

    Labour Department ....?.. _____
OR
    Labour Skill .....?..  __

```

```

F3=Exit  F4=Prompt

05-31    SF      MW      KS      IM      II  KENB20A  PET166S2


```

Labour Load Enquiry Screen 1

This screen displays a barchart. The barchart shows load on a labour department, commencing at the specified date. The first time 'bucket' displayed is the Start date selected.



This screen is displayed if a labour department has been entered on the Labour Loading Screen.

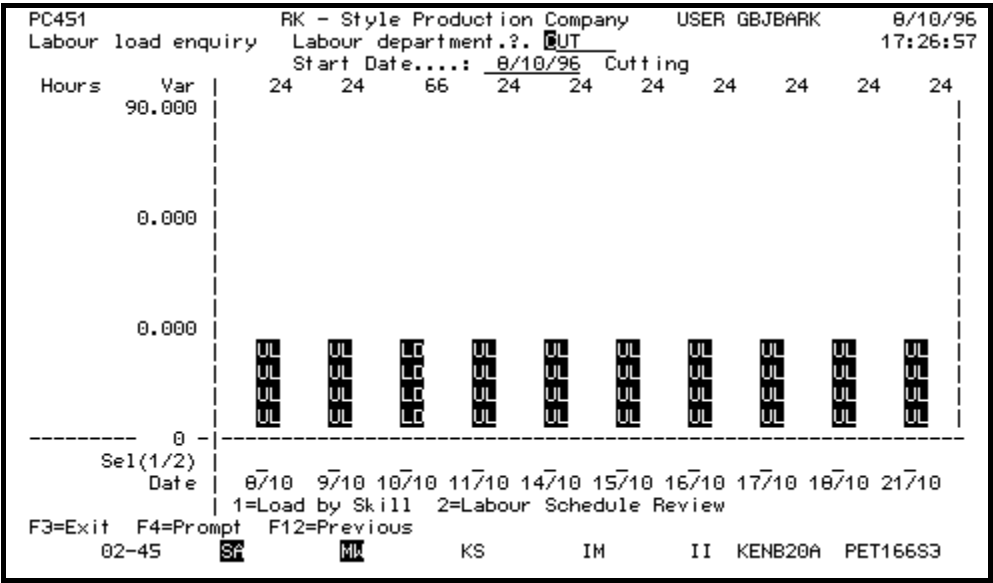

Fields:

Labour Department

Defaults to the department defined on the selection parameters but may be re-selected.

Start Date

Defaults to the first time 'bucket' but may be re-selected.

Sel(ect)

- 1 - Display a detailed breakdown of labour load by skill for the day.
- 2 - Display the Labour Schedule Review for the department.

Reallocate Operators Window (Option 1)

This screen is used to review the operators who have previously undertaken the selected skill. Re-allocation back to that skill is allowed, from the selected date until a specified date. Any changes made here will automatically update the available capacity for both skills affected.



Option 1 on Labour Load Enquiry screen 2 opens this window.

PC	Re-Allocate Operators					
La	Skill	Capacity	Over/under load	Date	96/10/10	
Da	Load					
	S Operator Name	Skill	Date Last Performed	Effective Date	Perform	
.....						
F12=Previous F8=Update						
(1=Base Skill 2=Review Skill 3=Assigned Operator)						
F3=Exit F12=Previous						
02-07 Sr ML KS IM II KENB20A PET166S3						

Fields:

Select

1 - Select the operator and enable allocation to the skill listed at the top of the screen.

Until

If an operator has been selected, this will default to the selected date. The date can be changed to a later date if you want to allocate the operator to the skill for longer than a single day. Any changes made will not take affect unless F8 is taken.

Load

The total load in hours for the base skill for the selected date.

Capacity

The total capacity in hours for the base skill for the selected date.

Over/Underload

If load is greater than capacity then this will be 'over' load. If capacity is greater than load then this will be 'under' load.



Warning: The Load, Capacity and Over/Underload fields are re-calculated automatically if any operators are re-allocated to this skill.

Functions:

F8

A new skill record will be created for the operator with a start date selected until the end date entered. The operator's prime skill will then revert back to the skill previously defined

Assigned Operators Window (Option 3)

This screen is used to review all operators presently assigned to a skill category.



Option 3 on Labour Load Enquiry screen 2 opens this window.

[illegible]

Fields:

Skill

The skill code and description.

Operator Name

The names of operators currently assigned to this skill.

Operators are displayed in ascending effective date sequence.

Effective To


The date that the operator is effective on this skill.

Labour Load Enquiry Screen 3

This screen displays a barchart. The barchart shows the load on a labour skill, commencing at the specified date. The first time 'bucket' displayed is the Start date selected.



This screen is displayed if a labour skill has been entered on the Labour Loading screen.

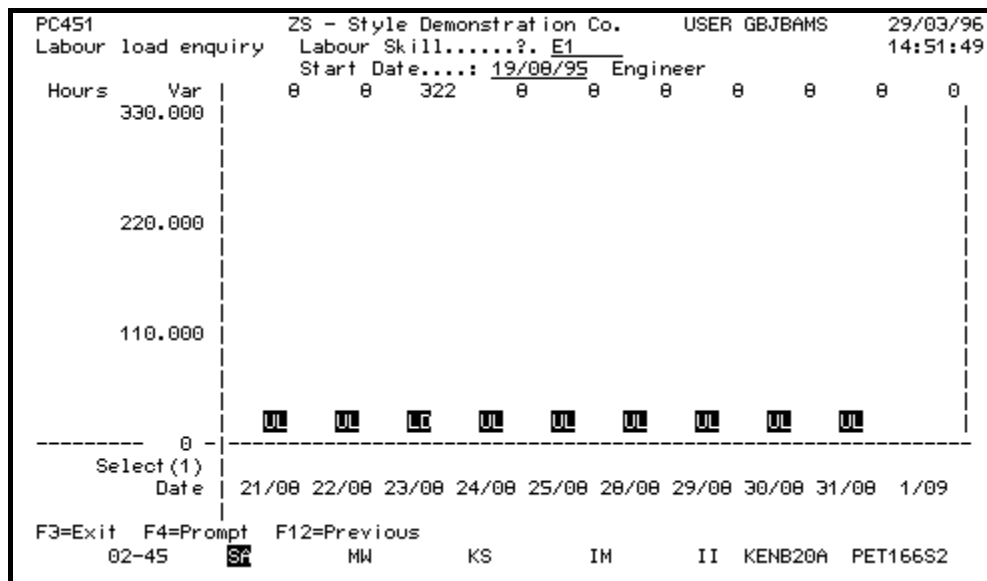

Fields:

Labour Skill

Defaults to the skill defined on the selection parameters but may be re-selected.

Start Date

Defaults to the first time 'bucket' but may be re-selected.

(Loading)

The enquiry screens display loading as a series of coloured bars (vertical columns). The degree of loading is reflected by the characters which comprise the bar:

- LD (silver) Indicates load is equal to capacity.
- UL (green) Indicates capacity exceeds load.
- OV (red) Indicates load exceeds capacity.

The characters displayed are user-definable via the Parameter file, CBAR type.

Maintain Machine Status

1...
2... **4/P4L**

Use this option to change the status of a machine by assigning a task to an operation.



Select Maintain Machine Status on the menu to display the Machine Status Maintenance screen.

PC350	ZS - Style Demonstration Co.	User GBJBAMS	29/03/96 15:01:35
Machine Status Maintenance			
Machine.....?	█		
Task.....	_		
Order.....?	_____		
Item.....?	_____		
Operation.....?	_____		
Reason.....?	_____		
1 = Start Operation 3 = Complete Operation			
4 = Start Setting 5 = Complete Setting			
6 = Start Maintenance 7 = Complete Maintenance			
F3=Exit F4=Prompt F16=Review Orders			
05-24 SP MW KS IM II KENB20A PET166S2			

Fields:

Machine

Enter the machine to which the status is to apply.

Task

Enter the task that is to be recorded against the current order/operation.



Valid entries are listed at the bottom right quarter of the screen.

Order

Enter the production order number against which the status is being recorded. The order must have attained at least 'Released' status.

Alternatively, enter an item code and select from the order review.

Item

Enter an item code. If a code is entered and **F16** pressed the system will display all production orders raised for the item.

Operation

Enter the production order operation sequence.

Reason

Enter an appropriate reason code for the status setting.

Codes are defined on the Style Inventory Management descriptions file, against type MOVR

Functions:

F16

Review orders

Daily Factory Loading

1... **11/P4L**
2...

This option produces a report that:

- Identifies daily work load on work centres, machines or labour departments
- Shows:
 - Major and minor production sequence.
 - Style and description.
 - Colour and size.
 - Production order number and status.
 - Quantity.
 - Unit of measure.
 - Work content
 - Capacity and work load.
 - Resulting under and overload values.



Select Daily Factory Loading on the menu to display the Daily Factory Loading Report screen.

PC468	ZS - Style Demonstration Co.	USER GBJBAMS	29/03/96
			15:04:37
Daily Factory Loading Report			
Time Basis..... 2 (1=Hours, 2=Minutes)			
Operation Start Date..... From 0/00/00 To 0/00/00			
Work Centre.....?. From ____ To ____			
OR			
Machine.....?. From ____ To ____			
OR			
Labour Department.....?. From ____ To ____			
F3=Exit F4=Prompt ENTER=Submit Job			
05-31	St	MM	KS IM II KENB20A PET166S2

Fields:

Time Basis

The option is given to report work in hours 1 or minutes 2 The default is the Time Basis code set on the Company Profile.

Operation Start Date

Enter a cut-off date range or leave blank to include all operations.

Work Centre Range

Enter a range of work centres or leave blank to include all work centres.

(Or) Machine Range

Enter a range of machines or leave blank to include all machines.

(Or) Labour Department Range

Enter a range of labour departments or leave blank to include all labour departments.