

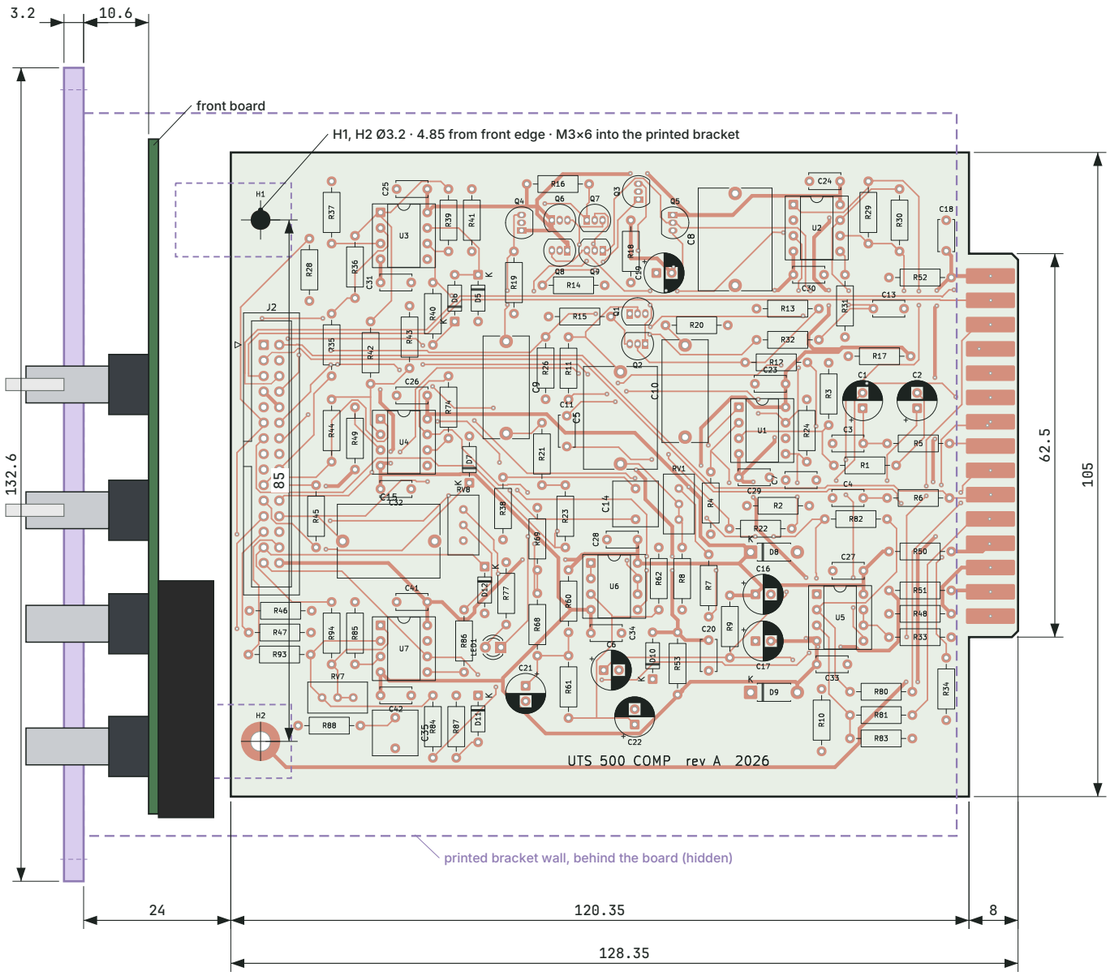


A MAIN BOARD · COMPONENT SIDE, WITH PANEL AND FRONT BOARD IN SECTION SCALE 1:1

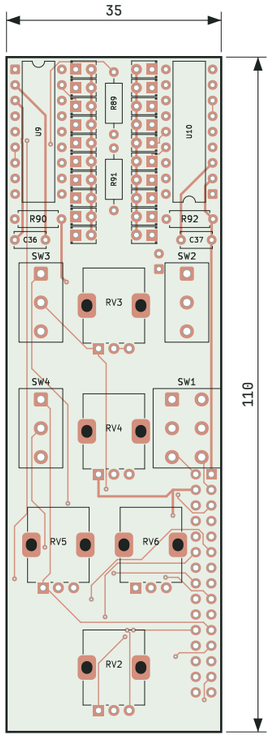


component side · faces the panel
35 × 110 · J1 and C38 on the back

B FRONT BOARD 1:1

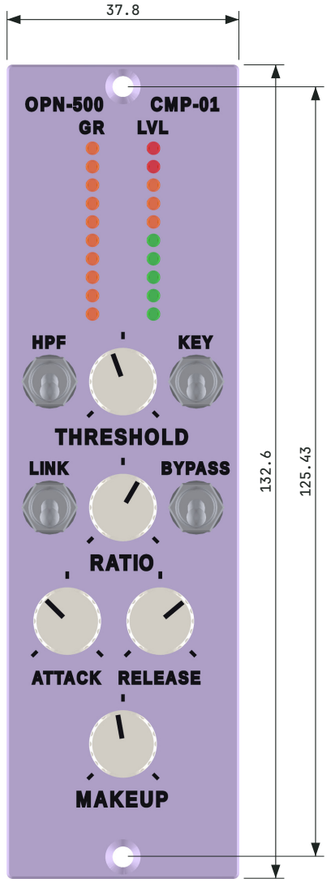


lilac matte PLA · black legend


C PRINTED FACEPLATE 1:1

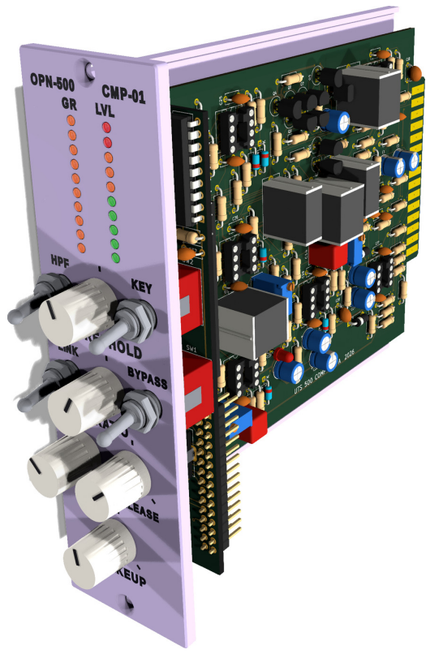


D ASSEMBLY 3D
faceplate, front board and main board

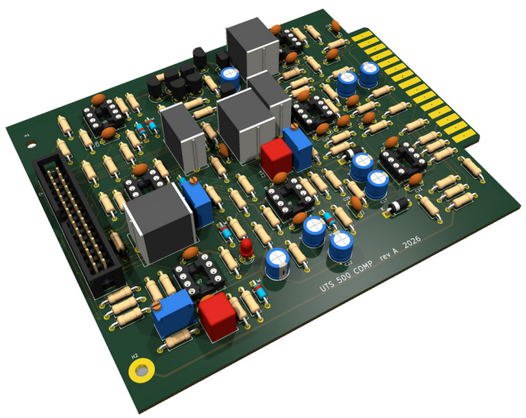

E MAIN BOARD 3D
card that plugs into the rack

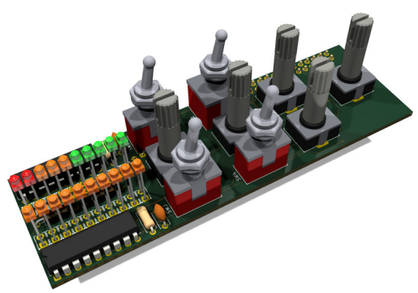

F FRONT BOARD 3D
pots, toggles and meters

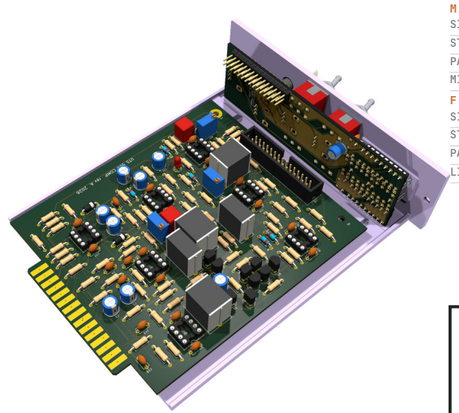

G ASSEMBLY, REAR 3D
printed bracket covers the solder side

BOARD DATA

MAIN BOARD	
SIZE	128.35 × 105 mm
STACKUP	2 layers · FR-4 1.6 mm
PARTS	137, through-hole
MIN TRACK	0.2 mm · vias 155
FRONT BOARD	
SIZE	35 × 110 mm
STACKUP	2 layers · FR-4 1.6 mm
PARTS	39, through-hole
LINK	30-way IDC ribbon, J2 → J1

NOTES

1. Print at 100 % (actual size) on A3: views A, B and C are 1:1. Dimensions in mm.
2. Panel spacing from the printed faceplate source: front board 10.6 mm and main board 24 mm behind the panel; main board centred 11.12 mm left of the panel centre line.
3. Faceplate printed face down, 3.2 mm thick, with the main-board bracket and LED retainer.
4. 3D: pots, toggles and meter LEDs are models drawn from the parts used (Alps RK09K, Salecom S1315/S1350, Jaycar 2 mm towers). Knobs are 11 mm stand-ins styled like the other modules' panels.
5. Copper: top layer red, bottom layer blue, holes white.

UTS 500
SERIES

UTS 500 SERIES · API 500 MODULE · PCB DRAWING

SHEET 1 / 3

COMPRESSOR

OPN-500 / CMP-01 · main board, front board and printed faceplate

SOURCE github.com/UTS-500-Series/Compressor	REVISION 8214cb2 · 2026-10-21	DATE 2026-10-21
BOARDS compressor_with_pcb · compressor_front	SCALE 1:1 unless noted	SIZE · UNITS A3 · mm
FACEPLATE panel/print/faceplate.scad	TOOL KiCad 10 · OpenSCAD	LICENCE CERN-OHL-S v2