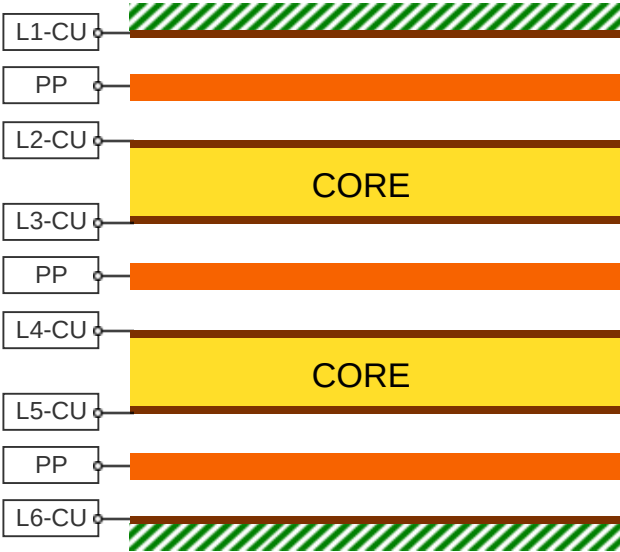


Thickness: **0.8MM** Finished Outer Copper: **1OZ** Inner Copper: **1OZ** Inner layer Residual copper ratio: **70%**

	Layer	Material	Thickness (mm)	Thickness after lamination(mm)
	L1-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)
	PP	3313 RC58% DK:4.45	0.1030	0.0925
	L2-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
	CORE	Core DK:4.6	0.1300	
	L3-CU	Inner Copper 1OZ	0.0350	
	PP	3313 RC58% DK:4.45	0.1030	0.0820
	L4-CU	Inner Copper 1OZ	0.0350	0.2 (Core with Cu)
	CORE	Core DK:4.6	0.1300	
	L5-CU	Inner Copper 1OZ	0.0350	
	PP	3313 RC58% DK:4.45	0.1030	0.0925
	L6-CU	Outer Base Copper 0.5OZ	0.0175	0.0175 (Plating to 1OZ)