

Stable Inc.

Reactor Station User Manual


Introduction

Welcome

Congratulations on your new role as station supervisor here at Stable Inc. We pride ourselves on how stable our reactors are, but there are occasional hiccups. That's where you come in. Your task is to correctly deal with any errors that come up. We're counting on you!

Types of panels

Switch

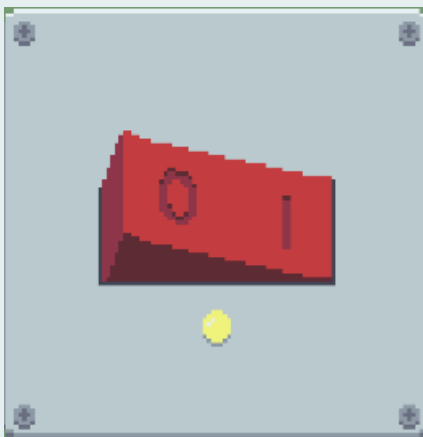


Turns on and off when flipped.

Knob




Flips between modes when turned.

Crank

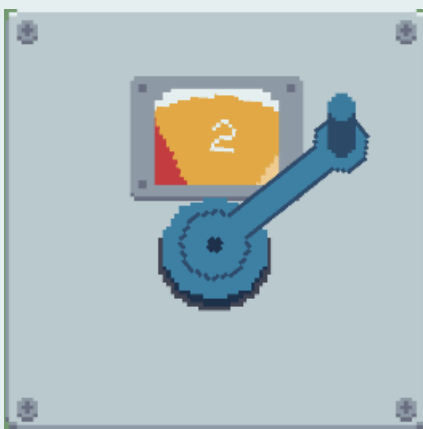

Rotates number wheel when cranked.

Button

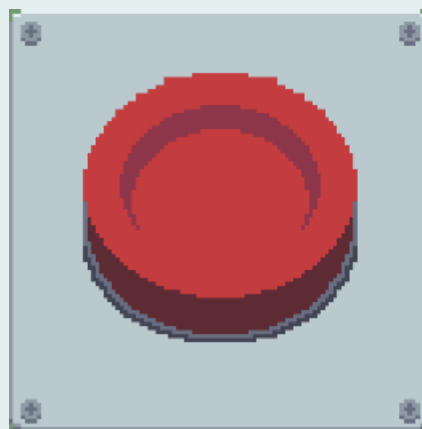

Presses down when you press it...

Station 1

Instructions

Nothing should go wrong, but in case the reactor becomes unstable, it will post an error code using the lights on the top of your station.

If this happens:

- Go through all criteria from top to bottom
- Set all station panels to the correct position for the error code
- **Always press the Button last, it will only work if all other criteria is met**

Error Code Criteria

Number of Lights Turned On

If there's only 1 Light turned on: Set the red switch to OFF

If there's 2 Lights turned on: Set the blue switch to ON

Position of Lights

If there's a Yellow light in Slot 2: You will need to press the GREEN BUTTON

Color of Lights

If there's Only 1 Red Light: Turn the red switch ON

If there's 2 Red Lights: You will need to press the RED BUTTON

If there's Only 1 Yellow Light: Turn the blue switch ON

Station 2

Instructions

Great work so far, we believe you can handle some more responsibility. The error codes will get a bit more complex now.

Error Code Criteria

Remember:

- Go through all criteria from top to bottom
- Set all station panels to the correct position for the error code
- **Always press the Button last, it will only work if all other criteria is met**

Number of Lights Turned On

1 Light: Set all red switches to OFF

2 Light: Set all blue switches to ON

3 Light: Turn the yellow knob to POWER

Position of Lights

No Light in Slot 1: Turn the blue crank to 6

Blue in Slot 1: Turn the yellow knob to HYDRO

Yellow in Slot 2: You will need to press the GREEN BUTTON

Blue in Slot 2: Turn the blue knob to OFF

Color of Lights

Only 1 Red Light: Turn **ONLY ONE** red switch ON

2 Red Lights: You will need to press the RED BUTTON

Only 1 Green Light: Turn the green switch OFF

2 Green Lights: Turn the green switch ON

Only 1 Yellow Light: Turn **ONLY ONE** blue switch ON

2 Yellow Lights: Turn the blue knob to OFF

Station 3

Instructions

You're doing great! As one of our top supervisors, you will now have to deal with some of our trickier error codes.

If you get stuck:

- Go through all criteria from top to bottom
- Set all station panels to the correct position for the error code
- **Always press the Button last, it will only work if all other criteria is met**

Error Code Criteria

Number of Lights Turned On

1 Light: Set all red switches to OFF

2 Lights: Set all blue switches to ON

3 Lights: Turn **ONLY ONE** yellow knob to POWER

4 Lights: Turn the green crank to 3

Position of Lights

No Light in Slot 1: Turn the blue crank to 6

Blue in Slot 1: Turn all yellow knobs to HYDRO

Yellow in Slot 2: You will need to press the GREEN BUTTON

Blue in Slot 2: Turn all blue knobs to OFF

Red in Slot 3: Turn the red knob to POWER

No Light in Slot 3: Turn all red knobs to HYDRO

Yellow in Slot 4: Turn the green crank to 3

Continued on the next page

Color of Lights

- 1 Red Light:** Turn **ONLY ONE** red switch ON
- 2 Red Lights:** You will need to press the RED BUTTON
- 3 Red Lights:** Turn all red cranks to 6
- 1 Green Light:** Turn all green switches OFF
- 2 Green Lights:** Turn all green switches ON
- 3 Green Lights:** Turn the red crank to 3
- 1 Blue Light:** Turn the yellow switches ON
- 2 Blue Lights:** Turn the red knob to POWER
- 3 Blue Lights:** Turn all yellow cranks to 5
- 1 Yellow Light:** Turn **ONLY ONE** blue switch ON
- 2 Yellow Lights:** Turn **ONLY ONE** blue knob to OFF
- 4 Yellow Lights:** Turn all green knobs to HYDRO

Number of Blinking Lights

- 1 Blinking Light:** Turn only one yellow switch to OFF
- 2 Blinking Lights:** Turn the green knob to HYDRO
- 3 Blinking Lights:** Turn the red crank to 6
- 4 Blinking Lights:** You will need to use the YELLOW BUTTON
- 5 Blinking Lights:** Turn **ONLY ONE** blue knob to OFF

Color of Blinking Lights

- 1 Blinking Red Light:** Turn the yellow crank to 6
- 2 Blinking Red Lights:** Turn all yellow switches OFF
- 3+ Blinking Red Lights:** Turn the blue crank to 2
- 1 Blinking Green Light:** You will need to press the BLUE BUTTON
- 2 Blinking Green Lights:** Set all blue switches to ON
- 3+ Blinking Green Lights:** Set **ONLY ONE** green switch to OFF