Cable trace: sto-cbl-00042 … osl-cbl-00009

From sto-dcp2-01 : Line/1/1 to osl-dcp2-01 : Line/1/1
5 cables · total length 447708 m · path complete

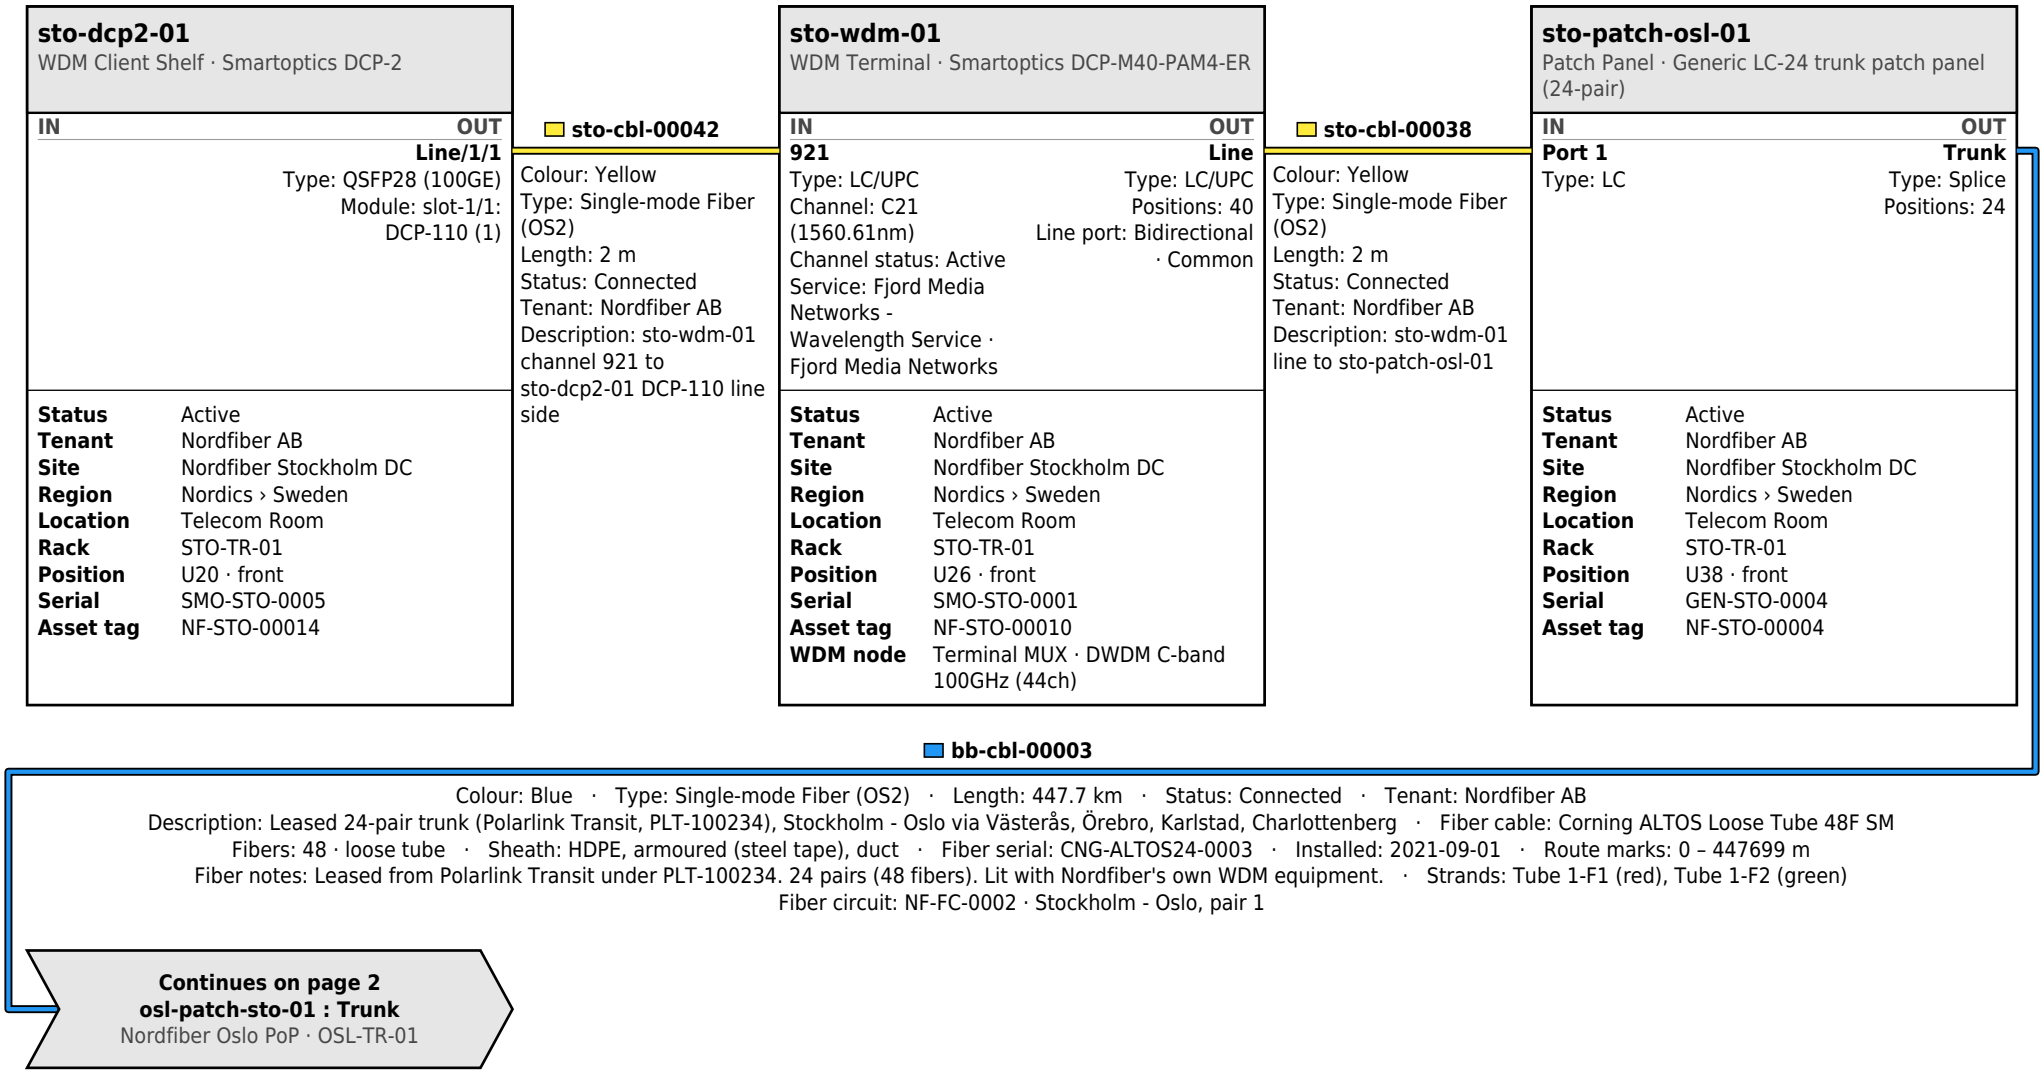

Cable trace: sto-cbl-00042 … osl-cbl-00009

Continued from page 1
sto-patch-osl-01 : Trunk
Nordfiber Stockholm DC · STO-TR-01

bb-cbl-00003

Colour: Blue
Type: Single-mode Fiber (OS2)
Length: 447.7 km
Status: Connected
Tenant: Nordfiber AB
Description: Leased 24-pair trunk (Polarlink Transit, PLT-100234), Stockholm - Oslo via Västerås, Örebro, Karlstad, Charlottenberg
Fiber cable: Corning ALTOS Loose Tube 48F SM
Fibers: 48 · loose tube
Sheath: HDPE, armoured (steel tape), duct
Fiber serial: CNG-ALTOS24-0003
Installed: 2021-09-01
Route marks: 0 – 447699 m
Fiber notes: Leased from Polarlink Transit under PLT-100234. 24 pairs (48 fibers). Lit with Nordfiber's own WDM equipment.
Strands: Tube 1-F1 (red), Tube 1-F2 (green)
Fiber circuit: NF-FC-0002 · Stockholm - Oslo, pair 1

osl-patch-sto-01

Patch Panel · Generic LC-24 trunk patch panel (24-pair)

IN	OUT
Trunk	**Port 1**
Type: Splice	Type: LC
Positions: 24	

Status	Active
Tenant	Nordfiber AB
Site	Nordfiber Oslo PoP
Region	Nordics › Norway
Location	Telecom Room
Rack	OSL-TR-01
Position	U41 · front
Serial	GEN-OSL-0002
Asset tag	NF-OSL-00002

osl-cbl-00008

Colour: Yellow
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Tenant: Nordfiber AB
Description: osl-wdm-01 line to osl-patch-sto-01

osl-wdm-01

WDM Terminal · Smartoptics DCP-M40-PAM4-ER

IN	OUT
Line	**921**
Type: LC/UPC	Type: LC/UPC
Positions: 40	Channel: C21 (1560.61nm)
Line port: Bidirectional · Common	Channel status: Active
	Service: Fjord Media Networks - Wavelength Service · Fjord Media Networks

Status	Active
Tenant	Nordfiber AB
Site	Nordfiber Oslo PoP
Region	Nordics › Norway
Location	Telecom Room
Rack	OSL-TR-01
Position	U26 · front
Serial	SMO-OSL-0001
Asset tag	NF-OSL-00006
WDM node	Terminal MUX · DWDM C-band 100GHz (44ch)

osl-cbl-00009

Colour: Yellow · Type: Single-mode Fiber (OS2) · Length: 2 m · Status: Connected · Tenant: Nordfiber AB · Description: osl-wdm-01 channel 921 to osl-dcp2-01 DCP-110 line side

Continues on page 3
osl-dcp2-01 : Line/1/1
Nordfiber Oslo PoP · OSL-TR-01

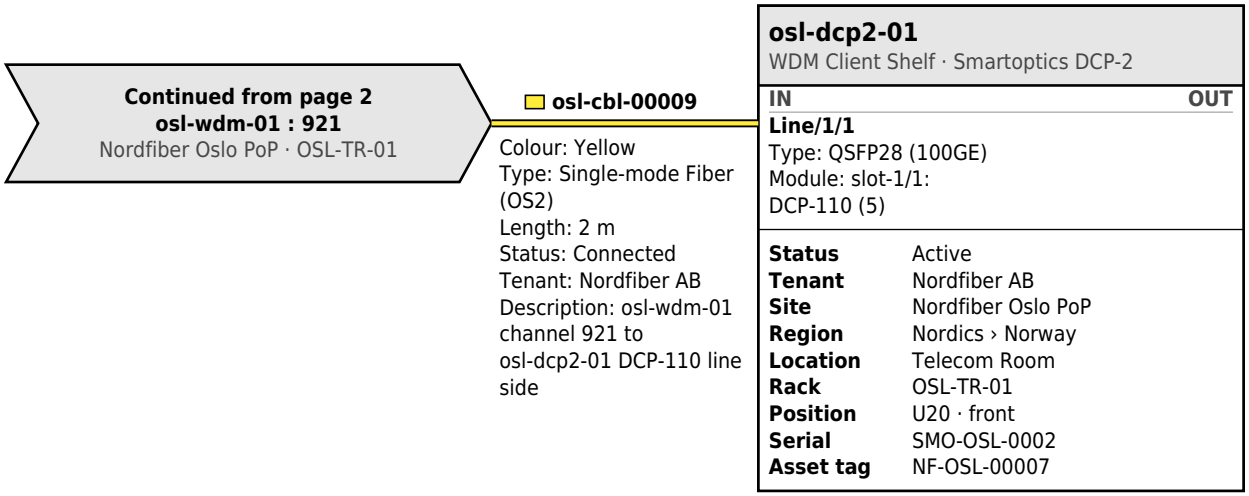
Continued from page 2
osl-wdm-01 : 921
Nordfiber Oslo PoP · OSL-TR-01
osl-cbl-00009
Colour: Yellow
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Tenant: Nordfiber AB
Description: osl-wdm-01 channel 921 to osl-dcp2-01 DCP-110 line side
osl-dcp2-01
WDM Client Shelf · Smartoptics DCP-2
IN
OUT
Line/1/1
Type: QSFP28 (100GE)
Module: slot-1/1: DCP-110 (5)
Status Active
Tenant Nordfiber AB
Site Nordfiber Oslo PoP
Region Nordics › Norway
Location Telecom Room
Rack OSL-TR-01
Position U20 · front
Serial SMO-OSL-0002
Asset tag NF-OSL-00007