Cable trace: sto-cbl-00046 … hel-cbl-00021

From sto-rtr-01 : et-0/0/2 to hel-rtr-01 : et-0/0/2
Scope: Site Nordfiber Stockholm DC · 5 of 10 blocks · 5 of 9 cables shown
9 cables · total length 849572 m · path complete

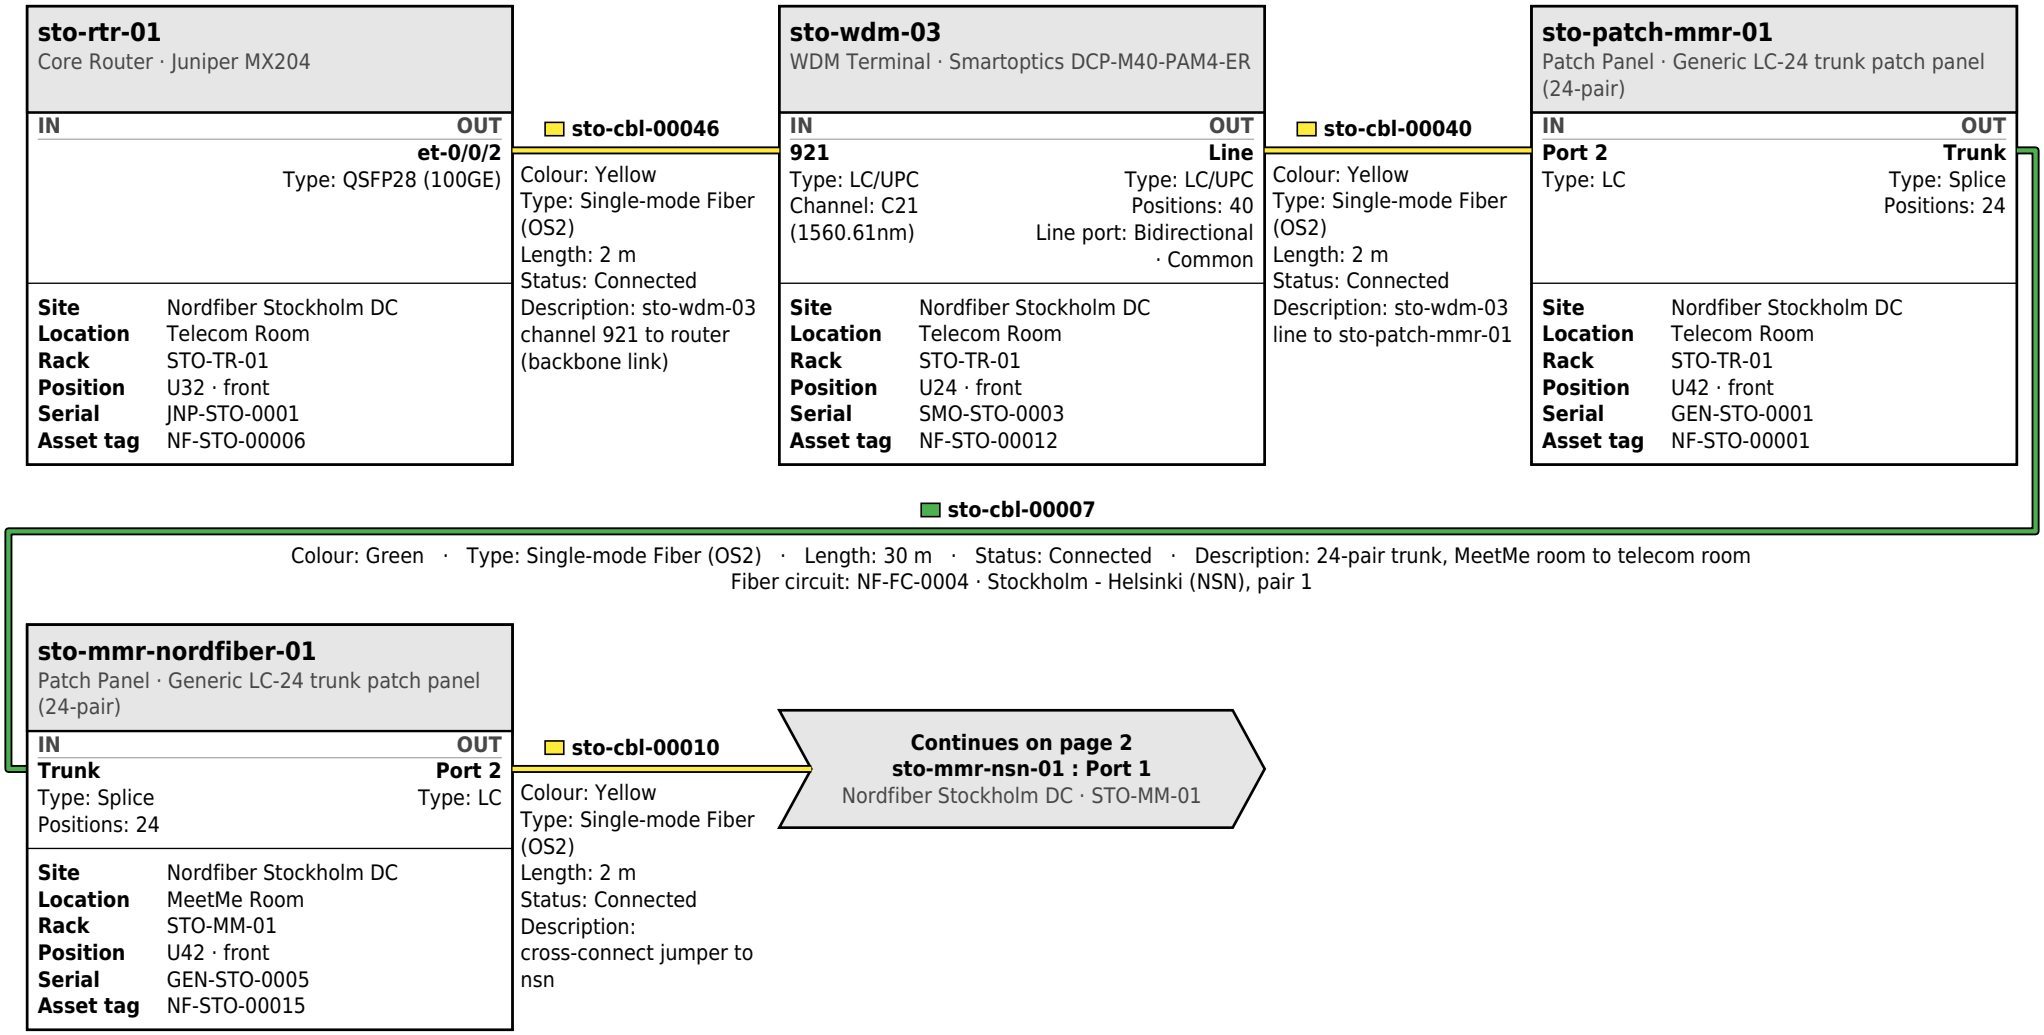

Cable trace: sto-cbl-00046 … hel-cbl-00021

Scope: Site Nordfiber Stockholm DC

Continued from page 1
sto-mmr-nordfiber-01 : Port 2
Nordfiber Stockholm DC · STO-MM-01

sto-cbl-00010
Colour: Yellow
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Description: cross-connect jumper to nsn

sto-mmr-nsn-01
Patch Panel · Generic LC-24 trunk patch panel (24-pair)

IN	OUT
Port 1	**Trunk**
Type: LC	Type: Splice Positions: 24

Site	Nordfiber Stockholm DC
Location	MeetMe Room
Rack	STO-MM-01
Position	U37 · front
Serial	GEN-STO-0007

bb-cbl-00005
Colour: Blue
Type: Single-mode Fiber (OS2)
Length: 849.5 km
Status: Connected
Description: NSN-DF-0001: leased 24-pair trunk between the vendor's MeetMe panels, Stockholm - Helsinki via Mariehamn and Vaasa
Fiber cable: Corning ALTOS Loose Tube 48F SM
Fibers: 48 · loose tube
Fiber serial: CNG-ALTOS24-0005
Fiber notes: Leased from Nordic Subsea Networks AB under NSN-DF-0001. 24 pairs (48 fibers). Strands: Tube 1-F1 (red), Tube 1-F2 (green)
Fiber circuit: NF-FC-0004 · Stockholm - Helsinki (NSN), pair 1

Leaves site Nordfiber Stockholm DC
to hel-mmr-nsn-01 : Trunk
Nordfiber Helsinki DC · HEL-MM-01