Cable trace: hel-cbl-00022 … sto-cbl-00041

From hel-rtr-01 : et-0/0/2 to sto-rtr-01 : et-0/0/2
9 cables · total length 849572 m · path complete

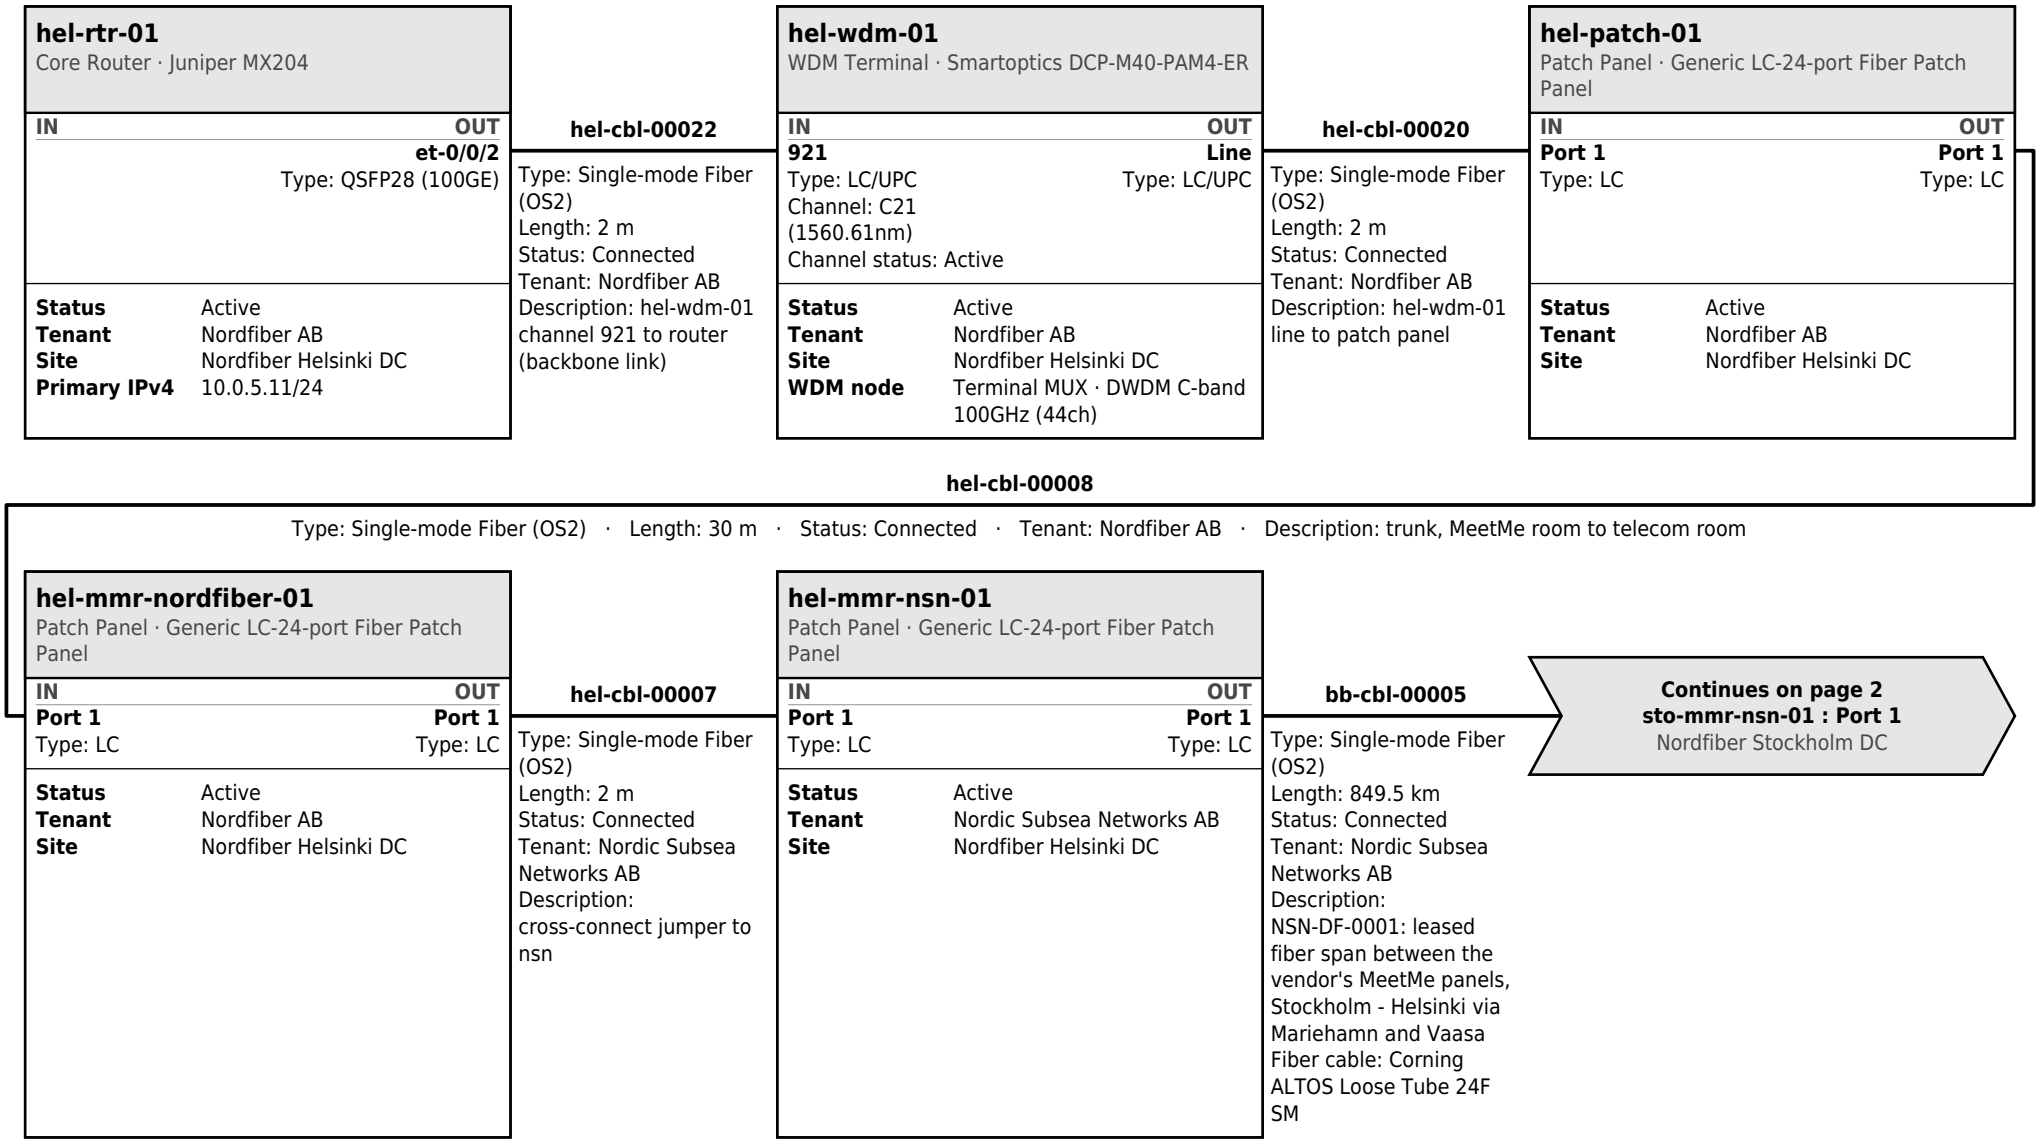

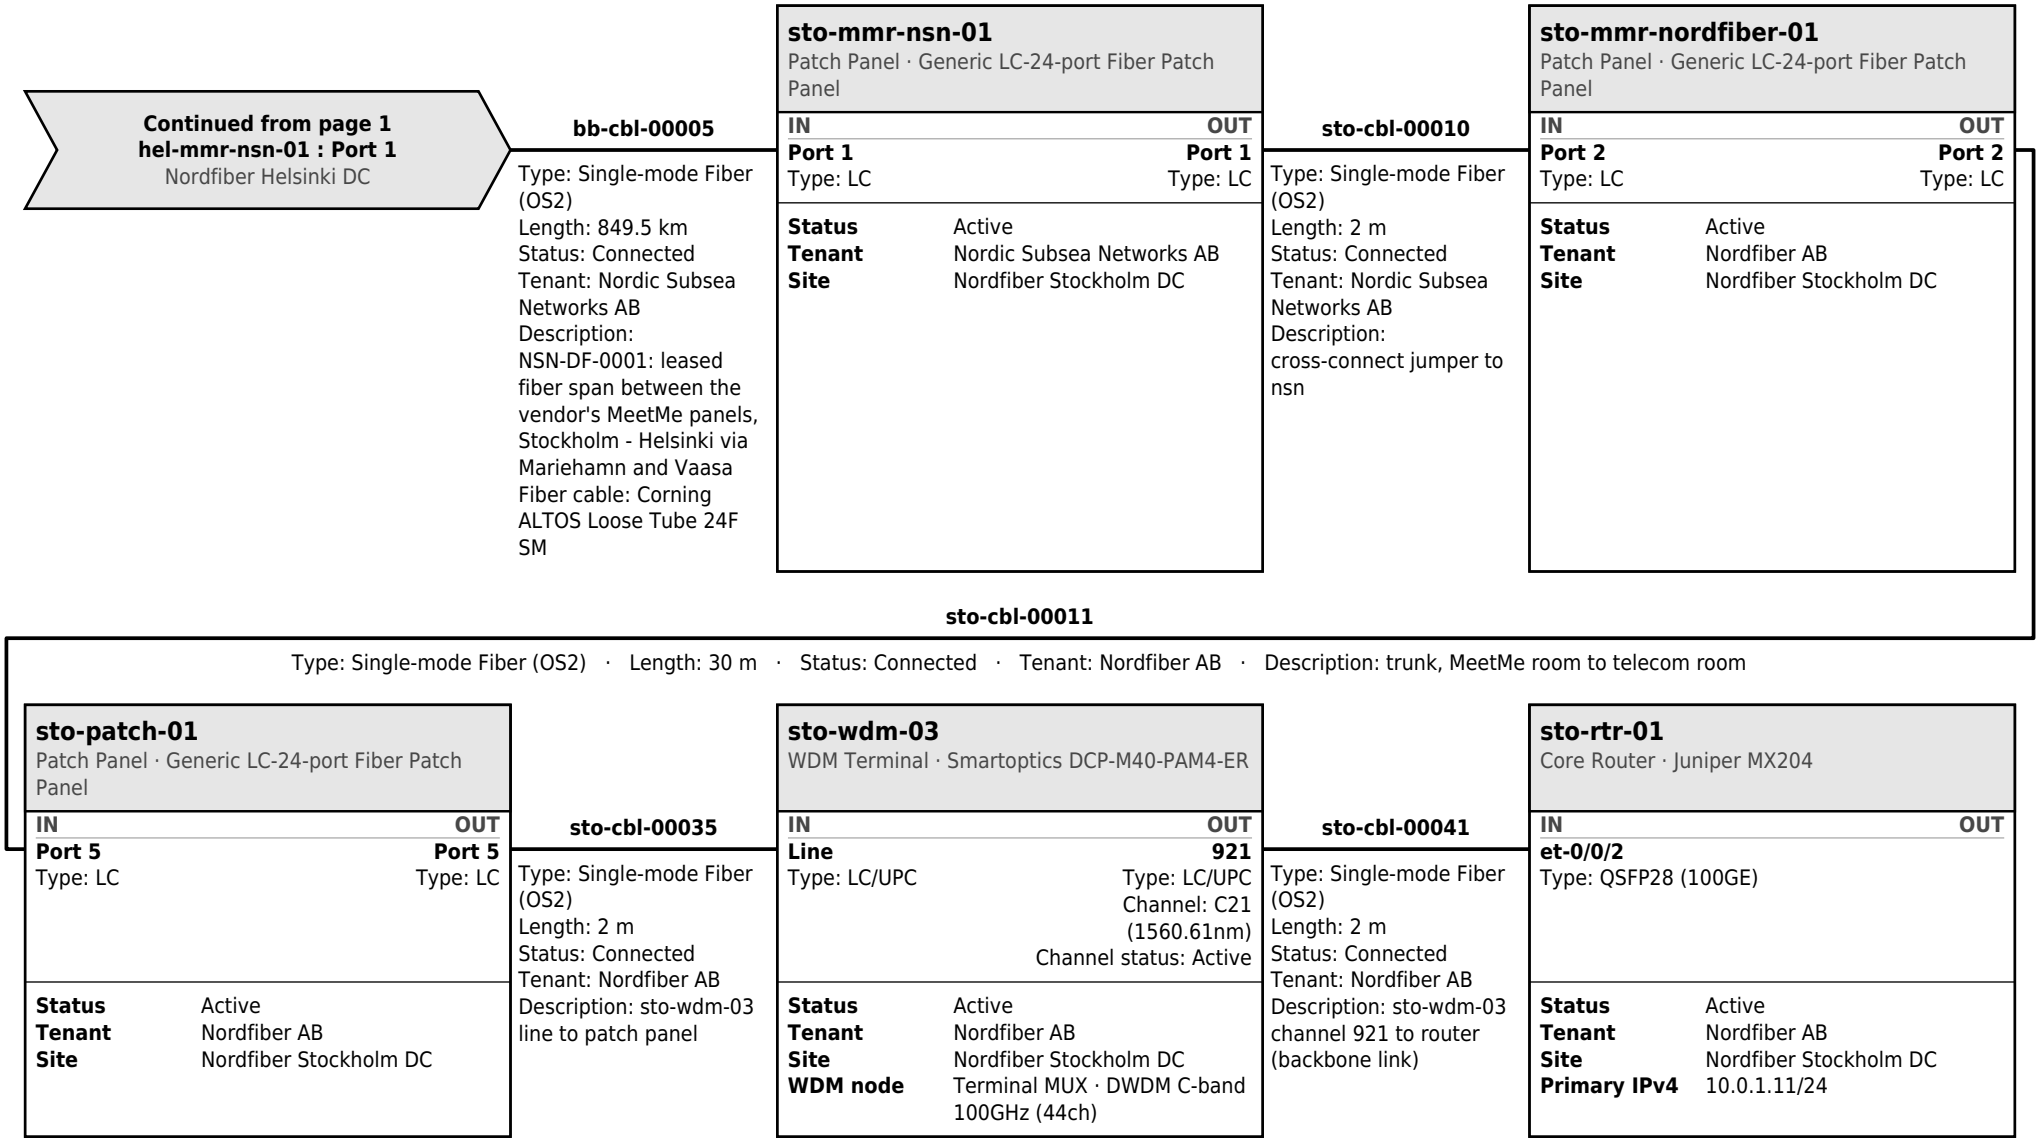
Continued from page 1
hel-mmr-nsn-01 : Port 1
Nordfiber Helsinki DC
bb-cbl-00005
Type: Single-mode Fiber (OS2)
Length: 849.5 km
Status: Connected
Tenant: Nordic Subsea Networks AB
Description: NSN-DF-0001: leased fiber span between the vendor's MeetMe panels, Stockholm - Helsinki via Mariehamn and Vaasa
Fiber cable: Corning ALTOS Loose Tube 24F SM
sto-mmr-nsn-01
Patch Panel · Generic LC-24-port Fiber Patch Panel
IN
Port 1
Type: LC
OUT
Port 1
Type: LC
Status Active
Tenant Nordic Subsea Networks AB
Site Nordfiber Stockholm DC
sto-cbl-00010
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Tenant: Nordic Subsea Networks AB
Description: cross-connect jumper to nsn
sto-mmr-nordfiber-01
Patch Panel · Generic LC-24-port Fiber Patch Panel
IN
Port 2
Type: LC
OUT
Port 2
Type: LC
Status Active
Tenant Nordfiber AB
Site Nordfiber Stockholm DC
sto-cbl-00011
Type: Single-mode Fiber (OS2) · Length: 30 m · Status: Connected · Tenant: Nordfiber AB · Description: trunk, MeetMe room to telecom room
sto-patch-01
Patch Panel · Generic LC-24-port Fiber Patch Panel
IN
Port 5
Type: LC
OUT
Port 5
Type: LC
Status Active
Tenant Nordfiber AB
Site Nordfiber Stockholm DC
sto-cbl-00035
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Tenant: Nordfiber AB
Description: sto-wdm-03 line to patch panel
sto-wdm-03
WDM Terminal · Smartoptics DCP-M40-PAM4-ER
IN
Line
Type: LC/UPC
OUT
921
Type: LC/UPC
Channel: C21 (1560.61nm)
Channel status: Active
Status Active
Tenant Nordfiber AB
Site Nordfiber Stockholm DC
WDM node Terminal MUX · DWDM C-band 100GHz (44ch)
sto-cbl-00041
Type: Single-mode Fiber (OS2)
Length: 2 m
Status: Connected
Tenant: Nordfiber AB
Description: sto-wdm-03 channel 921 to router (backbone link)
sto-rtr-01
Core Router · Juniper MX204
IN
et-0/0/2
Type: QSFP28 (100GE)
OUT
Status Active
Tenant Nordfiber AB
Site Nordfiber Stockholm DC
Primary IPv4 10.0.1.11/24