

AIAC-ASSIGNMENT 18.4

Name: B. Akshara

HtNo:2303A51279

Batch - 05

TASK – 01

Prompt :

Create a Python script using the requests library to fetch movie details from OMDb API.Requirements:

Take movie title as user input, Fetch data from API using API key,Display: Title, Year, IMDb Rating, Plot,Handle errors: invalid movie, API key issues, network errors, empty response,Use clean formatting and functions

Code :

```
import requests
API_KEY = "d69f7ff3"
BASE_URL = "http://www.omdbapi.com/"
def get_movie_details(movie_title):
    params = {
        "apikey": API_KEY,
        "t": movie_title
    }
    try:
        response = requests.get(BASE_URL, params=params)
        response.raise_for_status() # Raise an error for HTTP errors
        data = response.json()
        if data.get("Response") == "False":
            print("Movie not found.")
            return None
        return data
    except requests.RequestException as e:
        print(f"Error fetching movie details: {e}")
        return None
def display_movie_details(movie_data):
    if not movie_data:
```

```

    return
    print(f"Title: {movie_data.get('Title', 'N/A')}")
    print(f"Year: {movie_data.get('Year', 'N/A')}")
    print(f"IMDb Rating: {movie_data.get('imdbRating', 'N/A')}")
    print(f"Plot: {movie_data.get('Plot', 'N/A')}")
def main():
    movie_title = input("Enter the movie title: ")
    movie_data = get_movie_details(movie_title)
    display_movie_details(movie_data)
if __name__ == "__main__":
    main()

```

Output:

```

18.4.py > get_movie_details
1  #Create a Python script using the requests library to fetch movie
2  #details from OMDb API.Requirements: Take movie title as user input, Fetch
3  #data from API using API key,Display: Title, Year, IMDb Rating, Plot,Handle
4  #errors: invalid movie, API key issues, network errors, empty response,Use clean
5  #formatting and functions for better readability.
6  import requests
7  API_KEY = "d69f7ff3"
8  BASE_URL = " http://www.omdbapi.com/"
9  def get_movie_details(movie_title):
10     params = {
11         "apikey": API_KEY,
12         "t": movie_title
13     }
14     try:
15         response = requests.get(BASE_URL, params=params)
16         response.raise_for_status() # Raise an error for HTTP errors
17         data = response.json()
18         if data.get("Response") == "False":
19             print("Movie not found.")
20             return None
21         return data
22     except requests.RequestException as e:

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE Python

```

S C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding> & C:\Users\AKSHARA\anaconda3\python.exe c:/Users/AKSHARA/OneDrive/Desktop
Enter the movie title: Bahubali
Title: Bahubali
Year: 2008-2009
IMDb Rating: 7.9
Plot: Babhubali means a most powerful person, he can manage and control every situation and boss of the village.
S C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding>

```

Explanation :

This script allows users to fetch movie details from the OMDb API by entering a movie title and an API key. It uses the requests library to make an HTTP GET request to the API, retrieves the movie details in JSON format, and displays the title, year, IMDb rating, and plot. The script also includes error handling for invalid movie titles, API key issues, network errors, and empty responses.

TASK – 02

Prompt :

Create a Python script using the requests library to fetch public transport arrival times from an API. Take stop ID as user input, validate it, and display the next 3 arrivals. Handle errors like invalid stop ID, server issues, timeout, and empty response using try-except. Include at least one retry attempt and keep the output clean and readable.

Code :

```
import requests
import time
from datetime import datetime

API_URL = "https://api.tfl.gov.uk/StopPoint/{stop_id}/Arrivals"

def fetch_arrival_times(stop_id):
    url = API_URL.format(stop_id=stop_id)

    try:
        response = requests.get(url, timeout=5)
        response.raise_for_status()
        data = response.json()

        # TfL returns a list, not a dict
        if not isinstance(data, list) or len(data) == 0:
            print("⚠ No arrivals found for this stop.")
            return None

        # Sort by arrival time
        data.sort(key=lambda x: x.get("timeToStation", 999999))
```

```

    return data[:3] # next 3 arrivals

except requests.exceptions.HTTPError as e:
    print("❌ Invalid Stop ID or API issue:", e)

except requests.exceptions.ConnectionError:
    print("❌ Network error. Check your internet connection.")

except requests.exceptions.Timeout:
    print("❌ Request timed out.")

except requests.exceptions.RequestException as e:
    print("❌ Unexpected error:", e)

return None

def format_time(seconds):
    minutes = seconds // 60
    return f'{minutes} min'

def display_arrivals(arrivals):
    if not arrivals:
        print("🚫 No data to display.")
        return

    print("\n🚌 Next Bus Arrivals")
    print("-" * 40)

    for bus in arrivals:
        line = bus.get("lineName", "N/A")
        destination = bus.get("destinationName", "Unknown")
        time_to_arrival = format_time(bus.get("timeToStation", 0))

        print(f"🚌 Bus {line} → {destination}")
        print(f"    Arrival in: {time_to_arrival}")
        print("-" * 40)

def main():

```

```
print("👋 Welcome to Smart Bus Arrival Checker")

stop_id = input("Enter TfL Stop ID (e.g., 490008660N): ").strip()

if not stop_id:
    print("❌ Stop ID cannot be empty.")
    return


arrivals = fetch_arrival_times(stop_id)

if arrivals is None:
    print("🔄 Retrying in 2 seconds...")
    time.sleep(2)
    arrivals = fetch_arrival_times(stop_id)

display_arrivals(arrivals)

if __name__ == "__main__":
    main()
```

Output:

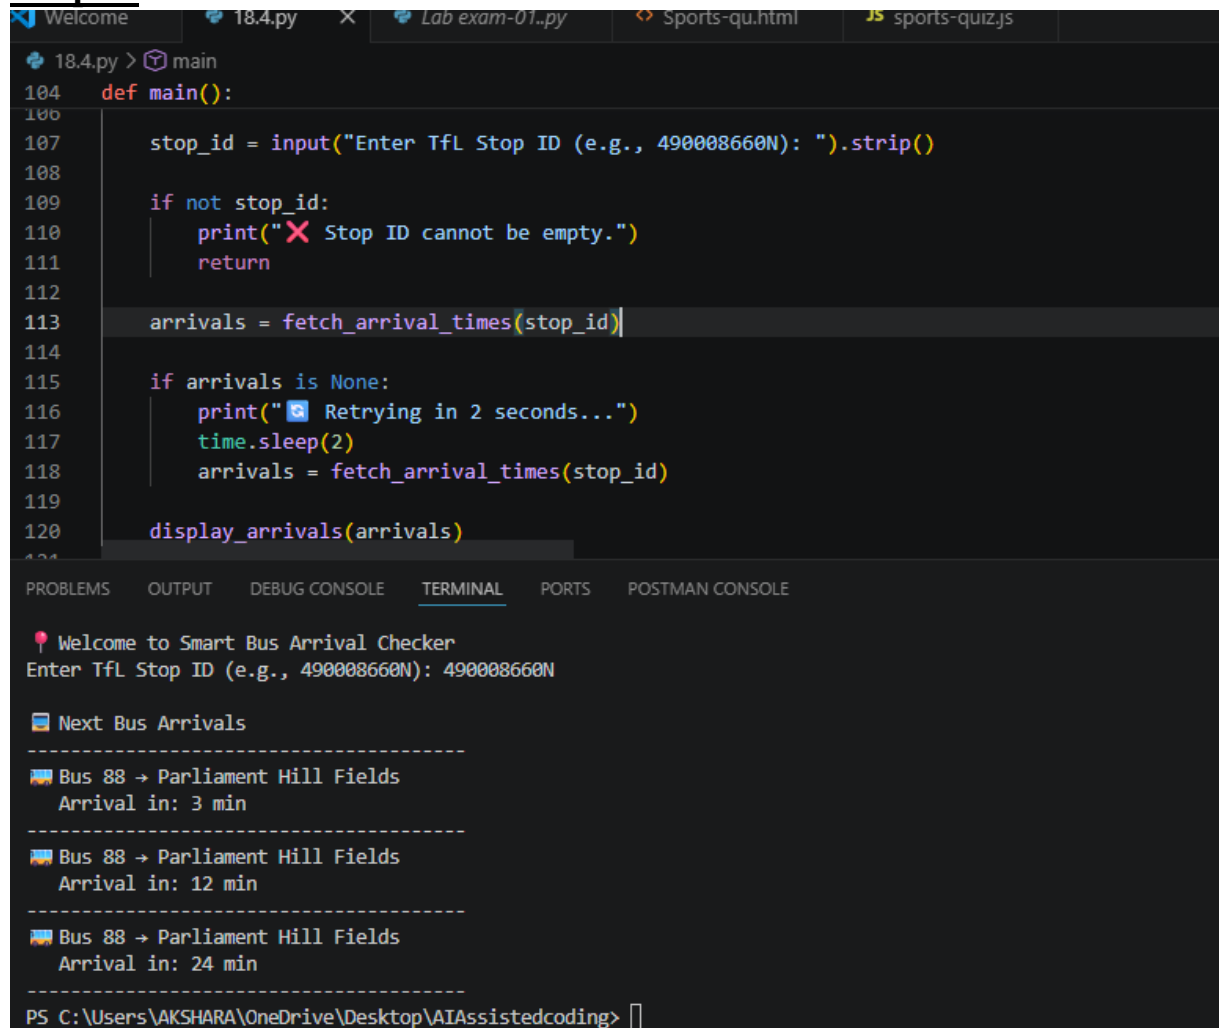

```
18.4.py > main
def main():
    stop_id = input("Enter TfL Stop ID (e.g., 490008660N): ").strip()

    if not stop_id:
        print("❌ Stop ID cannot be empty.")
        return

    arrivals = fetch_arrival_times(stop_id)

    if arrivals is None:
        print("🔄 Retrying in 2 seconds...")
        time.sleep(2)
        arrivals = fetch_arrival_times(stop_id)

    display_arrivals(arrivals)
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS POSTMAN CONSOLE

```
📌 Welcome to Smart Bus Arrival Checker
Enter TfL Stop ID (e.g., 490008660N): 490008660N

🚌 Next Bus Arrivals
-----
🚌 Bus 88 → Parliament Hill Fields
Arrival in: 3 min
-----
🚌 Bus 88 → Parliament Hill Fields
Arrival in: 12 min
-----
🚌 Bus 88 → Parliament Hill Fields
Arrival in: 24 min
-----

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding>
```

Explanation :

The program takes a stop ID as input and fetches arrival data from the TfL API using the requests library.

It processes the response, sorts arrivals by nearest time, and displays the next 3 arrivals with details.

It also handles errors (timeout, connection, invalid data) and includes a retry mechanism for reliability.

TASK – 03

Prompt :

Create a Python script using the requests library to fetch live stock data from a financial API (such as Alpha Vantage).

The program should accept a stock symbol as user input and display the current price, day high, and day low.

It must handle errors like invalid stock symbols, API rate limits, and missing fields in the JSON response. Ensure proper validation and safe parsing of the API response using try-except blocks, and display clean, user-friendly output without any crashes.

Code :

```
import requests
```

```
API_KEY = "YOUR_API_KEY" # Replace with your Alpha Vantage API key
BASE_URL = "https://www.alphavantage.co/query"
```

```
def fetch_stock_data(symbol):
```

```
    if not symbol.strip():
```

```
        print("✗ Stock symbol cannot be empty.")
```

```
        return None
```

```
    params = {
```

```
        "function": "GLOBAL_QUOTE",
```

```
        "symbol": symbol.upper().strip(),
```

```
        "apikey": API_KEY
```

```
    }
```

```
    try:
```

```
        response = requests.get(BASE_URL, params=params, timeout=5)
```

```
        response.raise_for_status()
```

```
        data = response.json()
```

```
        # Handle API rate limit
```

```
        if "Note" in data:
```

```
            print("⚠ API limit reached. Please try again later.")
```

```
            return None
```

```

# Handle invalid API key
if "Error Message" in data:
    print("❌ Invalid API key or request.")
    return None

quote = data.get("Global Quote")

if not quote:
    print("❌ Invalid stock symbol or no data found.")
    return None

return quote

except requests.exceptions.ConnectionError:
    print("❌ Network error. Check your internet connection.")

except requests.exceptions.Timeout:
    print("❌ Request timed out. Try again.")

except requests.exceptions.RequestException as e:
    print("❌ Unexpected error:", e)

return None

def display_stock_data(quote):
    try:
        symbol = quote.get("01. symbol", "N/A")
        price = quote.get("05. price", "N/A")
        high = quote.get("03. high", "N/A")
        low = quote.get("04. low", "N/A")

        print("\n📊 Stock Details")
        print("-" * 40)
        print(f"Symbol      : {symbol}")
        print(f"Current Price: ${price}")
        print(f"Day High    : ${high}")
        print(f"Day Low     : ${low}")
        print("-" * 40)

```


except Exception:

```
print("❌ Error displaying stock data (missing fields).")
```

```
def main():
```

```
print("📈 Live Stock Price Checker")
```

```
symbol = input("Enter stock symbol (e.g., AAPL, TSLA): ")
```

```
stock_data = fetch_stock_data(symbol)
```

```
if stock_data:
```

```
    display_stock_data(stock_data)
```


```
else:
```

```
    print("⚠️ Unable to retrieve stock data.")
```

```
if __name__ == "__main__":
```

```
    main()
```

Output :

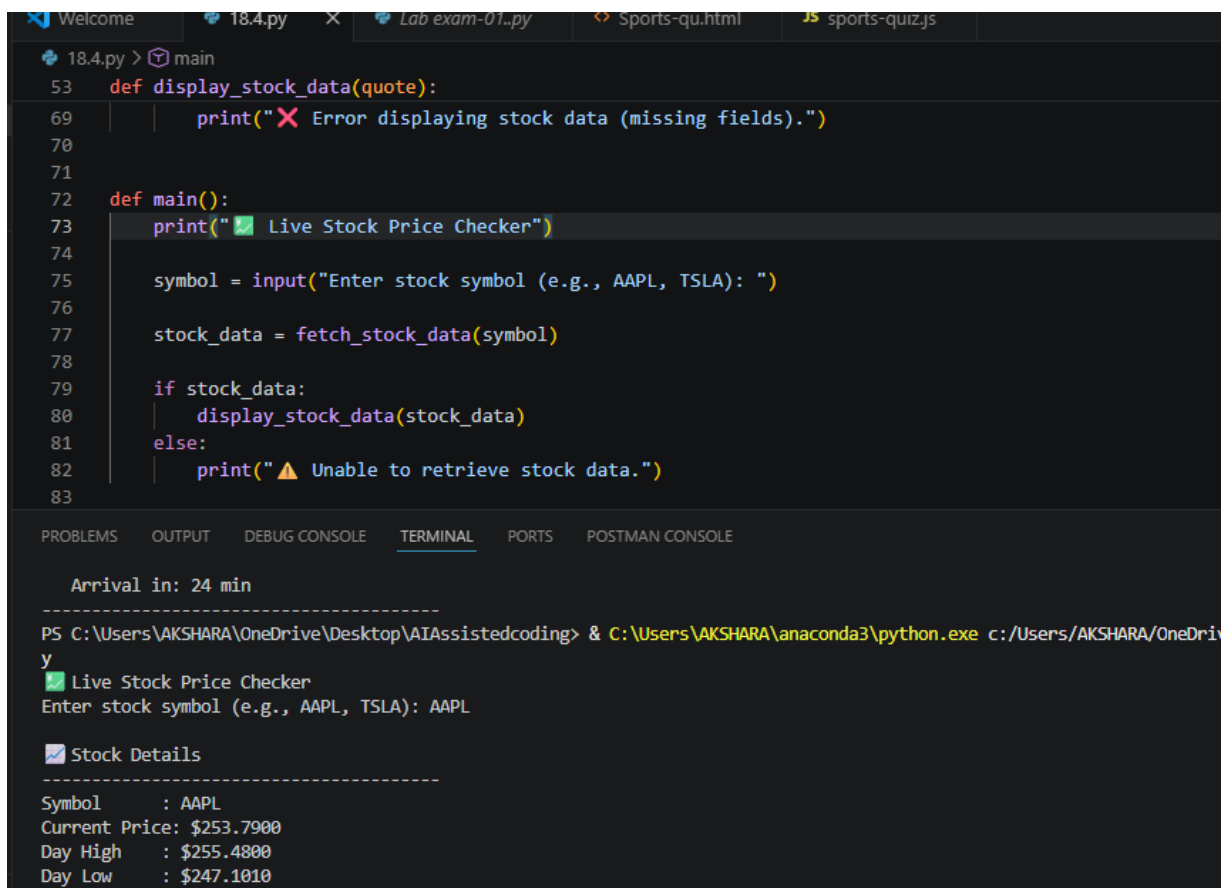

The screenshot shows a code editor with a Python file named 18.4.py. The code defines a function `display_stock_data` that prints an error message if stock data is missing, and a `main` function that prompts the user for a stock symbol, fetches the data, and displays it. The terminal output shows the program running, prompting for a stock symbol (AAPL), and displaying the stock details for AAPL.

```
18.4.py > main
53 def display_stock_data(quote):
69     print("❌ Error displaying stock data (missing fields).")
70
71
72 def main():
73     print("📈 Live Stock Price Checker")
74
75     symbol = input("Enter stock symbol (e.g., AAPL, TSLA): ")
76
77     stock_data = fetch_stock_data(symbol)
78
79     if stock_data:
80         display_stock_data(stock_data)
81     else:
82         print("⚠️ Unable to retrieve stock data.")
83
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE

Arrival in: 24 min

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding> & C:\Users\AKSHARA\anaconda3\python.exe c:/Users/AKSHARA/OneDrive/18.4.py

📈 Live Stock Price Checker

Enter stock symbol (e.g., AAPL, TSLA): AAPL

📈 Stock Details

Symbol : AAPL

Current Price: \$253.7900

Day High : \$255.4800

Day Low : \$247.1010

Explanation:

The script takes a stock symbol as input and fetches its current price, day high, and day low from a financial API.

It safely handles errors like invalid symbols, rate limits, and missing data, ensuring clean output without crashes.

TASK – 04:

Prompt : Generate a Python script that takes an IP address as input, validates its format, and uses a Geolocation API (like ip-api.com) to fetch country, city, and ISP. Include error handling for invalid IPs, API failures, and JSON parsing issues, and display results clearly.

Code :

```
import requests
```

```
import re
```

```
API_URL = "http://ip-api.com/json/"
```

```
def is_valid_ip(ip):
```

```
    """Validate IPv4 address format"""
```

```
    pattern = re.compile(r"^(?:[0-9]{1,3}\.){3}[0-9]{1,3}$")
```

```
    if not pattern.match(ip):
```

```
        return False
```

```
    # Check each octet is between 0–255
```

```
    parts = ip.split(".")
```

```
    for part in parts:
```

```
        if int(part) < 0 or int(part) > 255:
```

```
            return False
```

```
    return True
```

```

def fetch_ip_details(ip):
    """Fetch geolocation data from API"""
    try:
        url = API_URL + ip
        response = requests.get(url, timeout=5)
        response.raise_for_status()

    try:
        data = response.json()
    except ValueError:
        print("✗ Error parsing server response (invalid JSON).")
        return None

    # API-specific error handling
    if data.get("status") == "fail":
        print(f"✗ API Error: {data.get('message', 'Invalid IP address')}")
        return None

    return data

except requests.exceptions.ConnectionError:
    print("✗ Network error. Please check your internet connection.")

except requests.exceptions.Timeout:
    print("✗ Request timed out. Try again later.")

```

```
except requests.exceptions.HTTPError as e:
```

```
    print("✖ HTTP error:", e)
```

```
except requests.exceptions.RequestException as e:
```

```
    print("✖ Unexpected error:", e)
```

```
return None
```

```
def display_ip_details(data):
```

```
    """Display results cleanly"""
```

```
    if not data:
```

```
        print("⚠ No data to display.")
```

```
        return
```

```
    print("\n🌐 IP Geolocation Details")
```

```
    print("-" * 40)
```

```
    print(f'IP Address : {data.get('query', 'N/A')}')
```

```
    print(f'Country   : {data.get('country', 'N/A')}')
```

```
    print(f'City      : {data.get('city', 'N/A')}')
```

```
    print(f'ISP       : {data.get('isp', 'N/A')}')
```

```
    print("-" * 40)
```

```
def main():
```

```
    print("🌐 IP Geolocation Finder")
```

```
    ip = input("Enter an IP address: ").strip()
```

```
if not is_valid_ip(ip):  
    print("✗ Invalid IP address format.")  
    return
```

```
data = fetch_ip_details(ip)
```

```
if data:  
    display_ip_details(data)  
else:  
    print("⚠ Could not retrieve IP details.")
```

```
if __name__ == "__main__":  
    main()
```

Output :

```
72 def main():
73     ip = input("Enter an IP address: ")
74
75
76
77     if not is_valid_ip(ip):
78         print("❌ Invalid IP address format.")
79         return
80
81     data = fetch_ip_details(ip)
82
83     if data:
84         display_ip_details(data)
85     else:
86         print("⚠️ Could not retrieve IP details.")
87
88
89 if __name__ == "__main__":
90     main()
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE

Day Low : \$247.1010

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding> & C:\Users\AKSHARA\anaconda3\Scripts\python.exe C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding\ip_geolocation_finder.py

🌐 IP Geolocation Finder

Enter an IP address: 8.8.8.8

🌐 IP Geolocation Details

IP Address : 8.8.8.8
Country : United States
City : Ashburn
ISP : Google LLC

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding>

Explanation:

This script takes an IP address, checks if it is valid, and then calls a Geolocation API to get details like country, city, and ISP. It also handles errors such as invalid IP format, API failure, and incorrect JSON response to ensure the program runs safely.

TASK – 05

Prompt :

Generate a Python script that simulates payment processing using a sandbox Payment API. It should send a POST request with amount, currency, and payment method, validate inputs, handle errors (invalid details, HTTP errors, network issues), display transaction status, and log failed transactions to a file.

Code :

```
import requests
import json
from datetime import datetime

# Example sandbox endpoint (mock API)
API_URL = "https://jsonplaceholder.typicode.com/posts"

def validate_payment(amount, currency, method):
    if amount <= 0:
        print("✗ Amount must be greater than 0.")
        return False

    if not currency.isalpha() or len(currency) != 3:
        print("✗ Currency must be a 3-letter code (e.g., USD, INR).")
        return False

    valid_methods = ["card", "upi", "netbanking"]
    if method.lower() not in valid_methods:
        print(f"✗ Invalid payment method. Choose from {valid_methods}")
        return False

    return True
```

```

def log_failed_transaction(data, error_message):
    with open("failed_transactions.log", "a") as file:
        log_entry = {
            "timestamp": str(datetime.now()),
            "data": data,
            "error": error_message
        }
        file.write(json.dumps(log_entry) + "\n")

def process_payment(amount, currency, method):
    payload = {
        "amount": amount,
        "currency": currency.upper(),
        "payment_method": method.lower()
    }

    try:
        response = requests.post(API_URL, json=payload, timeout=5)
        response.raise_for_status()

        try:
            data = response.json()
        except ValueError:
            print("✗ Invalid JSON response from server.")
            log_failed_transaction(payload, "JSON parsing error")
            return None

    return data

```



```
except requests.exceptions.HTTPError as e:
```

```
    print(" ❌ HTTP error:", e)
```

```
    log_failed_transaction(payload, str(e))
```

```
except requests.exceptions.ConnectionError:
```

```
    print(" ❌ Network error. Check your connection.")
```

```
    log_failed_transaction(payload, "Connection error")
```

```
except requests.exceptions.Timeout:
```

```
    print(" ❌ Request timed out.")
```

```
    log_failed_transaction(payload, "Timeout")
```

```
except requests.exceptions.RequestException as e:
```

```
    print(" ❌ Unexpected error:", e)
```

```
    log_failed_transaction(payload, str(e))
```

```
return None
```

```
def display_result(response_data):
```

```
    if not response_data:
```

```
        print(" ⚠️ Payment failed.")
```

```
        return
```

```
print("\n 📄 Payment Status")
```

```
print("-" * 40)
```


```
print("Status    : SUCCESS ✅")
```

```
print(f"Transaction ID: {response_data.get('id', 'N/A')}")
```

```
print("-" * 40)
```

```
def main():  
    print(" 💰 Payment Processing Simulator")  
  
    try:  
        amount = float(input("Enter amount: "))  
    except ValueError:  
        print(" ❌ Invalid amount.")  
        return  
  
    currency = input("Enter currency (e.g., USD, INR): ").strip()  
    method = input("Enter payment method (card/upi/netbanking): ").strip()  
  
    if not validate_payment(amount, currency, method):  
        return  
  
    response = process_payment(amount, currency, method)  
    display_result(response)  
  
if __name__ == "__main__":  
    main()
```

Output :

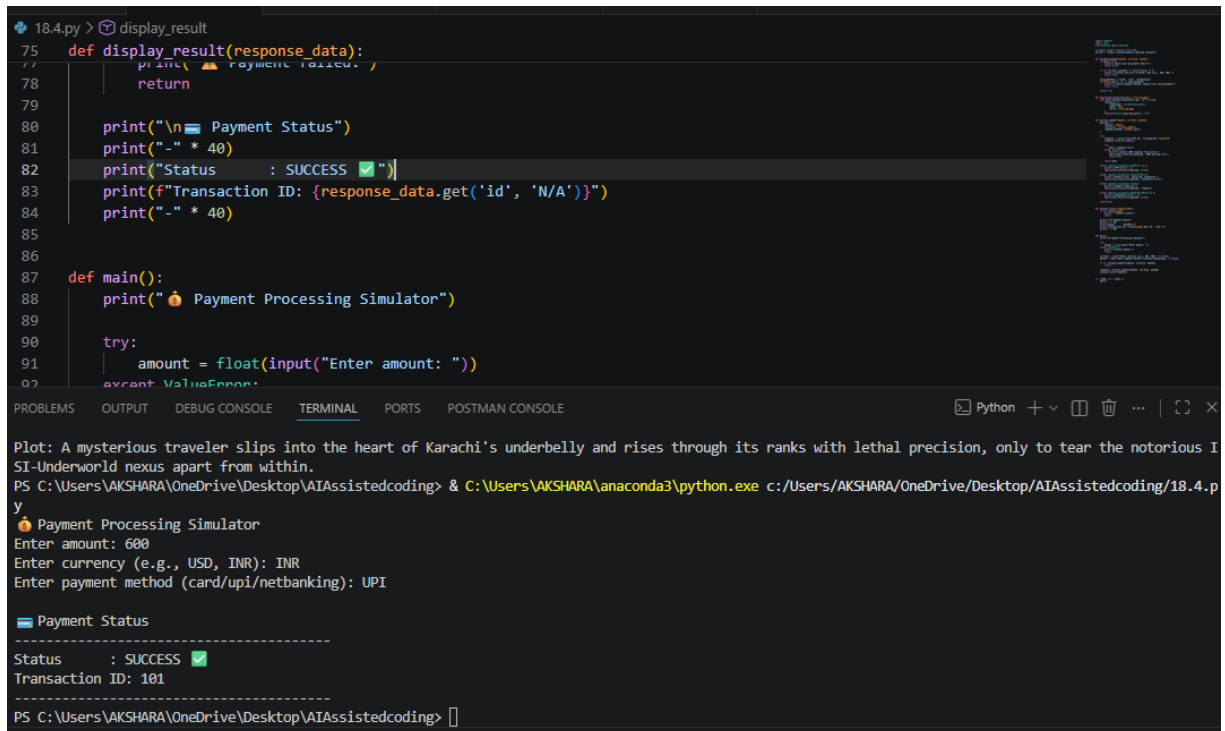

```
18.4.py > display_result
75 def display_result(response_data):
76     print(🚨 Payment Failed.)
77     return
78
79
80     print("\n💳 Payment Status")
81     print("-" * 40)
82     print(f"Status : SUCCESS ✅")
83     print(f"Transaction ID: {response_data.get('id', 'N/A')}")
84     print("-" * 40)
85
86
87 def main():
88     print("🔥 Payment Processing Simulator")
89
90     try:
91         amount = float(input("Enter amount: "))
92     except ValueError:
```

Plot: A mysterious traveler slips into the heart of Karachi's underbelly and rises through its ranks with lethal precision, only to tear the notorious I SI-Underworld nexus apart from within.

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding> & C:\Users\AKSHARA\anaconda3\python.exe c:/Users/AKSHARA/OneDrive/Desktop/AIAssistedcoding/18.4.py

🔥 Payment Processing Simulator

Enter amount: 600

Enter currency (e.g., USD, INR): INR

Enter payment method (card/upi/netbanking): UPI

💳 Payment Status

Status : SUCCESS ✅

Transaction ID: 101

PS C:\Users\AKSHARA\OneDrive\Desktop\AIAssistedcoding>

Explanation : This script sends payment details (amount, currency, method) to a sandbox API, checks if inputs are valid, and processes the transaction. It handles errors like invalid data, server issues, or network failures, shows the payment status, and logs failed transactions to a file.