1

(RoHS Compliant)

(SC BIDI SFP)

SPB-9640G / SPB-9640BG / SPB-9640AG

SPB-9640LG / SPB-9640BLG / SPB-9640ALG (LC BIDI SFP)

1310 nm TX / 1550 nm RX , 3.3V / 2.5 Gbps Single-Fiber SFP Transceiver

FEATURES

- 1-Fiber Bi-Directional SFP Optical Transceiver
- Simplex SC Connector: SPB-9640G
- Simplex LC Connector: SPB-9640LG
- Tri-rate for OC-48 / STM-16, Gigabit Ethernet 1000BASE & Fibre Channel
- 1310 nm DFB LD Transmitter
- 1550 nm Receiver
- Distance Up to 40 km
- AC/AC Coupling according to MSA
- Single +3.3 V Power Supply
- RoHS Compliant
- 0 to 70°C Operation: SPB-9640G • -10 to 85°C Operation: SPB-9640BG -40 to 85 °C Operation: SPB-9640AG
- Class 1 Laser International Safety Standard IEC 60825 Compliant

APPLICATIONS

- WDM OC-48 / STM-16 Links
- Gigabit Ethernet Interconnect
- Fibre Channel Links

DESCRIPTION

.....

The SPB-9640G series are high performance module for OC-48 / STM-16 and Gigabit Ethernet 1000BASE single fiber communications by using 1310 nm transmitter and 1550 nm receiver. It is with the SFP 20-pin connector to allow hot plug capability. The transmitter section uses a multiple quantum well 1310 nm DFB laser and is a class 1 laser compliant according to International Safety Standard IEC 60825. The receiver section is designed to receive 1550 nm signal. The receiver section uses an integrated 1550 nm detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

LASER SAFETY

This single mode transceiver is a Class 1 laser product. It complies with IEC 60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

ORDER INFORMATION

P/No.	Bit Rate	Distance	TX	RX	Package	Temp	TX Power	RX Sens.	RoHS
	(Gb/s)	(km)	(nm)	(nm)		(°C)	(dBm)	(dBm)	Compliant
SPB-9640G	2.5	40	1310 DFB	1550	SC SFP	0 to 70	3 to -2	-20	Yes
SPB-9640BG	2.5	40	1310 DFB	1550	SC SFP	-10 to 85	3 to -2	-20	Yes
SPB-9640AG	2.5	40	1310 DFB	1550	SC SFP	-40 to 85	3 to -2	-20	Yes
SPB-9640LG	2.5	40	1310 DFB	1550	LC SFP	0 to 70	3 to -2	-20	Yes
SPB-9640BLG	2.5	40	1310 DFB	1550	LC SFP	-10 to 85	3 to -2	-20	Yes
SPB-9640ALG	2.5	40	1310 DFB	1550	LC SFP	-40 to 85	3 to -2	-20	Yes

OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303 Tel: 886-3-5979798 Fax: 886-3-5979737

......

E-mail: sales@optoway.com

http://www.optoway.com

12/1/2015 V4.0



Absolute Maximum Ratings							
Parameter	Symbol	Min	Max	Units	Notes		
Storage Temperature	Tstg	-40	85	°C			
Operating Case Temperature	Topr	0	70	°C	SPB-9640G		
		-10	85		SPB-9640BG		
		-40	85		SPB-9640AG		
Relative Humidity	RH	0	85	%	No condensing		
Power Supply Voltage	Vcc	0	3.6	V			
Input Voltage		GND	Vcc	V			
Output Current	Iout	0	30	mA			

Recommended Operating Conditions							
Parameter	Symbol	Min	Тур	Max	Units / Notes		
Power Supply Voltage	Vcc	3.13	3.3	3.47	V		
Power Supply Current	I _{CC (TX+RX)}		200	300	mA		
Operating Case Temperature	Topr	0		70	°C / SPB-9640G		
		-10		85	°C / SPB-9640BG		
		-40		85	°C / SPB-9640AG		
Data Rate		622	2488	2670	Mb/s		

Transmitter Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)							
Parameter	Symbol	Min	Тур	Max	Units	Notes	
Optical							
Optical Transmit Power	Po	-2		3	dBm	1	
Output Center Wavelength	λ	1261		1360	nm		
Output Spectrum Width	Δλ			1	nm	-20 dB width	
Side Mode Suppression Ratio	SMSR	30			dB		
Extinction Ratio	E_R	8.2			dB		
Output Eye	Compliant with 7	Γelecordia GR	-253-GORE	and ITU-T Rec	ommendation	G.957	
Optical Rise Time	$t_{\rm r}$			150	ps	20% to 80% Values	
Optical Fall Time	$t_{ m f}$			150	ps	20% to 80% Values	
Relative Intensity Noise	RIN			-120	dB/Hz		
Electrical							
Data Input Current – Low	$ m I_{IL}$	-350			μΑ		
Data Input Current – High	${ m I}_{ m IH}$			350	μΑ		
Differential Input Voltage	V_{IH} - V_{IL}	0.5		2.4	V	Peak-to-Peak	
TX Disable Input Voltage – Low	$T_{DIS,L}$	0		0.5	V	2	
TX Disable Input Voltage – High	$T_{DIS, H}$	2.0		Vcc	V	2	
TX Disable Assert Time	T_{ASSERT}			10	μs		
TX Disable Deassert Time	$T_{DEASSERT}$			1	ms		
TX Fault Output Voltage Low	T_{FaultL}	0		0.5	V	3	
TX Fault Output Voltage High	T_{FaultH}	2.0		Vcc+0.3	V	3	

- Notes: 1. Output power is power coupled into a $9/125 \mu m$ single mode fiber.
 - 2. There is an internal 4.7K to 10K ohm pull-up resistor to VccTX.
 - 3. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).

OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303

Tel: 886-3-5979798 Fax: 886-3-5979737

E-mail: sales@optoway.com http://www.optoway.com 12/1/2015 V4.0


Optoway

Receiver Specifications (0°C < Topr < 70°C, 3.13 V < Vcc < 3.47V)							
Parameter	Symbol	Min	Тур	Max	Units	Notes	
Optical							
Sensitivity				-20	dBm	4	
Maximum Input Power	Pin	0			dBm		
Signal Detect Asserted	Pa			-20	dBm	Transition: low to high	
Signal Detect Deasserted	Pd	-31			dBm	Transition: high to low	
Signal detect Hysteresis		1.0			dB		
Wavelength of Operation		1480		1580	nm	5	
Electrical							
Differential Output Voltage	$V_{OH} - V_{OL}$	0.6		2.0	V		
Output LOS Voltage Low	V_{OL}	0		0.5	V	6	
Output LOS Voltage – High	V_{OH}	2.0		Vcc+0.3	V	6	
Signal Detect Assert Time	AS_{MAX}			100	μs	OFF to ON	
Signal Detect Deassert Time	ANS _{MAX}			300	μs	ON to OFF	

Notes: 4. Minimum sensitivity and saturation levels at BER 1E-10 for a 2²³-1 PRBS.

- 5. At least 30 dB optical isolation for the wavelength 1260 to 1360 nm.
- 6. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).

RECOMMENDED CIRCUIT SCHEMATIC

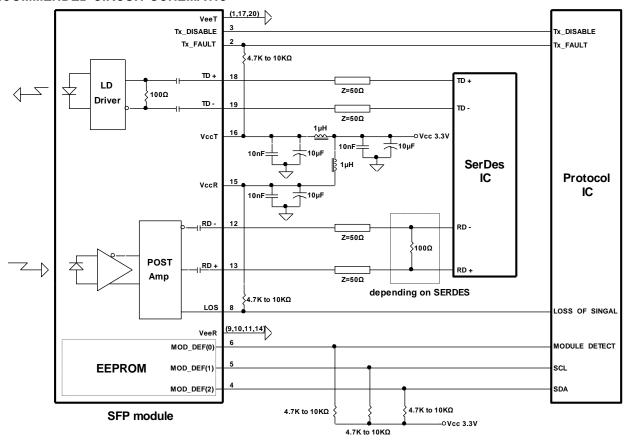


OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303

Tel: 886-3-5979798 Fax: 886-3-5979737

E-mail: sales@optoway.com http://www.optoway.com 12/1/2015 V4.0



CONNECTION DIAGRAM

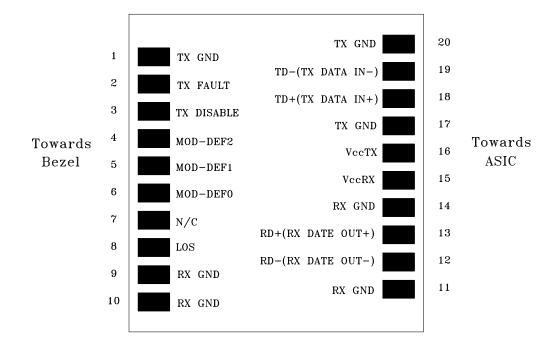

PIN	Signal Name	Description	PIN	Signal Name	Description
1	TX GND	Transmitter Ground	11	RX GND	Receiver Ground
2	TX Fault	Transmitter Fault Indication	12	RX DATA OUT-	Inverse Receiver Data Out
3	TX Disable	Transmitter Disable (Module disables on high or open)	13	RX DATA OUT+	Receiver Data Out
4	MOD-DFE2	Modulation Definition 2 – Two wires serial ID Interface	14	RX GND	Receiver Ground
5	MOD-DEF1	Modulation Definition 1 – Two wires serial ID Interface	15	Vcc RX	Receiver Power – 3.3V±5%
6	MOD-DEF0	Modulation Definition 0 – Ground in Module	16	Vcc TX	Transmitter Power – 3.3V±5%
7	N/C	Not Connected	17	TX GND	Transmitter Ground
8	LOS	Loss of Signal	18	TX DATA IN+	Transmitter Data In
9	RX GND	Receiver Ground	19	TX DATA IN-	Inverse Transmitter Data In
10	RX GND	Receiver Ground	20	TX GND	Transmitter Ground

Module Definition

Module Definition	MOD-DEF2 PIN 4	MOD-DEF1 PIN 5	MOD-DEF0 PIN 6	Interpretation by Host
4	SDA	SCL	LV-TTL Low	Serial module definition protocol

Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, MOD-DEF(1:2) appear as no connector (NC) and MOD-DEF(0) is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E^2 PROM protocol of the ATMEL AT24C01A/02/04 family of components.

OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303

Tel: 886-3-5979798 Fax: 886-3-5979737

E-mail: sales@optoway.com h


http://www.optoway.com

Optoway


PACKAGE DIAGRAM

Units in mm

A) SC SFP

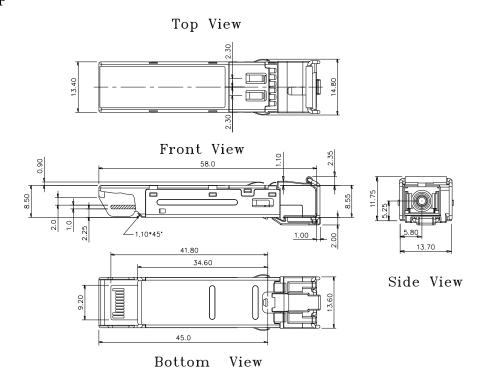

B) LC SFP

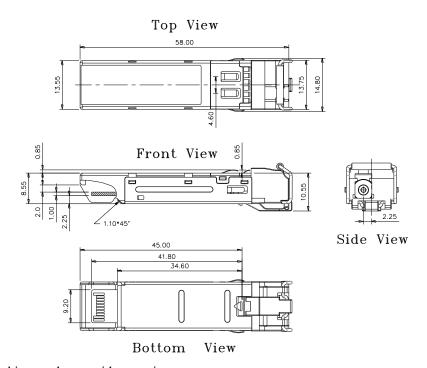

Note: Specifications subject to change without notice.

OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303

Tel: 886-3-5979798 Fax: 886-3-5979737 E-mail: sales@optoway.com

http://www.optoway.com

12/1/2015

V4.0

12/1/2015 V4.0

6

Optoway

REVISION HISTORY

Version	Subject	Release Date
1.0	Initial datasheet	2005/12/1
2.0	Combine datasheet of SC BIDI SFP and LC BIDI SFP	2006/3/1
3.0	Revise SC BIDI SFP package diagram for high port density use	2008/1/1
4.0	Change package diagram	2015/12/1

OPTOWAY TECHNOLOGY INC. No.38, Kuang Fu S. Road, Hu Kou, Hsin Chu Industrial Park, Hsin Chu, Taiwan 303

Tel: 886-3-5979798 Fax: 886-3-5979737

E-mail: sales@optoway.com http://www.optoway.com