Bredenoord NEA Generator

Quick guide: 15 kVA genset (HAG4392-HAG4456) - start, stop and key location

1. Where are the keys?

The keys hang on the red EMERGENCY STOP button inside the small red cabinet (box with the hinged flap) on the outside of the genset. Open the flap/cover - the key ring with the transparent tag is attached to the red mushroom button. The yellow label around the button says "EMERGENCY STOP". Do not press the button - just take the keys off it.




Keys hanging on the emergency stop button




Same red box in the manual (Noodstop / Not-Aus / Emerg. Stop)

2. Before starting

1	Check the **lube oil level (2)** and **fuel level (3)**. Top up oil (1) and fuel/diesel (4) if necessary.
2	Turn the **battery switch (5)** clockwise (the chained switch on the blue frame, labelled "Battery switch").

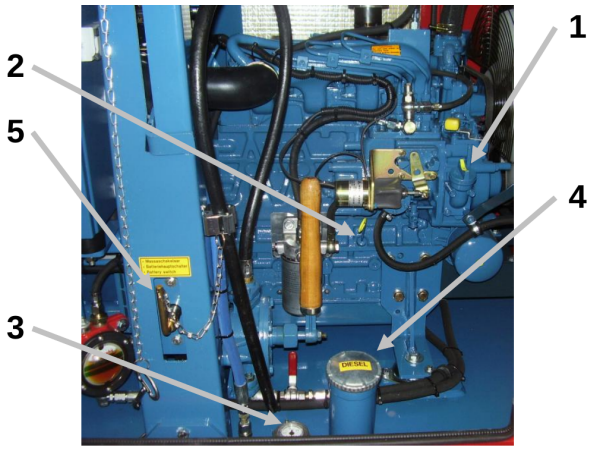

Engine side: 1 oil filler, 2 dipstick, 3 fuel level, 4 diesel filler, 5 battery switch

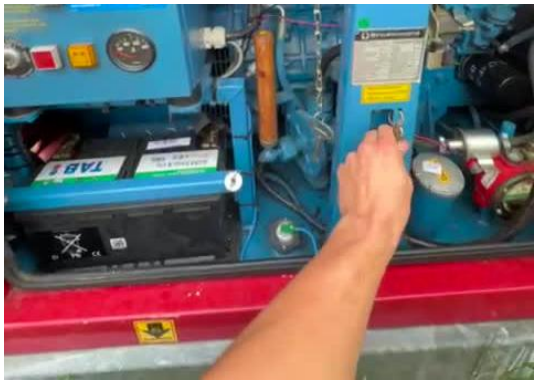


Battery switch (video)

Bredenoord NEA Generator

Quick guide: 15 kVA genset (HAG4392-HAG4456) - start, stop and key location

3. Starting

1	Press and **hold** the button **"PUSH DURING START" (6)** (red button on the control panel).
2	After approx. **5 seconds**, push in the **ignition key (7)** and turn it to **"START"**. The engine starts.
3	Release the "PUSH DURING START" button (6) **when the light goes off**.
4	Switch **on** the **main switch (8)** (upwards).

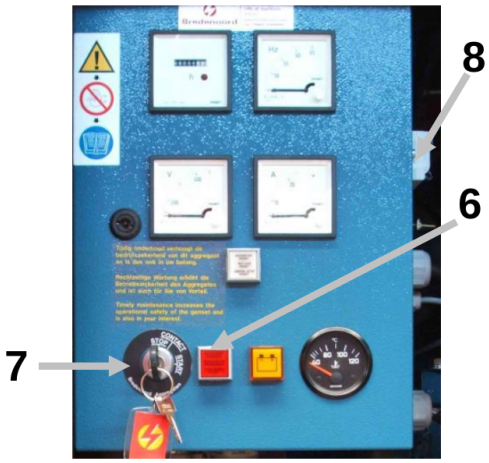

Control panel: 6 push-during-start, 7 ignition key, 8 main switch



Control panel with ignition key (video)

4. Stopping

1	Switch **off** the main switch (8) (downwards).
2	Let the genset run and **cool down for 5 minutes**.
3	Turn the ignition key (7) to **"STOP"**. The engine stops.

Emergency: use the red EMERGENCY STOP button in the red cabinet only in real danger. Put the keys back on the button when finished. Source: Bredenoord operating instructions 15 kVA GG (HAG4392-HAG4456) and start-up video.