# Thick Film Chip Resistors / Low Resistance Type

Type: ERJ 2LW, 3LW, 6LW
2BW, 3BW, 6BW,
8BW, 6CW, 8CW
ERJ 2B, 3B, 6D, 6B, 8B,
14B, 3R, 6R, 8R, 14R,
12R, 12Z, 1TR
ERJ L03, L06, L08, L14,
L12. L1D. L1W

#### **Features**

- Current Sensing resistor
- Small size and lightweight
- Realize both low-resistance & High-precision by original thick film resistive element & special electrode structure
- Suitable for both reflow and flow soldering
- Realize High-power by double-sided resistive elements structure that aimed to suppress temperature rising: ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6BW, 8BW, 6CW, 8CW
- Low TCR: ±75×10<sup>-6</sup>/°C (ERJ6CW, 8CW)
- Low Resistance Value

40m  $\Omega$  to 100m  $\Omega$  : ERJL1D, L1W


401132 (0 1001132 . ENGLID, ETV

47m  $\Omega$  to 100m  $\Omega$  : ERJ2BW, ERJL03, L06, L08

- Reference Standards : IEC 60115-8, JIS C 5201-8, JEITA RC-2144
- AEC-Q200 qualified (Exemption ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6CW, 8CW)
- RoHS compliant
- As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions, Please see Data Files

### **Explanation of Part Numbers**


ERJ2LW, 3LW, 6LW, 2BW, 3BW, 6BW, 8BW, 6CW, 8CW
 High power (double-sided resistive elements structure) type>

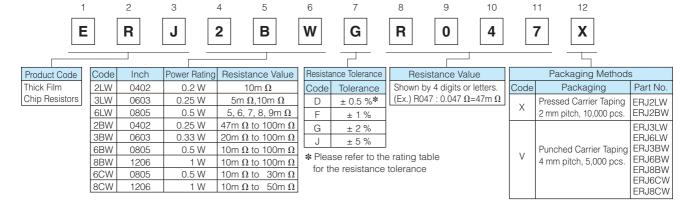


# **Panasonic**

# Thick Film Chip Resistors / Low Resistance Type

ERJ2BS/2BQ, 3BS/3BQ, 6BS/6BQ, 8BS/8BQ, 14BS/14BQ, 6D, 3R, 6R, 8R, 14R, 12R, 12Z, 1TR
 High power type/Standard type>

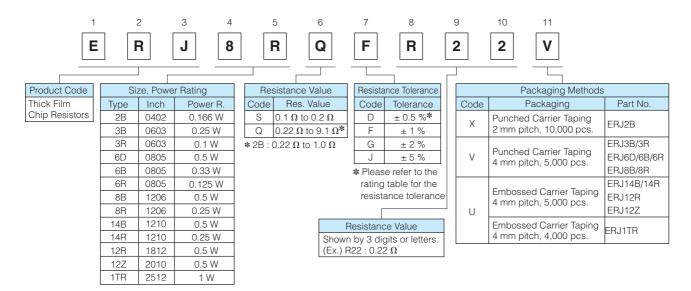

● ERJL03, L06, L08, L14, L12, L1D, L1W <Low TCR type>

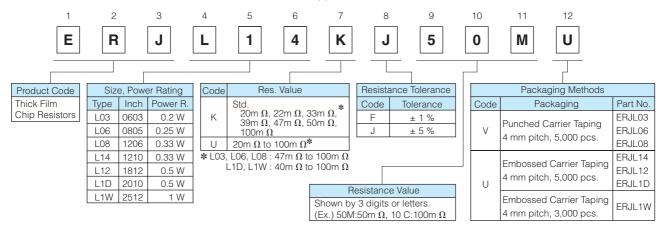

### Ratings

<High power (double-sided resistive elements structure) type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance $^{(1)}$ Range $(\Omega)$	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJ2LW (0402)	0.2	±1, ±2, ±5	10m	0 to 500	-55 to +125
ERJ3LW (0603)	0.25	±1, ±2, ±5	5m	0 to 700	-55 to +125
	0.23		10m	0 to 300	-55 to +125
<b>ERJ6LW</b> (0805)	0.5	±1, ±2, ±5	5, 6, 7, 8, 9m	0 to 300	-55 to +125
ERJ2BW (0402)	0.25	±1, ±2, ±5	47m to 100m (E24)	±300	-55 to +155
ERJ3BW (0603)	0.33	±1, ±2, ±5	20m to 100m (E24)	R < 39m Ω : ±250 R ≥ 39m Ω : ±150	-55 to +155
ERJ6BW (0805)	0.5	±1, ±2, ±5	10m to 100m (E24)	R < 15m $\Omega$ : ±300 R $\geq$ 15m $\Omega$ : ±200	-55 to +155
ERJ8BW (1206)	1	±1, ±2, ±5	10m to 100m (E24)	$\begin{array}{ll} 10m \ \Omega \leq R < & 20m \ \Omega : \pm 200 \\ 20m \ \Omega \leq R < & 47m \ \Omega : \pm 150 \\ 47m \ \Omega \leq R \leq 100m \ \Omega : \pm 100 \\ \end{array}$	-55 to +155
ERJ6CW (0805)	0.5	±0.5, ±1, ±2, ±5	10m to 30m (E24)	±75	-55 to +125
ERJ8CW (1206)	1	±1, ±2, ±5	10m to 50m (E24)	±75	-55 to +125

<sup>(1)</sup> Please contact us when resistors of irregular series are needed.

# Panasonic Thick Film Chip Resistors / Low Resistance Type

### Ratings

<High power type>

Part No. Power Rating at 70 °C (W)		Resistance Tolerance (%)	Resistance $^{(1)}$ Range $(\Omega)$	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJ2BS (0402)	0.166	±1, ±2, ±5	0.10 to 0.20 (E24)	±300	-55 to +125
ERJ2BQ (0402)	0.100		0.22 to 1.0 (E24)	±250	
ERJ3BS (0603)		±1, ±2, ±5	0.10 to 0.20 (E24)	±300	-55 to +125
ED 13DO (0603)	0.25		0.22 to 0.91 (E24)	±300	
ERJ3BQ (0603)			1.0 to 9.1 (E24)	±200	
ERJ6DS (0805)	0.5	±0.5, ±1, ±2, ±5	0.10 to 0.20 (E24, E96)	±150	-55 to +155
ERJ6DQ (0805)	0.5		0.22 to 9.1 (E24, E96)	±100	
ERJ6BS (0805)			0.10 to 0.20 (E24)	±250	
<b>ED ICDO</b> (000E)	0.33	±1, ±2, ±5	0.22 to 0.91 (E24)	±23U	-55 to +125
<b>ERJ6BQ</b> (0805)			1.0 to 9.1 (E24)	±200	
ERJ8BS (1206)			0.10 to 0.20 (E24)	. 050	
ED 1000 (1006)	0.5	±1, ±2, ±5	0.22 to 0.91 (E24)	±250	-55 to +125
ERJ8BQ (1206)			1.0 to 9.1 (E24)	±200	
ERJ14BS (1210)			0.10 to 0.20 (E24)	. 200	
ED 144BO (1010)	0.5	±1, ±2, ±5	0.22 to 0.91 (E24)	±200	-55 to +125
ERJ14BQ (1210)			1.0 to 9.1 (E24)	±100	

<sup>(1)</sup> Please contact us when resistors of irregular series are needed.

### <Standard type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance Range $(\Omega)$	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJ3RS (0603)			0.10 to 0.20 (E24)	±300	
ERJ3RQ (0603)	0.1	±1, ±2, ±5	0.22 to 0.91 (E24)		-55 to +125
			1.0 to 9.1 (E24)	±200	
<b>ERJ6RS</b> (0805)			0.10 to 0.20 (E24)	±250	
ERJ6RQ (0805)	0.125	±1, ±2, ±5	0.22 to 0.91 (E24)		-55 to +125
			1.0 to 9.1 (E24)	±200	
ERJ8RS (1206)			0.10 to 0.20 (E24)	±250	
ERJ8RQ (1206)	0.25	±1, ±2, ±5	0.22 to 0.91 (E24)	1230	-55 to +125
L110011Q (1200)			1.0 to 9.1 (E24)	±200	
ERJ14RS (1210)			0.10 to 0.20 (E24)	±200	
ERJ14RQ (1210)	0.25	±1, ±2, ±5	0.22 to 0.91 (E24)	±200	-55 to +125
Enj 14nQ (1210)			1.0 to 9.1 (E24)	±100	]
ERJ12RS (1812)			0.10 to 0.20 (E24)	±200	
ERJ12RQ (1812)	0.5	±1, ±2, ±5	0.22 to 0.91 (E24)	±200	-55 to +125
Enj 12nQ (1012)			1.0 to 9.1 (E24)	±100	1
ERJ12ZS (2010)			0.10 to 0.20 (E24)	. 200	
ERJ12ZQ (2010)	0.5	±1, ±2, ±5	0.22 to 0.91 (E24)	±200	-55 to +125
Eng 122Q (2010)			1.0 to 9.1 (E24)	±100	
ERJ1TRS (2512)			0.10 to 0.20 (E24)	. 200	
ED 14TDO (0510)	1	±1, ±2, ±5	0.22 to 0.91 (E24)	±200	-55 to +125
ERJ1TRQ (2512)			1.0 to 9.1 (E24)	±100	


#### <Low TCR type>

Zen Terrapor							
Part No. (inch size)		Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance $^{ ext{(1)}}$ Range $(\Omega)$	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)	
ERJL03	(0603)	0.2	±1, ±5	47m to 100m	±200	-55 to +125	
ERJL06	(0805)	0.25	±1, ±5	47m to 100m	±100	-55 to +125	
ERJL08	(1206)	0.33	±1, ±5	47m to 100m	±100	-55 to +125	
ERJL14	(1210)	0.33	±1, ±5	20m to 100m		-55 to +125	
ERJL12	(1812)	0.5	±1, ±5	20m to 100m	$R < 47m \Omega$ : ±300	-55 to +125	
ERJL1D	(2010)	0.5	±1, ±5	40m to 100m	$R \ge 47 \text{m} \ \Omega : \pm 100$	-55 to +125	
ERJL1W	(2512)	1	±1, ±5	40m to 100m		-55 to +125	

<sup>(1)</sup> Standard R.V. : 20m  $\Omega$ , 22m  $\Omega$ , 33m  $\Omega$ , 39m  $\Omega$ , 47m  $\Omega$ , 50m  $\Omega$ , 100m  $\Omega$ , Custom R.V. : Each 1m  $\Omega$  within upper range.


# Panasonic Thick Film Chip Resistors / Low Resistance Type

### Construction

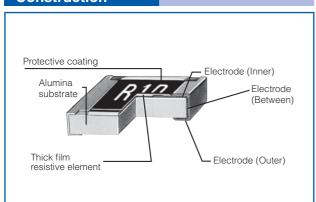


#### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

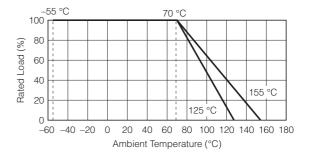

## **Dimensions** in mm (not to scale)

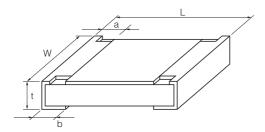

Part No.	Dimensions (mm)					Mass(Weight)
(inch size)	L	W	а	b	t	[g/1000 pcs.]
ERJ2LW (0402)	1.00 <sup>±0.10</sup>	$0.50^{+0.10}_{-0.05}$	$0.25^{\pm0.10}$	$0.25^{\pm0.10}$	$0.40^{\pm0.05}$	0.8
ERJ2BW (0402)	1.00 <sup>±0.10</sup>	0.50+0.10	$0.24^{\pm0.10}$	$0.24^{\pm0.10}$	$0.35^{\pm0.05}$	0.8
ERJ2BS (0402) ERJ2BQ	1.00 <sup>±0.10</sup>	0.50+0.10	0.20 <sup>±0.10</sup>	0.27 <sup>±0.10</sup>	0.35 <sup>±0.05</sup>	0.8
(3111 32)	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.55 <sup>±010</sup>	3
ERJ3LW (10m Ω) (0603) ERJ3BW	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.55 <sup>±010</sup>	3
ERJ3R ERJ3B (0603) ERJL03	1.60 <sup>±0.15</sup>	0.80+0.15	0.30 <sup>±0.20</sup>	0.30 <sup>±0.15</sup>	0.45 <sup>±0.10</sup>	2
ERJ6LW (0805)		1.25 <sup>±0.20</sup>	0.63 <sup>±0.20</sup>	$0.63^{\pm0.20}$	0.70 <sup>±0.10</sup>	6
ERJ6BW (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.20</sup>	$0.55^{\pm0.20}$	$0.55^{\pm0.20}$	$0.65^{\pm0.10}$	6
ERJ6CW (10 to 13m $\Omega$ )	2.05 <sup>±0.20</sup>	1.30 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	6
ERJ6CW (15 to 30m Ω)	2.00		0.45 <sup>±0.20</sup>	0.45 <sup>±0.20</sup>		
ERJ6D (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	$0.40^{\pm0.20}$	$0.55^{\pm0.25}$	0.60 <sup>±0.10</sup>	5
ERJ6R ERJ6B (0805) ERJL06	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	5
ERJ8BW (1206)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	1.00 <sup>±0.20</sup>	1.00 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8CW (10 to 16m $\Omega$ )	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	1.10 <sup>±0.20</sup>	1.10 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8CW (18 to 50m Ω)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8R ERJ8B (1206) ERJL08	3.20+0.05	1.60+0.05	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	10
ERJ14R ERJ14B (1210) ERJL14	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	16
ERJ12R ERJL12 (1812)	4.50 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	27
ERJ12Z ERJL1D (2010)	5.00 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>		0.60 <sup>±0.20</sup>		27
ERJ1TR (0510)	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	45
ERJ11R (2512)	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	1.30 <sup>±0.20</sup>	1.10 <sup>±0.10</sup>	79