# LAGRANGE INTERPOLATION

SUPERVISOR:MS.SHAISTA RAIS

# Example

The upward velocity of a rocket is given as a function of time in Table 1. Find the velocity at t=16 seconds using the Lagrangian method for linear interpolation.

Table Velocity as a function of time

| $t$ (s) | $v(t)$ (m/s) |
|---|---|
| 0 | 0 |
| 10 | 227.04 |
| 15 | 362.78 |
| 20 | 517.35 |
| 22.5 | 602.97 |
| 30 | 901.67 |

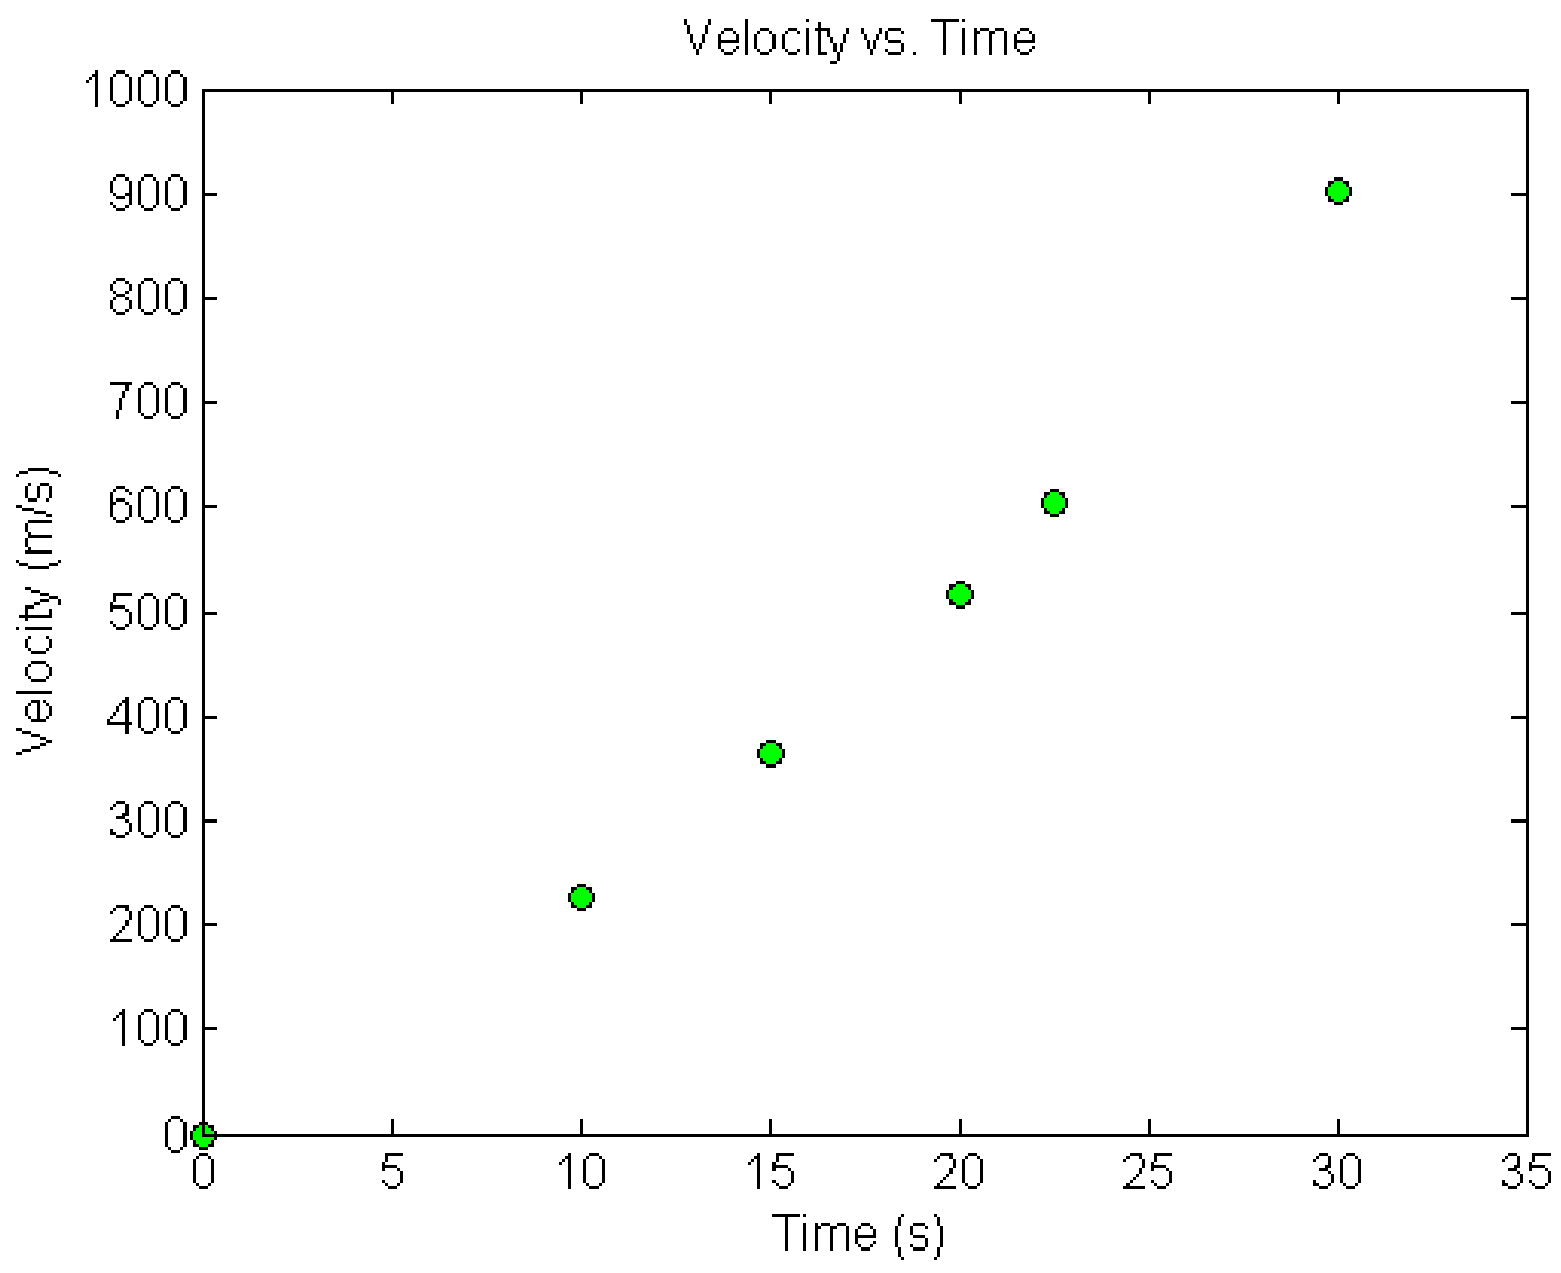


Figure. Velocity vs. time data for the rocket example

# Linear Interpolation

$$v(t) = \sum_{i=0}^{1} L_i(t)v(t_i)$$

$$= L_0(t)v(t_0) + L_1(t)v(t_1)$$

$$t_0 = 15, v(t_0) = 362.78$$

$$t_1 = 20, v(t_1) = 517.35$$

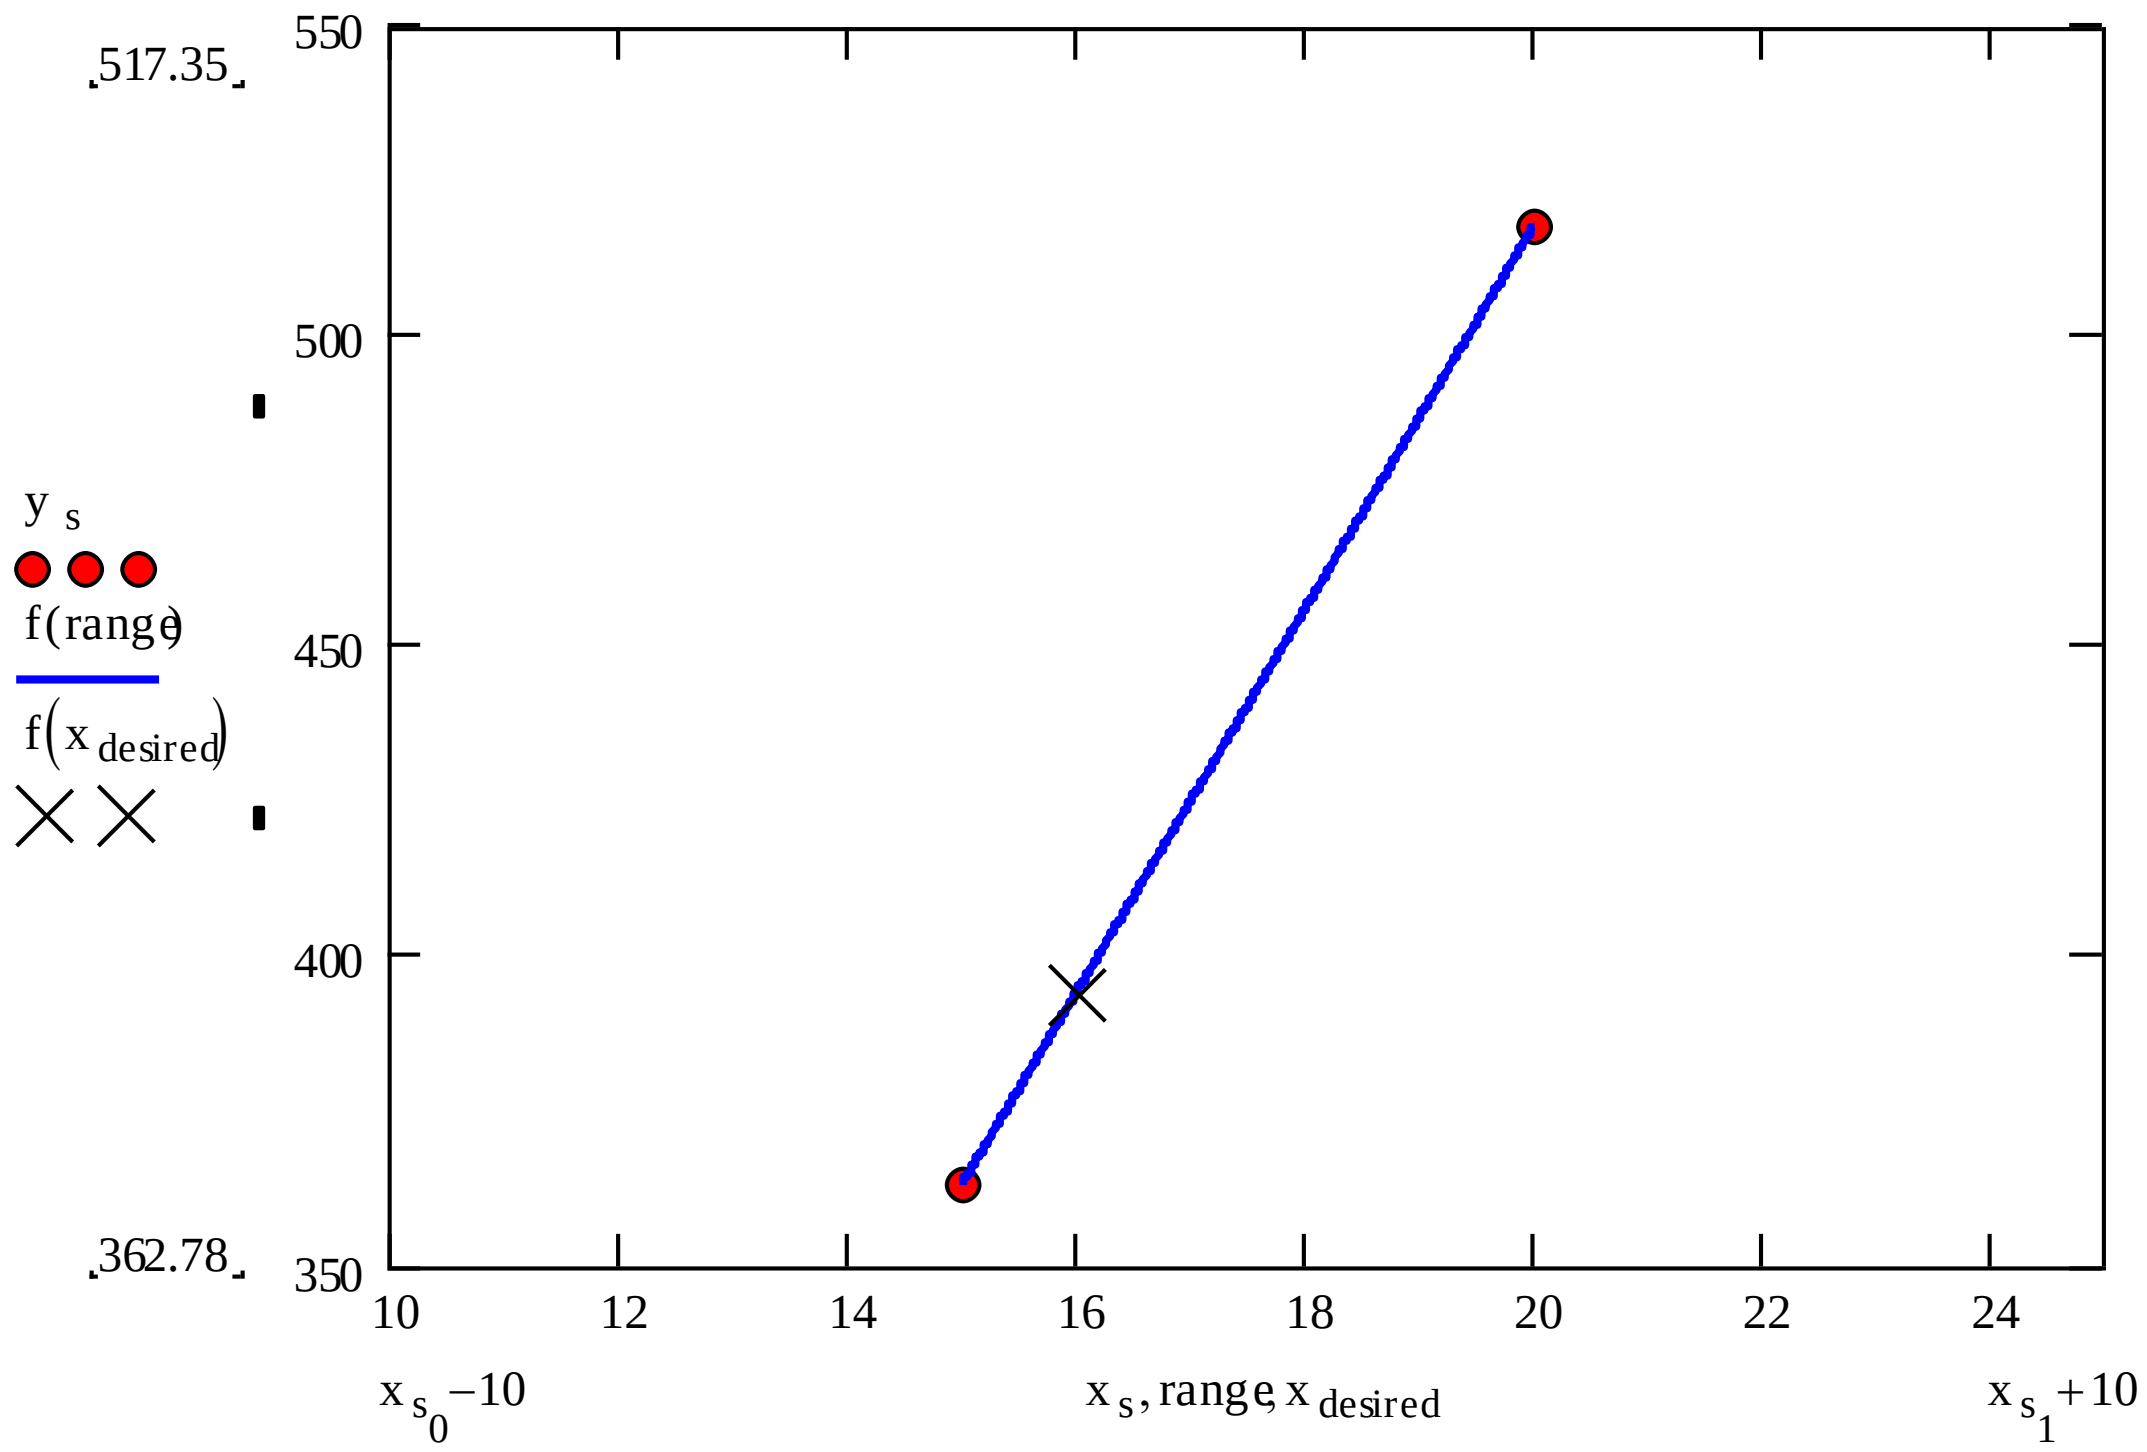

# Linear Interpolation (contd)

$$L_0(t) = \prod_{\substack{j=0 \\ j\neq 0}}^{1} \frac{t - t_j}{t_0 - t_j} = \frac{t - t_1}{t_0 - t_1}$$

$$L_1(t) = \prod_{\substack{j=0 \\ j\neq 1}}^{1} \frac{t - t_j}{t_1 - t_j} = \frac{t - t_0}{t_1 - t_0}$$

$$v(t) = \frac{t - t_1}{t_0 - t_1} v(t_0) + \frac{t - t_0}{t_1 - t_0} v(t_1) = \frac{t - 20}{15 - 20}(362.78) + \frac{t - 15}{20 - 15}(517.35)$$

$$v(16) = \frac{16 - 20}{15 - 20}(362.78) + \frac{16 - 15}{20 - 15}(517.35)$$

$$= 0.8(362.78) + 0.2(517.35)$$

$$= 393.7 \text{ m/s.}$$

# Quadratic Interpolation

For the second order polynomial interpolation (also called quadratic interpolation), we choose the velocity given by

$$v(t) = \sum_{i=0}^{2} L_i(t)v(t_i)$$

$$= L_0(t)v(t_0) + L_1(t)v(t_1) + L_2(t)v(t_2)$$

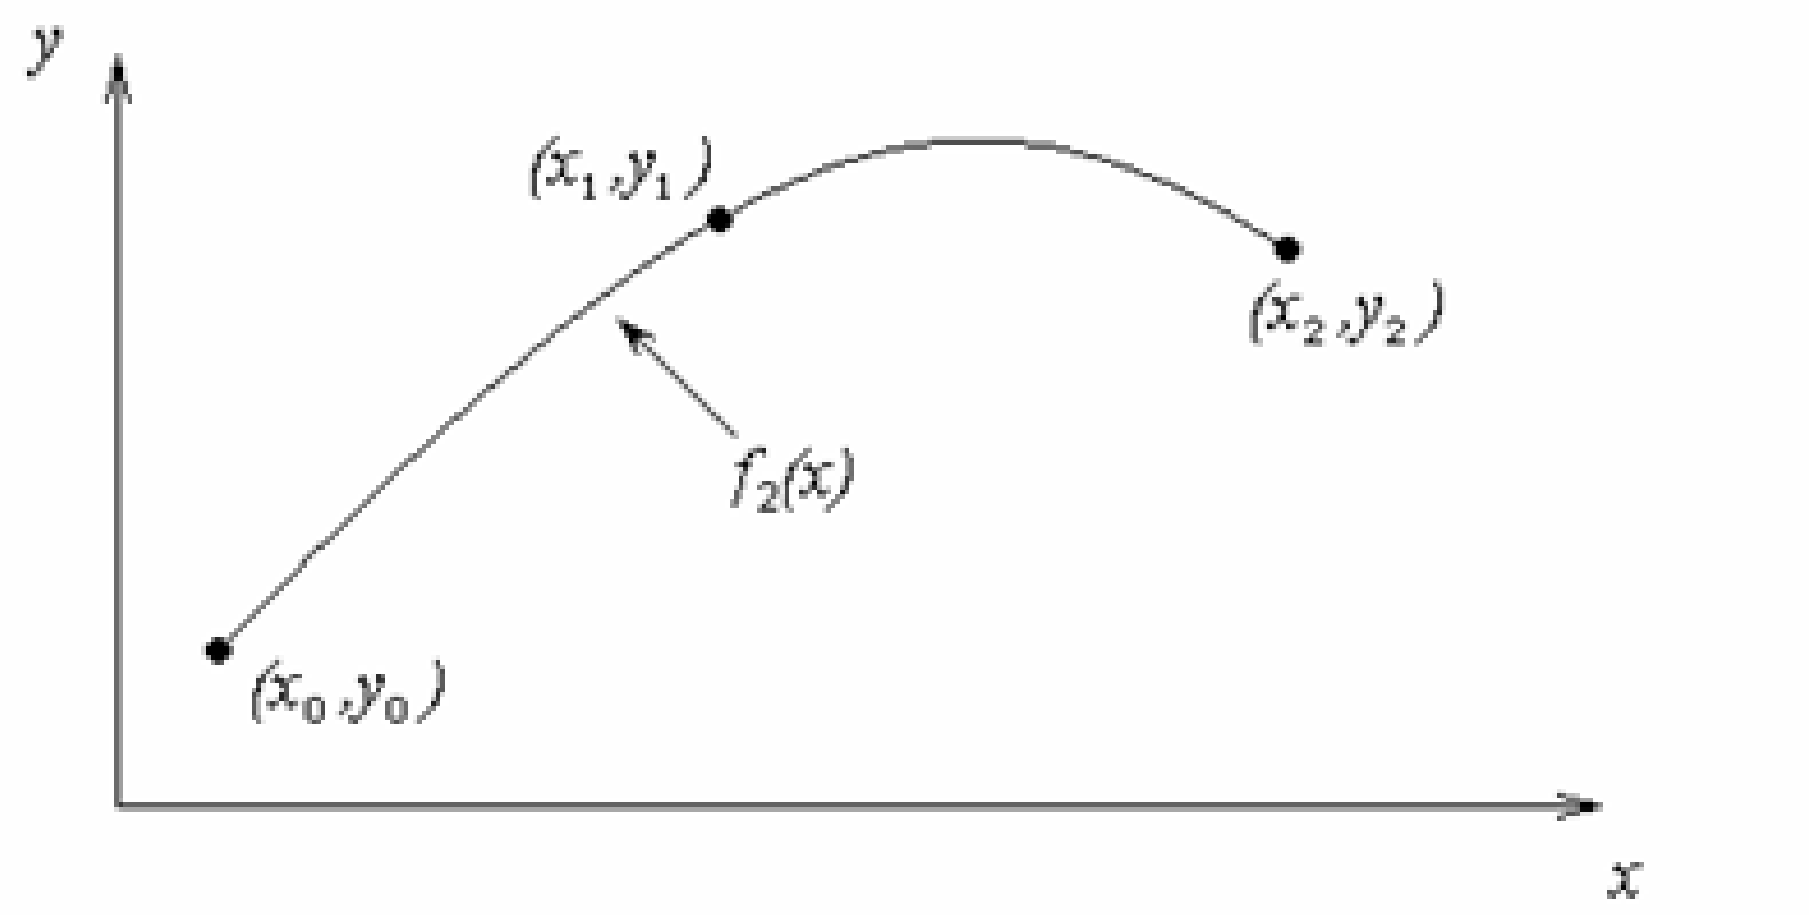

# Example

The upward velocity of a rocket is given as a function of time in Table 1. Find the velocity at t=16 seconds using the Lagrangian method for quadratic interpolation.

Table Velocity as a function of time

| $t$ (s) | $v(t)$ (m/s) |
|---|---|
| 0 | 0 |
| 10 | 227.04 |
| 15 | 362.78 |
| 20 | 517.35 |
| 22.5 | 602.97 |
| 30 | 901.67 |

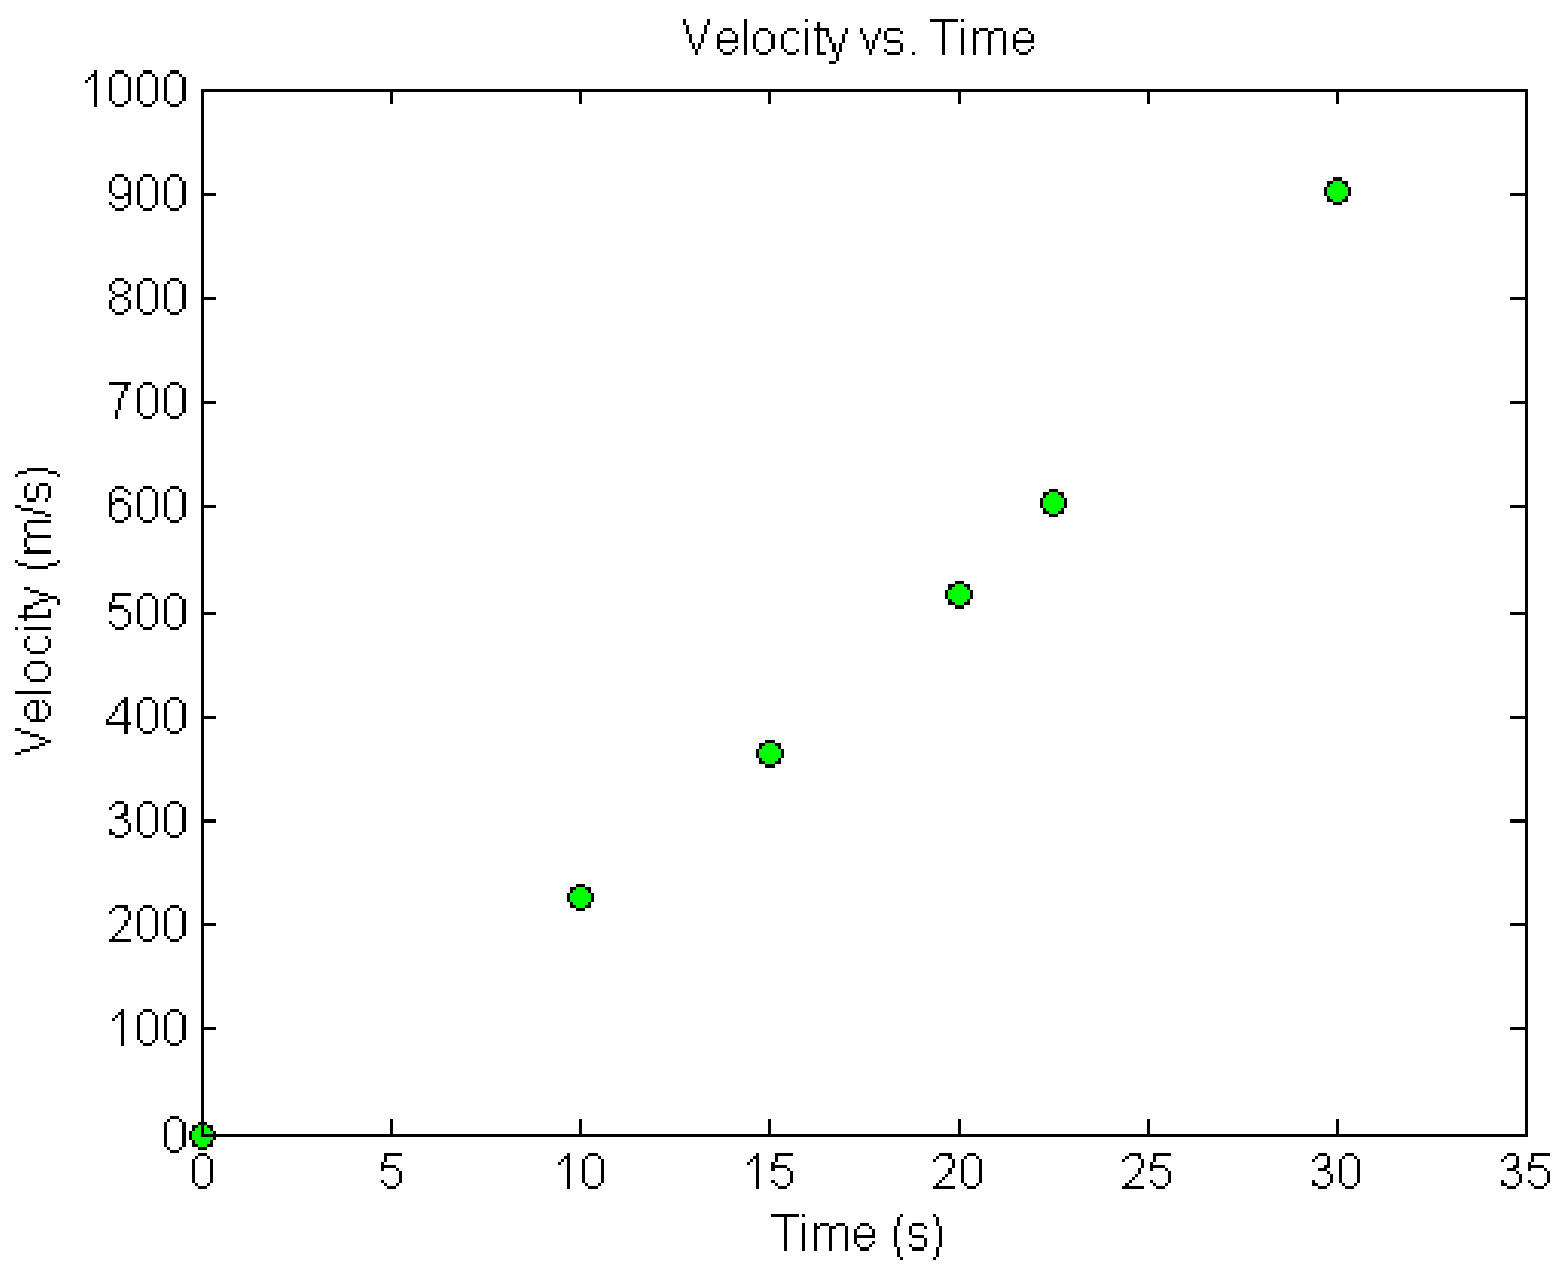


Figure. Velocity vs. time data for the rocket example

# Quadratic Interpolation (contd)

$$t_0 = 10, \; v(t_0) = 227.04$$

$$t_1 = 15, \; v(t_1) = 362.78$$

$$t_2 = 20, \; v(t_2) = 517.35$$

$$L_0(t) = \prod_{\substack{j=0 \\ j \neq 0}}^{2} \frac{t - t_j}{t_0 - t_j} = \left(\frac{t - t_1}{t_0 - t_1}\right)\left(\frac{t - t_2}{t_0 - t_2}\right)$$

$$L_1(t) = \prod_{\substack{j=0 \\ j \neq 1}}^{2} \frac{t - t_j}{t_1 - t_j} = \left(\frac{t - t_0}{t_1 - t_0}\right)\left(\frac{t - t_2}{t_1 - t_2}\right)$$

$$L_2(t) = \prod_{\substack{j=0 \\ j \neq 2}}^{2} \frac{t - t_j}{t_2 - t_j} = \left(\frac{t - t_0}{t_2 - t_0}\right)\left(\frac{t - t_1}{t_2 - t_1}\right)$$

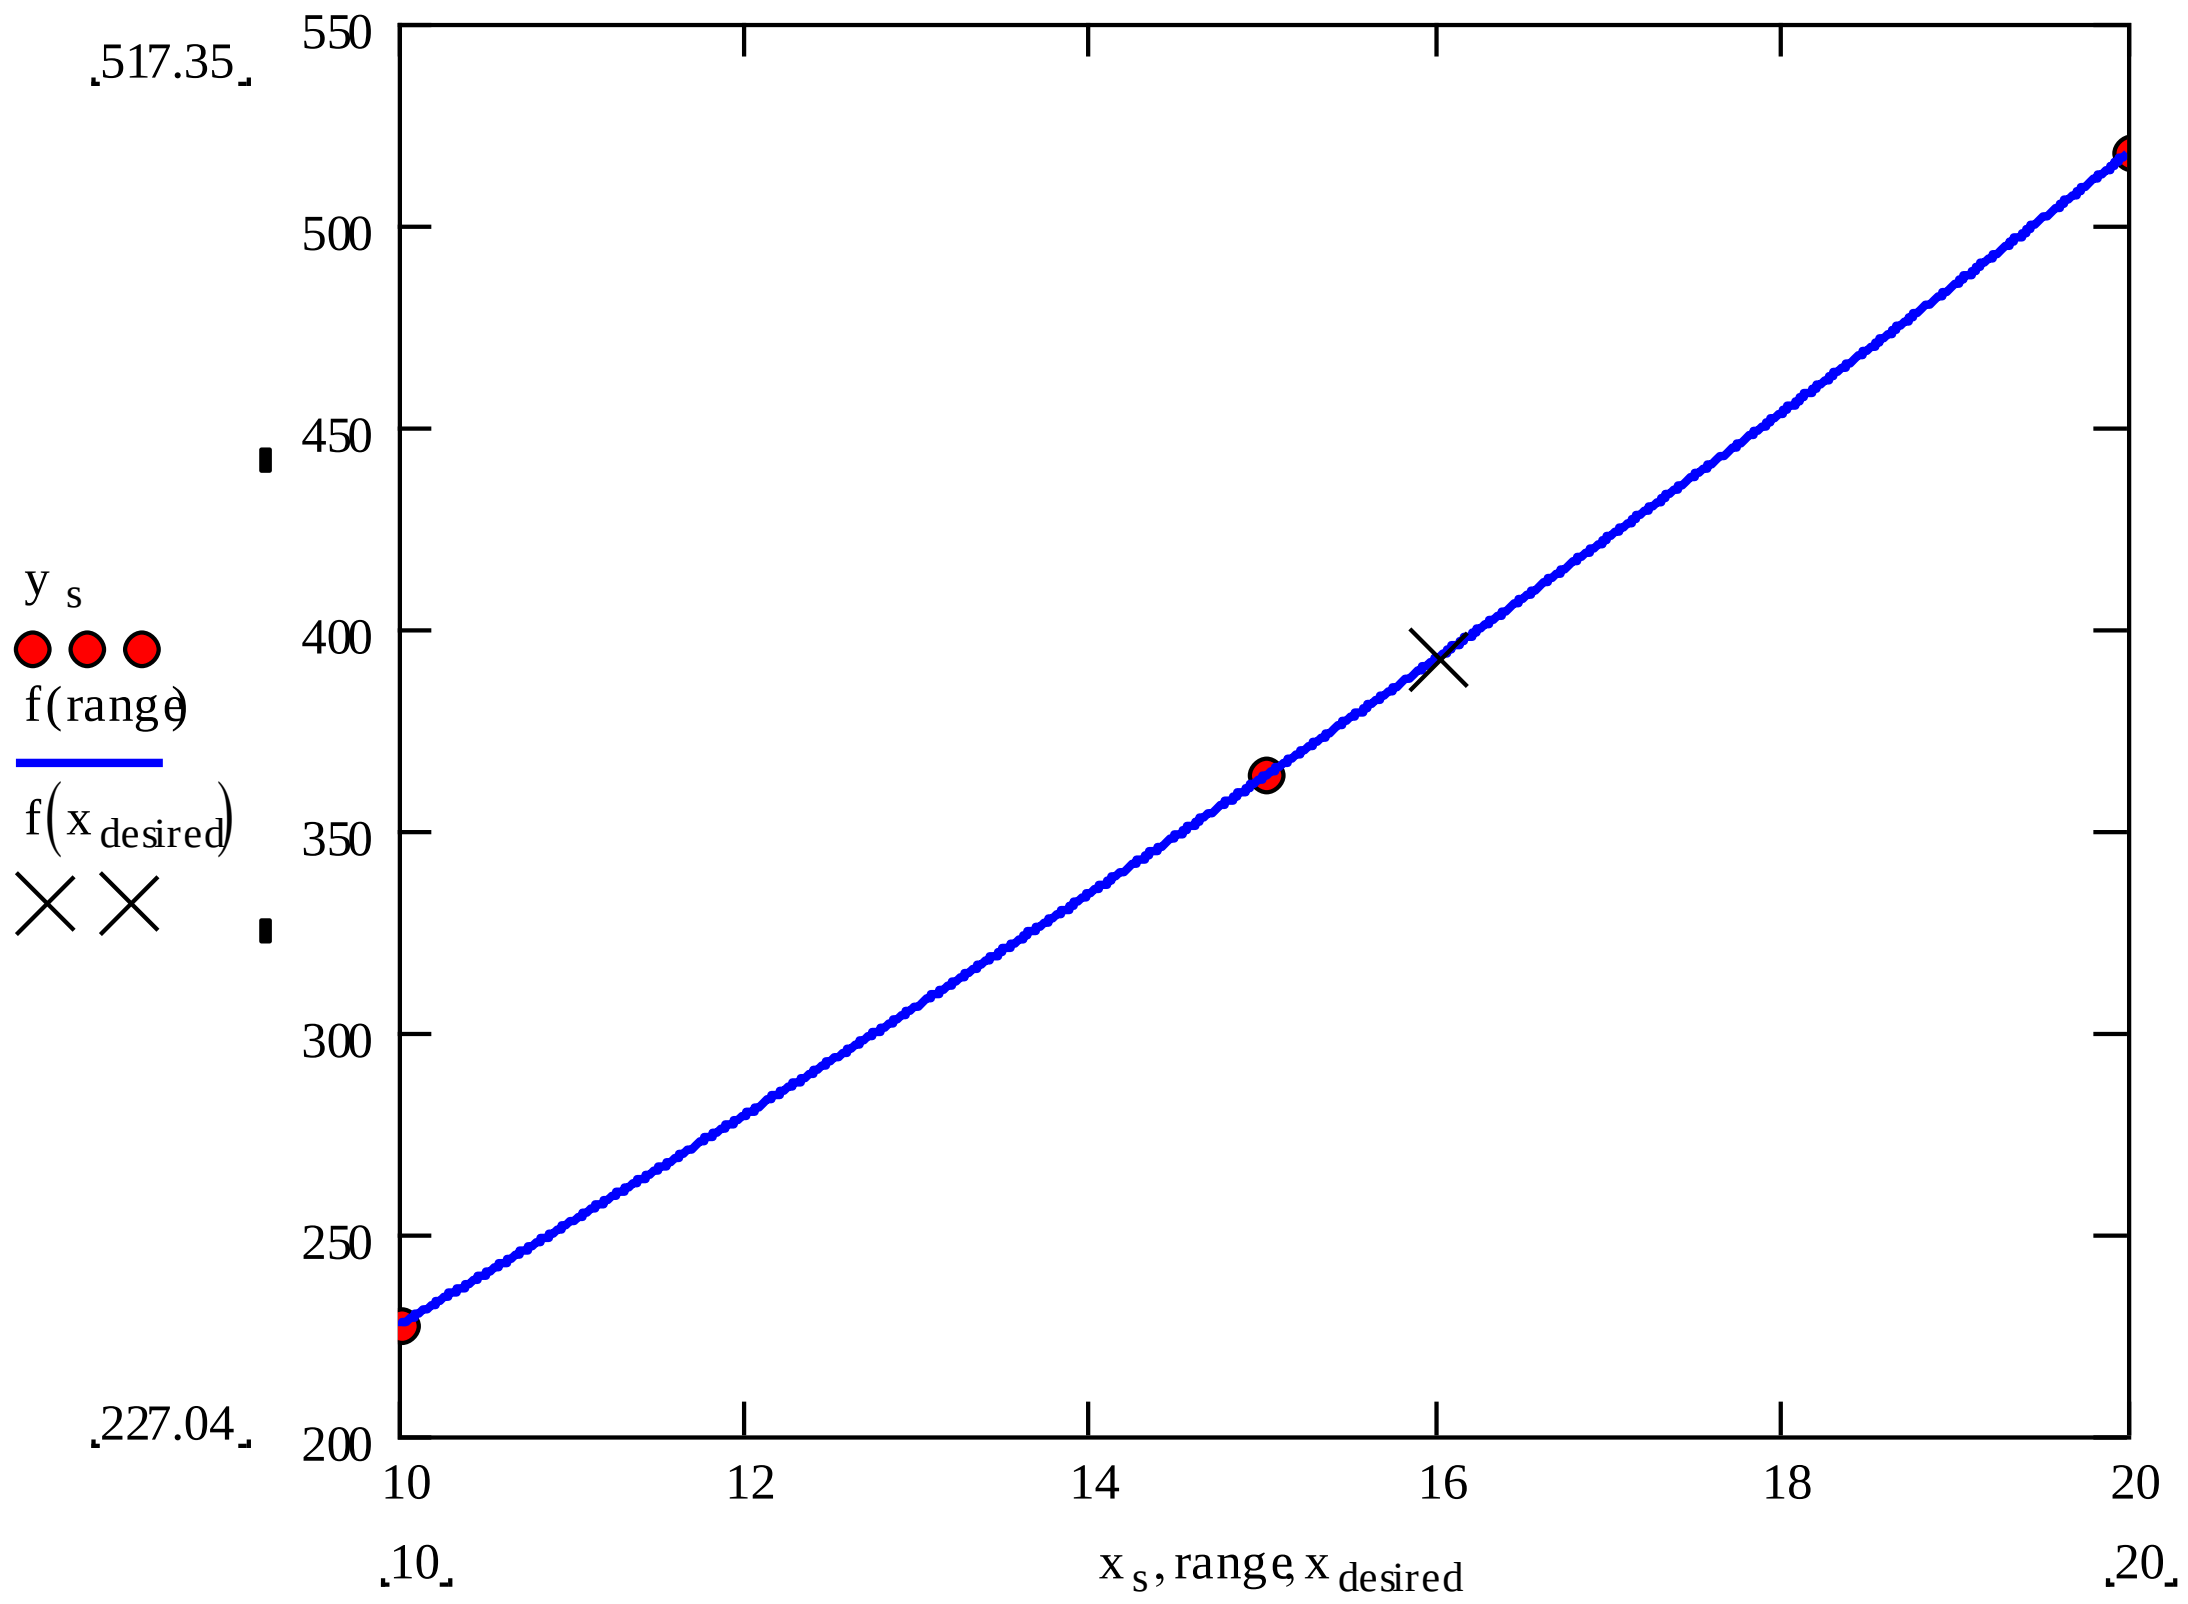

# Quadratic Interpolation (contd)

$$v(t)=\left(\frac{t-t_1}{t_0-t_1}\right)\left(\frac{t-t_2}{t_0-t_2}\right)v(t_0)+\left(\frac{t-t_0}{t_1-t_0}\right)\left(\frac{t-t_2}{t_1-t_2}\right)v(t_1)+\left(\frac{t-t_0}{t_2-t_0}\right)\left(\frac{t-t_1}{t_2-t_1}\right)v(t_2)$$

$$v(16)=\left(\frac{16-15}{10-15}\right)\left(\frac{16-20}{10-20}\right)(227.04)+\left(\frac{16-10}{15-10}\right)\left(\frac{16-20}{15-20}\right)(362.78)+\left(\frac{16-10}{20-10}\right)\left(\frac{16-15}{20-15}\right)(517.35)$$

$$=(-0.08)(227.04)+(0.96)(362.78)+(0.12)(527.35)$$

$$=392.19 \text{ m/s}$$

The absolute relative approximate error $|\in_a|$ obtained between the results from the first and second order polynomial is

$$|\in_a|=\left|\frac{392.19-393.70}{392.19}\right|\times 100$$

$$=0.38410\%$$

# Cubic Interpolation

For the third order polynomial (also called cubic interpolation), we choose the velocity given by

$$v(t)=\sum_{i=0}^{3}L_i(t)v(t_i)$$

$$=L_0(t)v(t_0)+L_1(t)v(t_1)+L_2(t)v(t_2)+L_3(t)v(t_3)$$

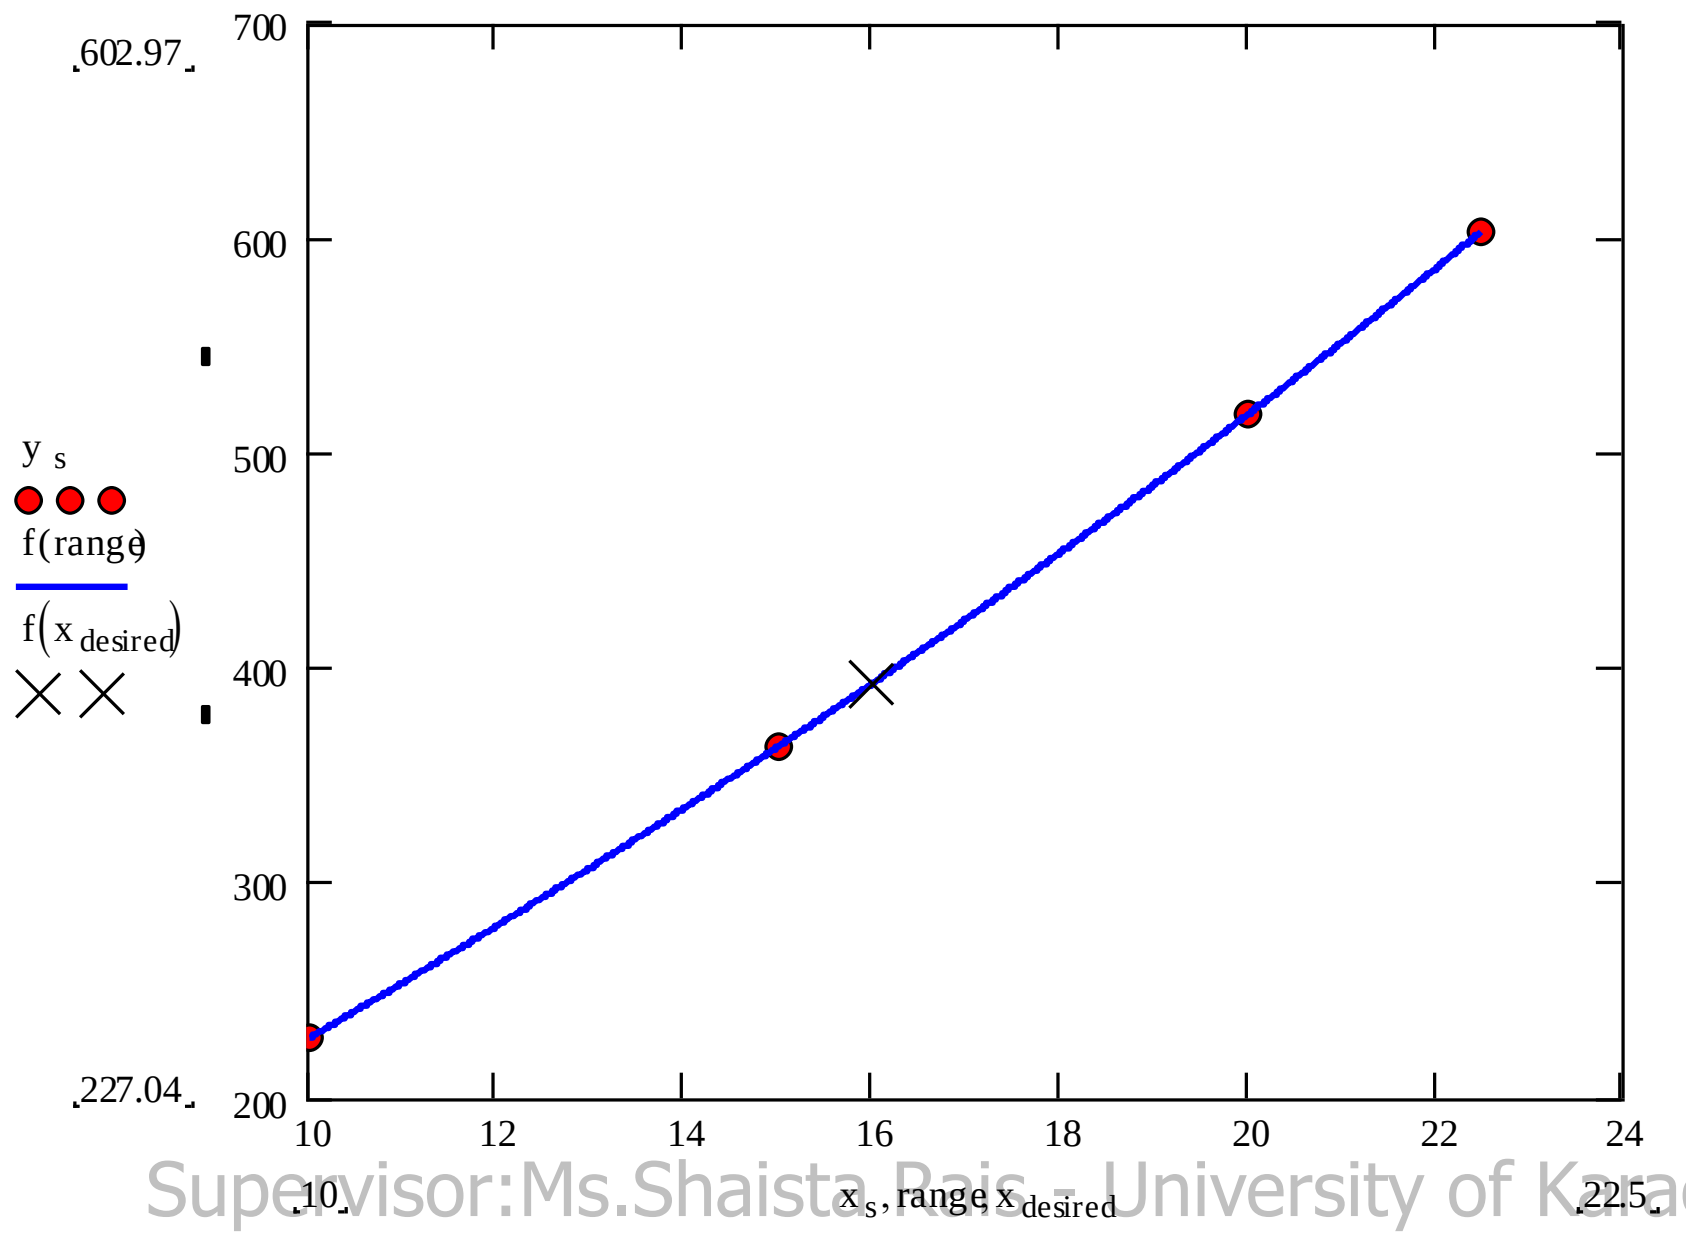

# Example

The upward velocity of a rocket is given as a function of time in Table 1. Find the velocity at t=16 seconds using the Lagrangian method for cubic interpolation.

Table Velocity as a function of time

| $t$ (s) | $v(t)$ (m/s) |
|---|---|
| 0 | 0 |
| 10 | 227.04 |
| 15 | 362.78 |
| 20 | 517.35 |
| 22.5 | 602.97 |
| 30 | 901.67 |

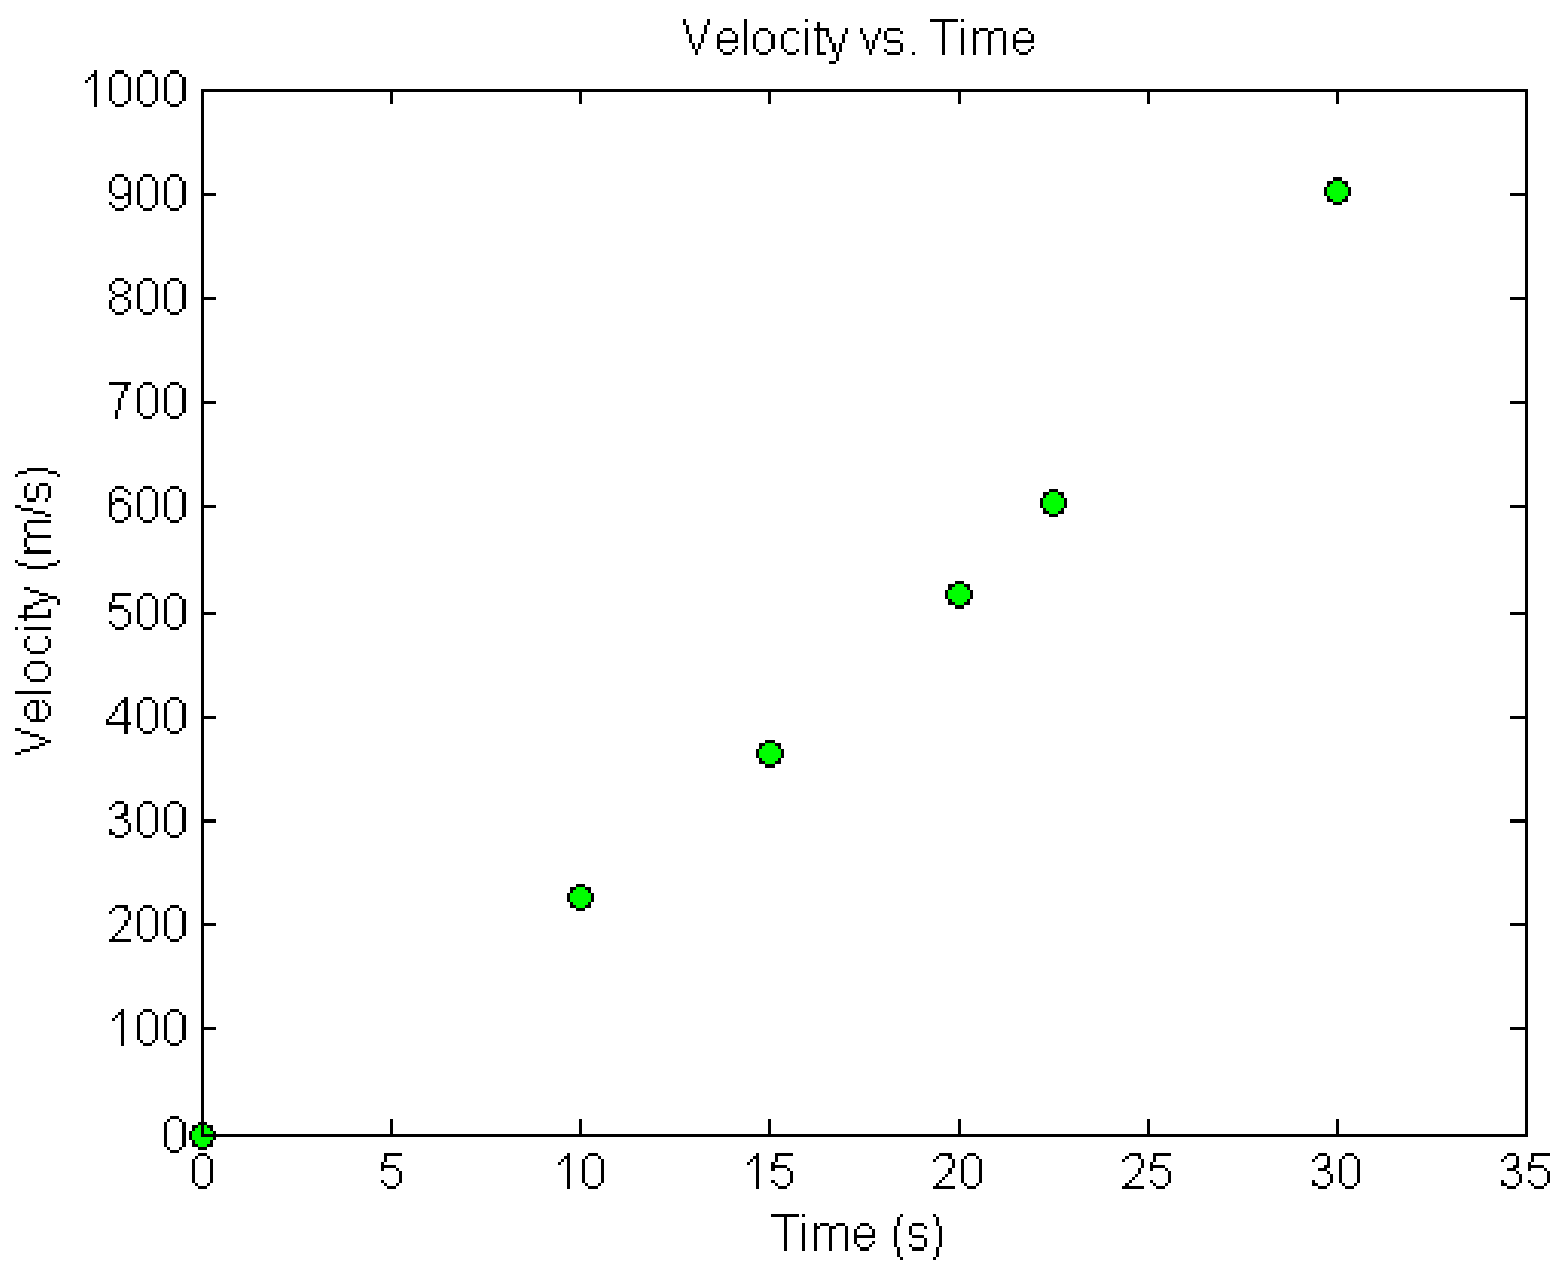


Figure. Velocity vs. time data for the rocket example

# Cubic Interpolation (contd)

$$t_o = 10,\ v(t_o) = 227.04 \qquad t_1 = 15,\ v(t_1) = 362.78$$

$$t_2 = 20,\ v(t_2) = 517.35 \qquad t_3 = 22.5,\ v(t_3) = 602.97$$

$$L_0(t) = \prod_{\substack{j=0 \\ j\neq 0}}^{3} \frac{t - t_j}{t_0 - t_j} = \left(\frac{t - t_1}{t_0 - t_1}\right)\left(\frac{t - t_2}{t_0 - t_2}\right)\left(\frac{t - t_3}{t_0 - t_3}\right);$$

$$L_1(t) = \prod_{\substack{j=0 \\ j\neq 1}}^{3} \frac{t - t_j}{t_1 - t_j} = \left(\frac{t - t_0}{t_1 - t_0}\right)\left(\frac{t - t_2}{t_1 - t_2}\right)\left(\frac{t - t_3}{t_1 - t_3}\right)$$

$$L_2(t) = \prod_{\substack{j=0 \\ j\neq 2}}^{3} \frac{t - t_j}{t_2 - t_j} = \left(\frac{t - t_0}{t_2 - t_0}\right)\left(\frac{t - t_1}{t_2 - t_1}\right)\left(\frac{t - t_3}{t_2 - t_3}\right);$$

$$L_3(t) = \prod_{\substack{j=0 \\ j\neq 3}}^{3} \frac{t - t_j}{t_3 - t_j} = \left(\frac{t - t_0}{t_3 - t_0}\right)\left(\frac{t - t_1}{t_3 - t_1}\right)\left(\frac{t - t_2}{t_3 - t_2}\right)$$

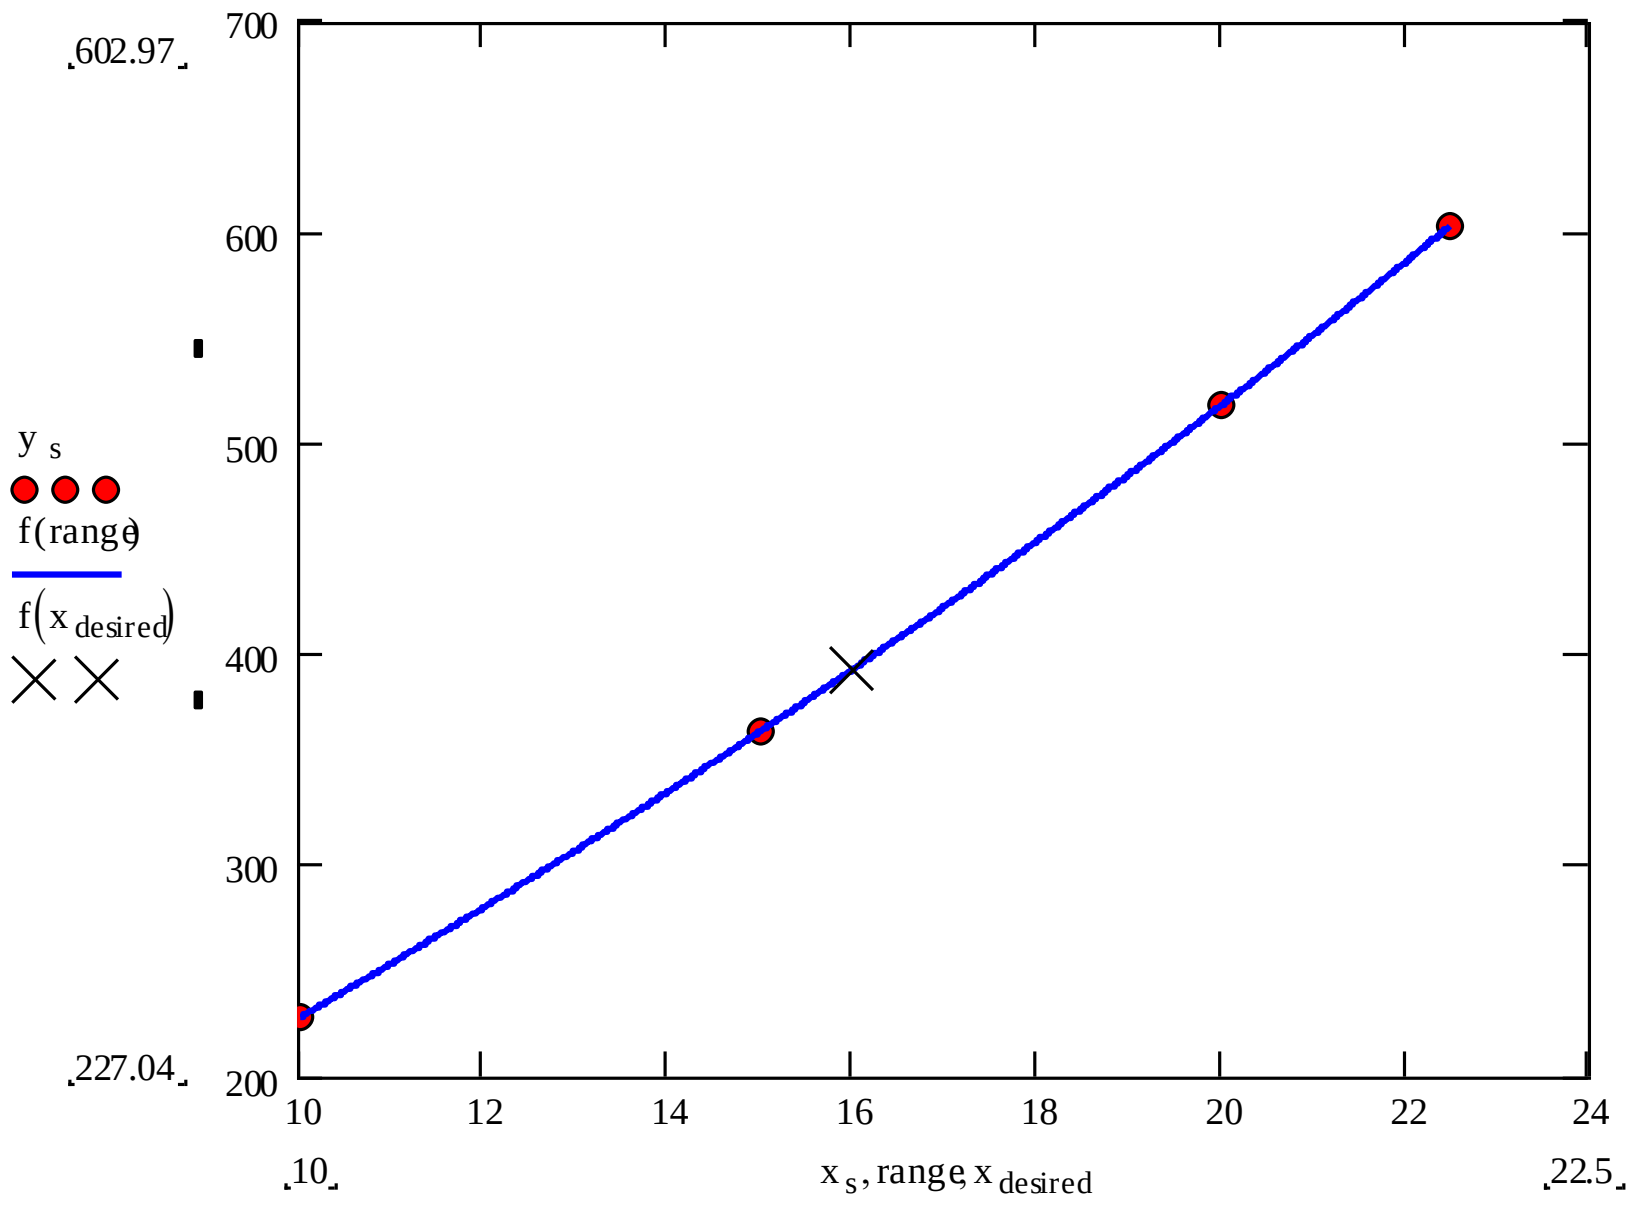

# Cubic Interpolation (contd)

$$v(t)=\left(\frac{t-t_1}{t_0-t_1}\right)\left(\frac{t-t_2}{t_0-t_2}\right)\left(\frac{t-t_3}{t_0-t_3}\right)v(t_1)+\left(\frac{t-t_0}{t_1-t_0}\right)\left(\frac{t-t_2}{t_1-t_2}\right)\left(\frac{t-t_3}{t_1-t_3}\right)v(t_2)$$

$$+\left(\frac{t-t_0}{t_2-t_0}\right)\left(\frac{t-t_1}{t_2-t_1}\right)\left(\frac{t-t_3}{t_2-t_3}\right)v(t_2)+\left(\frac{t-t_1}{t_3-t_1}\right)\left(\frac{t-t_1}{t_3-t_1}\right)\left(\frac{t-t_2}{t_3-t_2}\right)v(t_3)$$

$$v(16)=\left(\frac{16-15}{10-15}\right)\left(\frac{16-20}{10-20}\right)\left(\frac{16-22.5}{10-22.5}\right)(227.04)+\left(\frac{16-10}{15-10}\right)\left(\frac{16-20}{15-20}\right)\left(\frac{16-22.5}{15-22.5}\right)(362.78)$$

$$+\left(\frac{16-10}{20-10}\right)\left(\frac{16-15}{20-15}\right)\left(\frac{16-22.5}{20-22.5}\right)(517.35)+\left(\frac{16-10}{22.5-10}\right)\left(\frac{16-15}{22.5-15}\right)\left(\frac{16-20}{22.5-20}\right)(602.97)$$

$$=(-0.0416)(227.04)+(0.832)(362.78)+(0.312)(517.35)+(-0.1024)(602.97)$$

$$=392.06\,\mathrm{m/s}$$

The absolute relative approximate error $|\in_a|$ obtained between the results from the first and second order polynomial is

$$|\in|=\left|\frac{392.06-392.19}{392.06}\right|\times 100$$

$$=0.033269\%$$

# Comparison Table

| Order of Polynomial | 1 | 2 | 3 |
|---|---|---|---|
| v(t=16) m/s | 393.69 | 392.19 | 392.06 |
| Absolute Relative Approximate Error | -------- | 0.38410% | 0.033269% |