Table of Contents

NSF DWEL Pulse Model from Stationary Scans in Aug. 2014	1
Establish a baseline for noise removal	
Extract waveforms from the tube	
Remove baseline and establish pulse model	
Check the integral of the pulse model	

NSF DWEL Pulse Model from Stationary Scans in Aug. 2014

Generate a DWEL pulse model for a wavelength from a given HDF5 file. The HDF5 files are from several stationary scans collected in Aug. 2014 at UMass Lowell CAR center. *NOTICE*: the wavelength labels of all NSF DWEL scans used in this document are **swtiched**. All "1064" in the comments and codes is the actual 1548 and vice versa.

Zhan Li, zhanli86@bu.edu Created: 20141008 Last modified: 20141008

set *wavelength* to the wavelength we are interested. Create data set names and file names. *wavelength*=1548 actually reads 1064 data, vice versa.

```
wavelength = 1548;
wfsetname = ['/', num2str(wavelength), ' Waveform Data'];
```

Establish a baseline for noise removal


We blocked the lasers and collected pure noise returns saved in a HDF5 file. However, there are transient ringing noise in the noise sample returns as well, which makes our extraction of a robust baseline difficult. I tentatively tried median rather than mean to walk around transient noise in the extraction of a baseline.

Because of transient noises in the waveforms, a mean waveform will be affected and I've seen the effect. Here a median waveform will be tested to see if we can get a better waveform.

```
mdnoisewf = median(noisewf, 2);
Compare the median with the mean waveform
meannoisewf = mean(noisewf, 2);
```

Plot the waveforms. Notice that now the first two bins (32 bits) in the waveforms are assigned with pulse sequence number. Skip them if you need the just the waveform data.

```
figure();
plot(mdnoisewf(3:end), '.r');
hold on;
plot(meannoisewf(3:end), '.b');
title('Noise waveform from simple statistics');
legend('median waveform', 'mean waveform');
```

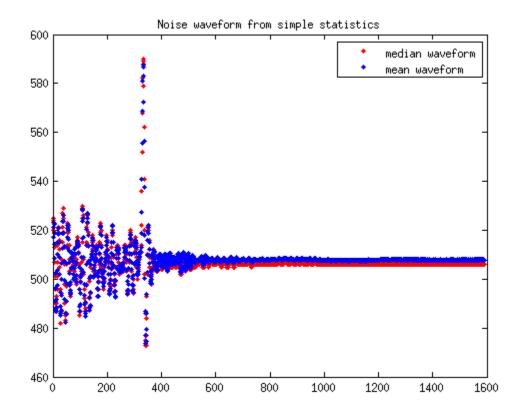


Extract waveforms from the tube

We collected returns from a tube's specular reflection at a few meters away, ~10 m and saved the waveforms in a HDF5 file.

mdtubewf = median(tubewf, 2);
meantubewf = mean(tubewf, 2);
figure();

```
plot(mdtubewf(3:end), '.r');
hold on;
plot(meantubewf(3:end), '.b');
title('Tube waveform from simple statistics');
legend('median waveform', 'mean waveform');
```

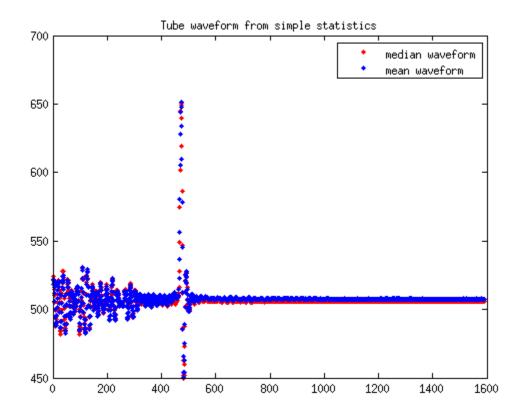

Remove baseline and establish pulse model


Subtract the noise waveform from the tube waveform. Slice 160 bins centered at the peak as the pulse model. Then normalize the derived waveform such that the maximum is one.


Also compare the pulse model from median and mean.

The median pulse shape shows the same pulse width, trough amplitude and secondary peak amplitude but avoids the bump in front of the mean pulse shape which is from transient noise. Also the head and tail of the pulse shape is cleaner, closer to zero.

```
% remove the baseline
mdpulsemodel = mdtubewf - mdnoisewf;
meanpulsemodel = meantubewf - meannoisewf;
figure();
plot(mdpulsemodel, '.r');
hold on;
plot(meanpulsemodel, '.b');
title('Baseline removed from tube waveform');
legend('median waveform', 'mean waveform');
```


```
% normalize
[pmax, pind] = max(mdpulsemodel);
mdpulsemodel = mdpulsemodel(pind-80:pind+80)/pmax;
[pmax, pind] = max(meanpulsemodel);
meanpulsemodel = meanpulsemodel(pind-80:pind+80)/pmax;
figure();
plot(mdpulsemodel, '.r');
hold on;
plot(meanpulsemodel, '.b');
title('Normalized pulse model');
legend('median waveform', 'mean waveform');
```

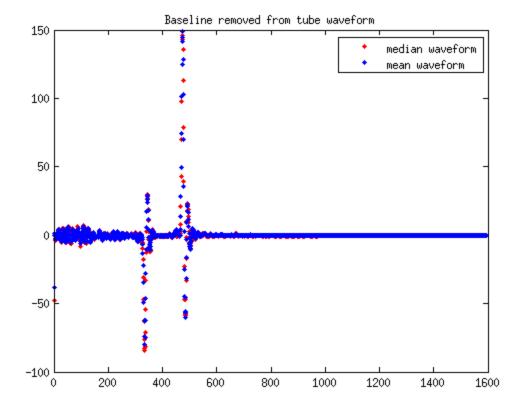

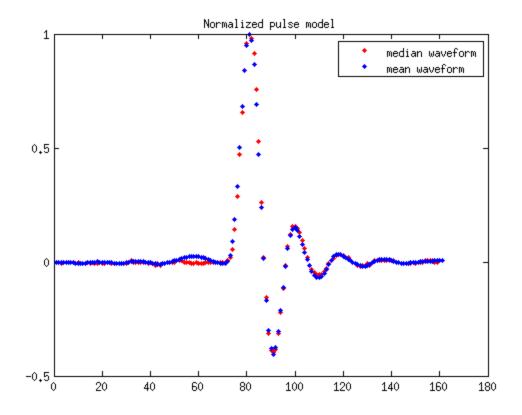

Check the integral of the pulse model

```
intmdpulse = cumsum(mdpulsemodel);
intmeanpulse = cumsum(meanpulsemodel);
figure();
plot(intmdpulse, '.r');
hold on;
plot(intmeanpulse, '.b');
title('Integral of pulse model');
legend('median waveform', 'mean waveform');
```

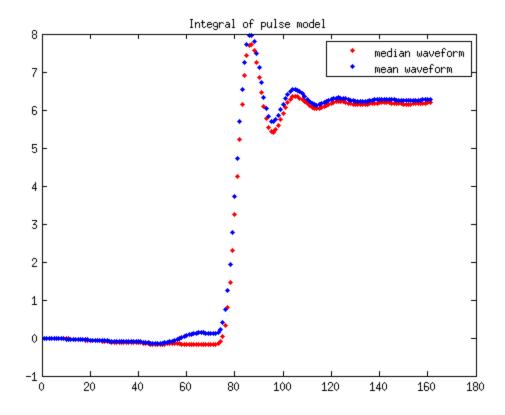

Published with MATLAB® R2013a