

TYPE-C

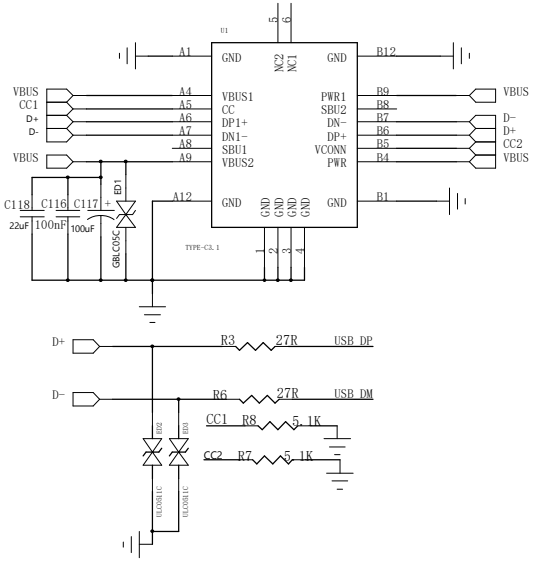


充电电路


SCL-----IO14
SDA-----IO13

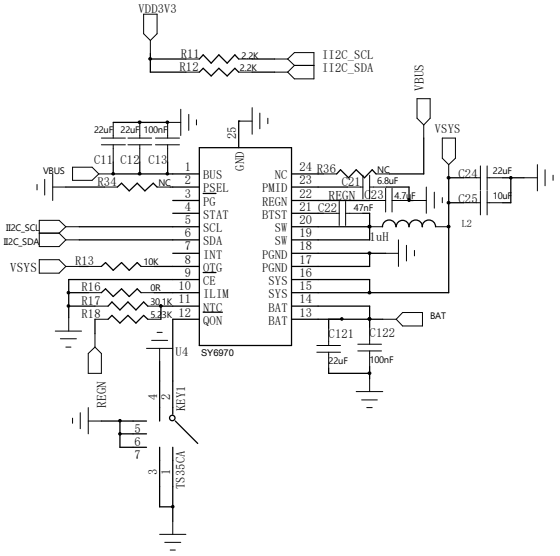


I2C Address:0x6B

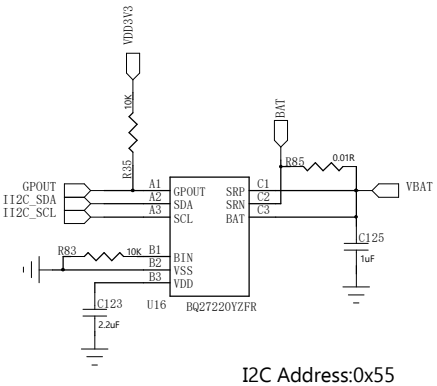


I2C Address:0x55



DCDC电源

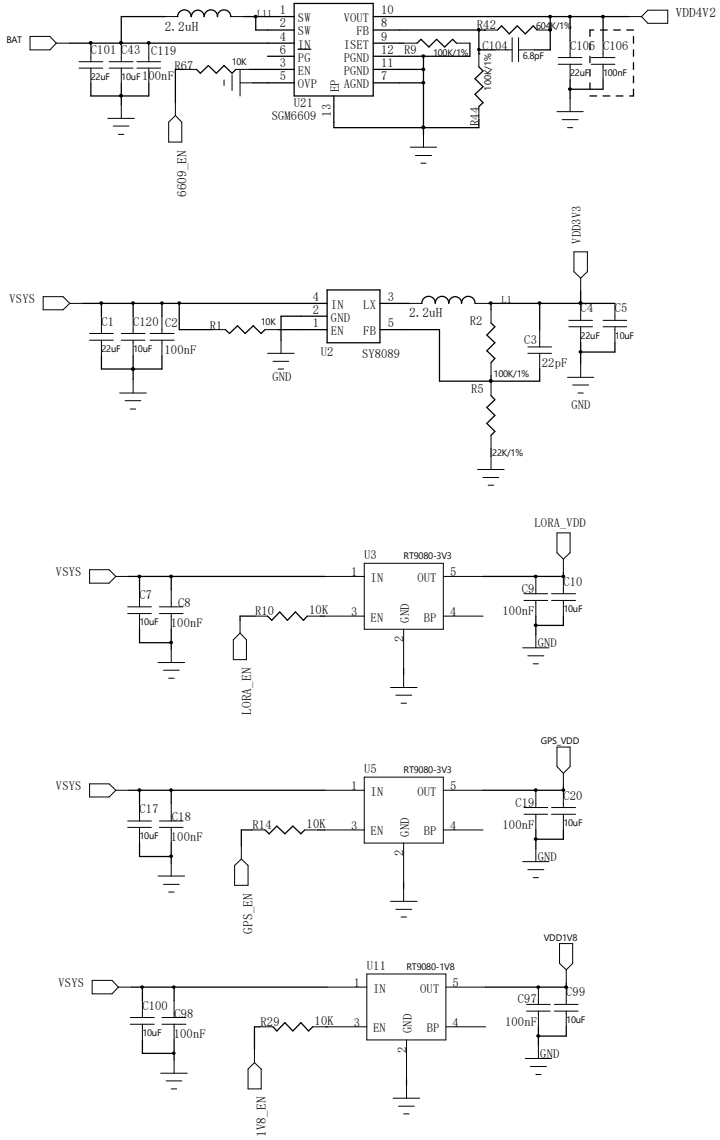


ESP32-S3

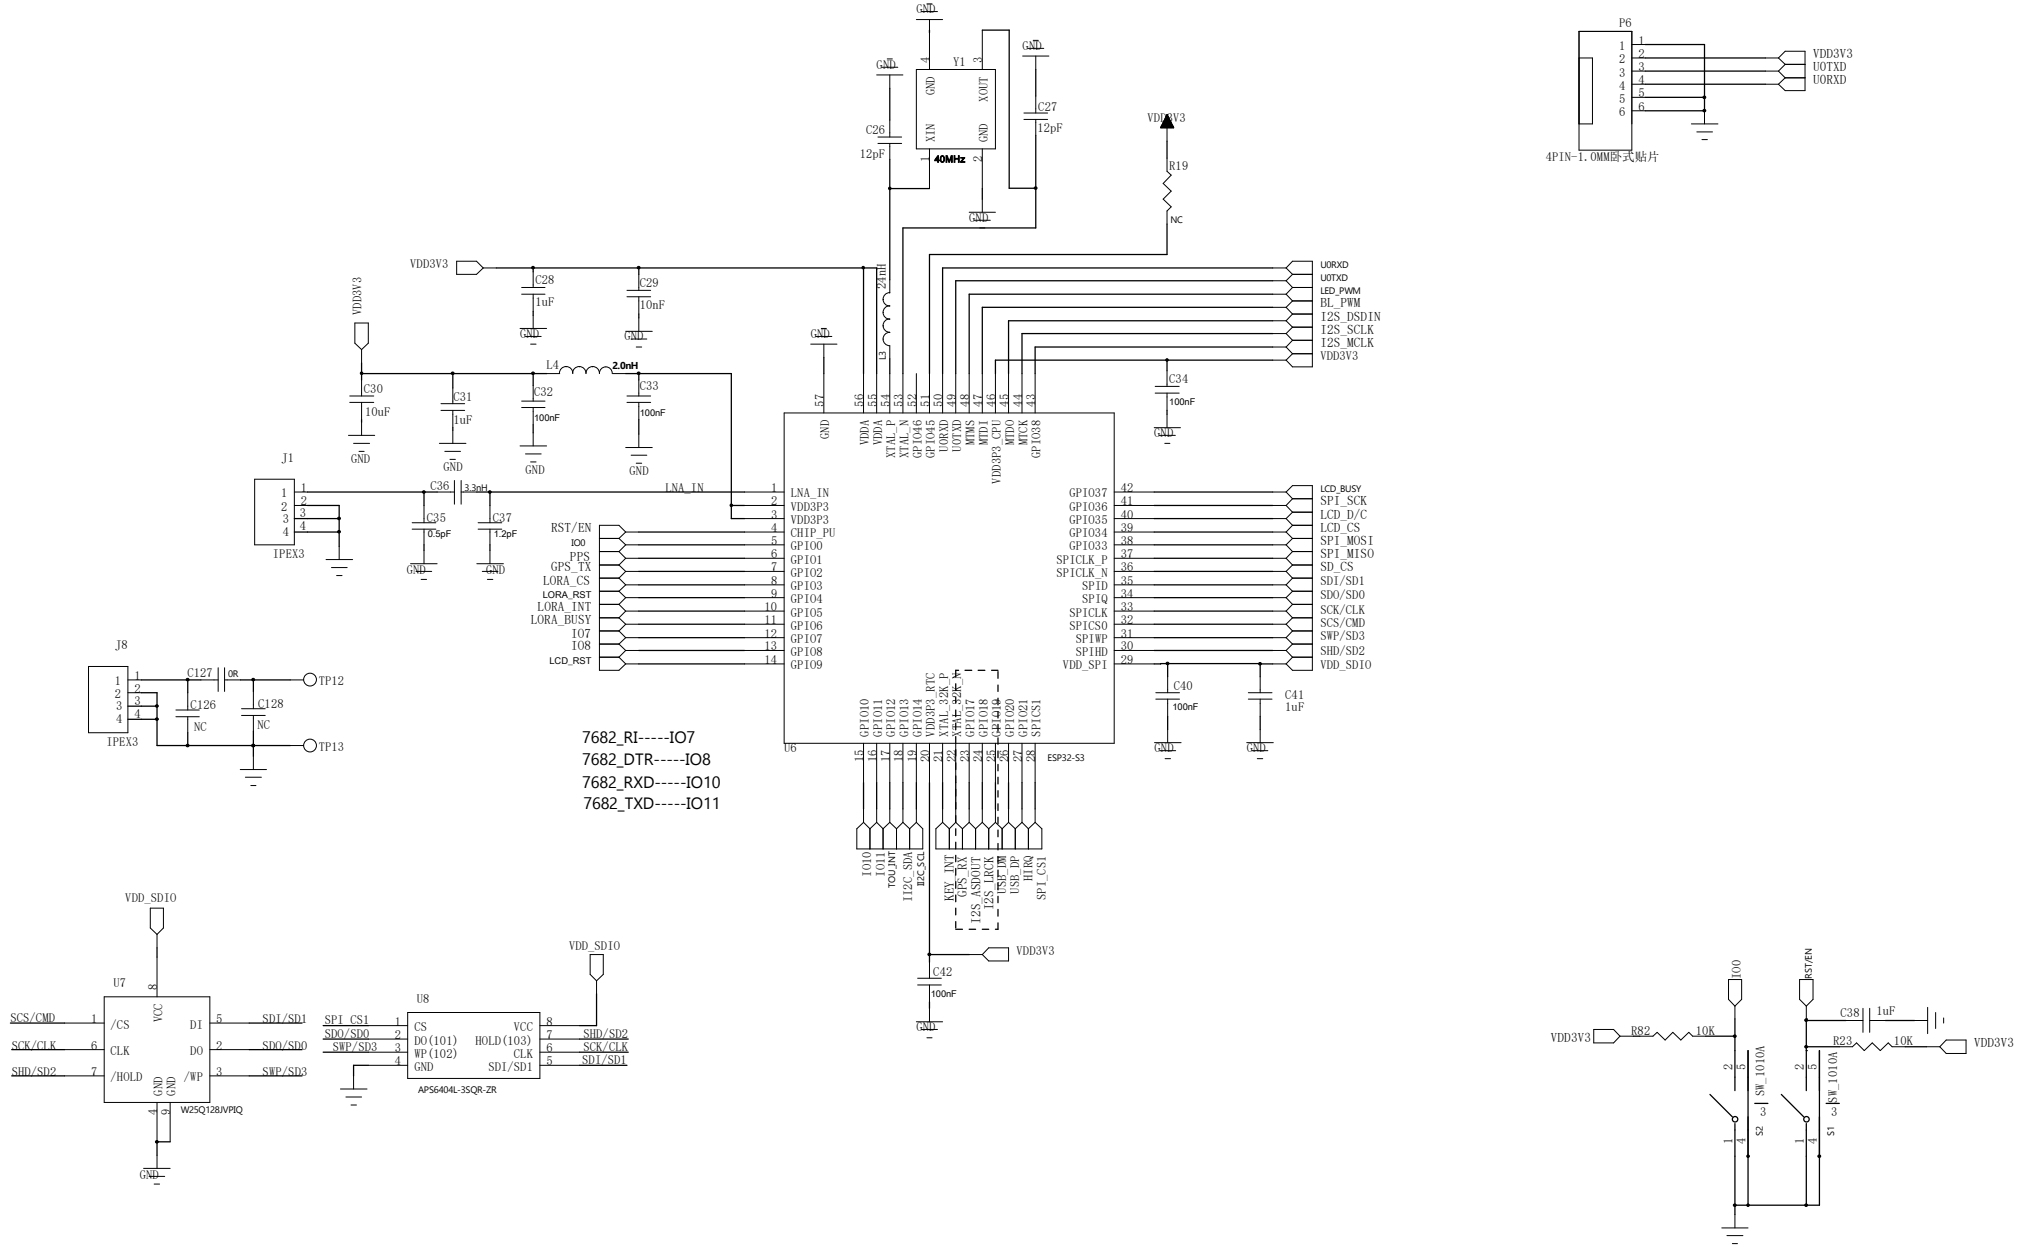

P6
VDD3V3
U0TXD
U0RXD
4PIN-1.0MM卧式贴片
Y1
40MHz
C26
12pF
C27
12pF
R19
NC
C28
1uF
C29
10nF
L4
2.0nH
C30
10uF
C31
1uF
C32
100nF
C33
100nF
C34
100nF
J1
IPEX3
C36
3.3pH
C35
0.5pF
C37
1.2pF
LNA_IN
U0RXD
U0TXD
LED_PWM
BL_PWM
I2S_DSDIN
I2S_SCLK
I2S_MCLK
VDD3V3
RST/EN
IO0
PPS
GPS_TX
LORA_CS
LORA_RST
LORA_INT
LORA_BUSY
IO7
IO8
LCD_RST
LCD_BUSY
SPI_SCK
LCD_D/C
LCD_CS
SPI_MOSI
SPI_MISO
SD_CS
SDI/SD1
SDO/SD0
SCK/CLK
SCS/CMD
SWP/SD3
SHD/SD2
VDD_SDIO
U6
ESP32-S3
C40
100nF
C41
1uF
J8
IPEX3
C127
0R
C126
NC
C128
NC
TP12
TP13
7682_RI-----IO7
7682_DTR-----IO8
7682_RXD-----IO10
7682_TXD-----IO11
C42
100nF
U7
W25Q128JVPIQ
SCS/CMD
SCK/CLK
SHD/SD2
SDI/SD1
SDO/SD0
SWP/SD3
U8
APS6404L-3SQR-ZR
SPI_CS1
SDO/SD0
SWP/SD3
SHD/SD2
SCK/CLK
SDI/SD1
R82
10K
C38
1uF
R23
10K
SW_1010A
S1
S2

PPS-----IO1
GPS_TX-----IO2
GPS_RX-----IO16


GPS

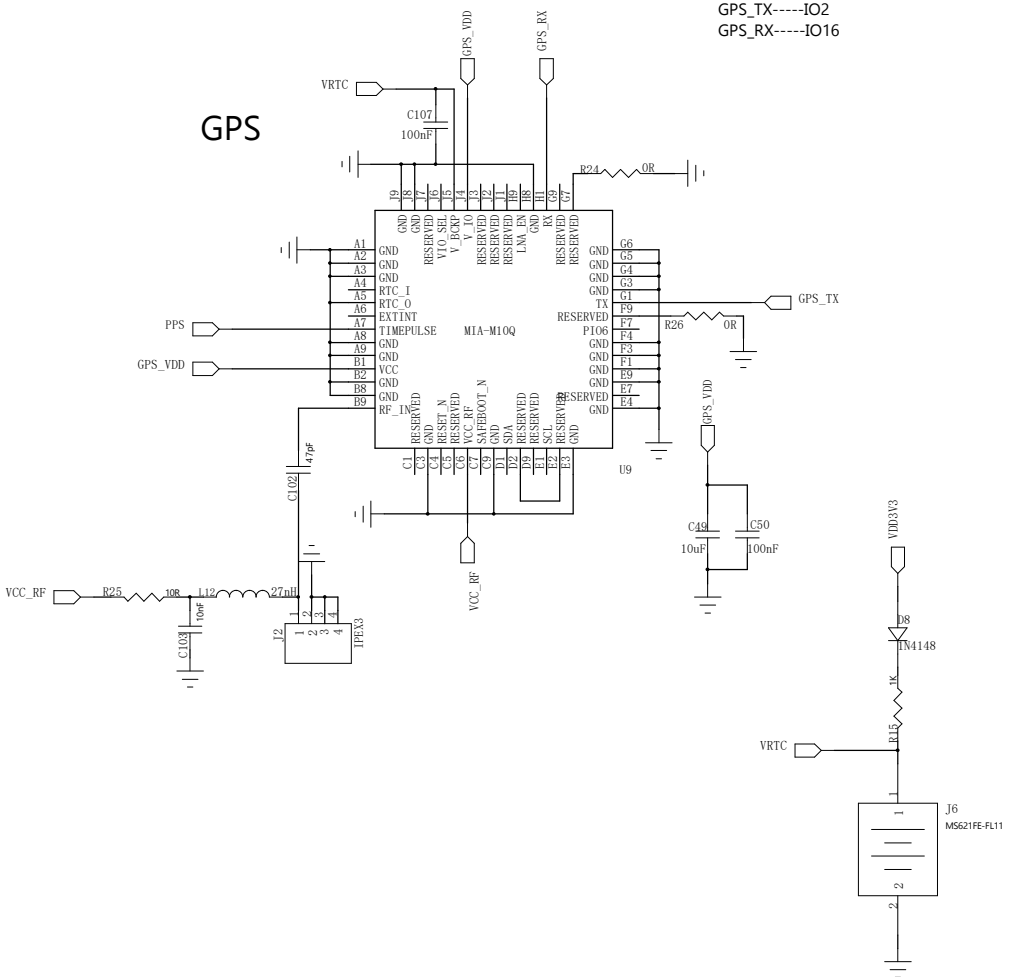

LORA_INT-----IO5
LORA_BUSY-----IO6
LORA_RST-----IO4
SPI_MISO-----IO47
SPI_MOSI-----IO33
SPI_SCK-----IO36
LORA_CS-----IO3

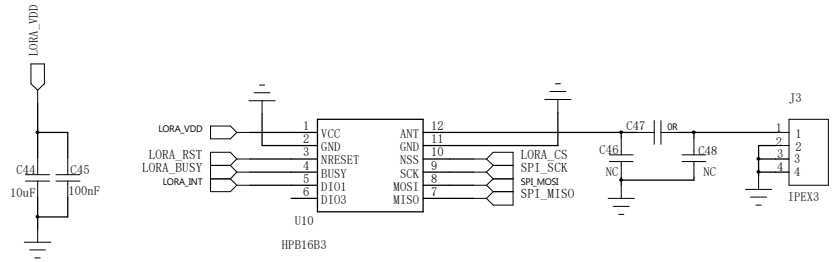


Lora

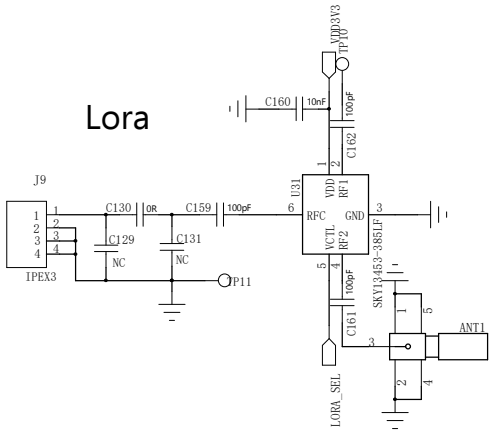

I2C Address:0x28


SCL-----IO14
SDA-----IO13
HIRQ-----IO21

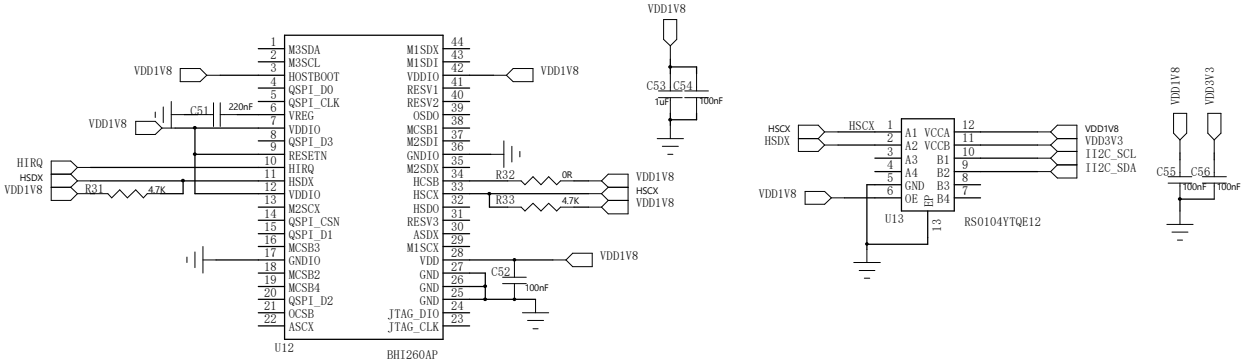


陀螺仪

马达

SCL-----IO14
SDA-----IO13

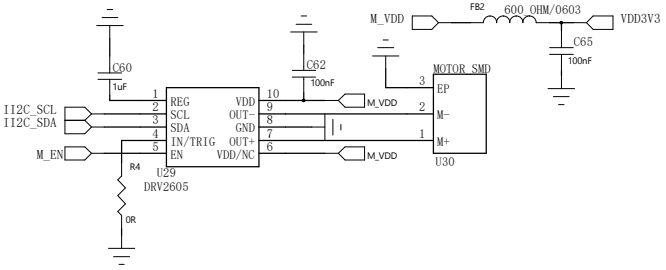


I2C Address:0x5A

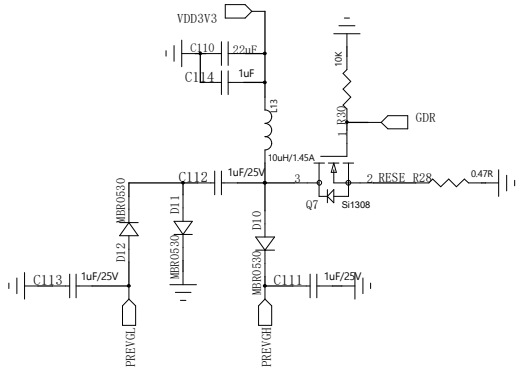


LCD

LCD_BUSY-----IO37
SPI_MOSI-----IO33
SPI_SCK-----IO36
LCD_CS-----IO34
LCD_D/C-----IO35
LCD_RST-----IO9
BL_PWM-----IO41

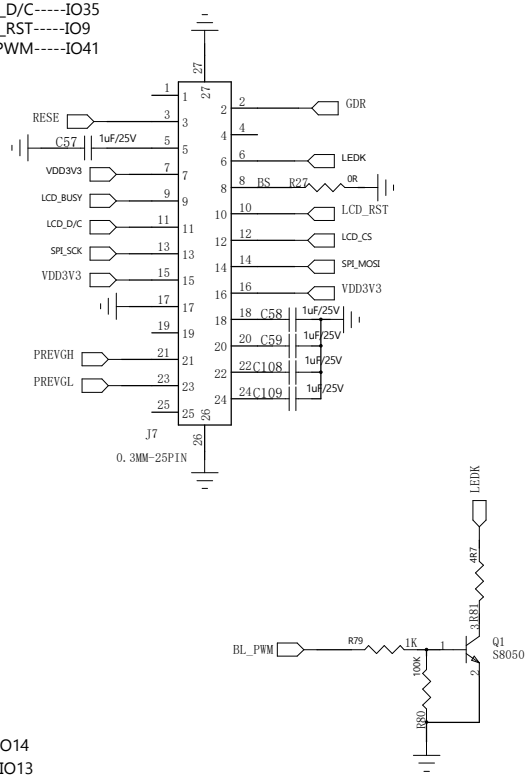


SCL-----IO14
SDA-----IO13
TOU_INT-----IO12

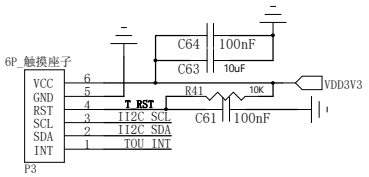


I2C Address:0x1A

触摸


7682模块

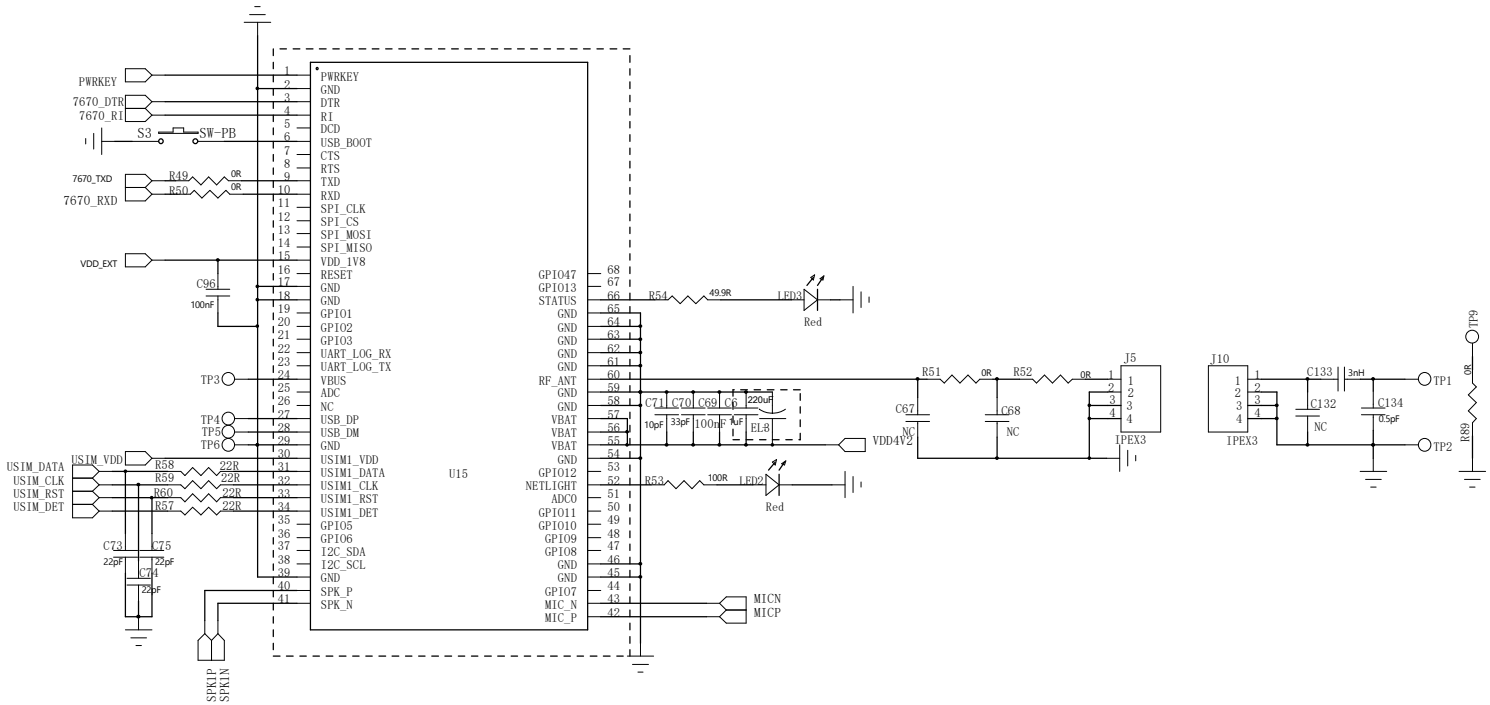
U15
PWRKEY
GND
DTR
RI
DCD
USB_BOOT
CTS
RTS
TXD
RXD
SPI_CLK
SPI_CS
SPI_MOSI
SPI_MISO
VDD_1V8
RESET
GND
GND
GPIO1
GPIO2
GPIO3
UART_LOG_RX
UART_LOG_TX
VBUS
ADC
NC
USB_DP
USB_DM
GND
USIM1_VDD
USIM1_DATA
USIM1_CLK
USIM1_RST
USIM1_DET
GPIO5
GPIO6
I2C_SDA
I2C_SCL
GND
SPK_P
SPK_N
GPIO47
GPIO13
STATUS
GND
GND
GND
GND
GND
RF_ANT
GND
GND
VBAT
VBAT
VBAT
GND
GPIO12
NETLIGHT
ADC0
GPIO11
GPIO10
GPIO9
GPIO8
GND
GND
GPIO7
MIC_N
MIC_P
PWRKEY
7670_DTR
7670_RI
S3
SW-PB
7670_TXD
7670_RXD
R49
R50
0R
VDD_EXT
C96
100nF
TP3
TP4
TP5
TP6
USIM_DATA
USIM_CLK
USIM_RST
USIM_DET
USIM_VDD
R58
R59
R60
R57
22R
C73
C75
C74
22pF
SPK1P
SPK1N
R54
49.9R
LED3
Red
R53
100R
LED2
Red
C71
C70
C69
C6
220uF
10pF
33pF
100nF
1uF
EL8
VDD4V2
R51
R52
J5
C67
C68
NC
IPEX3
J10
C133
3nH
C132
C134
0.5pF
TP1
TP2
TP9
R89


电平转换

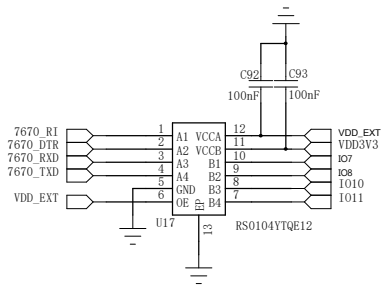


SPK

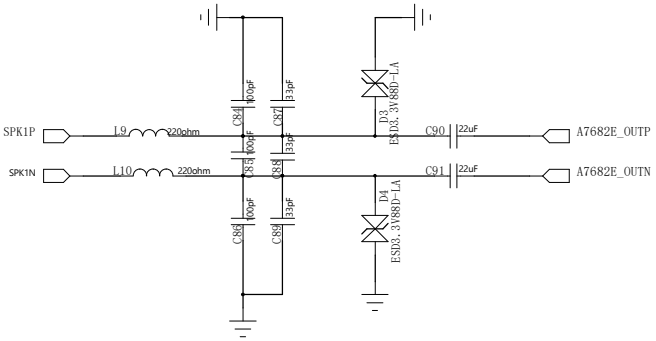


MIC

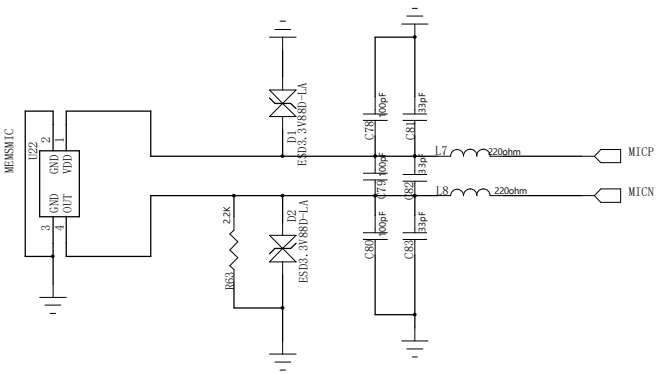


SIM&SD卡座

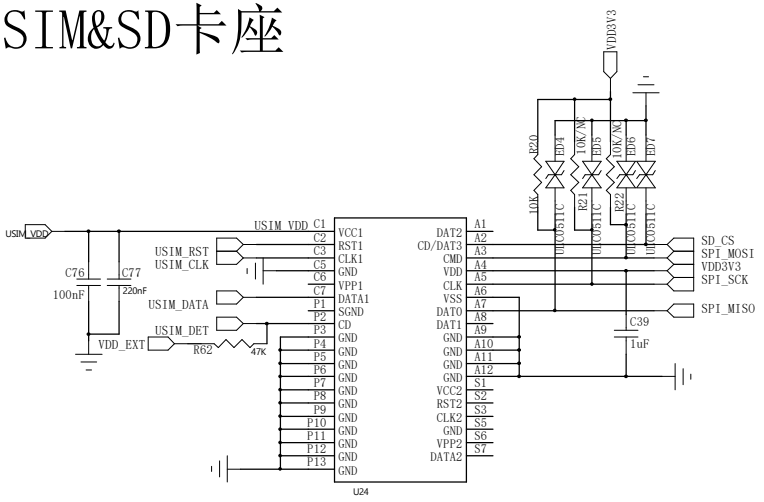

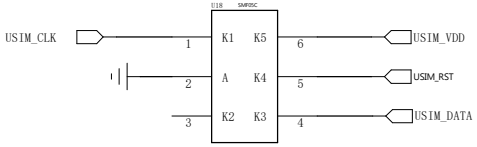


PWRKEY

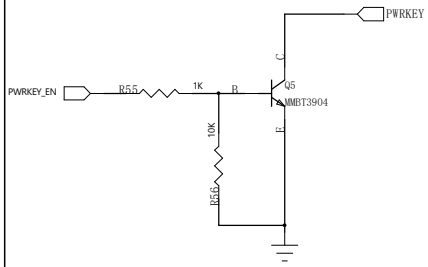


矩阵按键

I2C Address:0x34


SCL-----IO14
SDA-----IO13
KEY_INT-----IO15

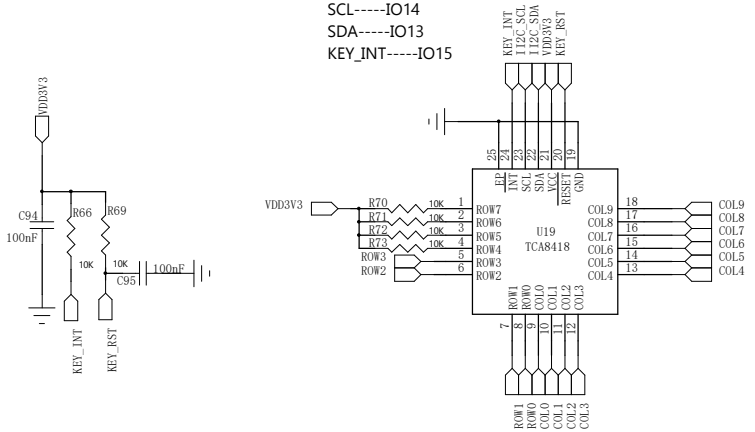


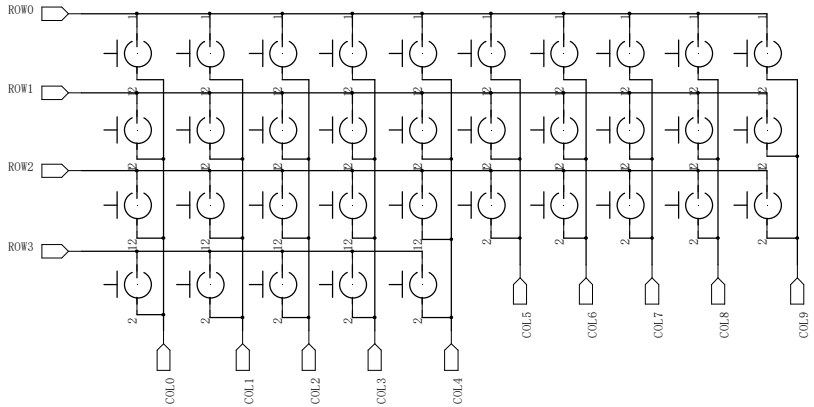

按键灯


LED_PWM-----IO42

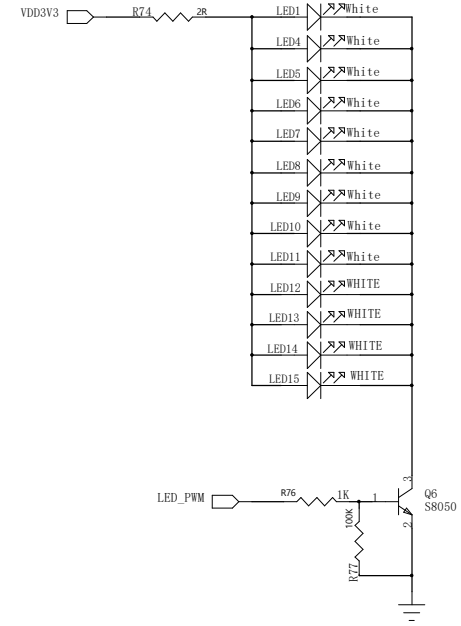


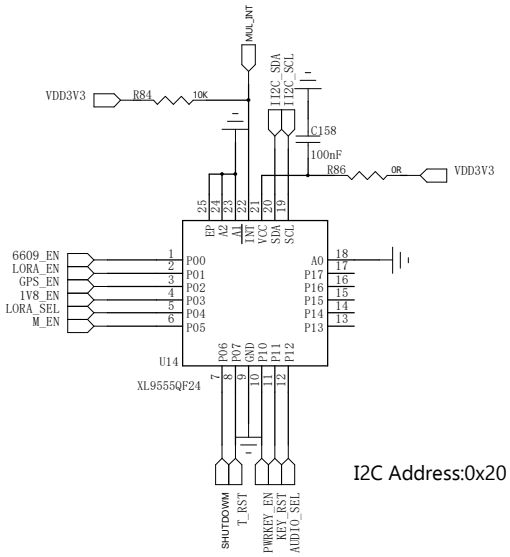



I2C Address:0x20


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

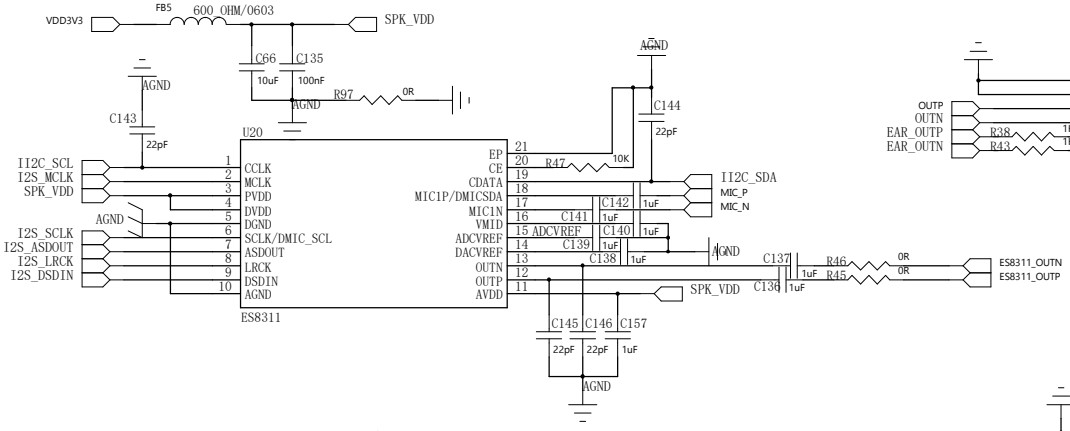



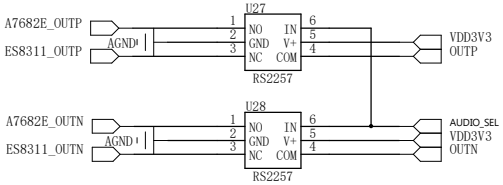

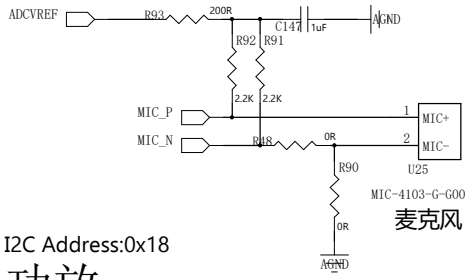

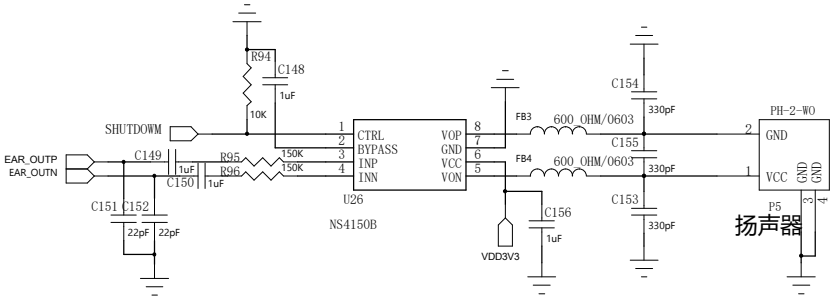

I2C Address:0x18

功放

I2S_MCLK------IO38
I2S_SCLK------IO39
I2S_ASDOUT------IO17
I2S_LRCK------IO18
I2S_DSDIN------IO40

DRAWN:	DATED:
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED:

COMPANY:			
TITLE:			
CODE:	SIZE: B	DRAWING NO:	REV:
SCALE:		SHEET: 8 OF 8	