

# Introduction to computer programming A LAB2

贾艳红 Jana

Email: [jiayh@mail.sustech.edu.cn](mailto:jiayh@mail.sustech.edu.cn)



# LAB OBJECTIVES

1

**Learn how to use an Integrated Development Environment (IDE) in writing JAVA programs**

2

**Primitive types**

3

**Practice using input and output statements.**

4

**Selections**





# 1 DownLoading and Installing IDEA


---

# DownLoading IDEA

Download IDEA Installer from: <https://www.jetbrains.com/idea/>

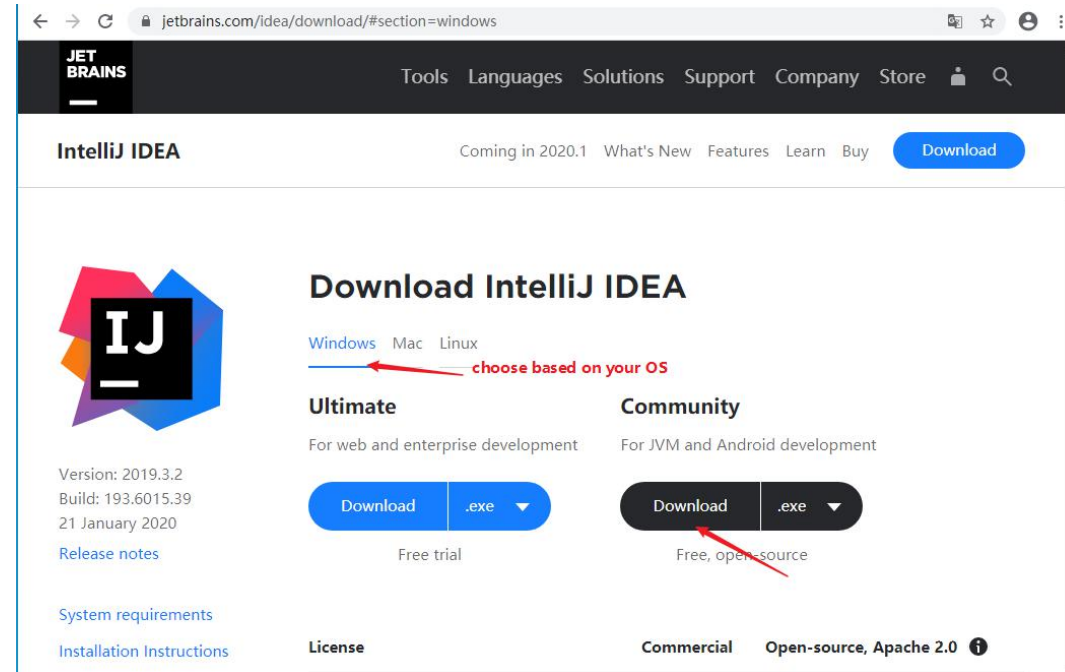
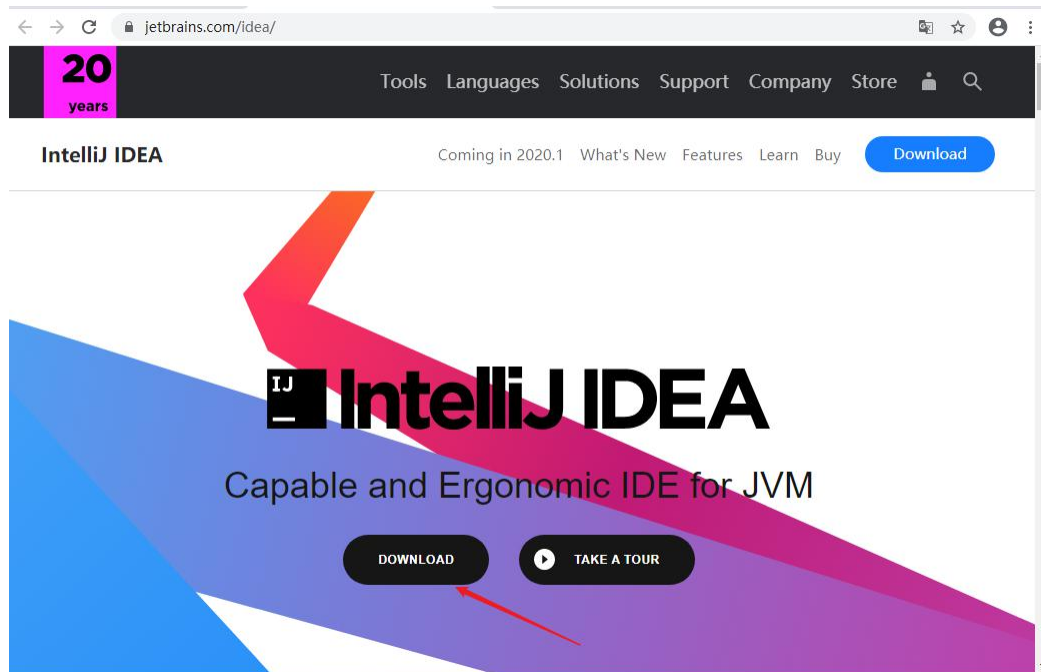


The idea installation package downloaded looks like this:







# Installing IDEA

- ◆ Once the download is complete, locate the *ideaIC-2019.3.2.exe* file and **double-click** to run the installer.

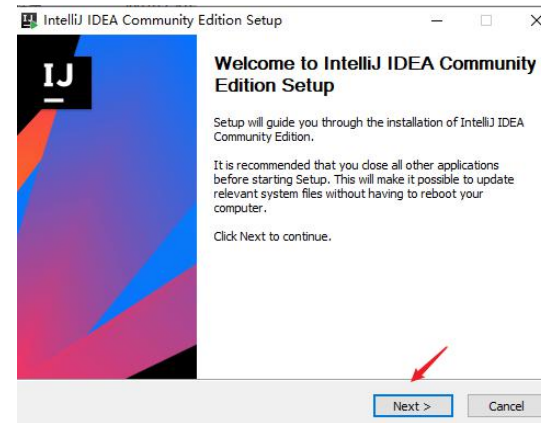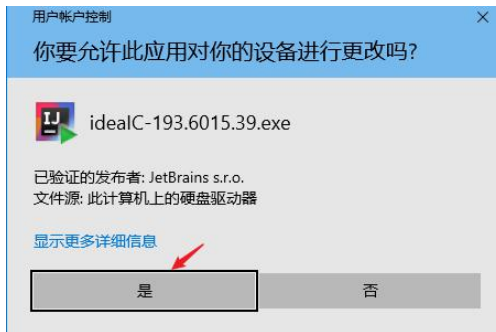

- ◆ Click *Next* and on the following screen optionally change the installation location by clicking on the *Change...* button. In this example the default install location was kept.

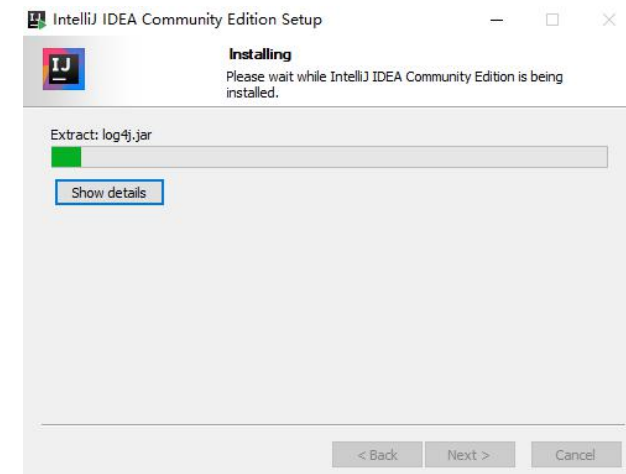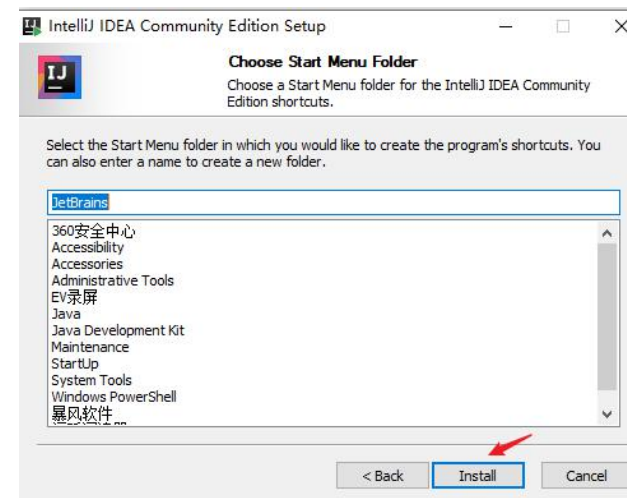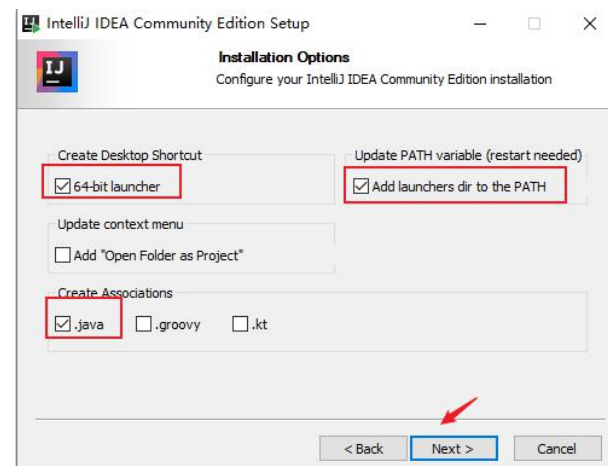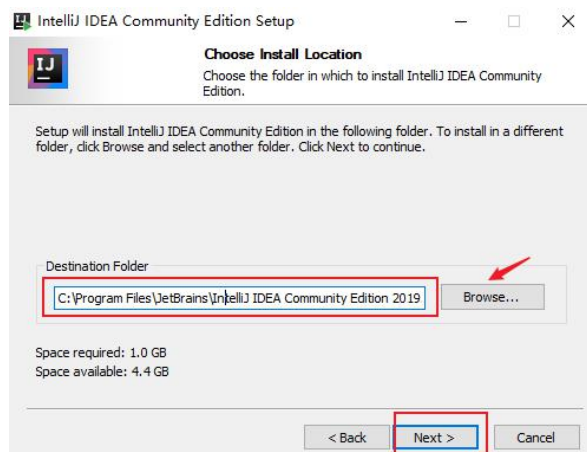



# Create a new Java project



1. Launch IntelliJ IDEA.

*If the Welcome screen opens, click **Create New Project**. Otherwise, from the main menu, select **File | New | Project**.*

2. In the New Project wizard, select Java from the list on the left.



3. From the **Project SDK** list, select the JDK that you want to use in your project.

*If the list is empty, click New and specify the path to the Java home directory (for example, **C:\Program Files\Java\jdk1.8.0\_212**).*

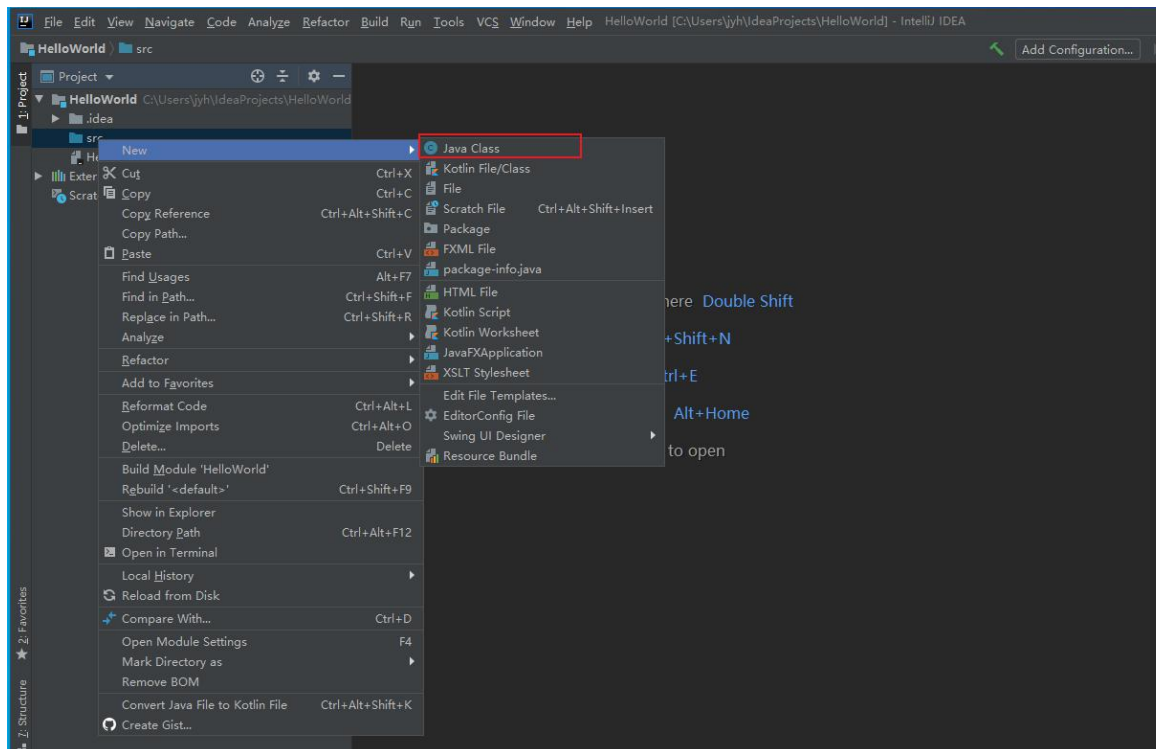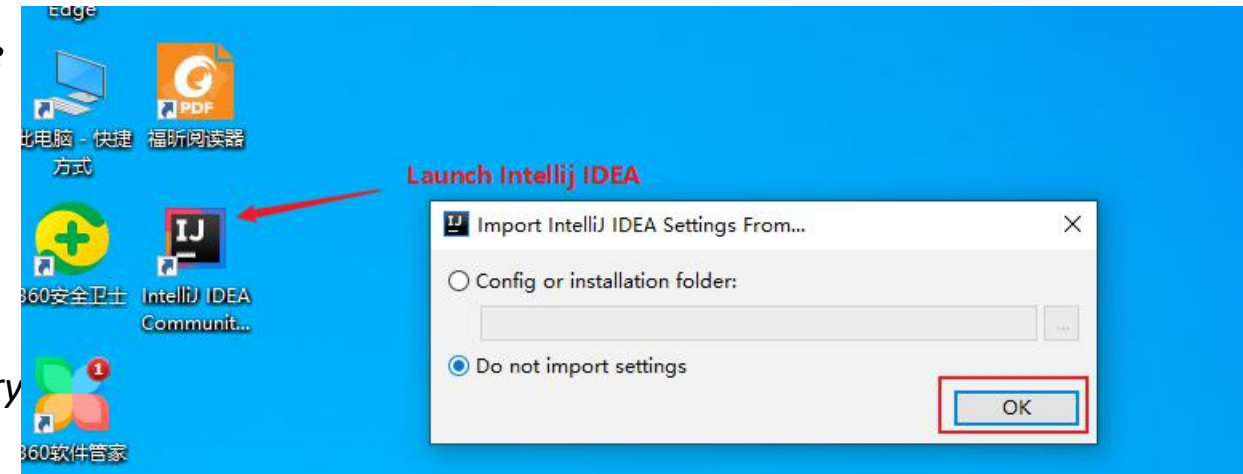

# Create a package and a class

1. In the Project tool window, select the `src` folder, right-click on it, and select **Java Class**.
  2. In the Name field, type ***com.example.helloworld.HelloWorld*** and click OK.
- IntelliJ IDEA creates the **com.example.helloworld** package and the **HelloWorld** class.*

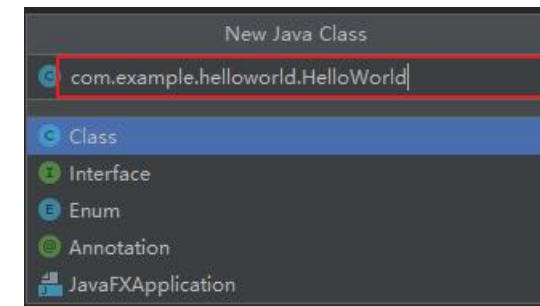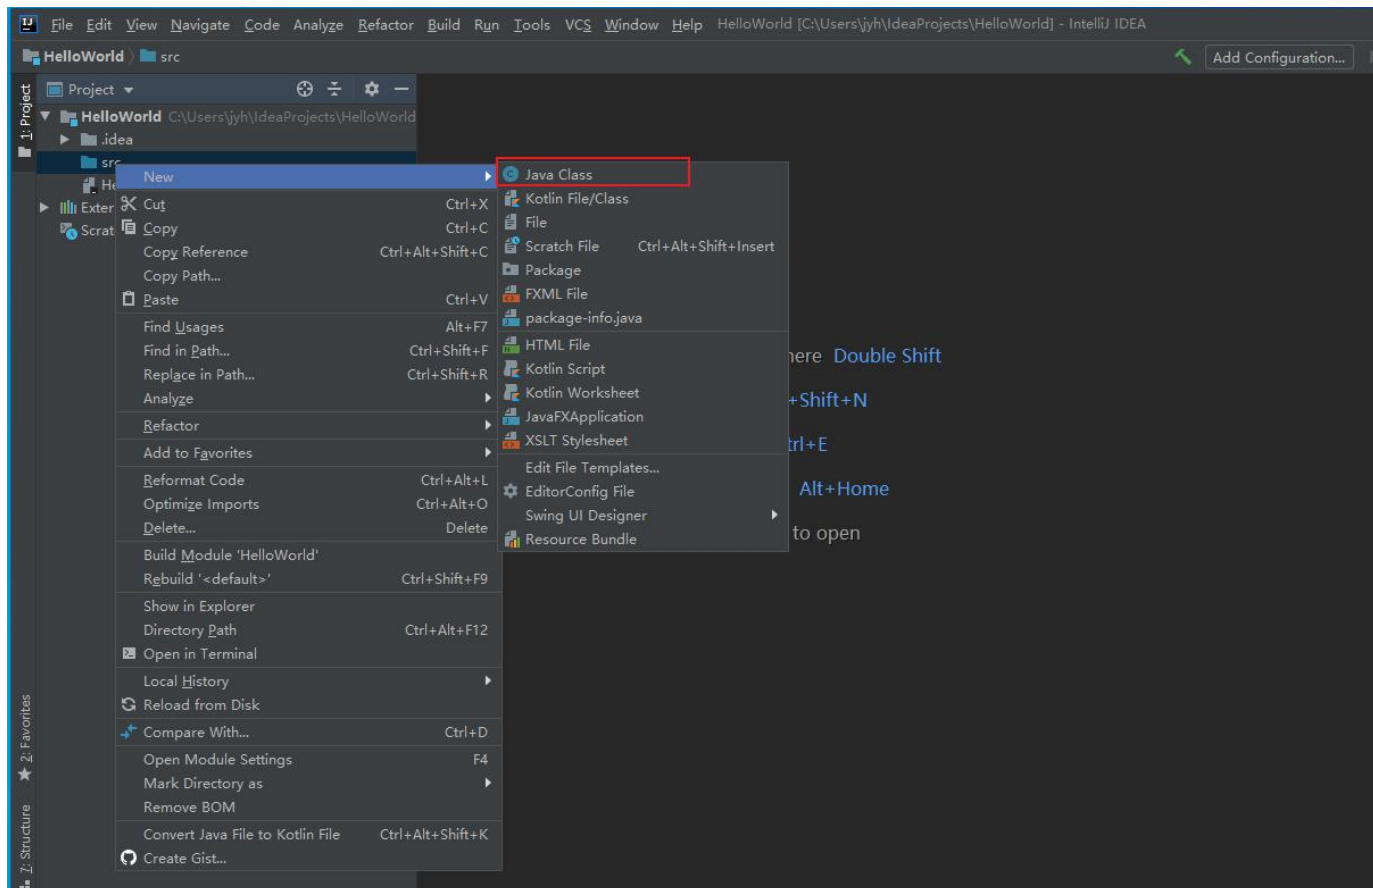


Note:

In Java, there's a **naming convention** that you should follow when you name packages and classes.



<https://www.oracle.com/technetwork/java/codconventions-135099.html>

# Write the code

1.Type **main** and select the template that inserts the **main()** method declaration.

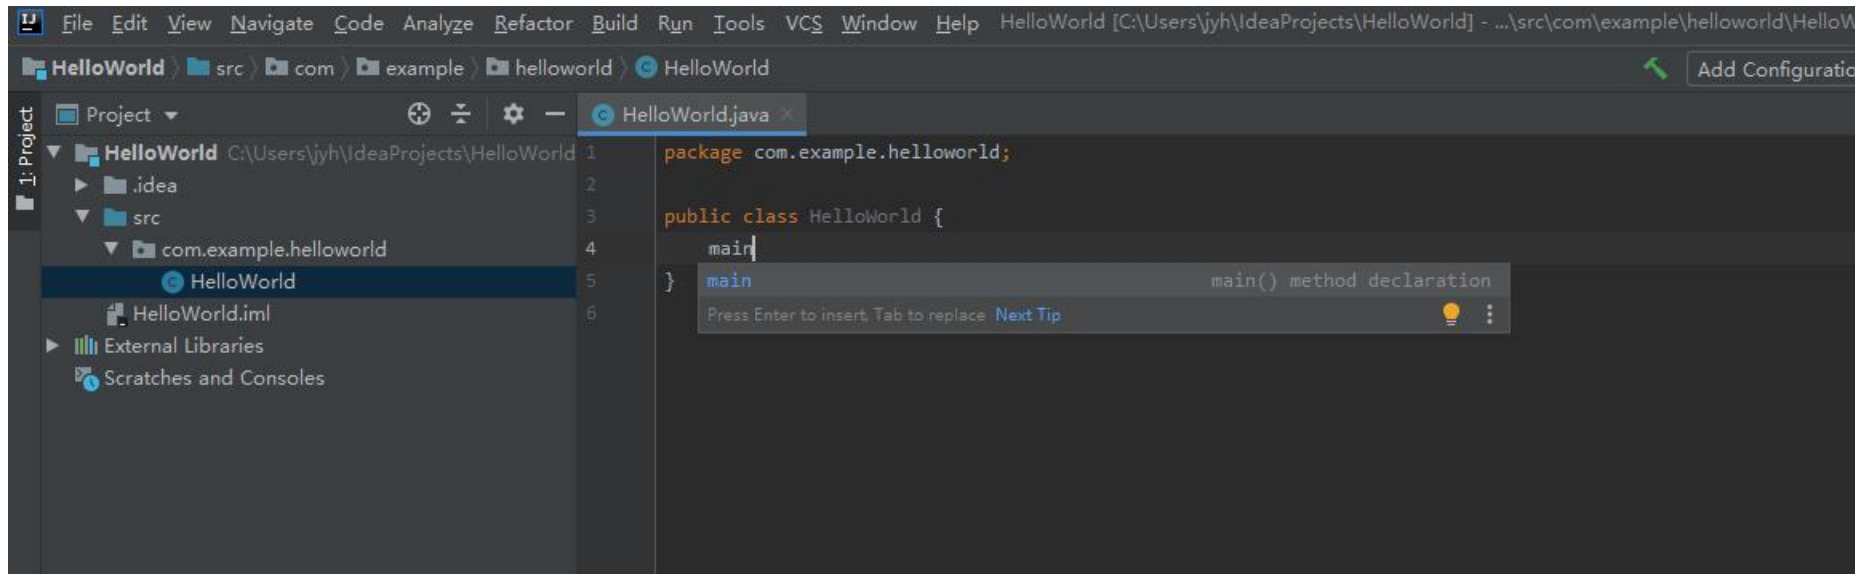


2.Call the **println()** method using code completion

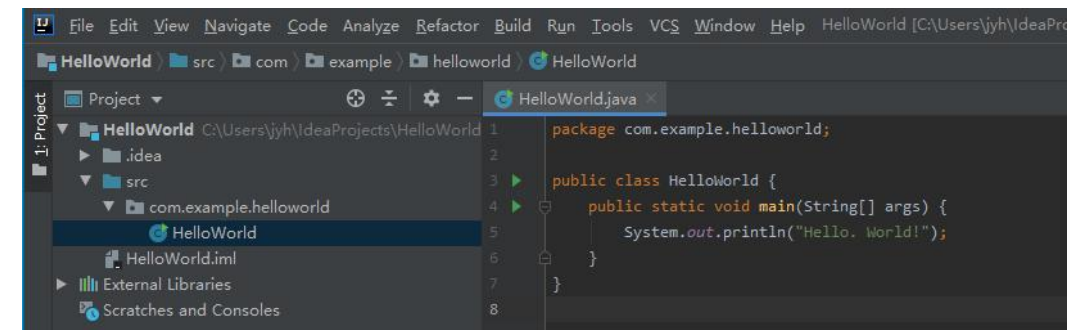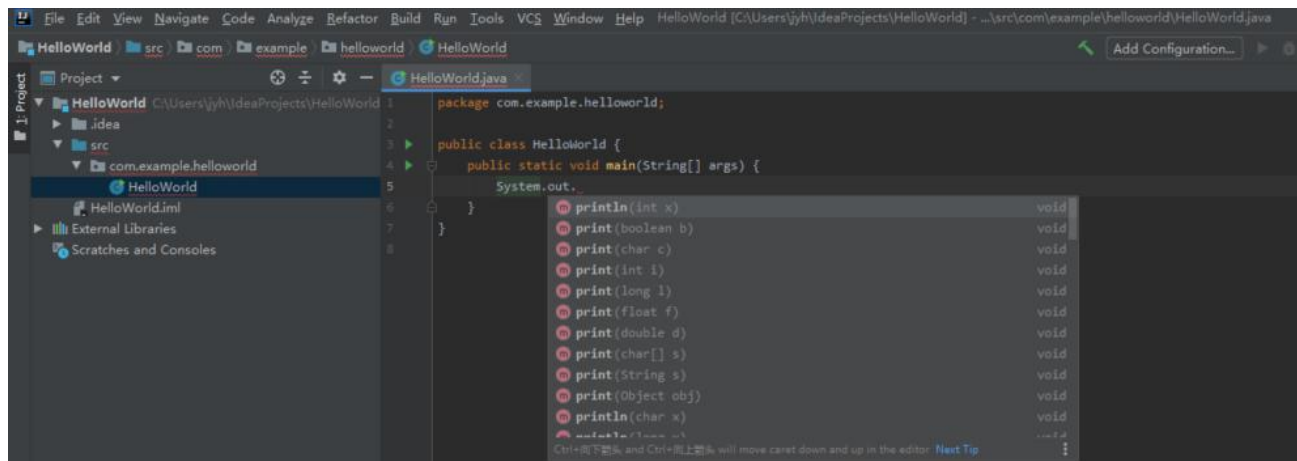



# Build and run the application

1. Go to the Run menu and select the Run option.
2. Select the Class name and click on Run.
3. right-click editor and elect Run 'HelloWorld.main()' in the popup

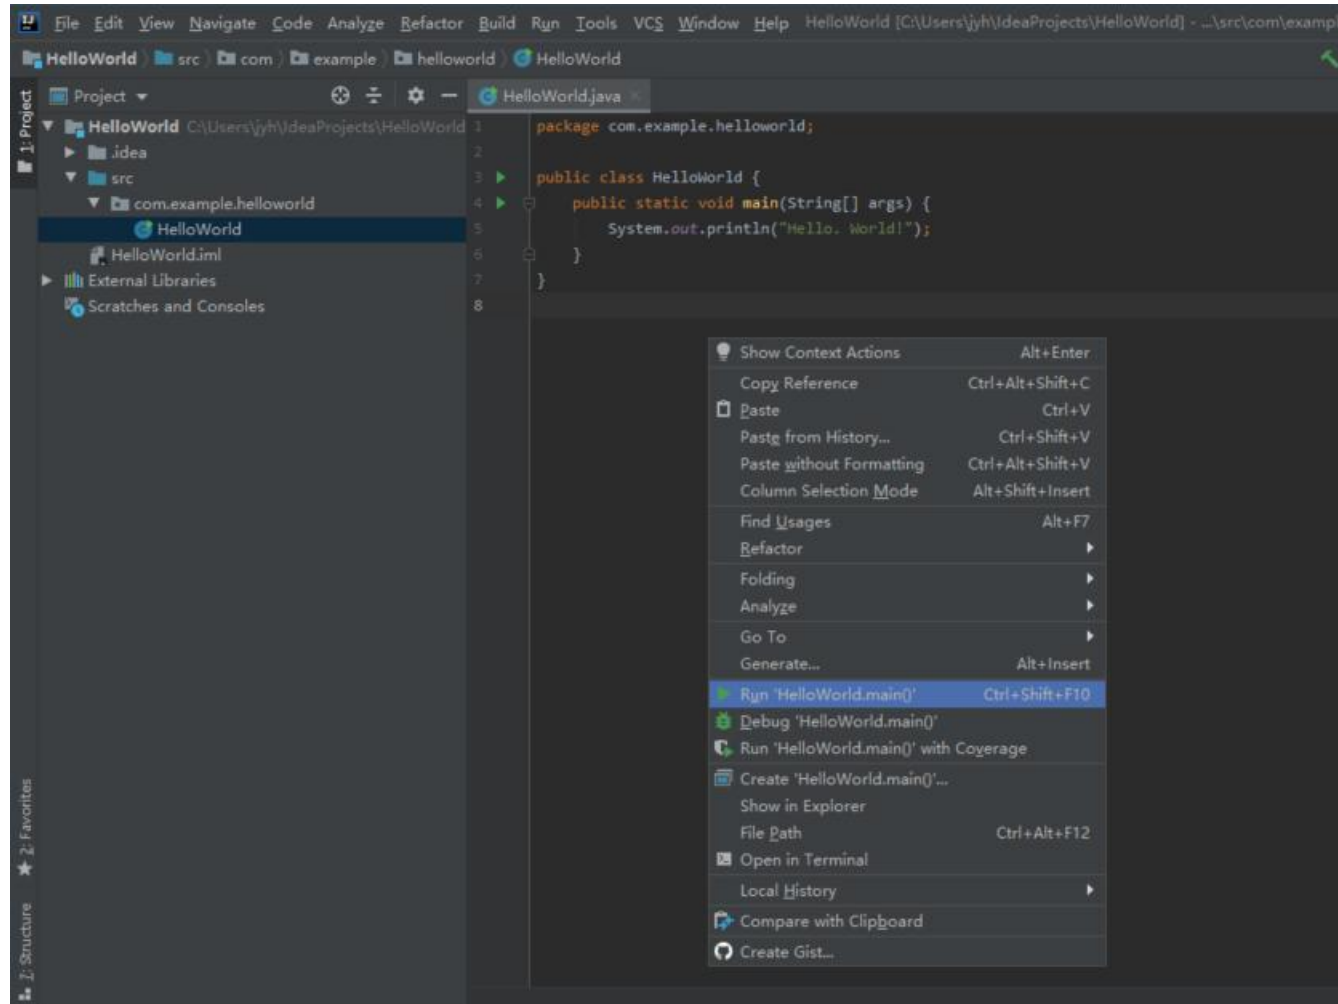

## 2 Primitive types

---



# Data type and its range

Table:List of Java's primitive data types

Type	Size in Bytes	Range
byte	1 byte	$-2^7$ to $2^7 - 1$ (-128 to 127)
short	2 bytes	$-2^{15}$ to $2^{15} - 1$ (-32768 to 32767)
int	4 bytes	$-2^{31}$ to $2^{31} - 1$ (-2147483648 to 2147483647)
long	8 bytes	$-2^{63}$ to $2^{63} - 1$ (-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807)
float	4 bytes	approximately $\pm 3.40282347\text{E}+38\text{F}$ (6-7 significant decimal digits) Java implements IEEE 754 standard
double	8 bytes	approximately $\pm 1.79769313486231570\text{E}+308$ (15 significant decimal digits)
char	2 byte	0 to 65,536 (unsigned)
boolean	not precisely defined*	true or false

\*boolean represents one bit of information, but its "size" isn't something that's precisely defined

# Data Operations(Basic Arithmetic Operators)

Name	Meaning	Example	Result
+	Addition	34 + 1	35
-	Subtraction	34.0 - 0.1	33.9
*	Multiplication	300*30	9000
/	Division	1.0 / 2.0	0.5
%	Remainder	20 % 3	2

```
public class TestArithmeticOperators {  
    public static void main(String[] args) {  
        //Variables Definition and Initialization  
        int number1 = 12, number2 = 4;  
        //Addition Operation  
        int sum = number1 + number2;  
        System.out.println("Sum is: " + sum);  
        //Subtraction Operation  
        int dif = number1 - number2;  
        System.out.println("Difference is : " + dif);  
        //Multiplication Operation  
        int mul = number1 * number2;  
        System.out.println("Multiplied value is : " + mul);  
        //Division Operation  
        int div = number1 / number2;  
        System.out.println("Quotient is : " + div);  
        //Modulus Operation  
        int rem = number1 % number2;  
        System.out.println("Remainder is : " + rem);  
    }  
}
```

```
Sum is: 16  
Difference is : 8  
Multiplied value is : 48  
Quotient is : 3  
Remainder is : 0
```

# Data Operations(Assignment Operators)

The Java Assignment Operators are used when you want to assign a value to the expression. The assignment operator denoted by the single equal sign =.

Syntax:

```
variable = expression;
```

Example:

```
int a = 6;  
float b = 6.8F;
```



# Data type Conversions

## ◆ Widening or Automatic Type Conversion

- The two data types are compatible.(char and boolean are not compatible with each other.)
- When we assign value of a smaller data type to a bigger data type.

Byte → Short → Int → Long → Float → Double

Example:

```
class Test
{
    public static void main(String[] args)
    {
        int i = 100;

        //automatic type conversion
        long l = i;

        //automatic type conversion
        float f = l;
        System.out.println("Int value "+i);
        System.out.println("Long value "+l);
        System.out.println("Float value "+f);
    }
}
```

```
Int value 100
Long value 100
Float value 100.0
```

# Data type Conversions

## ◆ Narrowing or Explicit Conversion

- This is useful for incompatible data types where automatic conversion cannot be done.
- Assign a value of larger data type to a smaller data type

Double → Float → Long → Int → Short → Byte

Example:

```
//Java program to illustrate incompatible data
// type for explicit type conversion
public class Test
{
    public static void main(String[] argv)
    {
        char ch = 'c';
        int num = 88;
        ch = num;
    }
}
```

Exception in thread "main" java.lang.Error: Unresolved compilation problem:  
Type mismatch: cannot convert from int to char

Example:

```
//Java program to illustrate explicit type conversion
class Test
{
    public static void main(String[] args)
    {
        double d = 100.04;

        //explicit type casting
        long l = (long)d;

        //explicit type casting
        int i = (int)l;
        System.out.println("Double value "+d);

        //fractional part lost
        System.out.println("Long value "+l);

        //fractional part lost
        System.out.println("Int value "+i);
    }
}
```

Output:

```
Double value 100.04
Long value 100
Int value 100
```

# 3 Input & Output

---



Copyright © 2012 Pearson Education, Inc.  
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without permission in writing from Pearson Education, Inc.

# Using Scanner to Input

In your code

- 1. import java.util.Scanner
- 2. new an Scanner object
- 3. invoke the **method** of the Scanner object to get input data
  - 3-1: next() to get a string data
  - 3-2: nextInt() to get an integer data
  - 3-3: nextDouble() to get a double data
- 4. if all the input process is end, invoke the “**close()**” method is suggested to make your program safe

```
import java.util.Scanner;
public class Demo_scanner{
    public static void main(String [] args){
        Scanner input=new Scanner(System.in);

        System.out.print("please input name: ");
        String name = input.next();
        System.out.print("please input age: ");
        int age = input.nextInt();
        System.out.print("please input level: ");
        char level = input.next().charAt(0);
        System.out.print("please input grade: ");
        double grade = input.nextDouble();

        System.out.printf("My name is %s.\nI am %d years old.\n"
            +"I got %c in Java last semester.\t My score is %.1f\n",name,age,level,grade);
    }
}
```

```
c:\vivian\Java_2018_spring\test>java Demo_scanner
please input name: John
please input age: 18
please input level: A+
please input grade: 96.5
My name is John.
I am 18 years old.
I got A in Java last semester.   My score is 96.5
```

# Runing programs with arguments

## ● In IDEA

The image shows the IntelliJ IDEA IDE interface. The main editor displays a Java class `PrintInfoFromArgu` with a `main` method. The code is as follows:

```
1 public class PrintInfoFromArgu {
2     public static void main(String[] args) {
3         // TODO Auto-generated method stub
4         if (args.length != 2) {
5             System.out.println("Usage: java PrintInfoFromArgu arg1 arg2");
6             System.exit( status: 1);
7         }
8         System.out.println("Hi,I'm " + args[0] +
9             ",I'm learning JAVA in room " + args[1]);
10    }
11 }
12
13 }
```

The `if` statement and the `args[0]` and `args[1]` expressions are highlighted with red boxes. A red arrow points from the `args[0]` box to the console output.

The Run tool window at the bottom shows the command executed: `"C:\Program Files\Java\jdk-1.8.0_212\bin\java.exe" ...` and the output: `Usage: java PrintInfoFromArgu arg1 arg2`. The process finished with exit code 1.

A right-click context menu is open over the `main` method, with the `Edit 'PrintInfoFromArgu...main()'...` option selected. A red arrow points from the text "right-click" to this menu.

The Run Configuration dialog for `PrintInfoFromArgu` is open on the right. The `Program arguments` field is highlighted with a red box and contains the text `Test 487`. A red arrow points from the `Edit 'PrintInfoFromArgu...main()'...` menu option to this field.



# Runing programs with arguments

- In command line

```
G:\2020Spring\CS102A\LAB3\Case\src>javac PrintInfoFromArgu.java

G:\2020Spring\CS102A\LAB3\Case\src>dir
驱动器 G 中的卷是 FILE
卷的序列号是 2ED6-9B8A

G:\2020Spring\CS102A\LAB3\Case\src 的目录

2020/02/24  23:02    <DIR>        .
2020/02/24  23:02    <DIR>        ..
2020/02/24  23:02                767 PrintInfoFromArgu.class
2019/09/06  19:17                348 PrintInfoFromArgu.java
                2 个文件          1,115 字节
                2 个目录 208,360,599,552 可用字节

G:\2020Spring\CS102A\LAB3\Case\src>java PrintInfoFromArgu
Usage: java PrintInfoFromArgu arg1 arg2

G:\2020Spring\CS102A\LAB3\Case\src>java PrintInfoFromArgu Jimmy 402
Hi,I'm Jimmy,I'm learning JAVA in room 402
```

# Conclusion

While using argument of running

- 1) The arguments is stored in String [] args
- 2) You may need to change its type as your desired

```
public class Demo{  
    public static void main(String [] args){  
        int age= Integer.parseInt(args[0]);  
        double grade= Double.parseDouble(args[1]);  
        char level = args[2].charAt(0);  
        String name = args[3];  
    }  
}
```

While using Scanner object

- 1) Import scanner
- 2) New a object
- 3) Invoke the method to get the right type of data
- 4) Invoke close() is suggested

```
import java.util.Scanner;  
public class Demo_scanner{  
    public static void main(String [] args){  
        Scanner input=new Scanner(System.in);  
  
        System.out.print("please input name: ");  
        String name = input.next();  
        System.out.print("please input age: ");  
        int age = input.nextInt();  
        System.out.print("please input level: ");  
        char level = input.next().charAt(0);  
        System.out.print("please input grade: ");  
        double grade = input.nextDouble();  
    }  
}
```

# Print without format

- `System.out.println();`
- `System.out.print();`

```
1 public class Welcome {  
2     public static void main(String[] args) {  
3         System.out.println("Welcome to Java!");  
4         System.out.print("Welcome to Java!");  
5     }  
6 }
```

## 3 Selections

---




**3.1 if Statements**

**3.2 if-else Statements**

**3.3 else-if Statements**

## 3.1 if Statements(if)

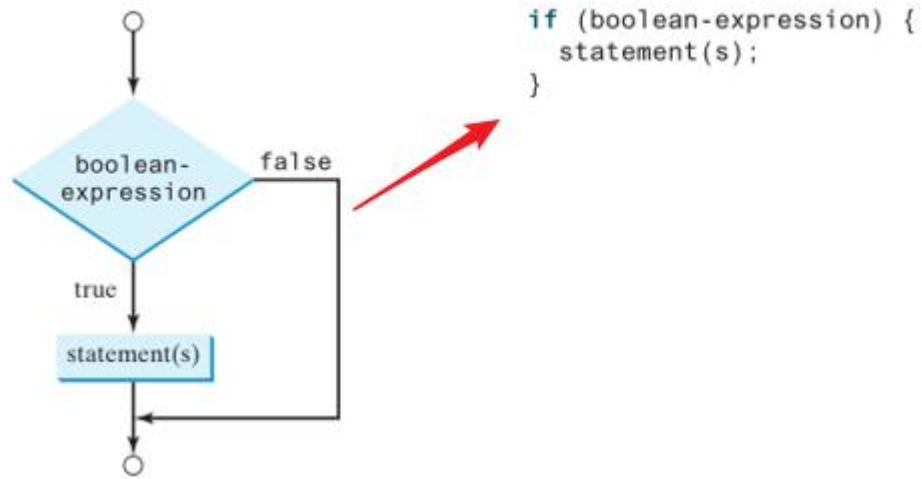

```
if (boolean-expression) {  
    statement(s);  
}
```

### Example:

```
import java.util.Iterator;  
import java.util.Scanner;  
  
public class SimpleIfDemo {  
  
    public static void main(String[] args) {  
        Scanner input = new Scanner(System.in);  
        System.out.print("Enter an integer: ");  
        // enter input  
        int number = input.nextInt();  
        // check 5  
        if (number % 5 == 0)  
            System.out.println("HiFive");  
        // check even  
        if (number % 2 == 0)  
            System.out.println("HiEven");  
    }  
}
```


Console

<terminated> SimpleIfDemo [Java Application] C

```
Enter an integer: 30  
HiFive  
HiEven
```



## 3.2 if Statements(if-else)

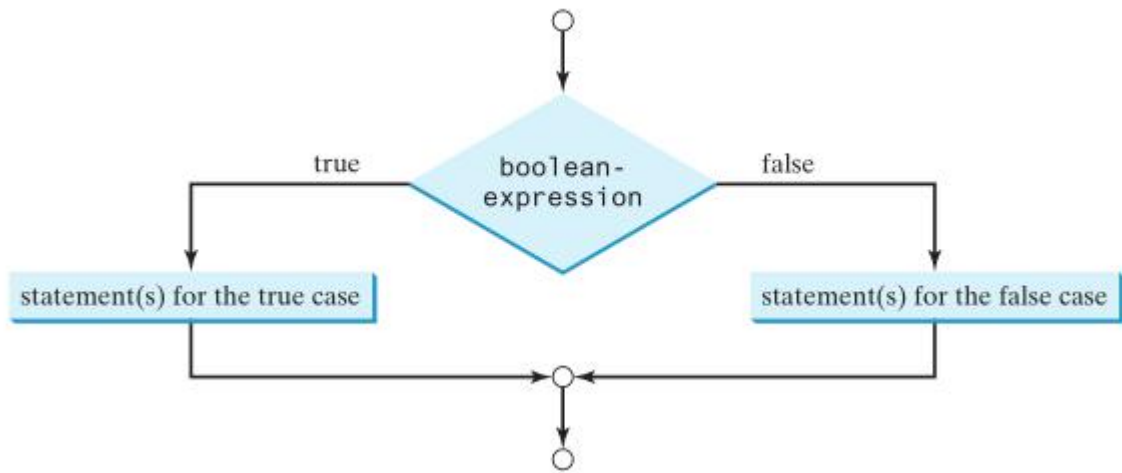

```
if (boolean-expression) {  
    statement(s)-for-the-true-case;  
}  
else {  
    statement(s)-for-the-false-case;  
}
```

### Example:

```
import java.util.Scanner;  
  
public class SimpleIfelseDemo {  
  
    public static void main(String[] args) {  
        Scanner input = new Scanner(System.in);  
        System.out.print("Enter an integer: ");  
        // enter input  
        int number = input.nextInt();  
        if (number % 2 == 0)  
            System.out.println(number + " is even.");  
        else  
            System.out.println(number + " is odd.");  
    }  
}
```

```
Console [X]  
<terminated> SimpleIfelseDemo [Java Appli  
Enter an integer: 5  
5 is odd.
```

```
Console [X]  
<terminated> SimpleIfelseDemo [Java Applicati  
Enter an integer: 6  
6 is even.
```

### 3.3 if Statements(else-if and Nested if)

Example:

```
if(boolean-expression)
{
    //execute your code
}
else if(boolean-expression n)
{
    //execute your code
}
else
{
    //execute your code
}
```

```
if(boolean-expression)
{
    if(boolean-expression)
    {
        //execute your code
    }
}
else
{
    //execute your code
}
```

```
public class SimpleElseifDemo {

    public static void main(String[] args) {
        int a = 30, b = 30;
        if (b > a) {
            System.out.println("b is greater");
        }
        else if(a > b){
            System.out.println("a is greater");
        }
        else {
            System.out.println("Both are equal");
        }
    }
}
```

else-if

```
Console
<terminated> SimpleElseifDemo [Java A
Both are equal
```

Example:

```
public class NestedIfDemo {


    public static void main(String[] args) {
        int i = 30, k = 30, j = 30;
        if (i > k) {
            if (j > k)
                System.out.println("i and j are greater than k");
        } else
            System.out.println("i is less than or equal to k");
    }
}
```

Nested if

```
Console
<terminated> NestedIfDemo [Java Application] C:\Pr
i is less than or equal to k
```

# 3 Exercises

---

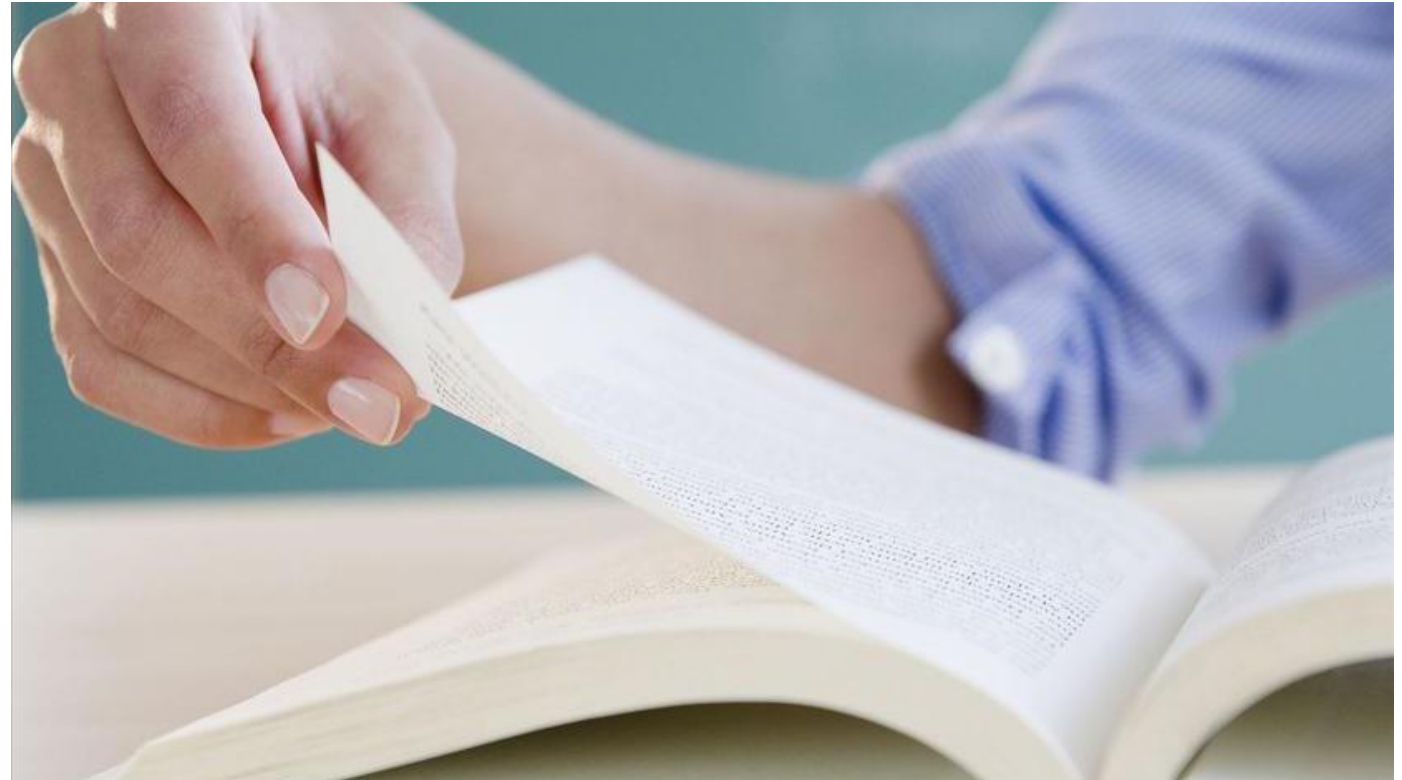

Complete the exercises in the **2021S-Java-A-Lab-2.pdf** and **2021S-Java-A-Lab-2\_Part2\_.pdf** .



**THANK YOU**

贾艳红 Jana

Email: [jiayh@mail.sustech.edu.cn](mailto:jiayh@mail.sustech.edu.cn)