1

EE3900 Gate Assignment - 4

Adhvik Mani Sai Murarisetty - AI20BTECH11015

Download latex-tikz codes from

https://github.com/adhvik24/EE3900/blob/main/ Gate_A4/main.tex

Download python codes from

https://github.com/adhvik24/EE3900/blob/main/ Gate_A4/codes/plot.py

PROBLEM

(GATE EC-1997 Qn 5.2) If the fourier transform of the deterministic signal x(t) is X(f), then

- 1) The fourier transform of x(t-2) is
 - a) $X(f)e^{-j4\pi f}$
 - b) X(2f)
 - c) 2X(2f)
 - d) X(f 2)
- 2) The fourier transform of $x(\frac{t}{2})$ is
 - a) $X(f)e^{-j4\pi f}$
 - b) X(2f)
 - c) 2X(2f)
 - d) X(f 2)

Solution

1) By the time shifting property of Fourier transform,

$$x(t - t_0) \stackrel{\mathcal{F}}{\rightleftharpoons} e^{-j2\pi f t_0} X(f) \tag{0.0.1}$$

$$x(t-2) \stackrel{\mathcal{F}}{\rightleftharpoons} e^{-j4\pi f} X(f)$$
 (0.0.2)

Let x(t) = rect(t) and $\text{sinc}(t) = \frac{\sin(t)}{t}$

$$X(f) = \operatorname{sinc}(f) \tag{0.0.3}$$

For x(t) = rect(t-2),

$$e^{-j4\pi f}X(f) = e^{-j4\pi f}\operatorname{sinc}(f)$$
 (0.0.4)

The correct option is (a).

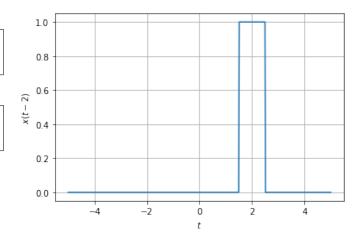


Fig. 1: Plot of rect(t-2)

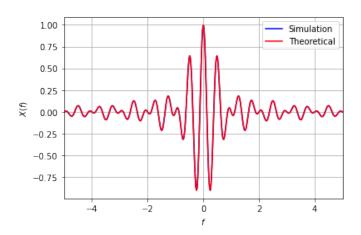


Fig. 2: Fourier transform Simulation v/s Theoretical

2) By the time scaling property of Fourier transform,

$$x(\alpha t) \stackrel{\mathcal{F}}{\rightleftharpoons} \frac{1}{|\alpha|} X\left(\frac{f}{|\alpha|}\right)$$
 (0.0.5)

$$x(\frac{t}{2}) \stackrel{\mathcal{F}}{\rightleftharpoons} 2X(2f)$$
 (0.0.6)

Let x(t) = rect(t) and $\text{sinc}(t) = \frac{\sin(t)}{t}$

$$X(f) = \operatorname{sinc}(f) \tag{0.0.7}$$

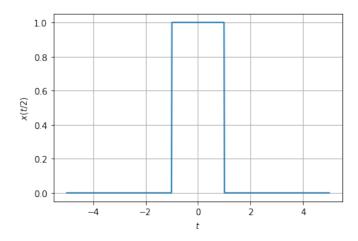


Fig. 3: Plot of rect(t/2)

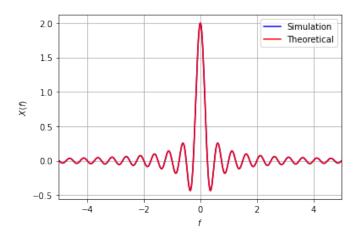


Fig. 4: Fourier transform Simulation v/s Theoretical

For
$$x(t) = \text{rect}(t/2)$$
,
 $2X(2f) = 2 \text{sinc}(2f)$ (0.0.8)

The correct option is (c).