


syncSuite

Max Package and Max for Live devices for complex multimedia synchronization

*This project was supported by Hamburg Online Open University and Hochschule für Musik
und Theater Hamburg*

Installation and Contents

If you're reading this document, it means you've already probably downloaded and unzipped the package successfully.

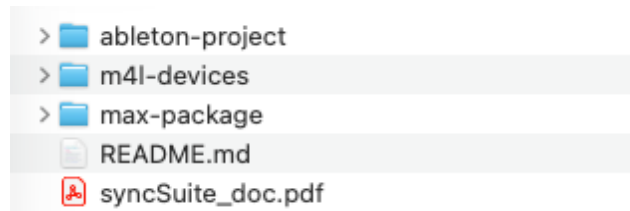

The [/ableton-project](#) can be kept where it is most convenient for you. It contains several Ableton Live Sessions with examples as well as some linked media.

The [/m4l-devices](#) contains all the Max4Live devices. This you can also keep where it is most convenient to you, although it is recommended to keep all your Max4Live devices together.


The [/max-package](#) folder needs to be copied inside Max's [/Packages](#) folder. Usually, this is:

[/Documents/Max 9/Packages](#)

Package Usage

This document will cover the basic usage of the Max4Live devices. You can find comprehensive information about the Max Package in the objects' help files as well as in the tutorial series.

CueSync

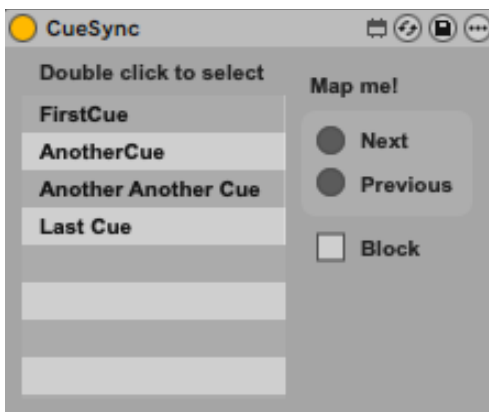


This device allows gets all markers in your Session and allow to easily and rapidly jump between them. Useful when needing to jump through cues.

- 1 Add a CueSync device to your Session.
- 2 Add Markers to your Session.
- 3 Double click on any item in the list.
- 4 You can map the “Next” and “Previous” buttons for more intuitive control.

Tutorial:

[/ableton-project/syncSuite-tutorial-cuesync.als](#)

LiveSync

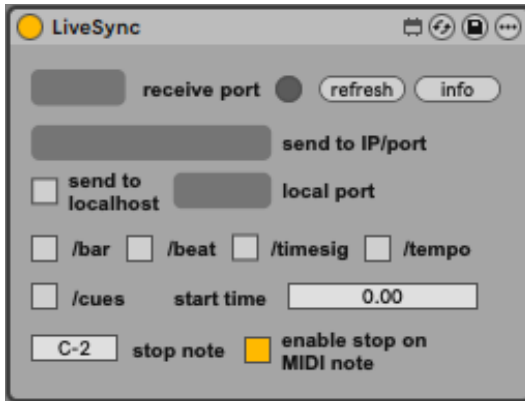

This device allows to send Transport information from your Live Session as well as receiving Transport and Cue controls via UDP.


Very useful for cueing Live from external software as well as connecting Transport information (bar and beat) with the Score devices.

- 1 Add a LiveSync device to a MIDI track in your session.
- 2 Set the “receive port” for controlling Live from external software, for example, 8080.
- 3 Set the target IP for sending Transport information to external controlling software. If the software is in the same computer, you can enable “send to localhost” and set a port (different from the receive port!)
- 4 Enable the information you want to send.
- 5 You can enable “stop on MIDI note” and set a MIDI note value. Then add that MIDI note in the Arrangement View and Live will stop the Transport as soon as it hits that note.

Tutorial:

[Follow the Tutorial in the Max Package “Controlling Liva Via UDP” and open /ableton-project/syncSuite-tutorial3.als](#)

OSCSync

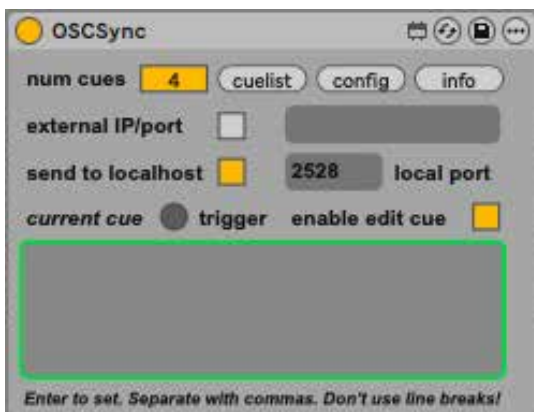

This device allows to send Transport information from your Live Session as well as receiving Transport and Cue controls via UDP.

Very useful for cueing Live from external software as well as connecting Transport information (bar and beat) with the Score devices.

- 1 Add a OSCSync device to a MIDI track in your session.
- 2 Set the target IP for sending Transport information to external controlling software. If the software is in the same computer, you can enable “send to localhost”.

- 3 In the Arrangement View add a MIDI clip (CMD + Shift + M)
- 4 Open the clip and add a random note (any note, any length). *You only need to do this the first time to activate the device.*
- 5 Move the clip in the Arrangement View just a few beats and then put it back on its place. *You only need to do this the first time to activate the device.*
- 6 Select the clip. Go to the device and type any message. Press Enter to confirm the message. You can send several messages with the same clip, just separate them with a comma (do not do a line break!).
- 7 Play the Transport. Your message will be sent as soon as the playhead triggers the MIDI note.

Tutorial:

Follow the Tutorial in the Max Package “Using Live To Send UDP In Sync” and open [/ableton-project/syncSuite-OSCSync.als](#)

