


Higher addresses

Lower addresses

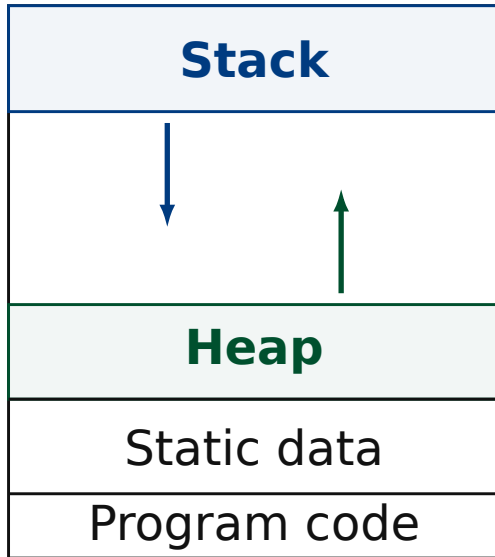

count and pointer `p`
Automatic locals

Room to grow
Opposing directions

`p[0]` to `p[count-1]`
Allocated integers

Globals and static