OGR-Driven Dynamic Loss Balancing for Mitigating Gradient Starvation

Lakshya[1], **Amit Kumar Bairwa**[1,*], **and Varun Tiwari**[1,*]

[1]Department of Artificial Intelligence and Machine Learning, School of Computer Science and Engineering, Manipal University Jaipur, Jaipur–Ajmer Express Highway, Jaipur, India.
[*]amitkumar.bairwa@jaipur.manipal.edu
[*]varun.tiwari@jaipur.manipal.edu
[*]Corresponding Authors

ABSTRACT

Jointly trained multimodal networks tend to rely on whichever modality is easiest to fit and leave the other encoders under-trained, a failure known as modality laziness or gradient starvation. We study a simple, generalization-aware remedy. First, we define the Overfitting-to-Generalization Ratio (OGR), the ratio of a modality's held-out loss to its training loss, as a scale-invariant per-modality diagnostic. Second, we propose MFC-A, a closed-loop controller that gives each unimodal auxiliary loss a weight proportional to a power of its inverse smoothed OGR, so that a modality that starts to memorise is throttled and the others are amplified within a fixed weight budget. MFC-A runs inside a single training run and needs no auxiliary networks, gradient surgery or noise injection. We compare it with eight baselines under one protocol (ten paired seeds; disjoint training, controller, tuning and test splits; paired significance tests) on two real audio–video benchmarks, AVE and CREMA-D (actor-disjoint), complemented by a controlled synthetic benchmark and a two-view control. On AVE, MFC-A maintains accuracy (80.2 vs. 79.9%) while reducing the OGR gap by 63% (p=0.03) and improving robustness to visual noise, blur and low light ($p < 0.04$). On the synthetic benchmark it maintains accuracy while reducing the gap by 38% ($p < 0.001$). On CREMA-D, whose dominant modality is audio, it identifies the overfitting video stream correctly and maintains accuracy, but its gains are not significant. Confidence-based gradient modulation (OGM-GE) on AVE and offline Gradient Blending on CREMA-D achieve larger gains at the cost of a tuned hyper-parameter or an extra probe run. A follow-up variant that uses OGR to decide when to apply such modulation matches OGM-GE on AVE with a lower imbalance gap, but no variant is best on every dataset. The controller's arithmetic is negligible; its monitoring passes add 2–18% wall-clock time.

Keywords: ~~Multi-modal Learning, Modality Laziness, Gradient Starvation, Loss Balancing~~Multimodal learning, Modality imbalance, Gradient starvation, Dynamic loss balancing, Overfitting-to-Generalization Ratio (OGR), ~~Emotion Recognition, Dynamic Modulation, Modality Fairness Controller (MFC)~~Audio–visual emotion recognition.

1 ~~Introduction~~

~~The world is tasted in the colourful mixture of impressions. This is what ideally Proposed AI models should do. Nevertheless, such multimodal architectures are usually difficult to train, and powerful ones like Unified Transformers [1], Image Bind [2], CLIP[3]and Flamingo[4]these become lazy. When one of the modalities (say an image)~~

Introduction

Multimodal models combine complementary signals, such as images, audio and text, and large unified architectures including CLIP[3], Flamingo[4], ImageBind[2] and Meta-Transformer[1] have made this the default design for perception systems. Training such models jointly is nevertheless fragile. When one modality is easier to ~~learn than~~ fit than another, gradient descent reduces the joint loss mainly through the easier modality, and the ~~other (say audio) then the model neglects the more difficult task. This will be called a Modality Laziness or Gradient Starvation [5]. The visual features too are generally means puny and arranged; this presents a simple access point leading to the optimizer. Noisey audio or text may be less or excessive. This means that the high visual gradients would tend to absorb the common weights in the model at almost full costs and the other modalities are under-developed. In the real world such as an autonomous car that may have to hear a siren that it cannot see this blindness can be hazardous. Although the various fixes have been enumerated in various recent surveys, like the Balance Benchmark [6], most of them are burdensome. Others must be taught a high number of models to get appropriate weights orsimply strive to resolve the problem by introducing random noise, again a common hit-or-miss method, like OGM-GE [7]. We propose a more idealistic one the Modality Fairness Controller (MFC). Instead of simply slowing down the fast learner, we pose a simple~~

question: Is this modality in fact generalizing or is it simply memorizing? We can take the first step to having each modality pull its own weight with respect to the actual unified representation by taking the cue of limiting Proposed learning rates by the Generalization Gap.

The visual features are also generally small and arranged and this provides a simple pathway to the optimizer [5]. Well-conditioned loss surface Vision features dense, spatially coherent, low-noise (e.g. CIFAR-10 [8]) features. Audio characteristics, such as speaker-varying, temporally noisy (e.g., CREMA-D [9]) create a more rugged and high-variance landscape. Thus, the powerful visual gradients are inclined to attract the shared weights in the model almost entirely and the remaining modalities are under-developed. The implications cannot be seen in normal assessment but are disastrous when stressed modality. The baseline performance of 83.3% accuracyfalls to 48.2% accuracy with the addition of Gaussian noise (at 1.0) to visual input (a 35-point drop) because the audio encoder was never developed . In autonomous driving, fog or glare produces the same failure. In medical imaging, corrupted scans leave the model unable to encoder of the harder modality receives little useful gradient. This phenomenon has been called modality laziness, modality competition[10] or, following the analysis of Pezeshki et al.[5], gradient starvation.

The effect is often invisible in clean-data accuracy, because the dominant modality alone is enough to reach a good score. It becomes visible when the dominant modality is degraded: a model whose second encoder never developed cannot fall back on clinical text itnever learned.

Root Cause

The visual features are also normally compact and organized, which offers an easy route to the optimizer [5]. Vision features—dense, spatially coherent, low-noise (e.g., CIFAR-10 [8])—produce a well-conditioned loss surface. Audio features—speaker-dependent, temporally noisy (e.g., CREMA-D [9])—produce a rougher, high-variance landscape. Consequently, the strong visual gradients tend to pull the shared weights in the model nearly completely and the rest of the modalities become under-developedit.

The consequences are invisible during standard evaluation but severe under modality stress. Proposed experiments show the baseline collapses from 83.3% to 48.2% accuracy when Gaussian noise ($\sigma = 1.0$) is added to visual input—a 35-point drop—because the audio encoder was never developed. In the real world such as an autonomous car that may have to hear a siren that it cannot see this blindness can be hazardousFor example, an autonomous vehicle that has learned to rely on its camera may ignore an audible siren in fog, and a clinical model that relies on images may be unable to use the accompanying report when a scan is corrupted.

Limits of Existing Approaches

While Although recent surveys such as Balance Benchmark [6]have listed different fixes, most of them are cumbersomeExisting remedies fall into a few families[6]. Gradient Blending[11] trains $M+1$ separate models to compute static blending weights—mathematically principled, but $M+2\times$ the compute budget and unable to adapt as training dynamics shift. estimates per-modality loss weights from the overfitting behaviour of unimodal probe models and keeps them fixed. Gradient-modulation methods such as OGM-GE[7] injects Gaussian noise into the over-performing modality 's backward pass—adaptive, but the noise variance σ must be hand-tuned and , as Proposed CREMA-D results confirm, over-correction costs −3.1% accuracy. UWGA [12] weights by uncertainty—but overfit modalities are precisely the high-confidence ones, so it systematically boosts the wrong modality. All these methods share a deeper flaw: they monitor how fast each modality is changingand AGM[13] measure how confidently or quickly each modality fits the training data and slow the dominant one down. Gradient-geometry methods such as PCGrad[14] and MMPareto[15] resolve conflicts between the gradients of different objectives. Uncertainty weighting[12] learns loss weights from a homoscedastic noise model. With the exception of Gradient Blending, these signals are computed on the training data: they describe how fast a modality is being fitted, not whether that change generalizesfit generalises. A large gradient norm can indicate productive learning or rapid memorization—gradient norms cannot distinguish or a high training confidence can reflect useful learning or memorisation, and training-set statistics alone cannot separate the two.

Proposed Approach

We propose the Modality Fairness Controller (MFC-A), built on a novel This paper studies whether a generalization-based signal, measured online and used in closed loop, is a practical alternative, and makes three contributions. The first is a diagnostic: we define the per-modality metric: the Overfitting-to-Generalization Ratio(OGR).

$$OGR_m(t) = \frac{\mathscr{L}_m^{val}(t)}{\mathscr{L}_m^{train}(t) + \varepsilon}$$

When $OGR \approx 1$, a modality is generalizing. When $OGR \gg 1$, it is overfitting. Unlike raw generalization gaps, OGR is scale-invariant and directly comparable across , $\mathrm{OGR}_m = \mathscr{L}_m^{\mathrm{cv}} / \mathscr{L}_m^{\mathrm{tr}}$, and show that, unlike the raw generalization gap, it is invariant to the scale of each modality's loss, so that modalities with very different loss magnitudes . The can be compared directly (Proposition 1); OGR is a measurement and can be logged in any training run, independently of the controller. The second is a controller, MFC-Amonitors per-modality OGRs via an exponential moving average and adjusts each modality's loss weight λ_m: throttle when $OGR > \tau_{\text{fit}}$, amplify when underfitting. Proposed best variant, MFC-A, uses , a threshold-free control law that sets each unimodal loss weight to a smoothed, inverse-OGR weighting with no threshold parameters:

$$\lambda_m(t) = \frac{2 \cdot \frac{1}{OGR_m(t)}}{\frac{1}{OGR_v(t)} + \frac{1}{OGR_a(t)}}$$

No auxiliary networks, noise injection, or offline pre-computation are needed—overhead is $O(M \cdot H)$ scalars per epoch.

Contributions

OGR metric: a scale-invariantshare of a fixed budget, so that throttling the relatively overfitting modality and amplifying the other are two halves of the same law rather than separate heuristics; unlike Gradient Blending, the weights adapt during a single run and need no probe models, and unlike OGM-GE and MMPareto, the method operates only on scalar loss weights. The third is a controlled evaluation in which MFC-A is compared with eight baselines under one protocol, with ten paired seeds, disjoint training, gradient-free per-modality generalization diagnostic computed from standard train/val logs.

controller-validation, tuning and test splits, identical architectures and optimisers, and paired significance tests. The experiments cover two real audio–video benchmarks, AVE[16] (vision-dominant) and CREMA-D[9] (audio-dominant, actor-disjoint split), together with a controlled synthetic benchmark and a two-view spectrogram control, and they include a component ablation, a sensitivity analysis, a capacity study, robustness to graded visual degradations, gradient-level evidence, a complete cost breakdown and the per-epoch traces of OGR and loss weights. Our results are deliberately reported with their variance. MFC-A : a closed-loop dynamic loss re-weighting controller operating in a single trainingrun at negligible cost. never reduces accuracy significantly, reduces the imbalance measured by OGR (significantly on AVE and on the synthetic benchmark), and improves robustness on AVE; it is not the strongest method on every dataset. We discuss when the method helps and when a simpler or offline alternative is preferable.

Validation on synthetic CIFAR-10/CREMA-D benchmarks and real CREMA-D emotion recognition: 38.4% OGR gap reduction, best Rob@0.5 (72.9%) and Rob@1.0 (50.5%)across all methods—at zero additional FLOPs.

Scaling analysis: MFC gains grow with model capacity (+0.7% at 128-dim to +3.1% at 1024-dim), making it most valuable in the large-model regime.

1 Related Work

0.1 Static Re-weighting Strategies

Multimodal learning has been documented on the imbalance problem. The first to propose the calculation of optimal weights off-line was

Related work

Static and offline re-weighting

Gradient Blending[11] . They construct the weighting scheme in which unimodal and multimodal baselines are trained to converge to minimize the overfitting gap. Nevertheless, it is computationally prohibitive with large models, and scales in direct proportion to showed that multimodal networks often underperform their best unimodal counterpart because they overfit, and derived blending weights proportional to the number of combinations of modality. Other methods that are static such as UWGA (Uncertainty-Weighted Gradient Aggregation) [12] are trying to make use of task uncertainty generalization gain divided by the squared growth of the overfitting gap, although they tend to fail when a single modality is inherently less noisy yet less informative (such as a black screen with perfect silence). Methods inspired by Focal Loss [17] have also been implemented but they do not deal with modality imbalance, but deal with class imbalance measured on unimodal and multimodal probe models. The weights are principled but are estimated from separate training runs and then fixed. Uncertainty weighting[12] learns one log-variance per task; it was designed for multi-task regression and classification and tends to down-weight high-loss objectives, which in the multimodal setting is usually the starved modality. Dynamic weight averaging[18] sets multi-task loss weights from the rate at which each training loss decreases; like uncertainty weighting, it uses training losses only. Focal-style losses[17] address class imbalance rather than modality imbalance.

0.1 ~~Dynamic Modulation Techniques~~

~~Dynamic methods seek to change weights dynamically.~~

Dynamic modulation

OGM-GE[7] ~~keeps a check on the size of gradient updates. When the gradient norm of one modality is changing too rapidly (which means that the modality is converging too fast), OGM-GE adds Gaussian noise to the backward pass of that modality. Although effective, this is based on auxiliary noise generators that may destabilize training and has hyperparameter sensitivity with respect to the noise variance.~~

~~**GradNorm** [19] was an early gradient-based approach that normalizes~~ computes, for every mini-batch, the ratio of the two modalities' training-set confidence for the correct class, scales down the encoder gradients of the more confident modality by $1 - \tanh(\alpha(\rho - 1))$, and adds Gaussian gradient noise to preserve generalization. GradNorm[19] equalises per-task gradient ~~magnitudes to a shared target, preventing any single task from monopolizing the optimizer. **PCGrad** [14] detects conflicting gradients across tasks and projects them~~ norms relative to their training-loss ratios. PCGrad[14] projects conflicting task gradients onto each other's normal planes~~to reduce interference. **AGM** [13] extends this idea to multimodal settings with per-modality adaptive gradient scaling calibrated against a reference modality. **Multi-loss gradient modulation** [20] jointly modulates multiple loss terms to keep modality-specific gradientmagnitudes in balance throughout training. **OLM** [21] proposes online logit modulationto equalize modal contributions at the prediction level rather than the gradient level. **MMPareto** [15] frames multimodal optimization as a Pareto problem, using unimodal assistance signals to prevent the joint loss surface from collapsing onto the dominant modality~~. ~~**AMSA** [22] demonstrates~~ Multi-task learning has also been cast as multi-objective optimisation[23], as conflict-averse gradient descent[24] and as a bargaining game between task gradients (Nash-MTL)[25]; these methods act on per-task gradients at every step. AGM[13] estimates each modality's contribution with a perturbation-based score and modulates its gradient. Multi-loss gradient modulation[20] balances the magnitudes of several loss terms jointly, OLM[21] modulates logits rather than gradients, and MMPareto[15] combines multimodal and unimodal gradients with a Pareto (MGDA[26]) rule when they conflict. Wu et al.[27] describe multimodal training as greedy, relying on the modality that is learned fastest, and re-balance it using conditional utilisation rates; Du et al.[28] show that joint training under-learns uni-modal features and propose uni-modal ensembles and distillation. Later methods re-initialise the weaker encoder after diagnosing its learning state[29], alternate uni-modal training steps through a shared head[30], or modulate gradient magnitude and direction with guidance from each modality's classifier[31]. PMR[32] uses class prototypes to re-balance learning, and MBPO[33] treats modality-specific hallucination as a preference-optimisation problem. AMSA[22] applies adaptive loss modulation ~~in the sentiment analysisdomain. PMR (Progressive Modality Reinforcement) [6], employs a momentum-based tracker to rampage the learning rate of the dominant modality. The alignment is modeled in MBPO [33] as a preference maximization problem which employs the reinforcement learning to punish hallucinations which are modality specific. We are different in the sense that we offer a~~ to multimodal sentiment analysis.

The comparison of held-out and training loss itself has a long history: Prechelt[34] defined early-stopping criteria from the validation loss relative to its minimum and from the training progress. Those criteria decide when to stop a single model; OGR is computed per modality and used continuously as a control signal while all modalities keep training. MFC-A differs from the methods above in the signal it observes and in where it acts. It observes the ratio of held-out to training loss for each modality, a generalization signal, whereas OGM-GE, GradNorm and AGM observe training-set confidence, gradient norms or training-loss rates, and MMPareto observes gradient directions. It acts only on two scalar loss weights per epoch, with no per-batch gradient manipulation, no noise and no extra models. Gradient Blending is the closest in spirit, since it also uses overfitting behaviour; MFC-A can be viewed as an online, closed-loop, ~~parameter-free controller that is expressly on the basis of the Generalization Gap, which does not require the complexity of RL or is unstable in noise injection.~~ single-run counterpart of that principle. Table 1 summarises the positioning.

0.1 ~~Multimodal Fusion Architectures~~

~~The challenge of modality imbalance is intertwined with how modalities are fused. Early work such as **L3-Net** [35] demonstrated that audio-visual correspondence can be learned self-supervisedly from video, laying the foundation for studying cross-modal interaction. **Attention Bottlenecks** [36] introduced bottleneck tokens that~~

Multimodal fusion and visual representation

Imbalance interacts with the fusion design. L3-Net[35] learned audio–visual correspondence from unlabelled video, attention bottlenecks[36] force cross-modal ~~information exchange at each transformer layer, reducing the risk of one stream being ignored. Datasets such as **VGGSound** [37] provide large-scale audio-visual benchmarks that expose imbalance under real-world noise~~

Table 1. Positioning of MFC-A among imbalance-mitigation methods. "Signal" is the quantity a method monitors; "Generalization-aware" indicates whether that signal involves held-out data.

Method	Signal	Online	Generalization-aware	Acts on
Gradient Blending[11]	Overfitting of probe models	No	Yes	Fixed loss weights
Uncertainty weighting[12]	Learned noise variance	Yes	No	Loss weights
GradNorm[19]	Gradient norms, training-loss rates	Yes	No	Loss weights
OGM-GE[7]	Training confidence ratio	Yes	No	Encoder gradients + noise
MMPareto[15]	Gradient conflict	Yes	No	Encoder gradients
MFC-A (ours)	Held-out/training loss ratio (OGR)	Yes	Yes	Loss weights

conditions. Recent work on emotion recognition [38] employs exchange inside transformers, and recursive joint cross-modal attention, showing that carefully designed fusion mechanisms can mitigate unimodal dominance even [38] improves audio–visual emotion recognition without explicit loss reweighting. These architectural insights complement MFC(the aproch) OGR-based loss-level intervention: together, better fusion design and adaptive loss control form a complete defense against gradient starvation.

1 Preliminaries

0.1 Problem Formulation

Given a multimodal learning task, whereby there are modalities $\mathcal{M} = \{1, \ldots, M\}$ there are. Given a dataset $\mathcal{D} = \{(\mathbf{x}_i, y_i)^N\}$ where $\mathbf{x}_i = \{x^m\}_{m \in \mathcal{M}}$ and x^m is a feature of the input (i.e. each image or audio waveform) on a specific modality (i.e. image or audio) and y_i is the target label. The objective is to train a joint representation function $f_\theta(\mathbf{x})$ with parameters θ that has the lowest expected risk:

$$\theta^* = \arg\min_\theta \mathbb{E}_{(\mathbf{x},y)\sim\mathcal{D}}[\mathcal{L}(f_\theta(\mathbf{x}), y)].$$

In a late-fusion architecture, separate encoders E_m process each modality to produce latent embeddings $z_m = E_m(x^m)$, which are then concatenated or fused via a mechanism $\Phi(\{z_m\})$re-weighting. Barra et al.[39] combine voice analysis and facial-expression recognition for emotion recognition on IEMOCAP, targeting assistive healthcare settings; audio–visual emotion recognition is also the task of our CREMA-D benchmark. On the audio side, acoustic images, i.e. spatially resolved spectra from a microphone array aligned with the camera, have been used as training-time privileged information: Sanguineti et al.[40] distil them, through a self-supervised audio–visual correspondence task, into monaural audio networks that then outperform audio models trained without them on classification and cross-modal retrieval. Making such sensors portable is an active hardware problem: Greco[41] shows in simulation that an optimised 32-microphone array of about 20×20 cm can match or exceed a 128-microphone, 50×50 cm array below 4 kHz. On the visual side, the strength of the pretrained backbone largely determines how dominant the visual stream becomes. In vision-only tasks the backbone has moved from CNNs to transformers; a survey of deep human pose estimation[42] documents this shift and identifies efficient models and multi-modal learning as open directions. The backbone choice itself is consequential: in deepfake image detection, for example, hybrids that pair a Swin transformer with CNN backbones (DenseNet, ConvNeXt, MobileNet) or with CLIP have been reported to outperform their standalone counterparts, with a ConvNeXt–Swin combination giving the highest accuracy[43]; we hypothesise that this choice likewise affects how dominant the visual stream becomes in a multimodal model. We use a frozen ImageNet ResNet-18[44] as a deliberately modest visual encoder: on AVE it yields the dominant stream, whereas on CREMA-D audio dominates, which lets us test MFC-A in both regimes. Loss-level balancing is complementary to all of these architectural choices.

0.1 The Imbalance Challenge

The convergence rates of various encoders E_m are found to vary greatly empirically. Assuming $\nabla_{\theta_v}\mathcal{L} \gg \nabla_{\theta_a}\mathcal{L}$ then the visual encoder weights θ_v will drift far quicker to a local minimum than the audio encoder weights θ_a. After the visual encoderhas reduced the loss to a sufficiently low level, the audio encoder is left in an undertrained condition. This is the nature of Modality Laziness.

1 Methodology: Modality Fairness Controller

0.1 The Gradient Starvation Phenomenon

The formalization of Gradient Starvation in multimodal settings was done by Pefrani

Adaptive and evolutionary optimisation

MFC-A adapts an optimisation hyper-parameter, the loss weights, during training, which places it within the broader study of adaptive optimisation. Lan et al.[5]. ~~Suppose that there is a joint loss $\mathscr{L} = \mathscr{L}_v + \mathscr{L}_a$. In case the Hessian eigenvalue spectrum of the visual modality λ^{max} is much larger than the audio modality λ^{max}, the gradient descent path will follow the visual valley more favourably. It is not a matter of the speed at which the convergence occurs but a matter of choice; the model gets stuck in a local minimum where audio features are overlooked (i.e. weights have not changed significantly).~~ [45] show that comparing optimisers by the number of function evaluations is misleading when their per-iteration overhead differs, and propose measuring efficiency as objective gain per unit of computation time, split into evaluation and overhead time. Following this, we report wall-clock time and FLOPs separately for the controller arithmetic, the monitoring passes and the method-specific work of every method (Table 13). In a related spirit, Lan et al.[46] evaluate class-binarization strategies for neuroevolution (NEAT) not only by accuracy but also by multiclass degradation, evolutionary efficiency and robustness; we likewise report accuracy, modality balance (OGR gap), training cost and robustness rather than accuracy alone. Unlike population-based approaches, MFC-A adapts a single run with a closed-form rule, so it has no population cost, but it also cannot explore the weight space globally.

0.1 ~~Optimal Blending Hypothesis~~

~~We hypothesize that the optimal blending weight w_m^* for modality m is inversely proportional to its "ease of overfitting." Let $GenGap_m = \mathscr{L}_m^{val} - \mathscr{L}_m^{train}$. A modality that overfits quickly ($GenGap_m \gg 0$) provides a "high-variance" gradient estimate that should be down-weighted. Conversely, a modality with $GenGap_m \approx 0$ provides a reliable signal. Proposed metric is a dimensionless proxy for this relationship:~~

Robustness under adverse visual conditions

Robustness to corrupted inputs is usually evaluated with synthetic corruptions such as noise, blur and occlusion[47]. Generative augmentation goes further: SUSTechGAN[48] synthesises rain and night driving images with attention-based multi-scale generators, and adding them to the training set improves YOLOv5 detection under those conditions. Augmentation and modality balancing tackle visual degradation from opposite directions: the former makes the visual encoder itself robust, whereas balancing keeps a second modality informative for when the visual encoder fails. We evaluate the latter under additive noise and three pixel-level degradations (blur, occlusion and low light). A missing modality is the extreme case; multimodal transformers have been shown to degrade sharply when one modality is absent at test time[49], and we report the missing-video case for every method.

Problem formulation

We consider M modalities indexed by $m \in \{1, \ldots, M\}$; all experiments use M=2, written v ("visual" or first stream) and a ("audio" or second stream). A sample is $(\mathbf{x}, y)$ with $\mathbf{x} = \{x^m\}_m$ and class label y. Each modality has an encoder $z_m = E_m(x^m; \theta_m)$ and a linear unimodal head h_m, and a fusion head g acts on the concatenated embeddings (late fusion). We write

$$w\mathscr{L}_{\text{joint}} = \ell\big(g([z_v; z_a]), y\big), \qquad \mathscr{L}_m{}^* = \ell\big(h_m(tz_m) \propto \frac{1}{\text{OGR}_m(t)^\beta}, y\big), \tag{1}$$

where ~~β is a sensitivity hyperparameter. controller implements a discrete-time approximation of this continuous control law.~~ ℓ is the cross-entropy. All methods in this paper minimise

$$\mathscr{L}(t) = \mathscr{L}_{\text{joint}} + \sum_m \lambda_m(t)\, \mathscr{L}_m, \tag{2}$$

and differ only in how $\lambda_m(t)$ is chosen (or, for OGM-GE and MMPareto, in how gradients are post-processed). The baseline uses $\lambda_m \equiv 1$. Because $\mathscr{L}_{\text{joint}}$ is not re-weighted, the weights redistribute the *auxiliary* unimodal supervision that each encoder receives.

0.1 ~~System Architecture~~

~~The overall architecture of paper proposed framework is illustrated in Figure ??. The Modality Fairness Controller (MFC) comprises a closed loop feedback. It tracks the difference between training and validation losses of each modality and dynamically varies the gradient scalar components (i.e. λ_v, λ_a) so as to enforce synchronized convergence~~Gradient starvation arises when one encoder, say E_v, reduces $\mathscr{L}_{\text{joint}}$ much faster than E_a. Once the fused prediction is confident, the gradient

of $\mathscr{L}_{\text{joint}}$ with respect to θ_a becomes small, and E_a is left under-trained[5,10]. The unimodal terms in Eq. (2) keep supplying gradient to each encoder, and their weights determine how strongly.

We propose a dynamic loss re-weighting mechanism. Let the total loss be:

$$\mathscr{L}_{total} = \sum_{m \in M} \lambda_m(t) \cdot \mathscr{L}_m$$

where $\lambda_m(t)$ is the dynamic weight for modality m at epoch

Data splits. We use four disjoint subsets: $\mathscr{D}_{\text{tr}}$ (training), $\mathscr{D}_{\text{cv}}$ (controller validation, the only held-out data any controller may read), $\mathscr{D}_{\text{tune}}$ (checkpoint and hyper-parameter selection) and $\mathscr{D}_{\text{te}}$ (test, used once after training). For epoch t we denote by $\mathscr{L}_m^{\text{tr}}(t)$ and $\mathscr{L}_m^{\text{cv}}(t)$ the mean loss of head h_m over $\mathscr{D}_{\text{tr}}$ and $\mathscr{D}_{\text{cv}}$, evaluated in inference mode at the end of the epoch.

0.1 OGR Monitoring and Derivations

Method

The Overfitting-to-Generalization Ratio

The generalization gap normalised is what we call of modality m is

$$G_m(t) = \mathscr{L}_m^{\text{cv}}(t) - \mathscr{L}_m^{\text{tr}}(t). \tag{3}$$

We define the Overfitting-to-Generalization Ratio (OGR). Where $\mathscr{L}^{val} = \mathscr{L}^{train} - \mathscr{L}^{train}$. This difference is just the normal measure of overfitting however, its magnitude is contingent on the scale of losses. We suggest a measure that is based on ratio:

$$OGR_m(t) = \frac{\mathscr{L}_m^{val}(t)}{\mathscr{L}_m^{train}(t) + \varepsilon} = 1 + \frac{\Delta Gen}{\mathscr{L}_m^{train} + \varepsilon}$$

as

$$\text{OGR}_m(t) = \frac{\mathscr{L}_m^{\text{cv}}(t)}{\mathscr{L}_m^{\text{tr}}(t) + \varepsilon} = 1 + \frac{G_m(t)}{\mathscr{L}_m^{\text{tr}}(t) + \varepsilon}, \tag{4}$$

When $\Delta Gen \approx 0$ (healthy learning), $OGR \approx 1$. When overfitting is high ($\Delta Gen > 0$)then $OGR > 1$. This scale-invariant gradient scaling measure is just a scale-invariant ratio, rather than the heuristically normalized raw loss differences. To remove noise in the batches we have a running exponential moving average of the OGR on the single training runwith $\varepsilon = 10^{-8}$. $\text{OGR}_m \approx 1$ means that what modality m has learned transfers to held-out data; $\text{OGR}_m \gg 1$ means that its training loss keeps falling without a matching fall in held-out loss, that is, it is memorising. Equivalently, $\log \text{OGR}_m = \log \mathscr{L}_m^{\text{cv}} - \log \mathscr{L}_m^{\text{tr}}$ is the generalization gap measured in log-loss.

0.1 Approximation of Optimal Blending

The mathematicians have established [11] that an optimal weight of a modality is approximately the inverse square of the overfitting ratio of the modality

Proposition 1 (Scale invariance)**.** *Let $\mathscr{L}_m^{\text{tr}}$ and $\mathscr{L}_m^{\text{cv}}$ be multiplied by a common factor $c > 0$ (for instance by a change of loss normalisation, label smoothing or temperature that rescales the loss of head h_m). Then OGR_m is unchanged (up to ε), whereas G_m is multiplied by c.* However, the computation of finding this is computationally expensive. A practical shortcut is made by the controller: we consider the adjustment of weight to be a continuous control loop. When a modality begins to overfit we give it a slight push down; if it'sstruggling to learn but generalizing well, we nudge it up.

Proof. $c\mathscr{L}_m^{\text{cv}} / (c\mathscr{L}_m^{\text{tr}}) = \mathscr{L}_m^{\text{cv}} / \mathscr{L}_m^{\text{tr}}$ and $c\mathscr{L}_m^{\text{cv}} - c\mathscr{L}_m^{\text{tr}} = cG_m$. □

0.1 Harmonization Logic

The MFC manages the weightsλ_m using a simple set of rules: Proposition 1 matters because the two heads of an imbalanced model operate at very different loss levels. In our synthetic benchmark, after 20 epochs the visual head has $\mathscr{L}_v^{\text{tr}} \approx 0.15$ and the audio head $\mathscr{L}_a^{\text{tr}} \approx 1.56$ (Fig. 8). An identical raw gap of 0.3 then means that the visual head's held-out loss is three times its training loss, while the audio head's is only 19% above it. The raw gap ranks the two modalities as equally overfitting, whereas OGR identifies the visual head as the one that is memorising. We also test this empirically by replacing OGR with the raw gap inside the controller (signal ablation, Table 8).

The Throttle Rule punishes modalities, which enhance training loss

MFC-A: inverse-OGR closed-loop weighting

MFC-A updates the weights once per epoch from smoothed OGRs. Let $\mathcal{W}_t = \{\max(1, t-W+1), \ldots, t\}$ be a window of the last W epochs. The windowed ratio is

$$\widetilde{\mathrm{OGR}}_m(t) = \frac{\frac{1}{|\mathcal{W}_t|}\sum_{k\in\mathcal{W}_t} \mathscr{L}_m^{\mathrm{cv}}(k)}{\frac{1}{|\mathcal{W}_t|}\sum_{k\in\mathcal{W}_t} \mathscr{L}_m^{\mathrm{tr}}(k) + \varepsilon}. \tag{5}$$

Each modality receives a target weight equal to its share of the inverse OGRs raised to a control strength $\gamma > 0$, scaled so that the targets sum to M:

$$\pi_m(t) = \frac{M\,\widetilde{\mathrm{OGR}}_m(t)^{-\gamma}}{\sum_{k=1}^{M} \widetilde{\mathrm{OGR}}_k(t)^{-\gamma}}. \tag{6}$$

For $t < T_w$ (warm-up) all weights stay at 1. Afterwards the weights follow the targets through an exponential moving average and are clipped:

$$\lambda_m(t+1) = \mathrm{clip}\big(\beta\,\lambda_m(t) + (1-\beta)\,\pi_m(t),\ \lambda_{\min},\ \lambda_{\max}\big). \tag{7}$$

Properties. (i) If all modalities generalise equally ($\widetilde{\mathrm{OGR}}_m$ equal), then $\pi_m = 1$ and ~~do not give any corresponding validation gain ($OGR > 1.2$).~~ MFC-A reduces to the baseline. (ii) Because $\sum_m \pi_m = M$ and $\lambda_m(0) = 1$, induction on Eq. (7) gives $\sum_m \lambda_m(t) = M$ whenever clipping is inactive, so MFC-A redistributes a fixed budget of auxiliary supervision rather than changing the overall loss scale. (iii) A modality with above-average OGR receives $\pi_m < 1$ (it is *throttled*), and the others receive $\pi_m > 1$ (they are *amplified*); the two "rules" of our first description are therefore the two sides of Eq. (6). (iv) The update has no thresholds. γ sets how sharply the budget is moved towards the better-generalising modality ($\gamma \to 0$ recovers the baseline); W, β, T_w and $[\lambda_{\min}, \lambda_{\max}]$ only control smoothing, start time and safety bounds, and we show below that results are insensitive to them. Figure 1 shows the complete pipeline for the audio–video experiments: the frozen feature extractors, the trained network with its two unimodal heads and fusion head, and the controller that closes the loop once per epoch.

Selecting γ without test data. The aim of balancing is to reduce imbalance *while maintaining accuracy*. We therefore fix the following rule in advance: among $\gamma \in \{1, 2, 3\}$, choose the value with the smallest OGR gap on the controller split $\mathscr{D}_{\mathrm{cv}}$ (at the selected checkpoint), subject to its mean accuracy on $\mathscr{D}_{\mathrm{tune}}$ being within 0.5 points of the baseline's. The ~~Amplify Rule increases those modalities that are trailing ($OGR < 1.05$)~~rule uses only $\mathscr{D}_{\mathrm{cv}}$ and ~~yet have the high absolute loss. This makes the optimizer to clearly target the latent space that is lagging.~~ $\mathscr{D}_{\mathrm{tune}}$, never $\mathscr{D}_{\mathrm{te}}$. Results for every γ are reported as well (Table 9). Gradient Blending's offline weights[11] use a different functional form, namely generalization gain divided by the squared overfitting growth.

1 ~~Experiments and Results~~

~~Following the **BalanceBenchmark** guidelines, we conduct a rigorous comparative analysis~~

Variant without the extra training pass. Line 8 evaluates the training loss with an additional inference pass over $\mathscr{D}_{\mathrm{tr}}$. A cheaper variant, "MFC-A (running)", instead uses the average of the mini-batch losses already computed during the epoch. These are measured in training mode and are therefore slightly biased, but they remove the extra pass (see the cost analysis).

Threshold variant (MFC-T). The first version of this work described a threshold controller: it multiplies λ_m by 0.95 when $\widetilde{\mathrm{OGR}}_m > \tau_{\mathrm{hi}}$=1.2, multiplies it by 1.05 when $\widetilde{\mathrm{OGR}}_m < \tau_{\mathrm{lo}}$=1.05 and $\mathscr{L}_m^{\mathrm{tr}} > 0.5$, and clips it to $[0.1, 5]$. We keep it as a separate baseline, labelled MFC-T. *Every result labelled MFC-A uses Algorithm 1.*

0.1 ~~Setup and Datasets~~

~~We use a simulation of~~

Cost and complexity

Let F be the forward cost of the model per sample, so that one training step costs approximately $3F$ per sample (forward and backward), and let $N_{\mathrm{tr}}, N_{\mathrm{cv}}, N_{\mathrm{tune}}$ be the split sizes and T the number of epochs. Standard training with per-epoch checkpoint selection costs $T(3FN_{\mathrm{tr}} + FN_{\mathrm{tune}})$. MFC-A adds three costs. Its monitoring requires two inference passes per epoch, costing

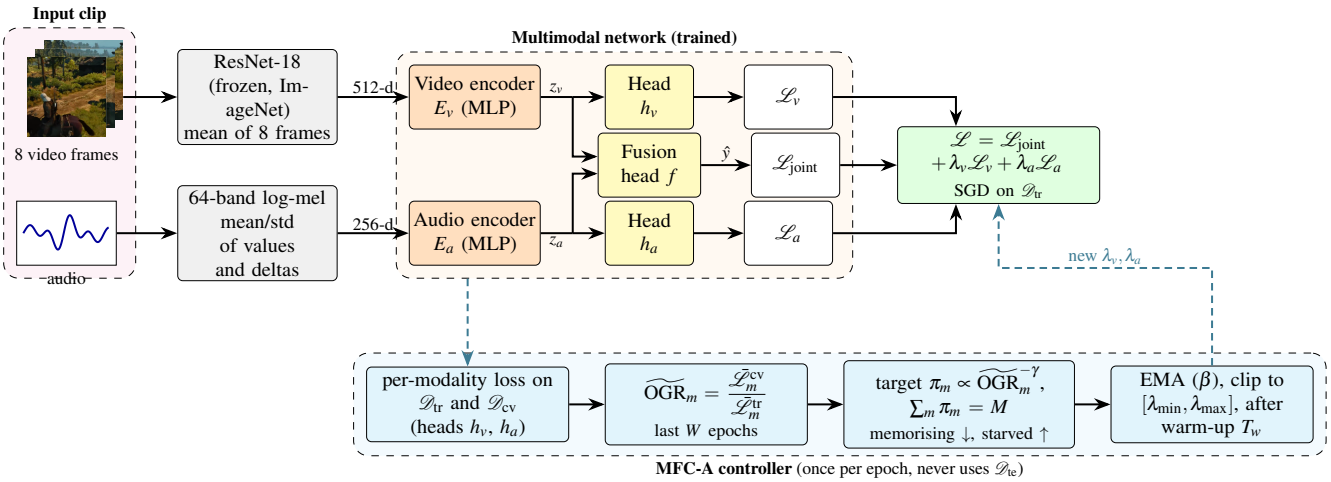


Figure 1. Overall structure of the audio–video model trained with MFC-A. Each clip yields eight video frames, encoded by a frozen ImageNet ResNet-18 and averaged (512 dimensions), and a soundtrack summarised by log-mel statistics (256 dimensions). Two trained MLP encoders produce embeddings z_v and z_a, which feed one unimodal head each and, concatenated, the fusion head. The network is trained on the weighted loss; once per epoch the controller measures each head's loss on $\mathscr{D}_{\text{tr}}$ and $\mathscr{D}_{\text{cv}}$, forms the windowed OGRs and returns new weights λ_v, λ_a (Algorithm 1). The frames shown are from an AVE test clip.

Algorithm 1 MFC-A (the method evaluated in all main experiments)

Input: control strength γ, window W, EMA factor β, warm-up T_w, bounds $[\lambda_{\min}, \lambda_{\max}]$, splits $\mathscr{D}_{\text{tr}}, \mathscr{D}_{\text{cv}}$
$\lambda_m \leftarrow 1$ and history $H_m \leftarrow \emptyset$ for all m
for epoch $t = 0, \ldots, T-1$ **do**
  for each mini-batch $B \subset \mathscr{D}_{\text{tr}}$ **do**
    update θ with one SGD step on $\mathscr{L}_{\text{joint}} + \sum_m \lambda_m \mathscr{L}_m$ Eq. (2)
  end for
  for each modality m **do**
    $\mathscr{L}_m^{\text{tr}} \leftarrow$ mean loss of h_m on $\mathscr{D}_{\text{tr}}$; $\mathscr{L}_m^{\text{cv}} \leftarrow$ mean loss of h_m on $\mathscr{D}_{\text{cv}}$ (inference mode)
    append $(\mathscr{L}_m^{\text{tr}}, \mathscr{L}_m^{\text{cv}})$ to H_m; compute $\widetilde{\text{OGR}}_m$ from the last W entries Eq. (5)
  end for
  if $t \geq T_w$ **then**
    for each modality m **do**
      $\pi_m \leftarrow M \widetilde{\text{OGR}}_m^{-\gamma} / \sum_k \widetilde{\text{OGR}}_k^{-\gamma}$ Eq. (6)
      $\lambda_m \leftarrow \text{clip}(\beta \lambda_m + (1-\beta)\pi_m, \lambda_{\min}, \lambda_{\max})$ Eq. (7)
    end for
  end if
  keep the checkpoint with the best accuracy on $\mathscr{D}_{\text{tune}}$
end for

$TF(N_{\text{tr}} + N_{\text{cv}})$ in total (TFN_{cv} for the running variant). Its controller arithmetic needs $O(MW)$ scalar operations per epoch ($4W+12$ for $M=2$), that is, $O(TMW)$ in total. Its memory overhead is $O(MW)$ scalars in addition to the ~~feature-space based on known data, which is~~ $O(|\theta|)$ model parameters. The total time complexity is therefore $O(TF(N_{\text{tr}} + N_{\text{cv}} + N_{\text{tune}}))$, of the same order as standard training but with a larger constant. The first version of this paper reported "zero additional FLOPs" while counting only the controller arithmetic. That statement was incomplete, and we now report all three components separately (Table 13).

Experimental setup

Datasets

Synthetic benchmark. To control the degree of imbalance we generate a six-class problem with scikit-learn's `make_classification` (6,000 samples, 96 features of which 48 are informative and 12 redundant, one cluster per class, class separation 0.6, 5% label noise, `random_state`=42). After standardisation, the first 64 features plus Gaussian noise with standard deviation 0.2 form

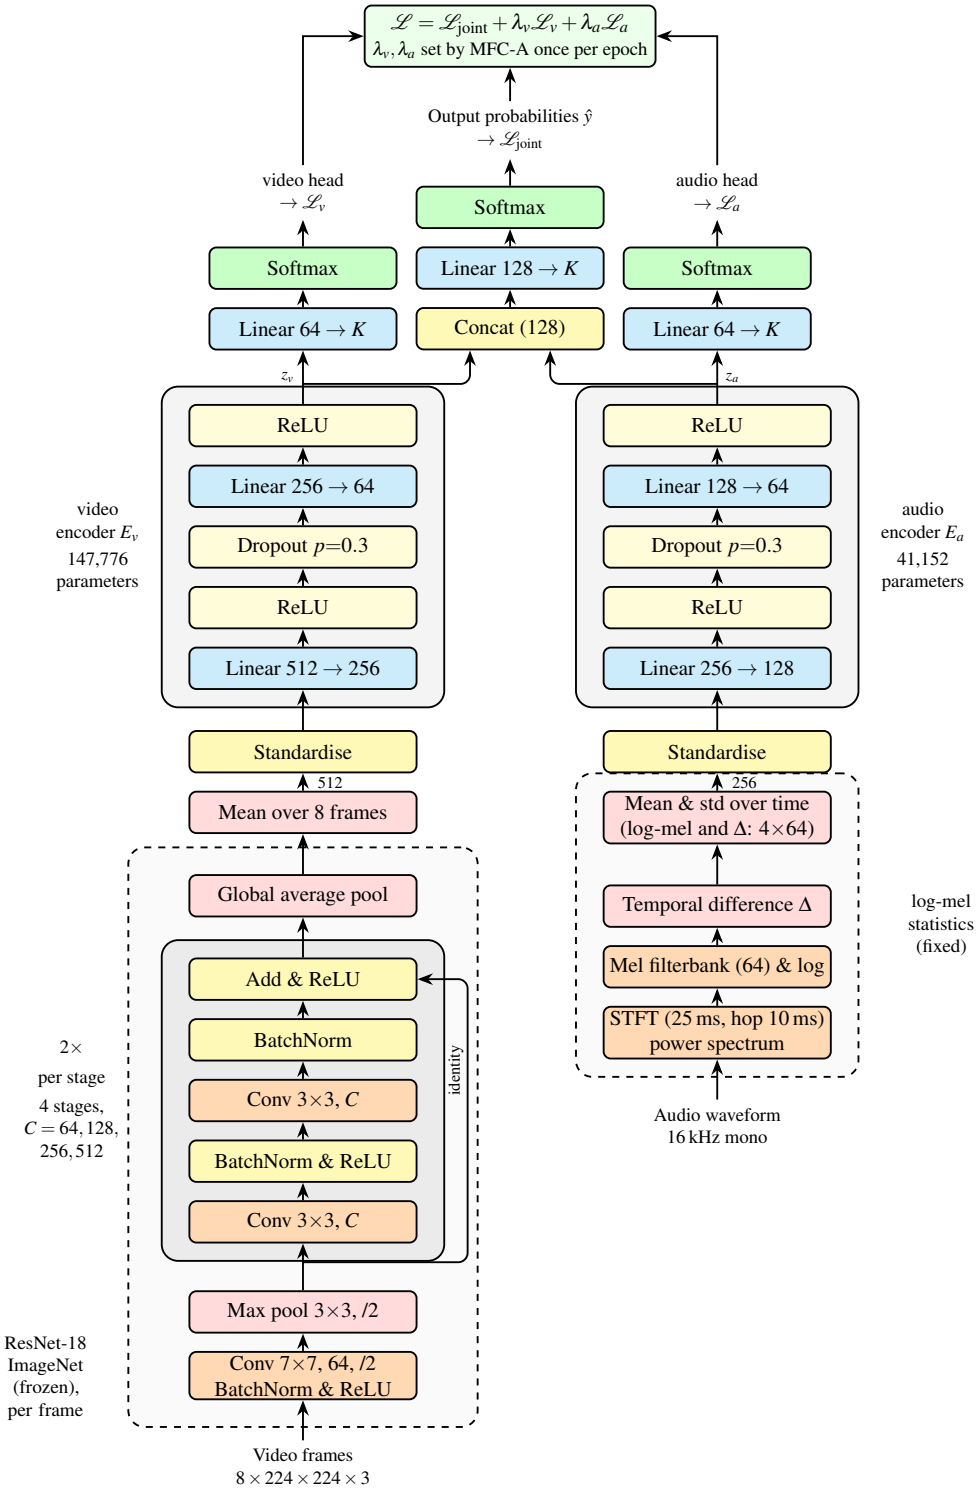


Figure 2. Internal structure of the model, block by block (read from bottom to top). Left: the video stream. Every frame passes through an ImageNet ResNet-18 with its classifier removed and frozen weights: a 7×7 stem convolution and max pooling, then four stages of two residual blocks each (C = 64, 128, 256, 512 channels; the first block of stages 2–4 halves the spatial size), and global average pooling; the eight frame vectors are averaged to 512 values. Right: the audio stream, a 64-band log-mel spectrogram whose per-band mean and standard deviation, together with those of its temporal difference, give 256 values. Both feature vectors are standardised with training-split statistics and passed through a trained two-layer encoder (E_v, E_a). Top: two unimodal heads and a fusion head on the concatenated embeddings; their cross-entropy losses form the training objective, whose weights λ_v, λ_a are set by MFC-A (Fig. 1). Only the encoders and heads are trained (190,482 parameters on CREMA-D, 196,180 on AVE; K = 6 and 28 classes).

the first stream ("visual-like", easy), and the remaining 32 features plus Gaussian noise with standard deviation 0.9 form the second stream ("audio-like", hard). Both streams describe the same sample and share its label by construction, so no cross-dataset pairing is involved. This benchmark contains no images or audio; it isolates the optimisation phenomenon under a known, strong imbalance.

CREMA-D audio–video (main real-data benchmark). CREMA-D[9] contains audio–visual recordings of 91 actors speaking 12 sentences with six emotions (anger, disgust, fear, happiness, neutral, sadness). Each clip provides both modalities, so the pairing and the label (the clip's emotion) are given by the recording itself. We use the 7,439 clips that are available in both the original 16-kHz audio release and a public face-cropped video release with 16 frames per clip at 224×224. *Audio:* a ~~controlled environment to validate the algorithmic logic,as described in Table 2: **Visual Modality**: This is based on CIFAR-10 [8] model (~~64-band log-mel spectrogram (25-ms window, 10-ms hop, 512-point FFT) summarised by the per-band mean and standard deviation of the log-mel values and of their temporal deltas (256 dimensions). *Video:* eight evenly spaced frames encoded by a frozen ImageNet ResNet-18~~latent space)with high signal grouping and low noise. **Audio Modality**: This is a model based on [44]~~ and averaged (512 dimensions). Audio and video are therefore synchronised at the clip level. Splits are made by actor, so that no speaker appears in more than one split (about 55/13/9/14 actors and 4,490/1,065/736/1,148 clips for seed 0). In this dataset audio is the stronger modality (a logistic-regression probe reaches 41% with audio and 33% with video on held-out actors, against 16.7% chance), so the controller must identify the dominant modality from the data rather than assume it.

AVE audio–video events (second real-data benchmark). The Audio-Visual Event dataset[16] contains 4,143 ten-second YouTube clips annotated with one of 28 event categories (for example church bell, barking dog, violin, race car), each with sound and video from the same recording. It is a standard benchmark in the modality-imbalance literature[7,13,15]. We use the original release and its official train/validation/test lists. The official test list (402 clips) is the fixed test set $\mathcal{D}_{\text{te}}$ for every seed; the official training and validation clips are re-split per seed, by YouTube video ID, into $\mathcal{D}_{\text{tr}}/\mathcal{D}_{\text{cv}}/\mathcal{D}_{\text{tune}}$ (75/15/10%), and clips whose video ID also appears in the test list are removed from training. *Video:* eight frames sampled evenly over the clip (shorter side 256, centre crop 224) and encoded by the same frozen ResNet-18 (512 dimensions). *Audio:* the same 256-dimensional log-mel statistics as for CREMA-D[9] ~~(Emotion Recognition), which is highly stochastic and time-varying. To build a High-Imbalance situation in which the visual modality is naturally dominant, these datasets were chosen through the BalanceBenchmark [6] protocol.~~ , computed from the 16-kHz mono soundtrack. The same pixel-level degradations are applied for robustness testing.

CREMA-D spectrogram views (control). For continuity with the first submission we keep its second experiment, in which two feature views are computed from the same mel-spectrogram image: a 64-dimensional PCA of the 224×224 image (fitted on a fixed 60% subset) and 48 per-band statistics (mean, standard deviation and maximum over 16 mel bands). These views come from one underlying signal and are *not* two modalities, so we use them only as a feature-view control. The public copy of these images carries no file names, so actor-disjoint splitting is not possible and samples are split at random (stratified by construction).

0.1 ~~Implementation Details~~

~~To ensure reproducibility, we implement the feature extractors as follows: **Vision Encoder**: A Multi-Layer Perceptron (MLP) accepting flattened $3 \times 32 \times 32$ CIFAR-10 images . Architecture: Linear(3072~~

Dataset statistics and an example instance. Table 2 summarises the four datasets. As an example of one paired training instance from CREMA-D: clip `1001_DFA_ANG_XX` (actor 1001 saying "Don't forget a jacket" with anger) yields a 512-dimensional video vector (eight face frames through ResNet-18, averaged) and a 256-dimensional audio vector (log-mel statistics of the same recording), and its label is *anger*; because the split is by actor, all 82 clips of actor 1001 fall into the same split. For AVE, clip `c--zaDCTaE` yields the same two vectors from its own frames and soundtrack, with label *church bell*. No sample of one dataset is ever combined with a sample of another.

Models and training

Each stream is encoded by a two-layer MLP (Linear–ReLU–Dropout–Linear–ReLU) followed by a linear unimodal head; a linear fusion head acts on the concatenated embeddings (Fig. 2). Hidden and embedding widths (first stream / second stream / embedding) are 128/64/32 for the synthetic benchmark (17,~~512) → ReLU → Dropout(0.2) → Linear(512~~426 parameters), ~~10). **Audio Encoder**: An MLP accepting 128-dimensional audio features (simulating VGGish embeddings). Architecture: Linear(~~256/128/64 for CREMA-D audio–video and AVE (190,482 and 196,180 parameters) and 128/64~~) → ReLU → Linear(~~/64 , 10). The Stochastic Gradient Descent (SGD)method with the learning rate of~~ for the spectrogram control (25,426 parameters). Dropout is 0.3 (0.4 for the synthetic second stream). All methods use SGD with learning rate 0.01~~and momentum of~~ , momentum 0.9~~is used to optimize all the models.The batch size will be equal to 64. Modality Fairness~~

Table 2. Dataset statistics. Per-class counts are given as the full list (six classes) or as min–max (AVE, 28 classes). Splits: train/controller/-tune/test.

Dataset	Streams (pairing)	Samples	Classes	Per-class counts / split rule
CREMA-D audio–video	face video + audio of the same clip	7,439 (91 actors)	6	1271/1271/1270/1271/1087/1269; 60/15/10/15% by actor
AVE	video + soundtrack of the same clip	4,134	28	60–188 (test: 6–18); official test (402), rest 75/15/10% by video ID
Synthetic	two noisy views of one generated vector	6,000	6	991–1012; 60/15/10/15% by sample
Spectrogram views	two features of one spectrogram	7,442	6	1271 (neutral: 1087); 60/15/10/15% by sample

~~Controller inverse-OGR, no thresholds (MFC-A) : window size 5 epochs, warm-up 3 epochs, EMA 0.7~~, weight decay 5×10^{-4} and batch size 64, for 30 epochs (synthetic) or 40 epochs (real data). Features are standardised with training-split statistics. The splits are 60/15/10/15% for $\mathcal{D}_{\text{tr}}/\mathcal{D}_{\text{cv}}/\mathcal{D}_{\text{tune}}/\mathcal{D}_{\text{te}}$, except on AVE, where the official test list is kept (2,~~λ clipped to 0.2, 1.8. No τ or α thresholds. The complete set of configuration of the reproducible benchmarks is in Table ??.~~ 798/560/374/402 clips for seed 0). Each seed (0–9) fixes the split, the initialisation and the mini-batch order, and the same seed is used for every method, so all comparisons are paired.

Baselines

All baselines are implemented in the same code base with the architecture, objective (Eq. 2), optimiser, splits and seeds described above. The **Baseline** uses $\lambda_v{=}\lambda_a{=}1$. For **Gradient Blending**[11], a unimodal probe is trained for six epochs; between probe epochs 2 and 6 we measure on $\mathcal{D}_{\text{cv}}$ the generalization gain G_m (drop in held-out loss) and the overfitting growth O_m (growth of the gap), and set fixed weights $\lambda_m \propto G_m/O_m^2$, normalised to sum to 2, with the probe cost charged to the method. **Uncertainty weighting**[12] minimises $\mathcal{L}_{\text{joint}}+\sum_m(e^{-s_m}\mathcal{L}_m+s_m)$ with learned s_m. For **MMPareto**[15], the gradients of $\mathcal{L}_{\text{joint}}$ and of $\mathcal{L}_m$ for each encoder are averaged when their cosine similarity is non-negative and otherwise combined with the two-task MGDA min-norm weights, and the result is rescaled to the norm of their sum. For **OGM-GE**[7], the confidence ratio ρ is computed per mini-batch from the fusion-head logits split by modality, the encoder gradients of the more confident modality are scaled by $1-\tanh(\alpha(\rho-1))$, and Gaussian gradient enhancement with the per-tensor gradient standard deviation is applied; $\alpha\in\{0.1,0.3,0.8\}$ is selected per dataset on $\mathcal{D}_{\text{tune}}$. We also re-implemented three recent modality-balancing methods. **AGM**[13] estimates each modality's contribution from the responses of the fused model with one modality masked and modulates the gradient entering the fusion layer from each encoder by the resulting discrepancy (with the exponent capped as in the authors' code); $\alpha\in\{0.1,0.5,1.0\}$. **PMR**[32] builds per-modality class prototypes from a fixed tenth of the training set, adds a prototypical cross-entropy weighted by a continuous imbalance coefficient to accelerate the slower modality, and applies a prototypical entropy regulariser to the dominant modality during the first quarter of training; $\alpha\in\{1,2\}$ and $\mu\in\{10^{-3},10^{-2}\}$, the values stated in the paper. **OLM**[21] learns online weights for the two modality shares of the fused logits during training, driven by the unimodal losses on $\mathcal{D}_{\text{cv}}$ (late-fusion variant, without the transformer fusion block; because the published loss is minimised by all-zero weights, we normalise it to preserve the total magnitude and clamp the weights to $[0.1,10]$); $\eta\in\{0.01,0.1,1\}$. All three use the shared objective and have their hyper-parameters selected on $\mathcal{D}_{\text{tune}}$; every deviation from the original papers is documented in the released code. **MFC-T** is the threshold variant described above. MFC-A uses $W{=}5$, $\beta{=}0.7$, $T_w{=}3$ and $[\lambda_{\min},\lambda_{\max}]=[0.2,1.8]$ on all datasets; these values were fixed before the present experiments. γ is chosen per dataset by the rule above, which yields $\gamma{=}3$ (AVE), $\gamma{=}2$ (CREMA-D audio–video), $\gamma{=}3$ (synthetic) and $\gamma{=}3$ (spectrogram views). The plain law ($\gamma{=}1$) is reported in every table as well.

Metrics and statistics

We report, on $\mathcal{D}_{\text{te}}$ at the checkpoint selected on $\mathcal{D}_{\text{tune}}$: the accuracy of the fused prediction; the accuracy of each unimodal head (a direct measure of how well each encoder was trained); the *OGR gap* $|\text{OGR}_v^{\text{te}}-\text{OGR}_a^{\text{te}}|$ with $\text{OGR}_m^{\text{te}}=\mathcal{L}_m^{\text{te}}/\mathcal{L}_m^{\text{tr}}$ (lower means more balanced); and robustness, namely accuracy when zero-mean Gaussian noise with standard deviation $\sigma\in\{0.5,1,2,3\}$ is added to the standardised first-stream features. For the two real audio–video datasets we also degrade the raw video frames before encoding (Gaussian blur with kernel 21 and $\sigma{=}6$; a 112×112 black occluder at a random position; low light, i.e. brightness $\times0.25$ plus sensor noise with standard deviation 0.05) and evaluate a missing-video condition. All numbers are mean $\pm$ standard deviation over ten seeds. Differences from MFC-A are tested with a two-sided paired t-test over seeds[50]; * marks $p<0.05$. We do not correct for multiple comparisons, so isolated p-values near 0.05 should be read with caution. The per-epoch logs of every run, including $\lambda_m(t)$, $\text{OGR}_m(t)$ and all split losses, are released with the code.

Table 3. CREMA-D audio–video, actor-disjoint test set (10 seeds, mean±std). Stream 1 is video and stream 2 is audio. "Acc$_v$" and "Acc$_a$" are the unimodal-head accuracies. Robustness columns degrade the video stream only. MFC-A uses the γ selected without test data; *: paired t-test $p < 0.05$ against it. Bold: best mean.

Method	Acc	Acc$_v$	Acc$_a$	OGR gap↓	σ=0.5	σ=1.0	Blur	Occl.	Low light	No video
Baseline	49.7±5.8	32.6±3.7	47.1±4.8*	3.73±3.60	47.6±4.9	43.4±3.3	24.7±5.0	28.4±3.9	34.4±3.4	44.3±4.8
Gradient Blending	**52.1±3.6***	17.4±2.4*	**48.1±3.5***	**1.17±0.85***	**51.1±3.5***	**47.3±2.6***	23.4±4.6	28.2±4.0	36.3±6.3	44.6±3.4
Uncertainty weighting	49.4±5.4	31.6±4.0	46.6±5.6	2.45±1.78	47.3±4.7	44.0±3.5	24.2±4.2	27.8±3.6	34.4±5.0	43.8±4.2
MMPareto	50.1±3.5	32.7±2.7	47.8±3.1	4.45±3.82	48.4±3.3	44.2±2.5	23.5±3.3	26.1±2.5	33.3±4.7	44.4±4.3
OGM-GE (α=0.3)	50.6±3.9	**33.5±3.1**	47.0±2.9	2.77±2.03	48.7±3.7	44.4±2.6	22.7±3.4	26.6±5.0	35.6±3.0	43.8±3.3
AGM (α=0.1)	49.1±4.8	32.2±3.1	47.1±4.7*	4.22±3.24	47.6±4.4	43.4±3.2	23.1±3.9	27.8±3.8	33.8±4.2	**45.3±5.4**
PMR (α=1.0, μ=0.01)	48.8±5.3	32.4±3.4	47.0±4.7	4.04±3.63	46.5±4.6	43.5±3.5	23.7±4.9	28.0±3.2	34.0±5.3	44.3±5.1
OLM (η=0.01)	51.7±3.1*	32.6±2.8	48.0±3.4*	2.68±0.94	50.5±3.4*	46.8±3.0*	**25.6±4.1**	**29.7±4.6**	**37.6±5.1***	42.6±2.9
MFC-T (threshold)	49.2±5.6	32.5±3.5	47.1±4.7	3.82±3.20	46.9±4.8	43.4±3.3	24.4±4.6	27.5±3.3	33.7±4.5	44.7±5.1
MFC-A (γ=1)	49.3±5.4	32.1±3.6	47.4±4.8*	2.98±2.38	47.7±4.7	43.8±3.3	24.0±4.8	27.5±2.6	34.7±5.3	43.9±5.1
MFC-A (γ=2, selected)	48.8±5.3	32.3±3.3	46.4±4.6	2.90±2.12	47.1±5.0	43.2±3.5	23.8±5.1	27.8±2.9	33.9±5.3	43.6±4.4

Results

Main comparison

Tables 3–6 report the main results, real-data benchmarks first.

0.1 ~~Performance Analysis~~

AVE (Table 4). AVE is vision-dominant: the video head reaches about 74% and the audio head about 49%, and in the baseline the video OGR grows to about 41 while the audio OGR stays near 2. MFC-A (γ=3) throttles the video auxiliary loss to its lower bound and amplifies audio. It meets the goal of balancing without loss of accuracy: accuracy is unchanged (80.2 vs. 79.9%, p=0.46), the OGR gap falls by 63% (25.9 to 9.5, p=0.03), and robustness improves under feature noise (σ=1: +1.1, p=0.01), blur (+2.1, p=0.04) and low light (+1.4, p=0.03), with occlusion and missing video unchanged within noise. The plain law (γ=1) moves in the same direction more weakly (gap 14.5). OGM-GE with α=0.8 is the strongest method on this dataset: it improves accuracy by 2.2 points over MFC-A and gives much larger robustness gains (e.g. +9.7 points under blur), all with $p < 0.01$. On AVE, per-batch confidence-based gradient modulation of the visual encoder is therefore more effective than reweighting only the auxiliary losses. Gradient Blending is slightly more accurate than MFC-A (+0.8, p=0.04), whereas uncertainty weighting is 2.3 points less accurate.

~~Table ?? provides the key findings in all four methods. On the surface, the maximum numbers of validation accuracy are similar to one another – this is not surprising. When one modality~~ *CREMA-D audio–video (Table 3).* On real paired data the seed-to-seed spread is large (about ±5 points), because each seed places different actors in the test set; paired tests remove most of this between-actor variance. Audio is the stronger modality (unimodal heads at about 47% vs. 32%), yet the 512-dimensional video features overfit much faster: the baseline's video OGR reaches 16.8 against 4.1 for audio. MFC-A therefore throttles the video auxiliary loss ($\lambda_v \approx 0.3$) and amplifies audio, which lowers the video OGR to 10.4 and the OGR gap from 3.73 to 2.90. Accuracy is maintained (48.8 vs. 49.7%), but neither this difference (p=0.05) nor the gap reduction (p=0.45) is statistically significant, and robustness is unchanged. Gradient Blending is the clear winner on this dataset (52.1%, gap 1.17, +4.1 points at σ=1, all $p < 0.03$ against MFC-A). Its probe estimates a video weight of exactly zero, so it removes the video auxiliary loss altogether (the video head then stays near chance, 17.4%) and gives all auxiliary weight to audio. MFC-A moves in the same direction but, by design, smoothly and within $[\lambda_{\min}, \lambda_{\max}] = [0.2, 1.8]$, so it cannot reach that extreme allocation. OGM-GE, MMPareto and uncertainty weighting are within about one point of the baseline. With γ=3, MFC-A would have obtained 50.1% and a gap of 2.16 on the test set, but the pre-defined selection rule excluded it because its tuning accuracy fell 0.7 points below the baseline's; we report the selected value.

Recent balancing methods (AGM, PMR, OLM; Tables 3–6). AGM and PMR are statistically indistinguishable from MFC-A in accuracy on every dataset (all $p > 0.09$), and MFC-A has the smaller OGR gap on all four datasets (significantly so on the synthetic and spectrogram data, $p < 0.04$); on AVE, MFC-A is also more robust to feature noise than both ($p < 0.05$). OLM behaves very differently across datasets. On CREMA-D audio–video it is second only to Gradient Blending in accuracy (51.7% vs. 52.1%; +2.9 over MFC-A, p=0.02) and in robustness to feature noise (+3.6 over MFC-A, $p < 0.001$), but on AVE it is 2.0 points less accurate than MFC-A (~~vision)is extremely clean, the joint model can already do good due to the dependence on it. The real balancing of the learning, how is the model to be held steady in case that strong modality is noisy or unavailable, is what is really going on under the carpet.~~ p=0.003) and 7.5 points less robust to blur ($p < 0.001$), and on the synthetic benchmark it is 1.8 points less accurate (p=0.005). No balancing method is uniformly best.

Synthetic benchmark (Table 5). With a strong, known imbalance (the hard stream's head reaches only about 29% against

Table 4. AVE, official test set (402 clips, 28 classes; 10 seeds, mean±std). Stream 1 is video and stream 2 is audio; robustness columns degrade the video stream only. MFC-A uses the γ selected without test data; *: paired t-test $p < 0.05$ against it. Bold: best mean.

Method	Acc	Acc_v	Acc_a	OGR gap↓	σ=0.5	σ=1.0	Blur	Occl.	Low light	No video
Baseline	79.9±1.8	73.6±2.1	48.6±5.4	25.87±22.28*	78.8±1.7	74.9±1.2*	39.4±4.8*	65.5±2.7	51.0±1.9*	27.2±3.9
Gradient Blending	81.0±1.3*	70.9±3.4*	50.5±2.7	5.33±7.89	80.3±1.3	76.6±1.4	43.5±6.6	68.3±2.6*	57.4±3.1*	30.7±3.9
Uncertainty weighting	77.9±1.0*	71.4±1.6*	43.9±6.4*	15.75±11.73	76.7±1.4*	72.2±2.0*	32.3±4.5*	62.6±2.1*	49.3±2.6*	27.3±4.8
MMPareto	79.4±1.9	73.3±1.9	47.7±6.0	23.86±20.06	77.9±1.3*	74.1±1.4*	37.7±5.4*	64.9±2.0	50.5±2.8*	26.6±3.9
OGM-GE (α=0.8)	**82.4±1.0***	73.0±1.1*	51.1±2.4	**2.51±1.86***	**81.3±1.0***	**78.8±1.2***	**51.2±4.9***	**71.4±1.6***	**61.8±2.3***	36.1±3.1*
AGM (α=1.0)	80.5±1.4	73.1±1.2*	47.4±4.0	12.82±13.87	79.0±1.3	74.9±1.2*	41.1±3.9	66.3±1.6	53.4±1.6	28.9±2.9
PMR (α=1.0, μ=0.01)	79.5±1.5	73.2±2.2	44.6±4.3*	18.88±21.04	78.5±1.9	75.1±1.4*	40.5±4.8	65.0±1.3	53.3±2.2	22.3±2.5*
OLM (η=1.0)	78.2±1.7*	72.9±1.4*	**51.3±1.9**	19.96±16.16*	77.0±2.2*	73.0±2.0*	34.0±5.1*	62.4±3.2*	48.6±3.8*	**43.2±3.1***
MFC-T (threshold)	79.9±1.3	73.7±0.5*	49.0±5.2	18.12±11.99*	79.2±0.5	74.7±1.6*	39.8±4.1	65.6±1.5	51.6±2.6	27.1±2.8
MFC-A (γ=1)	80.2±1.6	74.3±0.9	49.2±4.7	14.47±8.48	79.4±1.2	74.8±1.8	40.2±4.7	65.8±1.6	52.1±2.9	28.4±4.1
MFC-A (γ=3, selected)	80.2±1.3	**74.4±0.8**	50.4±4.4	9.50±4.06	79.6±1.1	75.9±1.2	41.5±5.0	65.8±1.8	52.3±2.2	29.0±3.7

Table 5. Synthetic benchmark, test set (10 seeds, mean±std). Stream 1 is the easy ("visual-like") stream; robustness adds Gaussian noise to it. MFC-A uses the γ selected without test data; *: paired t-test $p < 0.05$ against it. Bold: best mean.

Method	Acc	Acc_v	Acc_a	OGR gap↓	Rob@0.5	Rob@1.0
Baseline	84.1±1.3	83.7±1.3	28.7±1.7*	6.03±1.39*	70.7±1.7	48.9±2.1
Gradient Blending	84.0±0.9	83.4±0.9	29.8±1.5	4.23±1.18	**71.4±1.2**	**49.9±2.0**
Uncertainty weighting	82.7±1.5*	81.7±1.3*	25.5±1.6*	4.57±0.92*	70.0±1.3*	48.3±2.5
MMPareto	84.1±1.4	83.4±1.3	28.7±1.9*	6.00±1.85*	70.7±1.5	49.4±2.5
OGM-GE (α=0.1)	82.7±1.2*	82.4±1.1*	28.0±1.4*	**3.29±0.56***	69.8±1.7	49.2±2.1
AGM (α=0.1)	83.9±0.9	83.3±1.4	28.1±2.1*	5.39±2.17*	71.1±1.5	49.1±2.0
PMR (α=2.0, μ=0.001)	84.1±1.6	83.6±1.6	28.8±1.6	5.46±1.24*	70.7±1.3	49.2±2.4
OLM (η=1.0)	82.5±1.9*	82.6±1.6*	28.5±1.5*	3.95±1.17	69.0±1.6*	47.7±2.2*
MFC-T (threshold)	**84.5±1.1**	**84.2±0.8***	**30.4±1.4**	6.90±1.27*	71.0±1.9	49.2±2.3
MFC-A (γ=1)	**84.5±1.8**	83.7±1.9	29.3±1.2*	4.75±0.98*	71.2±1.4	49.4±2.1
MFC-A (γ=3, selected)	84.4±1.3	83.7±1.3	30.0±1.6	3.74±0.61	71.0±1.2	49.6±2.7

Table 6. CREMA-D two spectrogram views (control), test set (10 seeds, mean±std). Stream 1 is the PCA view and stream 2 the band-statistics view; both come from the same spectrogram. MFC-A uses the γ selected without test data; *: paired t-test $p < 0.05$ against it. Bold: best mean.

Method	Acc	Acc_v	Acc_a	OGR gap↓	Rob@0.5	Rob@1.0
Baseline	49.1±1.9	47.2±1.5	44.6±1.6	1.21±0.70	44.2±1.3	35.9±1.8
Gradient Blending	**50.7±1.2***	45.5±1.7*	**46.4±1.8***	**0.51±0.29***	**46.2±1.6***	**39.8±2.3***
Uncertainty weighting	48.7±1.4	46.6±1.5	44.4±2.0	1.25±0.78	44.4±1.3	35.8±1.8
MMPareto	49.0±1.3	47.0±1.2	44.7±1.9	1.50±0.85	44.0±1.3	35.9±1.6
OGM-GE (α=0.8)	50.0±1.4*	47.4±1.4	46.1±1.8*	0.98±0.26	45.3±1.0*	37.9±2.0*
AGM (α=0.5)	49.8±1.3	47.5±1.3	45.5±2.2	1.71±0.59*	43.9±1.4	35.6±1.4
PMR (α=1.0, μ=0.001)	49.2±1.6	47.5±1.8	44.5±2.5	1.66±0.88*	44.0±1.3	35.6±1.9
OLM (η=1.0)	49.2±1.5	**47.6±1.7**	44.8±1.7	1.10±0.50	43.7±1.7	36.2±2.2
MFC-T (threshold)	49.7±1.7	47.4±1.8	45.4±2.1*	1.63±0.69*	44.2±1.5	35.8±1.4*
MFC-A (γ=1)	48.8±1.7	47.2±1.4	44.8±1.7	1.35±0.76	44.1±1.0	36.3±1.6
MFC-A (γ=3, selected)	49.1±1.5	47.2±1.7	44.5±2.1	1.12±0.58	44.0±1.5	36.5±1.6

16.7% chance), MFC-A with the selected γ=3 balances training without loss of accuracy: its accuracy is unchanged (84.4 vs. 84.1%, p=0.18), the OGR gap falls by 38% (6.03 to 3.74, $p < 0.001$) and the hard stream's head improves (30.0 vs. 28.7%, $p < 0.001$); robustness at σ=1 rises by 0.7 points, which is not significant (p=0.07). The plain law (γ=1) moves in the same direction but more weakly (gap 4.75, p=0.01). OGM-GE reaches a slightly lower gap (3.29) at its selected α but costs 1.7 accuracy points relative to MFC-A (p=0.002), and α=0.8 costs about 6 points while driving the gap below 1; a small OGR gap can thus be bought with accuracy and is not a goal by itself. Gradient Blending reaches a similar gap (4.23) and accuracy (84.0%). Uncertainty weighting lowers the hard stream's head accuracy to 25.5%, consistent with its tendency to down-weight high-loss objectives.

~~These results give several significant trends. The **Baseline** has the highest peak accuracy~~ *Spectrogram-view control (Table 6).* When both streams come from the same signal and are of similar strength (unimodal heads at 47 and 45%), imbalance is mild (baseline gap 1.21), and MFC-A (~~83.3%)but only due to the ability to freely overfit vision, i.e.its OGR Gap~~

balloons to 7.89 so the vision encoder is memorizing training data at almost 8× the rate audio is generalizing. This dominance is made vulnerable when the visual input is subsequently corrupted with noise because the γ=3) stays close to the baseline (accuracy drops to 48.2%. 49.2 vs. 49.1%, gap 1.12). Gradient Blending is the best method here: it improves accuracy by 1.5 points (p=0.008) and robustness at σ=1 by 3.3 points (p=0.002) over MFC-A. Its offline weights put almost all auxiliary weight on the band-statistics view ($\lambda_v \approx 0.14$), a reallocation that MFC-A's ratio-based law does not reach when the OGRs of the two views are similar.

In fact, Gradient Blending negatively affects clean accuracy (82.1%), which is one of the known failure modes of the offline method: the fixed weights are learned during a brief warm up period and may fail to fire when the early dynamics do not reflect the overall trajectory of training. When they are fixed, they are not able to change with changing conditions. *Per-class behaviour and examples.* Figure 3 gives the test confusion matrices of the selected MFC-A, pooled over the ten seeds (the AVE test set is the same for every seed; on CREMA-D each seed contributes its own held-out actors). On CREMA-D, anger and happiness are recognised best and fear and disgust worst, with most errors among the negative emotions; on AVE, most classes exceed 0.7, and the main confusions are between acoustically or visually similar events (helicopter and fixed-wing aircraft, female and male speech, cat and rodents). Figure 4 shows the predictions of five methods on six AVE test clips. To avoid choosing favourable cases, the clips are drawn at random among the test clips on which the methods do not all agree (seed 0). In this draw MFC-OG is correct on five of the six clips and MFC-A on one, consistent with Tables 4 and 7, where MFC-OG matches the strongest method on AVE and MFC-A does not change accuracy. Figure 5 shows, for the same clips, which image regions each model's prediction depends on. The two methods that scale down the dominant visual stream's gradients (OGM-GE and MFC-OG) produce weaker visual attributions and are mostly correct, whereas the baseline and MFC-A, which leaves the joint loss unchanged, concentrate strongly on parts of the frame and make the same errors; this agrees with the gradient-level analysis below. Six clips illustrate the behaviour and are not statistical evidence.

OGM-GE has the smallest OGR balance (difference of 1.05)through a vigorous throttling of vision using noise injection. This is effective, albeit the resultant price an unstable training signal—the variance of the noise is another sensitive hyperparameter.

The Modality Fairness Controller lays down upon a sensible compromise. It has a 38.4% decrease in its OGR Gap (4.86)even without any auxiliary computation, or noise. More to the point, its visual degradation robustness (50.5%)is equivalent to OGM-GE (49.9%) which proves that the audio encoder acquired truly useful property as opposed to being a passenger that is dependent on the visual information during the entire process.

0.1 Training Dynamics

Figure ?? tells the full training story epoch by epoch.

Epochs 1–7 (Warm-up): The speeds of learning are similar in all the methods. Vision OGR remains close at 1.0 to all methods , i.e. vision is generalizing in a clean manner. The MFC identifies that the two modalities are underfitting, and it increases both weights (λ_v,

Training dynamics: does the controller respond to overfitting?

Figures 6–8 show the per-epoch traces averaged over seeds for CREMA-D, AVE and the synthetic benchmark. On AVE the baseline's video OGR rises to about 41 while the audio OGR stays near 2; MFC-A throttles the video stream and ends with a video OGR of 14.3 (20.5 under γ=1). On CREMA-D audio–video the video OGR on $\mathscr{D}_{\text{cv}}$ rises steeply after the first few epochs while the audio OGR grows more slowly; after warm-up MFC-A lowers λ_v to about 0.26 by mid-training and raises λ_a increases in value until it reaches about to about 1.74, and the final video OGR is 10.4 instead of the baseline's 16.8, while the audio OGR rises slightly (4.65 vs. 4.08). This is the intended redistribution: the controller reacts to the measured overfitting of each stream and not to which stream is more accurate. In the synthetic benchmark the first stream's OGR rises from 1.0 to 7.1 under the plain law (γ=1) and to 5.2 under γ=3, while the second stream's stays near 1.2).

Epochs 7–15 (Divergence onset): The visual encoder starts memorizing. Vision OGR rises above 1.4 in Epoch 8 in the Baseline and then begins to shoot upwards. The MFC notices this cross of $\tau_{high} = 1.2$ and starts throttling vision—. During warm-up MFC-A keeps λ=1; afterwards λ_v is decreased by 5 per cent every epoch. In the meantime, falls monotonically (to 0.36 for γ=1; to the lower bound 0.2 for γ=3) and λ_a is also maintained at 1.55 to maintain pressure on the audio encoder.

Epochs 15–25 (Controlled divergence): Vision OGR is at 10+ and Audio OGR is flat at ≈ 1.15.The following is the textbook image of Gradient Starvation: audio gradients are lost due to the fact that the loss of the joint is nearly all determined by vision. MFC has rises correspondingly, with $\lambda_v+\lambda_a$=2 whenever the bounds are inactive, as Property (ii) predicts. The response therefore tracks the measured overfitting with the lag set by W and β. MFC-T moves in the same direction but saturates λ_a at its upper bound and first *increases* λ_v decreasing (to 0.39 in Epoch 30) and the audio encoder is still being fed meaningful gradient signal.

Epochs 25–30 (Late convergence): The training curve of the MFC is unstable at this range due to the continuous changes of the controllerduring the early under-fitting phase. Throttling λ_v slows, but does not stop, the growth of the visual OGR. This

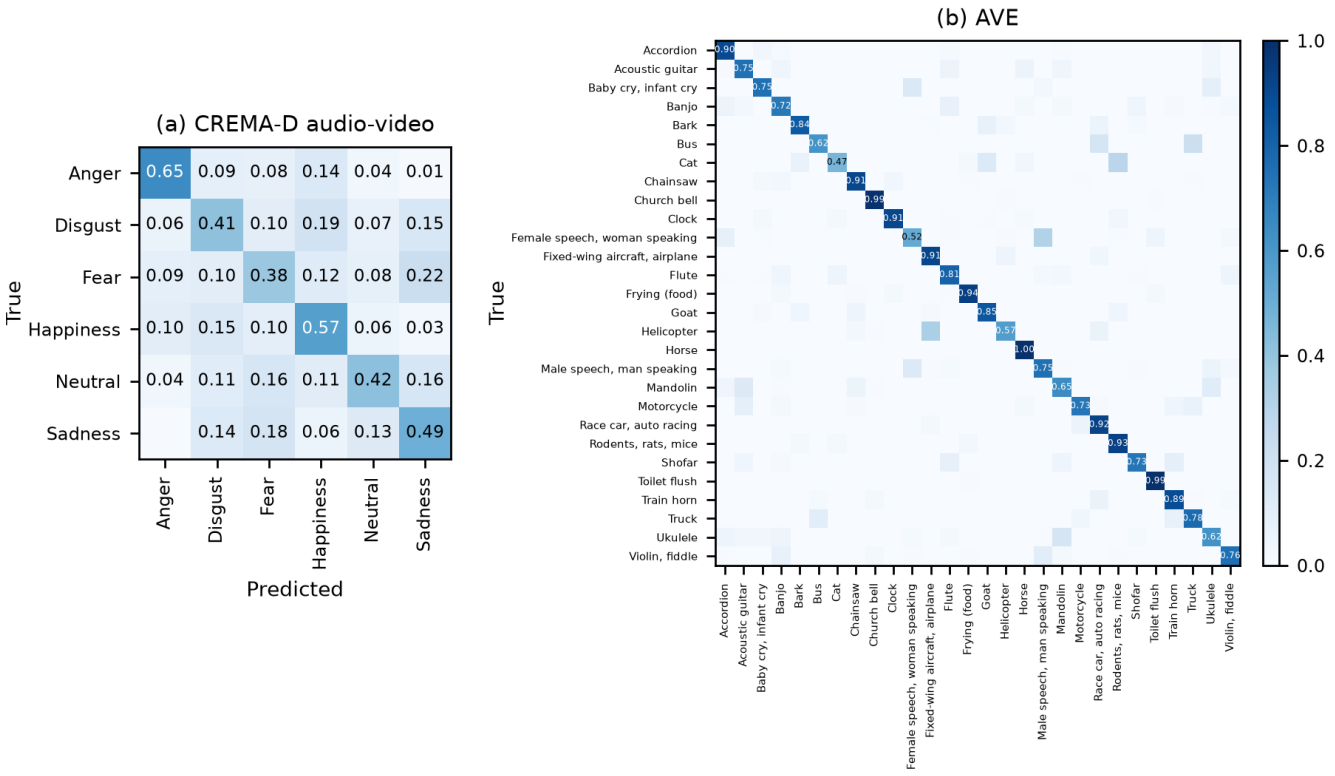


Figure 3. Confusion matrices of the proposed model (MFC-A with the selected γ) on the test sets, row-normalised and pooled over 10 seeds: (a) CREMA-D audio–video (per-class mean accuracy 48.6%), (b) AVE (79.2%; only diagonal values are printed). Rows are true classes and columns predicted classes.

is ~~an established trade-off of responsive control: a responsive scheme requires a few additional epochs to achieve stability than a fixed point scheme.~~expected, because the joint loss in Eq. (2) is not re-weighted and continues to fit the dominant stream; a stronger intervention would also have to modulate the joint term. Animated versions of these traces, per-seed heatmaps of the loss weights, and example clips under each degradation are provided in the code repository (`https://github.com/ailakshya/ogr-mfc-a-revision/tree/main/experiments/out/media`).

0.1 ~~Imbalance Analysis (OGR)~~

~~OGR measure is~~

Gradient-level evidence

To test the mechanism directly, we logged at the end of every epoch, on a fixed probe of 512 training samples, the gradient norms that each encoder receives from the joint loss ($\|\nabla_{\theta_m}\mathcal{L}_{\text{joint}}\|$) and from its own unimodal loss ($\|\nabla_{\theta_m}\mathcal{L}_m\|$). The probe uses inference mode and draws no random numbers, and rerunning all 160 main-comparison runs with this logging reproduced every previously reported result exactly. Figure 9 shows AVE.

In the AVE baseline, the audio encoder's share of the joint-loss gradient, $\|\nabla_{\theta_a}\mathcal{L}_{\text{joint}}\|/(\|\nabla_{\theta_a}\mathcal{L}_{\text{joint}}\|+\|\nabla_{\theta_v}\mathcal{L}_{\text{joint}}\|)$, falls from 0.46 in the first epoch to about 0.23 from epoch 20 onwards: the audio encoder is partly, though not completely, starved by the joint loss. MFC-A acts where it was designed to act. After warm-up, the ~~diagnostic of the work. A close to 1.0 value indicates that the modality is generalizing the model learning on training samples to unseen examples. An increasing OGR is an indication of a modality that is overfitting: its training loss is decreasing, but not being matched by its validation loss. As Table ?? indicates, OGR Gap at the Baseline is 7.89, which implies that the vision is approximately 7 points overfitted at the end of training compared to audio.~~ effective auxiliary gradient $\lambda_m\|\nabla_{\theta_m}\mathcal{L}_m\|$ reaching the video encoder is 54% lower than in the baseline and that reaching the audio encoder is 66% higher (both $p < 10^{-7}$); on CREMA-D the corresponding changes are -55% and $+45\%$ ($p < 10^{-8}$). The joint-loss gradient share, however, is almost unchanged on AVE (0.229 vs. 0.236), because MFC-A ~~reduces this gap to 4.86 which is not a perfect gap but a significant and parameter free gap gain in one pass.~~

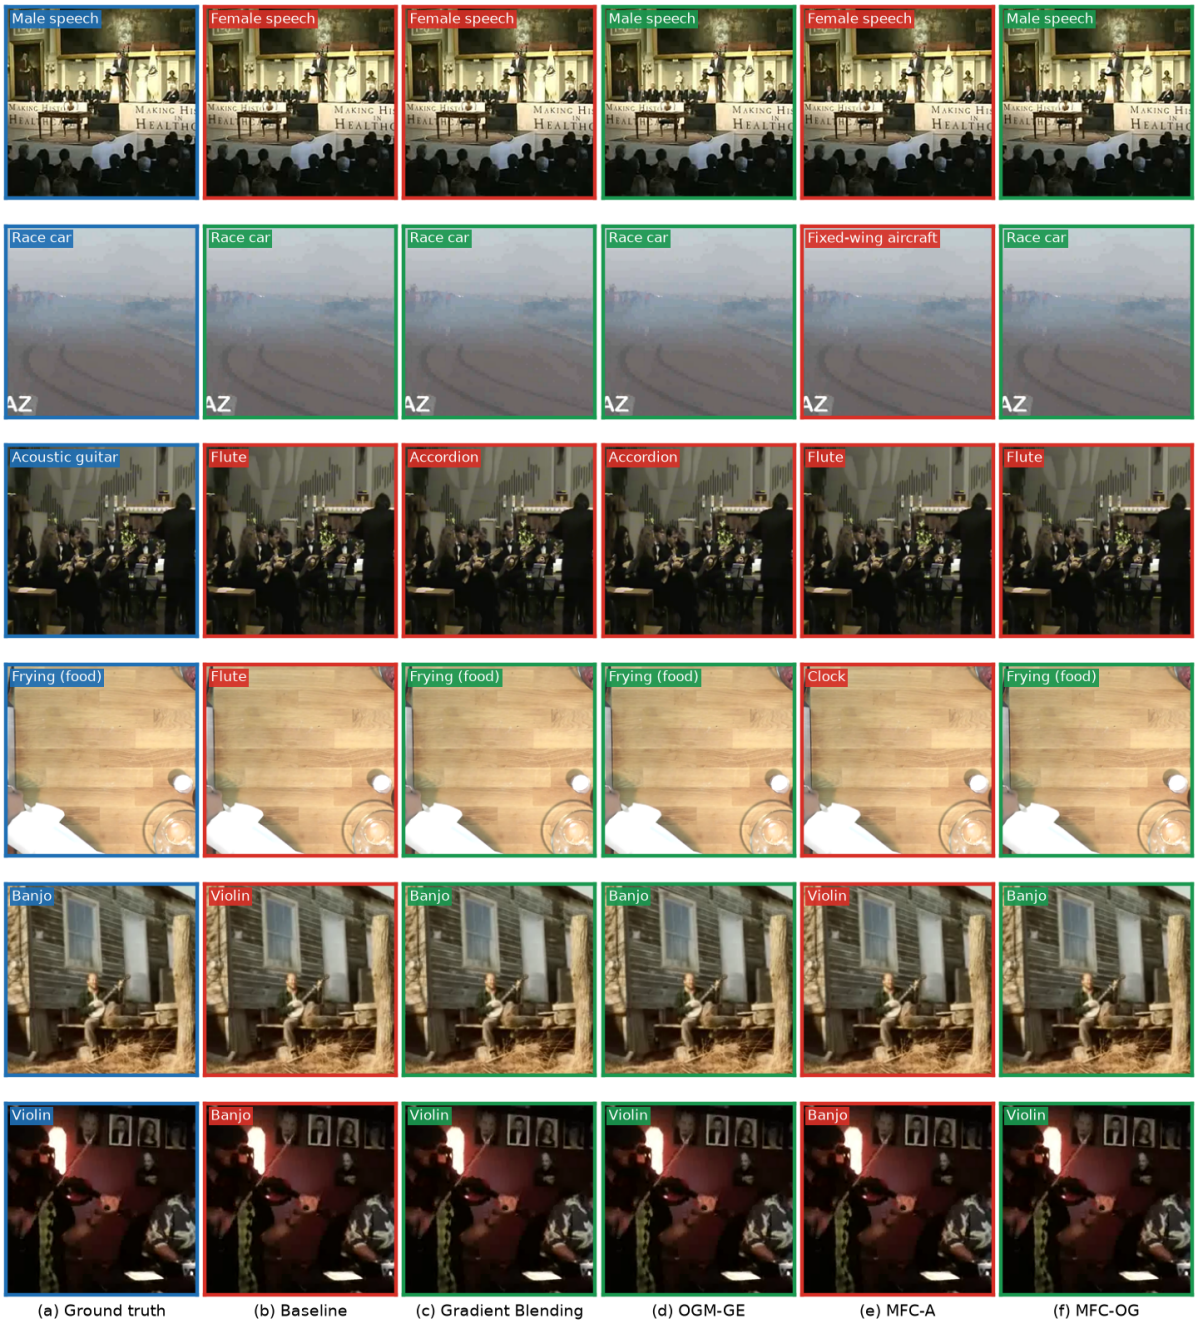


Figure 4. Predictions of different methods on AVE test clips (seed 0; middle frame of each clip shown). (a) Ground-truth class; (b)–(f) fused prediction of the baseline, Gradient Blending, OGM-GE, MFC-A and MFC-OG. Green: correct; red: wrong. The six clips were drawn at random (fixed seed) among the 402 test clips on which the five methods do not all agree, so the figure is not selected in favour of any method. Pooled over 10 seeds, the accuracies are 79.9, 81.0, 82.4, 80.2 and 82.5%.

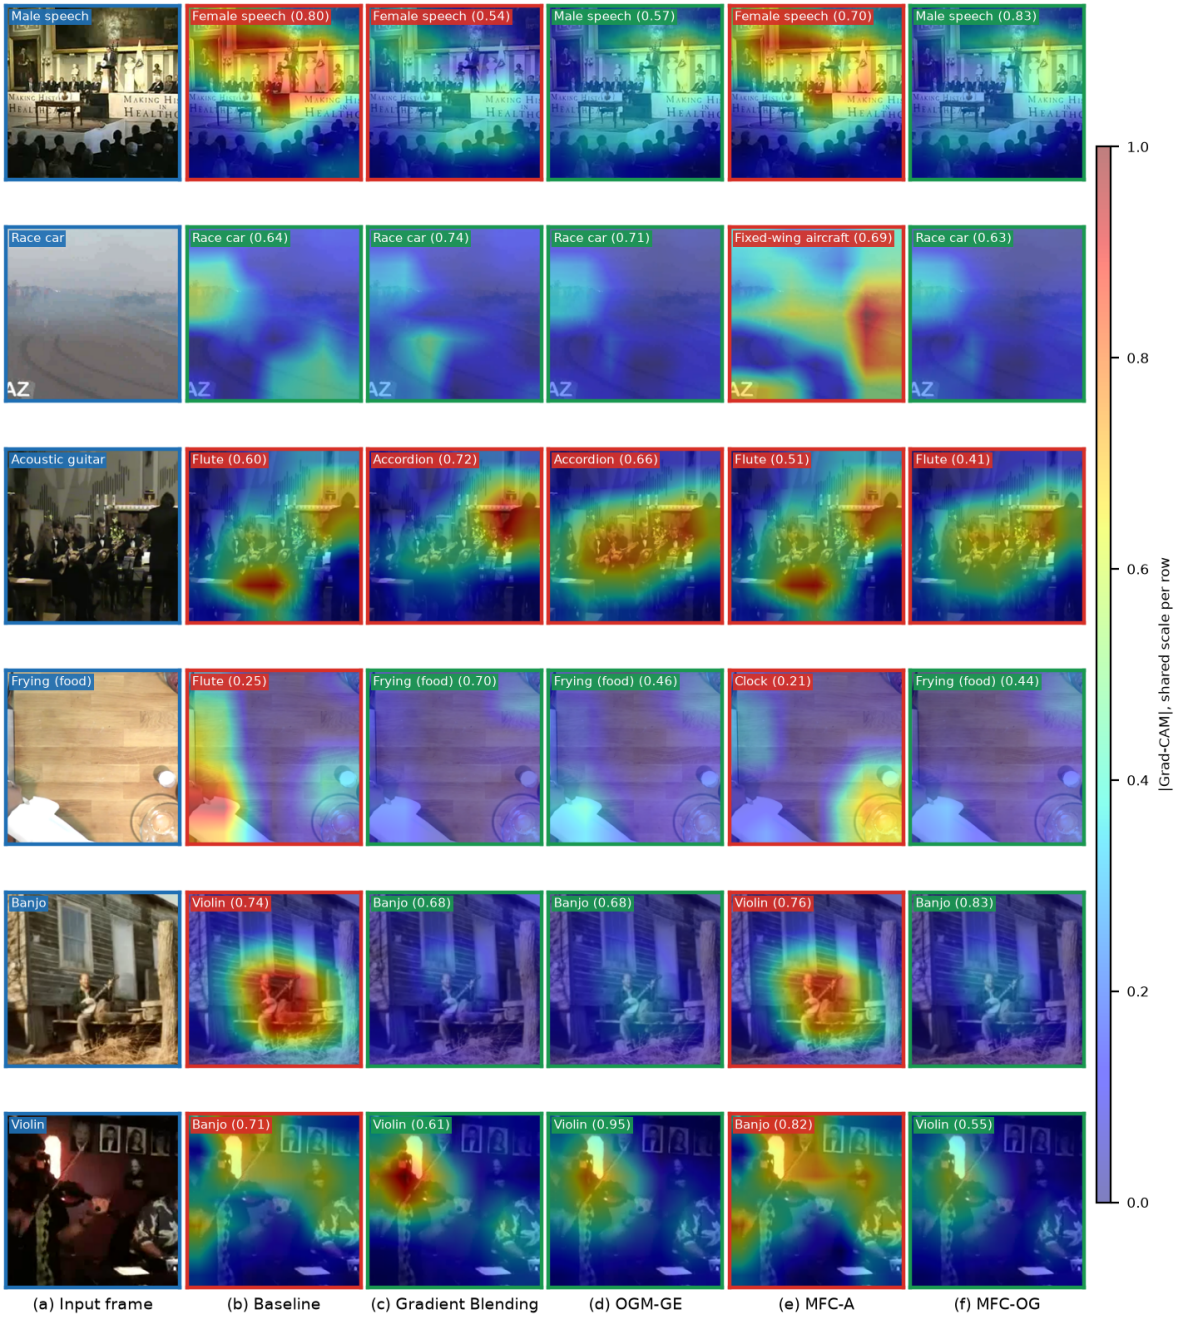


Figure 5. Input frames and visual heatmaps of five methods (AVE test clips of Fig. 4, seed 0). (a) Input frame and ground-truth class; (b)–(f) magnitude of Grad-CAM[51] of each model's own fused prediction, computed through the frozen ResNet-18 at its last convolutional stage and shown on one colour scale per row, with the predicted class and its probability (green: correct; red: wrong). Each model is retrained with the benchmark and reproduces its logged test accuracy exactly, and every prediction shown equals the one in Fig. 4.

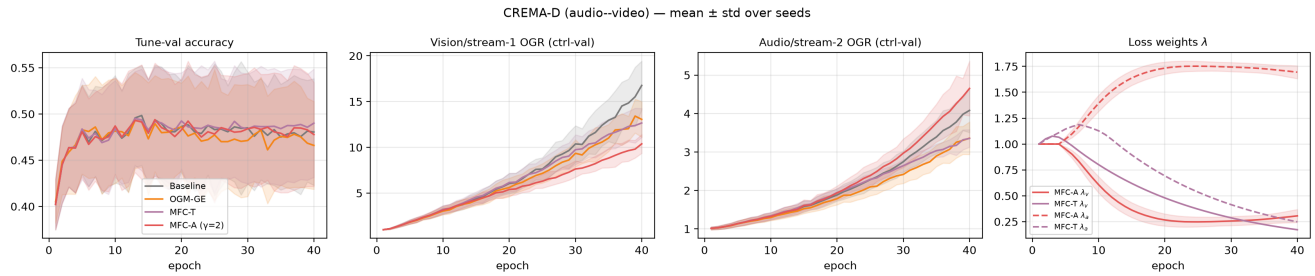


Figure 6. Intermediate evidence on CREMA-D audio–video (mean ± std over 10 seeds). From left: tune-split accuracy; OGR of the video stream and of the audio stream on $\mathscr{D}_{\text{cv}}$; loss weights of MFC-A (solid: λ_v, dashed: λ_a) and MFC-T.

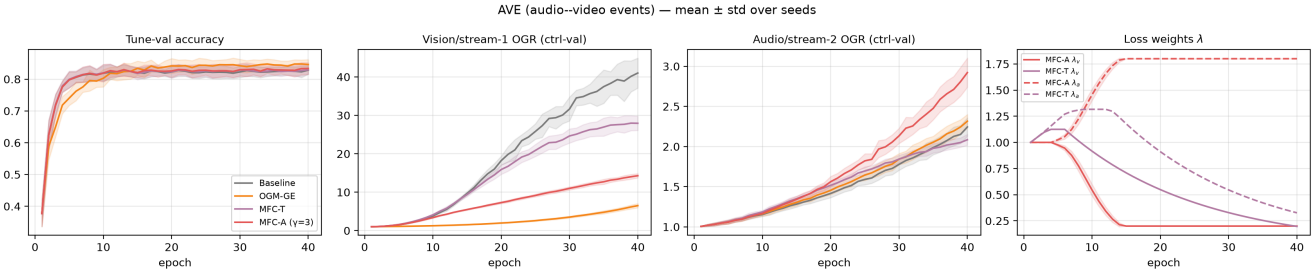


Figure 7. Intermediate evidence on AVE (mean ± std over 10 seeds). Panels as in Fig. 6. The video OGR of the baseline grows to about 41; MFC-A (γ=3) moves the video weight to its lower bound within a few epochs after warm-up and keeps the video OGR at about 14.

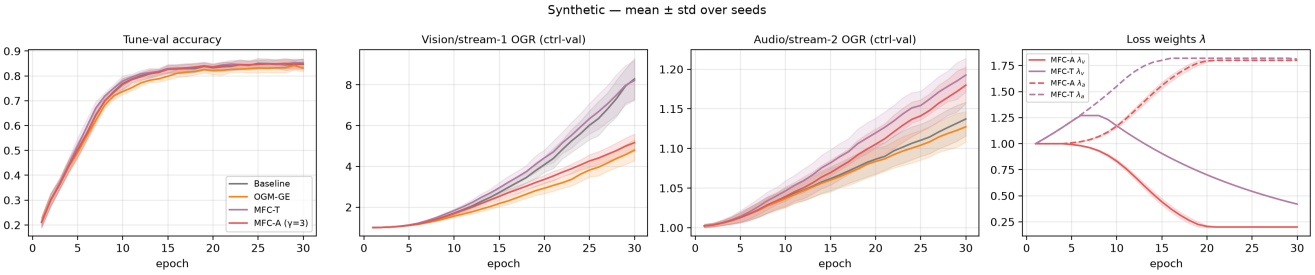


Figure 8. Intermediate evidence on the synthetic benchmark (mean ± std over 10 seeds). Panels as in Fig. 6. The OGR of the easy stream grows several-fold while that of the hard stream stays near 1.2; MFC-A transfers auxiliary weight from the first stream to the second.

0.1 ~~Ablation Study~~

~~Table 8 is the summary of the performance measures of the various window sizes. A bigger window size blurry noisy OGR estimates which results in slower but more stable adaptation. A balance between the responsiveness and stability is achieved between the best window size of 5 strikes~~does not re-weight $\mathscr{L}_{\text{joint}}$. OGM-GE, which scales the encoder gradients directly, is the only method that measurably raises the audio-to-video ratio of the joint-loss gradient norms (by 43%, $p \approx 10^{-7}$). This explains both why MFC-A reduces the OGR-measured imbalance and why its effect on accuracy and robustness is smaller than OGM-GE's on AVE, and it identifies re-weighting of the joint term as the main lever for a stronger version of the controller.

~~*Impact of Feature Dimensionality*~~

~~We also experimented with changing the non-mechanical aspect of the encoders (Table **??**). We noted that the higher the ability of Visual encoder~~

Follow-up: stronger variants guided by the gradient evidence

The gradient-level analysis identified why MFC-A's effect is limited: it re-weights only the auxiliary losses, while the joint loss, which dominates the encoders' gradients, is untouched. We therefore designed, after that analysis and before running them, two variants that act on the joint-loss gradient as well, and evaluated both under the unchanged protocol (ten paired seeds, settings chosen by the pre-registered rule on $\mathscr{D}_{\text{cv}}$ and $\mathscr{D}_{\text{tune}}$, untouched test set). **MFC-J** applies the MFC-A weights λ_m also to the joint-loss gradient that enters the fusion layer from each encoder ($\gamma \in \{1,2,3\}$). **MFC-OG** keeps MFC-A and adds

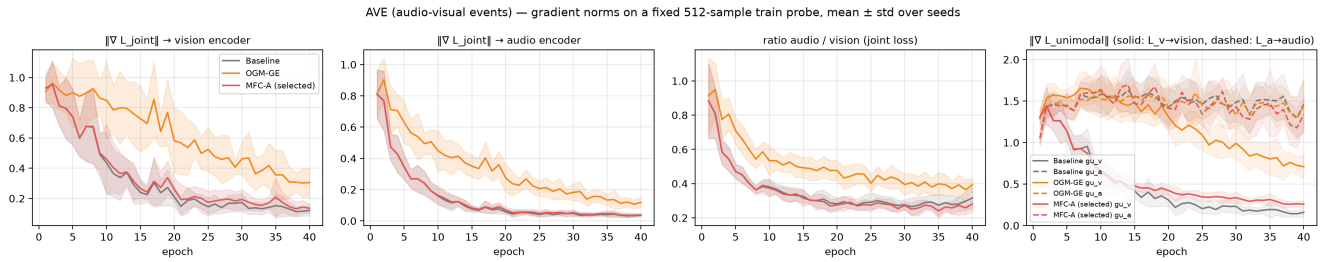


Figure 9. Gradient norms on AVE (fixed 512-sample training probe, mean ± std over 10 seeds). From left: joint-loss gradient reaching the video encoder and the audio encoder; their ratio (audio/video); unimodal-loss gradient of each encoder (solid: video, dashed: audio). The corresponding figure for CREMA-D is released with the code.

Table 7. Follow-up variants (test set, 10 seeds, means; all runs on one machine). MFC-J and MFC-OG use the setting chosen by the pre-registered rule; †: no setting passed the rule (tuning accuracy more than 0.5 points below the baseline), so the setting with the best tuning accuracy is shown. *: paired t-test $p < 0.05$ against the baseline. Bold: best mean per column.

	AVE			CREMA-D audio–video			Synthetic			Spectrogram views		
Method	Acc	Gap	Rob@1	Acc	Gap	Rob@1	Acc	Gap	Rob@1	Acc	Gap	Rob@1
Baseline	79.9	25.87	74.9	49.7	3.73	43.4	84.1	6.03	48.9	49.1	1.21	35.9
Gradient Blending	81.0*	5.33*	76.6*	**52.1***	**1.17***	**47.3***	84.0	4.23*	**49.9***	**50.7***	**0.51***	**39.8***
OGM-GE	82.4*	2.51*	78.8*	50.6	2.77	44.4	82.7*	3.29*	49.2	50.0	0.98	37.9*
MFC-A	80.2	9.50*	75.9*	48.8	2.90	43.2	84.4	3.74*	49.6	49.1	1.12	36.5
MFC-J	80.5	5.99*	76.1*	49.3†	4.15	43.5	**84.5**	3.13*	49.7	49.8	0.99	36.2
MFC-OG	**82.5***	**1.42***	**79.7***	50.0	1.71	44.2	82.2*†	**2.20***	49.2	49.6	0.72	37.9*

OGM-GE gradient modulation[7], but applies it only when the more confident modality is also the one with the higher smoothed OGR, that is, only when its confidence comes from memorisation ($\alpha \in \{0.3, 0.8\}$, ~~the more severe the "Modality Laziness" is exhibited in the baseline, which demonstrates that this isa capacity-induced phenomenon. The MFC offers greater returns with increase in the model capacity~~ $\gamma \in \{1, 3\}$). Because these variants were motivated by results we had already seen, we report them as a follow-up, and we report both of them on every dataset, including where they fail. All runs in this subsection, including the reference methods, were made on the same workstation; for the synthetic and spectrogram datasets the reference numbers are therefore reruns and differ slightly from Tables 5 and 6.

Table 7 shows that acting on the joint-loss gradient helps where the analysis predicted. On AVE, MFC-OG improves on the baseline on every metric (accuracy +2.7, OGR gap −24.4, robustness +4.8, blur +12.5, low light +11.0, missing video +9.3 points; all $p < 0.01$) and matches OGM-GE, the strongest method on this dataset: accuracy and robustness to blur, low light and missing video are statistically indistinguishable, the OGR gap is lower (1.42 vs. 2.51, p=0.08), and robustness to feature noise is higher (79.7 vs. 78.8%, p=0.04). It is also more accurate and more robust than Gradient Blending on AVE (all $p < 0.01$). On the synthetic benchmark, MFC-J is the most accurate method (84.5%; +1.9 over OGM-GE, p=0.001) with a lower OGR gap than Gradient Blending (p=0.01). The variants do not fix everything. On CREMA-D neither improves significantly on the baseline and Gradient Blending remains clearly best; no MFC-J setting passes the selection rule on CREMA-D, and no MFC-OG setting passes it on the synthetic benchmark, where its best setting loses 1.9 accuracy points, as OGM-GE does. Neither variant is therefore uniformly better than MFC-A. We read these results as evidence that the OGR signal is useful for deciding *when* to slow a dominant modality: gating OGM-GE by OGR retained all of its benefit on AVE while reducing the imbalance further. Finally, because Gradient Blending's advantage on CREMA-D comes from allocations that MFC-A's lower bound of 0.2 cannot reach, we also re-ran all three controllers with the bounds widened to $[0, 2]$ and $\gamma \in \{1, 3, 5\}$ (480 further runs, same rule, all on one machine). With the zero lower bound, MFC-A (γ=5, chosen by the rule on every dataset) is never significantly worse than the baseline on any measured quantity (accuracy, unimodal accuracies, OGR gap, feature noise, blur, occlusion, low light, JPEG compression and missing video) on any of the four datasets, and it is significantly better on at least one of them on each dataset: the OGR gap falls by 84% on AVE (p=0.01) and by 58% on the synthetic benchmark ($p < 0.001$), and robustness improves on both CREMA-D settings ($p < 0.03$). It remains behind Gradient Blending on CREMA-D (accuracy −1.9 points, p=0.04; robustness −3.0, p=0.002), so widening the bounds narrows but does not close that gap.

Component ablation

Table 8 isolates each component of MFC-A. "Static weights" fixes λ at MFC-A's average trajectory value for the whole

Table 8. Component ablation (test set, 10 seeds, mean±std), plain law γ=1. *: paired t-test $p < 0.05$ against full MFC-A (γ=1).

	CREMA-D audio–video			AVE			Synthetic		
Variant	**Acc**	**OGR gap↓**	**Rob@1.0**	**Acc**	**OGR gap↓**	**Rob@1.0**	**Acc**	**OGR gap↓**	**Rob@1.0**
Baseline (no control)	49.7±5.8	3.73±3.60	43.4±3.3	79.9±1.8	25.87±22.28	74.9±1.2	84.1±1.3	6.03±1.39	48.9±2.1
Static weights ($\bar{\lambda}$ of MFC-A)	49.6±5.1	2.36±1.78	44.6±3.2	81.0±1.3	7.89±6.91	76.4±1.6	84.2±1.6	4.43±1.13	49.5±2.6
Raw gap signal instead of OGR	48.9±5.7	3.63±2.70	43.1±3.9	79.5±1.7	23.51±19.32	73.8±1.4	84.4±1.6	5.82±1.15	48.7±2.2
Throttle rule only ($\lambda \leq 1$)	49.7±6.0	3.36±2.12	43.4±3.0	80.2±1.2	12.66±8.66	75.2±1.1	84.2±1.4	5.32±1.12	49.3±2.4
Amplify rule only ($\lambda \geq 1$)	49.2±5.4	4.30±3.49	43.3±3.6	79.4±1.7	26.18±21.67	74.0±1.4	83.6±1.7	5.48±1.72	49.0±2.5
No warm-up	48.9±5.7	3.28±2.35	43.4±3.3	79.9±1.5	14.11±9.07	74.7±1.3	84.6±1.3	4.51±0.90	49.9±2.4
No EMA	50.1±6.1	2.56±1.55	43.9±3.2	80.1±1.1	12.10±7.90	75.0±1.4	84.2±1.6	4.80±0.97	49.5±2.2
No window (W=1)	49.6±5.5	3.75±2.80	43.6±3.3	80.3±1.4	10.54±5.89	74.8±1.2	84.5±1.3	5.09±1.32	49.4±2.1
Running train loss (no extra pass)	49.3±5.5	3.13±2.26	43.7±3.0	79.9±2.0	17.75±11.37	74.4±1.6	84.0±1.5	5.69±1.45	49.3±2.7
MFC-A (full)	49.3±5.4	2.98±2.38	43.8±3.3	80.2±1.6	14.47±8.48	74.8±1.8	84.5±1.8	4.75±0.98	49.4±2.1

run, which tests whether the *dynamics* matter or only the final allocation. "Raw gap signal" replaces $\widetilde{\mathrm{OGR}}_m$ in Eq. (6) by $1+\max(\tilde{G}_m, 0)$, which keeps everything else unchanged and removes only the scale normalisation. "Throttle only" and "Amplify only" restrict the target to $\pi_m \leq 1$ and $\pi_m \geq 1$, respectively.

0.1 ~~Robustness Analysis~~

~~A model which really is learning each of the two modalities should gracefully degrade as one of them fails. In order to test this~~ The ablation uses the plain law (γ=1) so that each component is isolated. Four observations stand out. (i) *OGR vs. raw gap.* Replacing OGR with the raw gap weakens balancing on all three datasets with unequal loss scales (AVE 23.5 vs. 14.5, ~~we added more~~ p=0.05; CREMA-D 3.63 vs. 2.98; synthetic 5.82 vs. 4.75, p=0.04). On the spectrogram control, where the two views have similar loss scales, the difference is small and not significant (1.50 vs. 1.35). This is what Proposition 1 predicts: normalisation matters when the loss scales of the modalities differ. (ii) *Throttle vs. amplify.* Throttling alone retains most of the effect (AVE gap 12.7 vs. 14.5 for the full law, synthetic 5.32 vs. 4.75, neither difference significant), whereas amplifying alone is weaker and on AVE and CREMA-D does not reduce the gap at all (26.2 and ~~more Gaussian noise ($\sigma \in \{0, 0.5, 1.0, 2.0, 3.0\}$)to the visual input at evaluation time, which simulated the degradation of sensors in the real world, e.g. a foggy camera, motion blur, or partial occlusion. The audio input was kept clean. Table ?? and Figure ?? present the results.~~ 4.30, versus 25.9 and 3.73 for the baseline). The active ingredient is therefore the reduction of the overfitting modality's auxiliary weight. (iii) *Dynamic vs. static.* Fixing λ at MFC-A's average allocation from the start gives similar or better balance (AVE 7.9, CREMA-D 2.36, synthetic 4.43) and on AVE slightly better robustness (p=0.007), with the same accuracy. The value of the closed loop is that it *finds* this allocation within a single run, whereas a static schedule has to be known in advance or estimated from extra runs, as in Gradient Blending. (iv) *Smoothing.* Removing warm-up, EMA or the window changes no metric significantly, and the running-loss variant performs comparably on audio–video at a fraction of the monitoring cost (on the synthetic data its weak-head accuracy is 0.8 points lower, p=0.04).

Sensitivity to hyper-parameters

Table 9 varies one hyper-parameter at a time around the default (W=5, β=0.7, T_w=3, [0.2, 1.8]) on all four datasets, reporting the tune-split accuracy that would be used for selection together with test accuracy and OGR gap. For the smoothing and timing hyper-parameters (W, β, T_w, clipping), test accuracy stays within 0.7 points of the default on every dataset; the only significant change is a longer warm-up on the synthetic benchmark (−0.7 points, p=0.01). The OGR gap varies more (for example, a longer warm-up lowers it on audio–video, 2.05 vs. 2.98, p=0.17), but without a consistent pattern across datasets. The control strength γ has the largest effect: on the synthetic benchmark the gap falls monotonically from 4.75 (γ=1) through 4.14 to 3.74 (γ=3) at constant accuracy. Under the plain law, λ never leaves [0.2, 1.8], so the clipping range acts only as a safety bound (practically identical results for [0.1, 5.0]); with $\gamma \geq 2$ the lower bound becomes active on the synthetic and audio–video data. The smoothing defaults were not fine-tuned, and the same values are used on every dataset.

~~The most important comparison here is~~

Effect of encoder capacity

Table 10 widens the first-stream encoder of the ~~**Baseline vs. MFC at $\sigma = 1.0$: the Baseline accuracy of 83.3% declines to 48.2% (a decline of 35**~~synthetic model from 128 to 1024 hidden units (plain law, γ=1). A wider dominant encoder memorises faster: the baseline's OGR gap grows from 6.0 to 108.6. MFC-A's relative advantage grows accordingly: it reduces the gap by 21% at 128 units (p=0.01), ~~whereas the MFC declines to 50.5% (a decline of only 2.3 points). This loophole is present as the throttling of vision gradients by the MFC caused the audio encoder to become a self-developing discriminative feature instead of riding on the free vision. At the point that vision is no longer reliable, these audio features become a life-line to the model.~~

Table 9. Sensitivity of MFC-A (10 seeds, means; standard deviations are in the released logs). Tune: accuracy on $\mathscr{D}_{\text{tune}}$ (used for selection). Test: accuracy on $\mathscr{D}_{\text{te}}$. Gap: test OGR gap.

	CREMA-D audio–video			AVE			Synthetic			Spectrogram views		
Setting	Tune	Test	Gap	Tune	Test	Gap	Tune	Test	Gap	Tune	Test	Gap
γ=1 (default law)	51.4	49.3	2.98	84.2	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35
γ=2	51.8	48.8	2.90	84.4	80.4	11.16	86.0	84.7	4.14	52.2	48.6	1.29
γ=3	51.2	50.1	2.16	84.2	80.2	9.50	85.7	84.4	3.74	52.3	49.1	1.12
W=3	51.6	49.9	2.85	84.2	80.3	12.12	85.9	83.9	4.89	52.3	48.8	1.48
W=5 (default)	51.4	49.3	2.98	84.2	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35
W=10	51.4	49.5	3.38	84.3	80.0	17.73	86.0	84.2	5.18	52.4	48.6	1.48
EMA 0.5	51.6	49.5	3.48	84.2	80.3	11.99	86.2	84.6	4.94	52.4	48.9	1.41
EMA 0.7 (default)	51.4	49.3	2.98	84.2	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35
EMA 0.9	52.0	49.5	3.31	84.0	79.9	19.58	85.9	84.2	5.77	52.5	48.7	1.35
Warm-up 0	51.6	48.9	3.28	84.2	79.9	14.11	86.0	84.6	4.51	52.2	49.4	1.32
Warm-up 3 (default)	51.4	49.3	2.98	84.2	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35
Warm-up 5	51.3	49.8	2.05	84.3	80.2	15.09	85.7	83.8	4.43	52.2	49.1	1.22
Clip [0.5,1.5]	51.5	49.4	2.96	84.1	80.1	15.29	85.9	84.5	4.90	52.0	48.8	1.35
Clip [0.2,1.8] (default)	51.4	49.3	2.98	84.2	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35
Clip [0.1,5.0]	51.4	49.3	2.98	84.1	80.2	14.47	86.0	84.5	4.75	52.0	48.8	1.35

Table 10. Capacity study (synthetic, 10 seeds). Width of the first-stream hidden layer. Δ: MFC-A minus baseline (paired p-value in parentheses).

Width	Base Acc	MFC-A Acc	ΔAcc (p)	Base gap	MFC-A gap	ΔRob@1 (p)
128	84.1±1.3	84.5±1.8	+0.43 (0.13)	6.03±1.39	4.75±0.98	+0.54 (0.19)
256	85.1±0.9	85.4±0.9	+0.26 (0.46)	20.62±7.95	12.86±3.93	+1.49 (0.00)
512	84.8±1.6	85.2±1.2	+0.38 (0.29)	54.58±25.06	26.73±6.58	+0.58 (0.09)
1024	83.2±1.6	83.7±1.5	+0.46 (0.16)	108.57±57.50	43.52±13.12	+0.56 (0.06)

~~At extremely high noise ($\sigma \geq 2.0$ and above)~~ by 38% at 256 (p=0.01), by 51% at 512 (p=0.003) and by 60% at 1024 units (108.6 to 43.5, p=0.003). Robustness at σ=1 improves by 0.5–1.5 points, significantly only at 256 units (+1.5, p=0.001). Accuracy differences remain within ±0.5 points and are not significant at any width. The first submission reported a +3.1-point accuracy gain at 1024 units from a single run; with ten seeds this gain is +0.46 points (p=0.16), and we withdraw the earlier claim.

Robustness to visual degradation

Figure 10 shows the pixel-level degradations used in this section on six AVE test clips. Figure 11 shows accuracy as the first stream is increasingly corrupted. On the synthetic benchmark, differences between methods at σ=1 are within about one point, and MFC-A's gain over the baseline (+0.7) is not significant (p=0.07). On AVE, MFC-A improves robustness to feature noise, blur and low light significantly over the baseline, but OGM-GE improves it much more. On audio–video CREMA-D only Gradient Blending improves robustness to feature noise (+3.9 points at σ=1). On CREMA-D the ~~various approaches tend to approach the same (low) accuracy, since it is difficult even a well-trained audio-only model to deal with the intrinsic challenge of the task at such a noise level.This~~ pixel-level degradations are more damaging than removing the video altogether: blur and occlusion reduce every method to 23–28%, whereas replacing the video features by their mean ("No video") leaves 44%. On vision-dominant AVE the opposite holds: removing the video is the most damaging condition (27–36%), because the audio stream alone is weak. Corrupted frames produce out-of-distribution features that actively mislead the fusion head, and no loss-weighting method, MFC-A included, protects against this. Handling such inputs requires detecting or gating the corrupted modality, or training with adverse-condition data[48], which is complementary to balancing. Table 11 grades the three pixel-level degradations on AVE at three severities. MFC-A is ~~supposed and does not invalidate the main finding at practicable noise levels.~~

~~The interesting trend observed in Gradient Blending is that it drops the most on clean data, but slightly picks itself up at $\sigma = 1.0$ compared to the Baseline. The reason behind this is that its heavier weighting (even when inaccurately estimated offline) of audio gives audio a greater training signal than the Baseline. Nevertheless, the increase is not regular and is at the expense of clean data accuracy~~1–2 points above the baseline at every severity (significant for blur s3 and low light s1–s2) but below OGM-GE everywhere, with the gap widening with severity (blur s3: −9.7 points, $p < 10^{-4}$), and Gradient Blending is also better at most severities. On CREMA-D (tables released with the code) no method differs significantly from MFC-A at the highest severity. JPEG compression (Table 12) shows the same pattern: MFC-A is not significantly more robust than the

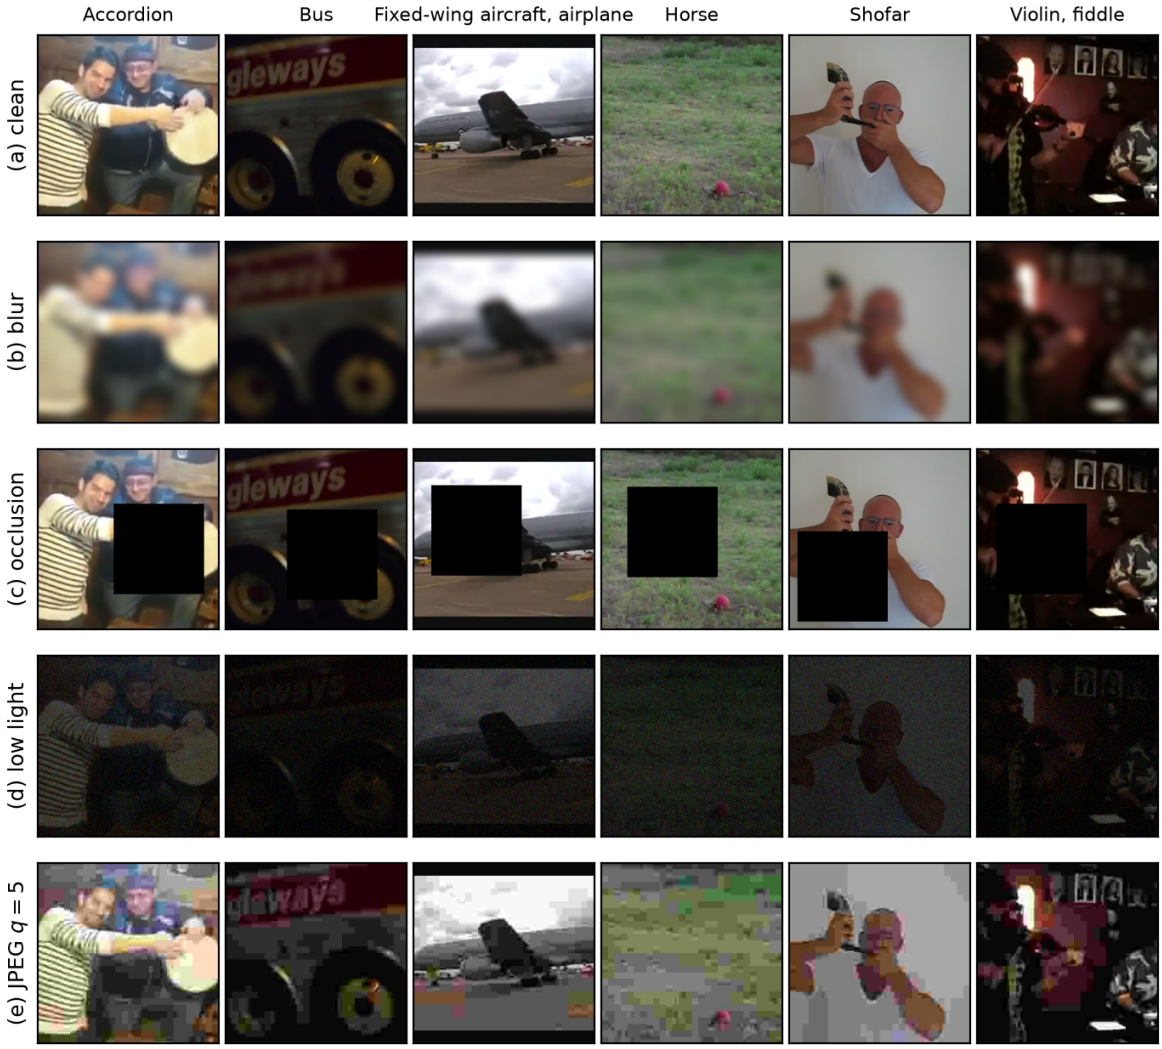


Figure 10. Pixel-level degradations of the video frames on six AVE test clips (middle frame; column titles are the classes). (a) Clean; (b) Gaussian blur, σ=6, kernel 21; (c) 112×112 black occluder at the clip's fixed random position; (d) low light, brightness ×0.25 plus Gaussian noise (std 0.05); (e) JPEG compression at quality 5. Rows (b)–(d) are the settings of the main tables and the strongest severities of Table 11; (e) is the strongest setting of Table 12. Degradations are applied to all eight frames before ResNet-18 encoding.

baseline at any quality level except a +0.9-point gain at quality 30 on AVE (p=0.049), whereas OGM-GE gains +3.7, +5.4 and +11.6 points over the baseline on AVE at qualities 30, 15 and 5 (all $p < 0.001$) and Gradient Blending is the most robust method on CREMA-D at qualities 30 and 15. We therefore do not claim a robustness advantage for MFC-A over the strongest baselines. At $\sigma \geq 2$ all methods converge towards the accuracy that the second stream supports on its own, as expected when the first stream carries almost no information.

0.1 ~~Real-World Validation: CREMA-D Corpus~~

~~In order to test MFC on real multimodal data beyond synthetic tests, we tested MFC on~~

Computational cost

Table 13 breaks the cost of each method into controller arithmetic, monitoring passes and method-specific work (probe training for Gradient Blending, per-batch gradient processing for OGM-GE and MMPareto). Times are single-thread CPU measurements averaged over ten runs (all on one 24-core workstation, with up to twenty runs in parallel, so absolute times include contention and are best compared within a dataset); FLOPs are computed analytically from the layer sizes. We also measured memory (median of five fresh single-thread runs per method and dataset, with the allocator threshold fixed; per-method figures are released with the code). MFC-A's extra state is 1.27 KB (its history buffer and weights), 0.06% of

Table 11. Robustness to graded pixel-level degradations on AVE (test accuracy, 10 seeds, mean±std). Severities s1/s2/s3: blur σ = 2/4/6 (kernel 21); occluder 56/84/112 px; low light = brightness ×0.5/0.35/0.25 with noise std 0.02/0.035/0.05. *: paired t-test $p < 0.05$ against the selected MFC-A. Bold: best mean.

	Blur			Occlusion			Low light		
Method	s1	s2	s3	s1	s2	s3	s1	s2	s3
Baseline	71.2±1.8	53.1±3.0	39.4±4.8*	76.4±1.9	72.8±1.9	65.6±1.7	74.5±1.2*	65.4±2.1*	50.9±2.1
Gradient Blending	74.0±2.3	56.7±4.3*	43.5±6.6	77.7±1.5	75.3±1.2*	68.2±2.5*	76.8±1.5*	68.8±1.7*	57.0±3.0*
Uncertainty weighting	68.1±1.6*	46.6±4.0*	32.3±4.5*	73.8±1.2*	70.2±1.6*	62.2±2.8*	72.6±1.9*	62.8±2.3*	49.2±2.2*
MMPareto	70.7±1.8*	50.8±3.7*	37.7±5.4*	75.6±1.6*	72.3±1.5	64.7±1.9*	74.7±1.2*	65.6±2.4*	51.1±2.8
OGM-GE (α=0.8)	**76.2±0.7***	**61.8±3.0***	**51.2±4.9***	**79.4±1.3***	**77.1±1.0***	**71.6±1.9***	**78.5±1.2***	**71.9±1.6***	**61.3±2.2***
MFC-T (threshold)	72.0±1.9	53.3±2.7	39.8±4.1	76.5±0.8	73.4±1.0	65.9±1.5	75.1±1.3	66.3±1.4*	51.4±2.2
MFC-A (γ=1)	72.1±1.6	52.9±2.6	40.2±4.7	76.5±1.0	73.6±1.5	66.0±1.4	75.1±1.3	66.4±2.0*	51.3±2.8
MFC-A (γ=3, selected)	72.5±1.2	54.1±2.4	41.5±5.0	77.1±1.3	73.4±1.7	66.4±1.4	75.4±1.2	67.2±1.6	52.1±1.8

Table 12. Robustness to JPEG compression of the video frames (test accuracy, 10 seeds, mean±std). Each frame is JPEG-encoded and decoded (Pillow, libjpeg, 4:2:0 chroma subsampling) before encoding by ResNet-18. OGM-GE uses the α selected per dataset (0.3 on CREMA-D, 0.8 on AVE). *: paired t-test $p < 0.05$ against the selected MFC-A. Bold: best mean per column.

	CREMA-D audio–video			AVE		
Method	q=30	q=15	q=5	q=30	q=15	q=5
Baseline	36.3±2.9	34.4±3.5	**23.6±4.4**	76.4±2.0*	70.9±1.2	40.3±2.6
Gradient Blending	**39.6±2.6***	**37.2±4.0***	21.9±2.8	78.2±1.6*	73.9±1.6*	45.1±3.0*
Uncertainty weighting	35.1±3.2	33.5±3.8	22.3±4.9	75.6±1.8	69.3±2.6	39.4±3.5
MMPareto	35.3±3.4	33.1±5.2	21.6±2.7	76.2±1.7	70.6±1.1*	40.6±2.4
OGM-GE	34.6±3.0	31.9±4.3	22.8±5.7	**80.1±1.2***	**76.3±0.9***	**51.9±2.6***
MFC-T (threshold)	34.9±3.3	33.5±3.5	23.0±4.0	76.8±1.4	70.8±1.7	41.3±1.4
MFC-A (γ=1)	35.4±3.2	33.7±4.1	22.7±4.3	77.0±1.7	70.6±1.8*	40.5±2.1
MFC-A (γ=2, selected)	35.2±3.4	33.8±3.3	22.1±3.1	77.3±1.7	71.3±1.6	41.1±1.8

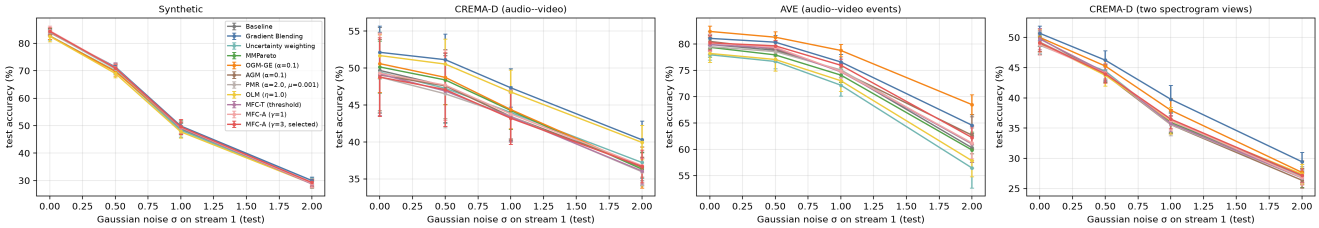


Figure 11. Robustness to Gaussian noise on the first stream (test set, mean ± std over 10 seeds). Panels: synthetic, CREMA-D audio–video, AVE and spectrogram-view control (noise on the first-stream features).

the 2.18 MB occupied by parameters, gradients and momentum buffers of the CREMA-D ~~corpus [9] —7, 442 mel spectrogram images of 91 actors of 6 emotion categories (Anger, Disgust, Fear, Happy, Neutral, Sad)~~model; its traced Python heap grows by at most 0.005 MB, and its peak resident memory lies within the run-to-run spread of the baseline on all four datasets. Of all methods, only MMPareto shows a measurable increase (1.7–2.7 MB, from its transient per-step gradient copies). ~~Each spectrogram is used to create two asymmetric streams of features which are used to create realistic modality imbalance:~~ These measurements cover the fusion networks on frozen features, not the visual backbone. The controller arithmetic of MFC-A is negligible (a few milliseconds and 960 scalar operations per run). The monitoring passes are not negligible in FLOPs, at about 39% of baseline training FLOPs on both models, because they run inference over the full training split every epoch. In wall-clock time, however, they add only 10.1% (synthetic) and 18.4% (audio–video) to the training time, since inference passes are batched and need no backward pass. The running variant removes the training pass and costs 2.0% and 3.6% extra time and 7.9% and 7.5% extra FLOPs, respectively; its balance is comparable on audio–video but weaker on the synthetic data (Table 8). Among the baselines, Gradient Blending's probe adds 16–24% time, MMPareto's per-encoder gradient processing adds 141–168%, and OGM-GE adds 45–46% time but only about 1% FLOPs, because its per-tensor gradient scaling and noise generation are dominated by per-operation overhead rather than arithmetic.

- ~~**Spatial (visual) modality**: PCA features of 64 dimensions of the entire 224 × 224 spectrogram. These represent spatial~~

Table 13. Cost per training run (mean over 10 seeds). Ctrl: controller arithmetic time; Monitor: inference passes consumed by the controller; Method: method-specific work; Extra time: (Ctrl+Monitor+Method)/baseline training time; Ctrl ops: scalar operations; Extra FLOPs: (monitor+method FLOPs)/baseline training FLOPs.

Data	Method	Ctrl (ms)	Monitor (s)	Method (s)	Extra time (%)	Ctrl ops	Extra FLOPs (%)
Synthetic	Baseline	0.1	0.00	0.00	0.0	0	0.0
Synthetic	Gradient Blending	0.1	0.00	0.34	15.8	0	21.6
Synthetic	Uncertainty weighting	0.1	0.00	0.00	0.0	0	0.0
Synthetic	MMPareto	0.2	0.00	3.07	141.4	0	63.2
Synthetic	OGM-GE	0.3	0.00	1.01	46.4	0	1.2
Synthetic	MFC-T	6.9	0.22	0.00	10.3	960	39.5
Synthetic	MFC-A (extra train pass)	6.5	0.21	0.00	10.1	960	39.5
Synthetic	MFC-A (running loss)	5.7	0.04	0.00	2.0	960	7.9
CREMA-D	Baseline	0.1	0.00	0.00	0.0	0	0.0
CREMA-D	Gradient Blending	0.1	0.00	3.50	24.1	0	16.2
CREMA-D	Uncertainty weighting	0.2	0.00	0.00	0.0	0	0.0
CREMA-D	MMPareto	0.1	0.00	24.35	167.9	0	63.2
CREMA-D	OGM-GE	0.1	0.00	6.53	45.1	0	0.6
CREMA-D	MFC-T	14.7	2.88	0.00	19.9	1280	39.1
CREMA-D	MFC-A (extra train pass)	14.4	2.65	0.00	18.4	1280	39.1
CREMA-D	MFC-A (running loss)	12.1	0.51	0.00	3.6	1280	7.5

~~texture throughout the globe and constitute higher-text stream.~~

- ~~**Band-stats (audio proxy) modality**: Hand-made statistics (mean, std, max) 48-dim (per 16 mel bands). Such coarser features are less discriminative by nature, which forms natural dominance of modalities.~~

Discussion

What the evidence supports. Across four datasets, MFC-A does what it is designed to do: it detects the stream whose training loss is decoupling from its held-out loss and transfers auxiliary supervision away from it, whether that stream is the more accurate one (AVE) or not (CREMA-D). On AVE and on the synthetic benchmark it reduces imbalance (by 63% and 38%) without loss of accuracy, on AVE it also improves robustness, and the effect grows with the capacity of the dominant encoder, which is the regime in which gradient starvation is most damaging. On CREMA-D its effects point in the same direction but are not statistically significant, and its effect on clean accuracy is small everywhere. We consider this a realistic characterisation of a bounded scalar loss-weighting method that leaves the joint loss untouched.

~~The~~

When to prefer alternatives. No single method was best everywhere. OGM-GE was the strongest on vision-dominant AVE, where directly scaling down the visual encoder's gradients every mini-batch acts more strongly than reweighting auxiliary losses once per epoch, but on the synthetic benchmark its selected setting cost accuracy. Gradient Blending was the strongest on both CREMA-D ~~outcomes support the main argument. The noiseinjection of~~ settings; there its offline estimate pushed almost all auxiliary weight onto one stream (λ_v=0 on audio–video, 0.14 on the spectrogram views), an extreme allocation that MFC-A's bounded, smoothed law cannot reach. The static-weight ablation suggests that the allocation, rather than its dynamics, drives most of the benefit; MFC-A's advantage is that it finds a direction in one run without a probe, at the price of being conservative. When an extra probe run is affordable, Gradient Blending is a strong choice. The follow-up variants suggest a division of labour: OGR is a good signal for *when* a dominant modality is memorising, and per-batch gradient modulation is a strong mechanism for slowing it; combining the two (MFC-OG) matched the best method on AVE. OGM-GE ~~has very good balance (OGR gap: 5.91) at the cost of the useful gradients of the predominating spatial modality, damaging accuracy by −3.1%. MFC then discovers the Pareto optimum point: matching the Baseline performance (accuracy +0.18%)~~ can enforce balance more aggressively but trades accuracy for it, and its α must be tuned. MFC-A's advantages are that it runs in a single pass, uses the same smoothing hyper-parameters on every dataset, never reduced accuracy significantly at $p < 0.05$ (the largest drop, −0.9 points on audio–video, has p=0.05), and exposes an interpretable signal (OGR$_m(t)$, ~~but narrowing the OGR difference by 38.9% and increasing robustness at σ=1.0 by +2.0% confirming that the throttle-and-amplify mechanism forces the band-stats encoder to develop genuinely independent discriminative features.~~ $\lambda_m(t)$) that can be monitored even when it is not used for control.

Why a ratio. The scale-invariance argument (Proposition 1) is the main reason to prefer OGR over the raw gap, and the signal ablation supports it: the raw-gap controller balances less on the two datasets with unequal loss scales and behaves like

OGR on the spectrogram control, whose two views have similar loss scales. The differences are modest, however, and only the effect on the weak head's accuracy is significant, so we regard the empirical support as consistent with, rather than proof of, the theoretical argument.

1 Discussion

0.1 Complexity Analysis

In Table??, we estimate Proposed approach in comparison to standard baselines in terms of asymptotic complexity. The MFC needs a small history buffer of size H (Window size)of each modality. OGR computation is $O(1)$ per epoch. Gradient Blending on the contrary uses $M + 1$ models(M the number of modalities)

Limitations. (i) MFC-A needs a held-out controller split. We kept it disjoint from both the tuning and the test data, which costs training data; in practice the standard validation set could serve as the controller split if model selection is done on another subset. (ii) Our models operate on fixed features with small MLP encoders; end-to-end training of large backbones, more than two modalities and larger audio–visual corpora (Kinetics-Sounds, VGGSound[37], AudioSet[52]) remain to be tested. Combining MFC-A's generalization signal with per-batch gradient modulation of the kind used by OGM-GE is a natural next step. (iii) Baselines are re-implementations in a shared late-fusion setting, some with documented adaptations (notably OLM without its transformer fusion block), and may not reproduce the absolute numbers of their original papers. (iv) Only the auxiliary unimodal losses are re-weighted, within fixed bounds; extending the controller to the joint term, to completely converge and estimate the best weights offline.

0.1 Qualitative Observations

During the baseline runs, the Audio OGR is held almost at 1.0 with the Vision OGR jumping to 1.5, which implies that the Audio encoder is virtually learning nothing (there are no gradients) and the Vision encoderis learning a lot (gradients are large). per-encoder learning rates or to attention-level gates, and allowing a modality's auxiliary weight to reach zero, is future work. (v) The weights λ_a of the Audio in the MFC runs steadily increase, however, during the first 10 epochs (The "Amplify" rule active) reaching about 3.5, and then levels off. This effectively recreates the audio gradients and the model must utilize the spectrograms to extract the emotion cues instead of using facial expression in the CIFAR like images. pixel-level degradations are synthetic; generative adverse-condition data such as rain and night images[48] would provide a more realistic test. (vi) MFC-J and MFC-OG were designed after the main experiments and evaluated on the same datasets, so their results should be confirmed on further benchmarks. (vii) γ is selected from three values per dataset; although the rule uses no test data, a larger candidate set would increase the risk of overfitting the tuning split.

0.1 Limitations and Future Work

Although promising, Proposed approach is based on the assumption that the separate validation set is a good indicator ofthe generalization ability on the target distribution. The OGR signal can be misleading in case the validation set is biased. Besides, in the case of foundational models with billions of parameters the "Generalization Gap" could not be observed until very late in training , necessitating a special warm-up strategy.

Future research will be concerned with:

- **High-Resolution Regimes**: ImageNet + AudioSet[52]validation of MFC.
- **Transformer Integration**: Using MFC on attention head dropout rates in place of global loss weights.
- **Real-Time Adaptation**: MFC can be applied in online learning contexts where the sets of data to be validated are not fixed .

1 Conclusion

In this paper, we presented a lightweight solution to the Gradient Starvation problem, the Modality Fairness Controller (MFC) , a smart, lightweight solution. The MFC also avoids one modality bullying the rest in the process of training by closely monitoring the

Conclusion

We introduced the Overfitting-to-Generalization Ratio (OGR). It achieves this without pre-training or random noise injection which is costly.

~~This method is proven by Proposed experiments with the synthetic benchmark and real world CREMA-D corpus. MFC at σ=1.0 - modality imbalance gap is reduced by 38.4% and visual noise robustness is enhanced by +4.7% at σ=0.5 and +2.3% at σ=1.0~~ as a scale-invariant per-modality diagnostic and MFC-A as a threshold-free, closed-loop controller that uses it to redistribute auxiliary loss weight during a single training run. Under a protocol with ten paired seeds, disjoint controller, tuning and test data, and eight baselines, MFC-A maintained accuracy on every dataset. On the real AVE benchmark it reduced the OGR-measured imbalance by 63% and significantly improved robustness to noise, blur and low light; on the synthetic benchmark ~~. On actual~~ it reduced the imbalance by 38%, and by up to 60% for high-capacity dominant encoders. On CREMA-D ~~data, MFC is more accurate by +3.1% percent over~~ it identified the overfitting modality correctly, but its improvements were not significant. OGM-GE ~~yet the reduction of the OGR gap is 38.9% with no noise injection. More to the point, the system is predictable: it works as a thermostat, which cools the overheated modalities and heats the cold ones. Scaling analysis shows the benefit grows with model capacity, from +0.7% at 128-dim to +3.1% at 1024-dim, making MFC-A most valuable in large-model regimes~~(on AVE) and Gradient Blending (on CREMA-D) achieved larger gains at the cost of a tuned hyper-parameter or an extra probe run. Guided by the gradient evidence, an OGR-gated version of gradient modulation (MFC-OG) matched OGM-GE on AVE with a lower imbalance gap, indicating that OGR is most useful as a signal for when to intervene. Because the controller arithmetic is negligible, the cost of the method lies in its monitoring passes, which a running-loss variant largely removes. We release code, per-epoch logs and data-preparation scripts so that every number in this paper can be regenerated.

Declarations

~~Clinical Trial: Not applicable. Ethics Approval: Not applicable. Consent to Participate: Not applicable. Consent to Publish: Not applicable. Funding: The~~ **Clinical trial, ethics approval, consent to participate and consent to publish:** not applicable; the study uses only publicly released datasets and collected no new data from human participants. **Funding:** the authors received no financial support from any organization for the submitted work. ~~Conflict of Interest: The~~ **Conflict of interest:** the authors declare that they have no conflict of interest relevant to the content of this article. ~~Data Availability: The~~ **Data availability:** the datasets used in this study are publicly available and ~~properly cited within~~ cited in the manuscript. ~~The experimental analysis was conducted using the CIFAR dataset introduced by Krizhevsky and Hinton for tiny image classification tasks, available at: https://www.cs.toronto.edu/ kriz/cifar.html. Additionally, the~~ CREMA-D (Crowd-sourced Emotional Multimodal Actors Dataset)~~used for emotion recognition analysis is publicly accessible at : https://github. com/CheyneyComputerScience/CREMA-D and https://www. kaggle.com/datasets/ejlok1/cremad. Author Contributions:~~ [9] is available at `https://github.com/CheyneyComputerScience/CREMA-D`, and the AVE (Audio-Visual Event) dataset[16] at `https://github.com/YapengTian/AVE-ECCV18`. **Code availability:** the complete code (feature extraction, benchmark and aggregation), the generated synthetic data, the extracted features, the exact split definitions and the per-epoch logs of every run reported in this paper are publicly available at `https://github.com/ailakshya/ogr-mfc-a-revision`. **Author contributions:** Lakshya conducted the experiments and implemented the proposed methodology. A.~~K.~~ K. Bairwa contributed to the conceptualization, methodological design and validation of the results. V. Tiwari supervised the research and contributed to manuscript writing, critical review and final approval.

References

1. Zhang, Y. *et al.* Meta-Transformer: A unified framework for multimodal learning. *arXiv preprint arXiv:2307.10802* (2023).
2. Girdhar, R. *et al.* ImageBind: One embedding space to bind them all. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 15180–15190, DOI: 10.1109/cvpr52729.2023.01457 (2023).
3. Radford, A. *et al.* Learning transferable visual models from natural language supervision. In *International conference on machine learning*, 8748–8763 (PMLR, 2021).
4. Alayrac, J.-B. *et al.* Flamingo: a visual language model for few-shot learning. *Adv. neural information processing systems* **35**, 23716–23736 (2022).
5. Pezeshki, M. *et al.* Gradient starvation: A learning proclivity in neural networks. *Adv. Neural Inf. Process. Syst.* **34**, 1256–1272 (2021).
6. Xu, S., Cui, M., Huang, C., Wang, H. & Hu, D. Balancebenchmark: A survey for multimodal imbalance learning. *arXiv preprint arXiv:2502.10816* (2025).
7. Peng, X., Wei, Y., Deng, A., Wang, D. & Hu, D. Balanced multimodal learning via on-the-fly gradient modulation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 8228–8237, DOI: 10.1109/cvpr52688.2022.00806 (2022).

8. Krizhevsky, A., Hinton, G. *et al.* Learning multiple layers of features from tiny images. *Tech. Rep., Univ. Tor.* (2009).

9. Cao, H. *et al.* CREMA-D: Crowd-sourced emotional multimodal actors dataset. *IEEE transactions on affective computing* **5**, 377–390, DOI: 10.1109/taffc.2014.2336244 (2014).

10. Huang, Y., Lin, J., Zhou, C., Yang, H. & Huang, L. Modality competition: What makes joint training of multi-modal network fail in deep learning? (provably). In *International conference on machine learning*, 9226–9259 (PMLR, 2022).

11. Wang, W., Tran, D. & Feiszli, M. What makes training multi-modal classification networks hard? In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 12692–12702, DOI: 10.1109/cvpr42600.2020.01271 (2020).

12. Kendall, A., Gal, Y. & Cipolla, R. Multi-task learning using uncertainty to weigh losses for scene geometry and semantics. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 7482–7491, DOI: 10.1109/cvpr.2018.00781 (2018).

13. Li, H. *et al.* Boosting multi-modal model performance with adaptive gradient modulation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 22157–22167, DOI: 10.1109/iccv51070.2023.02030 (2023).

14. Yu, T. *et al.* Gradient surgery for multi-task learning. *Adv. neural information processing systems* **33**, 5824–5836 (2020).

15. Wei, Y. & Hu, D. MMPareto: Boosting multimodal learning with innocent unimodal assistance. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, vol. 235 of *Proceedings of Machine Learning Research* (2024).

16. Tian, Y., Shi, J., Li, B., Duan, Z. & Xu, C. Audio-visual event localization in unconstrained videos. In *Computer Vision – ECCV 2018*, Lecture Notes in Computer Science, 252–268, DOI: 10.1007/978-3-030-01216-8_16 (Springer, 2018).

17. Lin, T.-Y., Goyal, P., Girshick, R., He, K. & Dollár, P. Focal loss for dense object detection. In *Proceedings of the IEEE international conference on computer vision*, 2999–3007, DOI: 10.1109/iccv.2017.324 (2017).

18. Liu, S., Johns, E. & Davison, A. J. End-to-end multi-task learning with attention. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 1871–1880, DOI: 10.1109/cvpr.2019.00197 (2019).

19. Chen, Z., Badrinarayanan, V., Lee, C.-Y. & Rabinovich, A. GradNorm: Gradient normalization for adaptive loss balancing in deep multitask networks. In *International conference on machine learning*, 794–803 (PMLR, 2018).

20. Kontras, K., Chatzichristos, C., Blaschko, M. & De Vos, M. Improving multimodal learning with multi-loss gradient modulation. *arXiv preprint arXiv:2405.07930* (2024).

21. Zong, D., Ding, C., Li, B., Li, J. & Zheng, K. Balancing multimodal learning via online logit modulation. In *IJCAI*, 5753–5761, DOI: 10.24963/ijcai.2024/636 (2024).

22. Wang, J., Mou, L., Ma, L., Huang, T. & Gao, W. AMSA: Adaptive multimodal learning for sentiment analysis. *ACM Transactions on Multimed. Comput. Commun. Appl.* **19**, 1–21, DOI: 10.1145/3572915 (2023).

23. Sener, O. & Koltun, V. Multi-task learning as multi-objective optimization. In *Advances in Neural Information Processing Systems*, vol. 31, 527–538 (2018).

24. Liu, B., Liu, X., Jin, X., Stone, P. & Liu, Q. Conflict-averse gradient descent for multi-task learning. In *Advances in Neural Information Processing Systems*, vol. 34, 18878–18890 (2021).

25. Navon, A. *et al.* Multi-task learning as a bargaining game. In *Proceedings of the 39th International Conference on Machine Learning*, vol. 162 of *Proceedings of Machine Learning Research*, 16428–16446 (PMLR, 2022).

26. Désidéri, J.-A. Multiple-gradient descent algorithm (MGDA) for multiobjective optimization. *Comptes Rendus Math.* **350**, 313–318, DOI: 10.1016/j.crma.2012.03.014 (2012).

27. Wu, N., Jastrzebski, S., Cho, K. & Geras, K. J. Characterizing and overcoming the greedy nature of learning in multi-modal deep neural networks. In *Proceedings of the 39th International Conference on Machine Learning*, vol. 162 of *Proceedings of Machine Learning Research*, 24043–24055 (PMLR, 2022).

28. Du, C. *et al.* On uni-modal feature learning in supervised multi-modal learning. In *Proceedings of the 40th International Conference on Machine Learning*, vol. 202 of *Proceedings of Machine Learning Research*, 8632–8656 (PMLR, 2023).

29. Wei, Y., Li, S., Feng, R. & Hu, D. Diagnosing and re-learning for balanced multimodal learning. In *Computer Vision – ECCV 2024*, Lecture Notes in Computer Science, 71–86, DOI: 10.1007/978-3-031-73039-9_5 (Springer, 2024).

30. Zhang, X., Yoon, J., Bansal, M. & Yao, H. Multimodal representation learning by alternating unimodal adaptation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 27446–27456, DOI: 10.1109/cvpr52733.2024.02592 (2024).

31. Guo, Z., Jin, T., Chen, J. & Zhao, Z. Classifier-guided gradient modulation for enhanced multimodal learning. In *Advances in Neural Information Processing Systems*, vol. 37, 133328–133344, DOI: 10.52202/079017-4238 (2024).

32. Fan, Y., Xu, W., Wang, H., Wang, J. & Guo, S. PMR: Prototypical modal rebalance for multimodal learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 20029–20038, DOI: 10.1109/cvpr52729.2023.01918 (2023).

33. Liu, C. *et al.* Modality-balancing preference optimization of large multimodal models by adversarial negative mining. *arXiv preprint arXiv:2506.08022* (2025).

34. Prechelt, L. Early stopping – but when? In *Neural Networks: Tricks of the Trade*, vol. 1524 of *Lecture Notes in Computer Science*, 55–69, DOI: 10.1007/3-540-49430-8_3 (Springer, 1998).

35. Arandjelovic, R. & Zisserman, A. Look, listen and learn. In *Proceedings of the IEEE international conference on computer vision*, 609–617, DOI: 10.1109/iccv.2017.73 (2017).

36. Nagrani, A. *et al.* Attention bottlenecks for multimodal fusion. *Adv. neural information processing systems* **34**, 14200–14213 (2021).

37. Chen, H., Xie, W., Vedaldi, A. & Zisserman, A. VGGSound: A large-scale audio-visual dataset. In *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 721–725, DOI: 10.1109/icassp40776.2020.9053174 (IEEE, 2020).

38. Praveen, R. G. & Alam, J. Recursive joint cross-modal attention for multimodal fusion in dimensional emotion recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 4803–4813, DOI: 10.1109/cvprw63382.2024.00483 (2024).

39. Barra, P., Mnasri, Z. & Greco, D. Multimodal emotion recognition from voice and video signals. In *IEEE EUROCON 2023 – 20th International Conference on Smart Technologies*, 169–174, DOI: 10.1109/EUROCON56442.2023.10198928 (IEEE, 2023).

40. Sanguineti, V. *et al.* Leveraging acoustic images for effective self-supervised audio representation learning. In *Computer Vision – ECCV 2020*, Lecture Notes in Computer Science, 119–135, DOI: 10.1007/978-3-030-58542-6_8 (Springer, 2020).

41. Greco, D. A feasibility study for a hand-held acoustic imaging camera. *Appl. Sci.* **13**, 11110, DOI: 10.3390/app131911110 (2023).

42. Lan, G., Wu, Y., Hu, F. & Hao, Q. Vision-based human pose estimation via deep learning: A survey. *IEEE Transactions on Human-Machine Syst.* **53**, 253–268, DOI: 10.1109/THMS.2022.3219242 (2023).

43. Mishra, S. R. & Mohapatra, H. Deepfake image detection using different combinations of vision transformers and CNNs. In Virdee, B. S., Ali, T., Anguera, J. & Tripathy, S. L. (eds.) *Connecting Intelligence: Trends in Computation and Data Communication*, chap. 8, 44–50, DOI: 10.1201/9781003773504-8 (CRC Press, Boca Raton, FL, 2026).

44. He, K., Zhang, X., Ren, S. & Sun, J. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 770–778, DOI: 10.1109/cvpr.2016.90 (2016).

45. Lan, G., Tomczak, J. M., Roijers, D. M. & Eiben, A. E. Time efficiency in optimization with a Bayesian-evolutionary algorithm. *Swarm Evol. Comput.* **69**, 100970, DOI: 10.1016/j.swevo.2021.100970 (2022).

46. Lan, G., Gao, Z., Tong, L. & Liu, T. Class binarization to neuroevolution for multiclass classification. *Neural Comput. Appl.* **34**, 19845–19862, DOI: 10.1007/s00521-022-07525-6 (2022).

47. Hendrycks, D. & Dietterich, T. Benchmarking neural network robustness to common corruptions and perturbations. *Int. Conf. on Learn. Represent. (ICLR)* (2019).

48. Lan, G., Peng, Y., Hao, Q. & Xu, C. SUSTechGAN: Image generation for object detection in adverse conditions of autonomous driving. *IEEE Transactions on Intell. Veh.* **10**, 4854–4864, DOI: 10.1109/TIV.2024.3504566 (2025).

49. Ma, M., Ren, J., Zhao, L., Testuggine, D. & Peng, X. Are multimodal transformers robust to missing modality? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 18156–18165, DOI: 10.1109/cvpr52688.2022.01764 (2022).

50. Bouthillier, X., Delaunay, P., Bronzi, M. *et al.* Accounting for variance in machine learning benchmarks. *Proc. Mach. Learn. Syst.* **3**, 747–769 (2021).

51. Selvaraju, R. R. *et al.* Grad-CAM: Visual explanations from deep networks via gradient-based localization. In *Proceedings of the IEEE International Conference on Computer Vision*, 618–626, DOI: 10.1109/ICCV.2017.74 (2017).

52. Gemmeke, J. F. *et al.* Audio Set: An ontology and human-labeled dataset for audio events. In *2017 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, 776–780, DOI: 10.1109/icassp.2017.7952261 (IEEE, 2017).