



NSE Clock

by AjAi


Exact market-candle alarms for the NSE trading day. A distinct beep at the open, at trading start, at every 5-minute candle close, and at the close — so your eyes stay on the chart, not the clock.

77 beeps / trading day

5-min candles

Asia/Kolkata (IST)

Runs in background

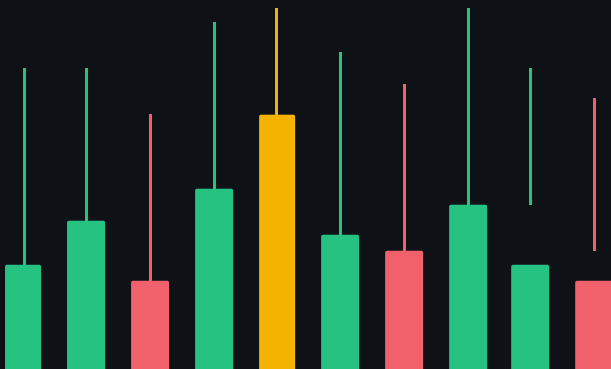

01 Overview

NSE Clock by AjAi is a lightweight Android companion for intraday traders on the National Stock Exchange of India. It sounds a distinct alarm at every key moment of the trading day, runs quietly in the background, survives reboots, and fires **exact** alarms straight through Doze and silent mode.

77

BEEPS / DAY

4

DISTINCT SOUNDS

5_{min}

CANDLE INTERVAL

0

ON HOLIDAYS

02 The trading day

Every event fires exactly on time, in IST. The last candle close coincides with the market close.

TIME (IST)	EVENT	SOUND	COUNT
09:00	● Market open · pre-open alert	Rising 2-tone	1
09:15	● Trading start	Triple chime	1
09:20 – 15:25	● Candle close · every 5 min	Short tick	74
15:30	● Market close	Long low	1

Silent when the market is. Weekends and every official NSE trading holiday produce zero beeps — the app automatically rolls to the next trading day's 09:00.

03 Highlights



Exact, not approximate

Alarm-clock scheduling wakes the device and bypasses battery Doze — beeps land on the second.



Always running

A persistent background service keeps it alive and re-arms after every reboot or app update.



Hear it anywhere

Tones play on the alarm channel, so they sound through silent mode and Do-Not-Disturb.




Live countdown

The ongoing notification ticks down to the next beep — glanceable without opening the app.

04 The Live screen

Current market state, a live countdown to the next beep, and today's full event timeline. The next event auto-centers; scroll for the rest.

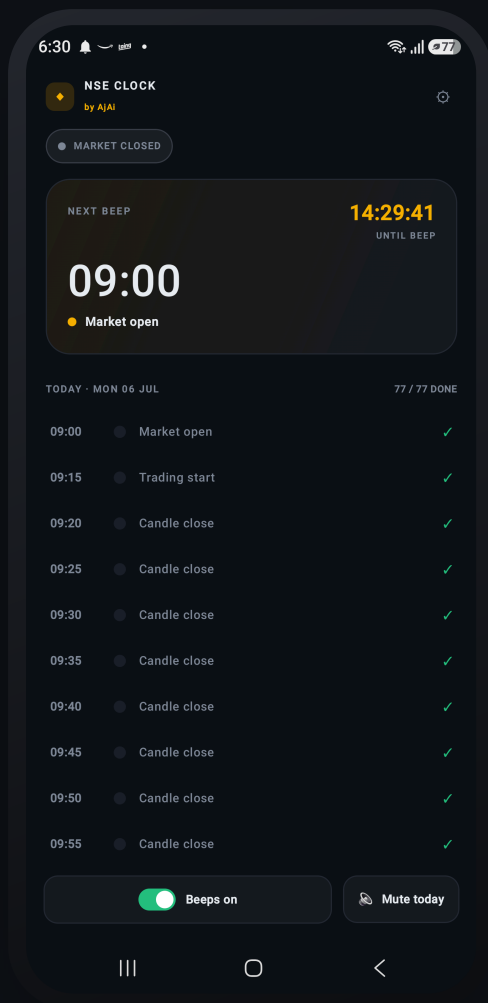

1 Brand & status pill

"NSE CLOCK · by AjAi" with live Market Live / Pre-open / Closed state.

2 Next-beep hero

Upcoming event time, its type, and a large live countdown.

3 Today's timeline

All 77 events, color-coded; past ones checked, next in amber.

4 Beeps toggle

Master on / off for every alarm.


5 Mute today

Skip the rest of today without disabling the app.

6 Settings

Opens the reliability checklist and sound tests.

IN THE NOTIFICATION SHADE

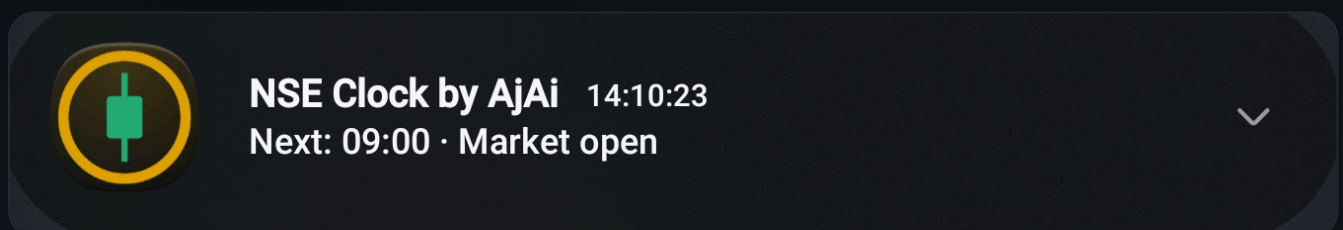


The ongoing notification shows the next event and a **live countdown** (system-driven, zero battery cost) — you never need to open the app to know when the next candle closes.

05 How it works

The engine is built for one thing: firing on time, forever, without draining the battery.

The reschedule-on-fire loop

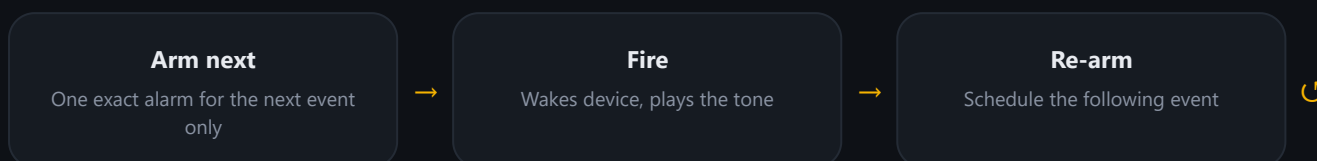

Only a single alarm is ever pending. It uses `setAlarmClock()` — treated like a user alarm, so it is exempt from Doze and fires precisely even with the screen off.

06 Reliability stack


- **Foreground service** — a persistent notification keeps the process alive so re-arming is instant.
- **Boot re-arm** — a receiver restarts everything after a reboot or app update.
- **15-minute heartbeat** — a background worker re-arms the alarm if it was ever lost.
- **Alarm-stream audio** — tones route as alarms, so they play through silent and Do-Not-Disturb.
- **IST everywhere** — all times computed in `Asia/Kolkata`, independent of the phone's timezone.
- **Wake lock on play** — a brief CPU lock guarantees the tone finishes with the screen off.

07 NSE holidays

Bundled	Official NSE 2026 equity-segment holidays (16 dates) — silent on each.
Refresh	nseindia.com/resources/exchange-communication-holidays (yearly)
Special sessions	Muhurat / extended sessions are not treated as holidays (out of scope).

08 Setup & reliability

First launch, open the gear → Setup and clear the checklist. This is what keeps beeps firing for months.

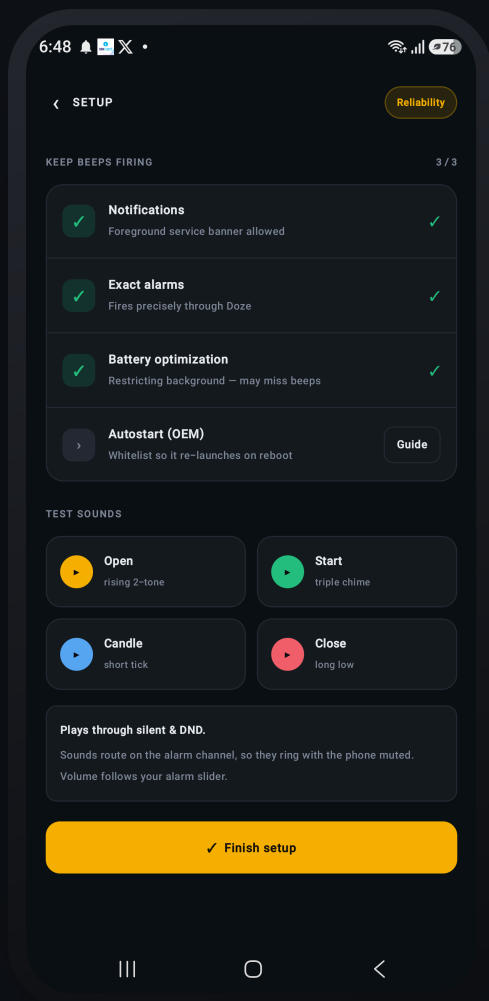

✓ Notifications

Required for the status banner and countdown.

✓ Exact alarms

Lets beeps fire precisely through Doze.

! Battery optimization

Disable for this app — the single most important step for long-term reliability.

! Autostart (OEM)

On Xiaomi / Oppo / Vivo / OnePlus / Samsung, enable "Autostart" manually — no app can set this for you.

OEM battery killers are the one real enemy. Aggressive vendor power managers can stop any background app. Whitelisting autostart + disabling battery optimization is the fix — see dontkillmyapp.com for your brand.

09 Sound identities

EVENT	tone	CHARACTER
● Market open	660 → 990 Hz	Rising two-tone — "get ready".
● Trading start	880 Hz ×3	Triple chime — "go".
● Candle close	1040 Hz	Single short tick — the 5-min heartbeat.
● Market close	392 → 294 Hz	Long low two-step — "done".

All four are generated at runtime — no audio files are shipped. Preview any of them from the Setup screen.

10 Install

Personal sideload. Copy the APK to the phone and tap it.

1. Transfer `NSE-Clock-by-AjAi-v1.0.apk` to the device (also in the phone's **Download** folder).
2. Open **Files** → **Download** and tap the APK.
3. Allow “**Install unknown apps**” for Files when prompted.
4. Tap **Install**, open the app, and complete the Setup checklist.

Build from source (Android Studio / CLI):

```
gradlew assembleDebug
→ app/build/outputs/apk/debug/app-debug.apk
```

11 Troubleshooting

SYMPTOM	FIX
Beeps stop after a while	Disable battery optimization + enable OEM autostart.
No sound in silent mode	Raise the Alarm volume — tones follow the alarm slider.
Nothing at 09:00	Grant the exact-alarm permission in Setup.
Duplicate icon after update	Long-press the ghost tile → Remove, or restart the launcher.

12 At a glance

Platform Android 10+ · native Kotlin · Jetpack Compose
Session 09:15 – 15:30 IST · 5-minute candles
Package `com.nseclock.app`
Version 1.0
Author AjAi



NSE Clock by AjAi

Never miss a candle.