



MODULE 6

MK6-S6MOD-0002

MONTE CARLO

©2002 BALLY GAMING AND SYSTEMS ALL RIGHTS RESERVED

Bally Gaming and Systems

6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and Information:
+1-702-896-7772 outside the U.S.
1-877-GO BALLY (877) 462-2559 in the U.S. and Canada
896-7772 in Las Vegas
FAX +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 6

Table of Contents

Overview **5**
Specifications **5**
Set UP **5**
Software 5
Option Setting 5
Troubleshooting **5**

Monte Carlo Parts and Hardware 6

Monte Carlo Programmable Devices **6**
Monte Carlo Illumination **6**
Wheel Control Unit **6**
Monte Carlo Filigree **7**
Transformer 110V **7**
Transformer 220V **7**
Lamp Sequencer Assembly **7**
Starter/Ballast Assembly **7**
Monte Carlo Top Box Assemblies **8**
Neon Light Assembly **9**
Light Wheel Assembly **9**
Ball and Wheel Assembly **9**
Wheel Graphics **9**
Monte Carlo Top Box Door **11**
Hinge Mounting Bracket **11**
Monte Carlo Marquee Light **12**

Monte Carlo System Panels 13

CTE/WTEP-08600-S655 ..... **13**
MAG/OPTP-08600-S654 ..... **13**

Monte Carlo Wiring 14

Monte Carlo Cables **14**
Transformer, 110V **14**
Power **15**
Wheel/RCU/Light **17**
Wheel Box Power **19**
Cabinet Top **20**
ProSound 21 ..... **21**
Wheel Control **23**

Monte Carlo Circuit Boards 24

Monte Carlo Circuit Boards **24**
9-LED PCB Assembly **24**
Wheel Control Unit **25**

©2004 Bally Gaming and Systems

©2004 Bally Gaming and Systems

Module 6


Monte Carlo

Overview

The Monte Carlo Oval Top is a second-feature bonus promotion added to a ProSlot® 6000 machine with a progressive jackpot. Incorporated into the top is a bonus wheel, activating when the Monte Carlo symbol appears on the payline. The Player is prompted to press the SPIN button to put the ball in motion. The Player receives the bonus amount where the ball stops. The wheel also has a super jackpot position that pays the progressive jackpot.

Besides the bonus wheel and progressive jackpot, the Monte Carlo will also award 10 free games when the symbol appears on the payline. The Player receives 20 credits and is instructed to press the SPIN button to begin the automatic completion of 10 games. Each of the 10 games will be a winner, and the wins will be doubled—including, possibly, the progressive jackpot.

Specifications

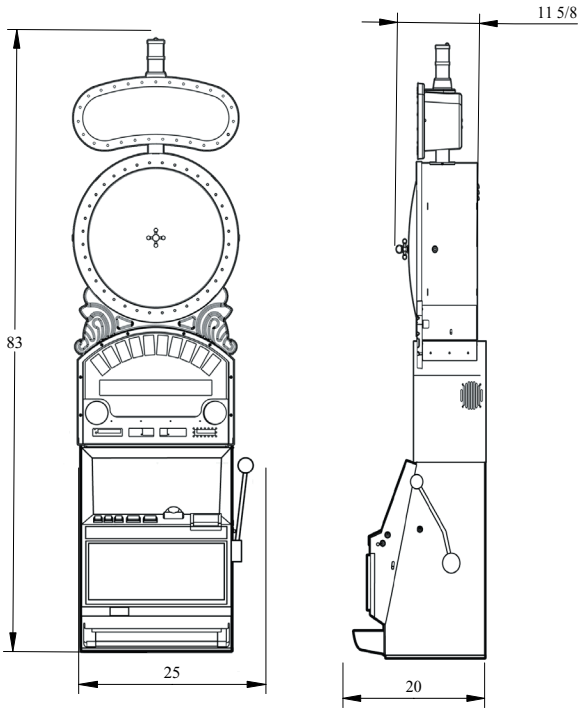

Dimentions and Weight			
A	Height	83"	210.82 cm
B	Width	25"	63.50 cm
C	Depth	20"	50.80 cm
	Weight	265 lbs	120.20 Kg

Set UP

Software

The Monte Carlo requires Main program version S6M100000007-06 or later with Bally Secondary Game (BSG) and Peripheral Device (PRD) protocol enabled by setting switches 4 and 6 of DIP switch package DS1 to OFF (See Module 2 of the Operator's Instruction Manual for more information). A SafeRAM™ Clear procedure is required for the settings to take effect.

Option Setting

The Monte Carlo has a progressive jackpot controlled by a Mikohn ChamII+® progressive controller. The controller requires the following machine Option settings (See Module 7 of the Operator's Instruction Manual for more information).

Troubleshooting

The following table lists exception codes that may appear in the WIN PAID section of the Message Center while all doors are closed:

Monte Carlo Machine Option Settings		
OPTION	SETTING	DESCRIPTION
02	0004	Enables S/MPI operation for serial communication
07	0001	Designates one external Jackpot
78L	0001	Specifies unique machine ID for the ChamII+ controller

91FF

If the wheel malfunctions, the WIN PAID will display 91FF until the feature malfunction is corrected. This exception code will disappear when the problem is corrected.

Table of Monte Carlo Exception Codes	
Code	Description
91FF	Feature Fault
91nC	No Communication
77	Secondary Device Communication Fault

91nC

If serial communication is lost between the Hand-held Unit (HHU) port of the ProSlot® MPU and the wheel, the WIN PAID will show 91nC. The exception code will disappear when communication is restored.

77

If serial communication is lost between the wheel and

©2004 Bally Gaming and Systems

Troubleshooting (cont.)

the ProSlot® MPU during a game, the machine will tilt with “77” showing in WIN PAID. Tilt recovery may be possible.

86

This code results from failure after “77” tilt. Activation of the keyswitch is required to restore operation, otherwise no tilt recovery is possible.

91JP/Pd

This code is the result of keyswitch activation after an “86” code. The game is voided, or the Player has been paid by the Attendant.

Service Notes:

Access through the Top Door requires two keys. The door has locks on opposite sides.

The Top Door is removable. Disconnect the cable and extend out to 45 degrees then lift from hinge.



Monte Carlo Parts and Hardware


Monte Carlo Programmable Devices

Monte Carlo Programmable Devices		
Part #	Description	Where Used
E-00867-0046	(Blank) EPROM, IC, 8 MEG, 1M X 8, 120 NS	AS-003356-0565 Wheel Control Unit Board
G2S0100S1RCU-01	Programmed EPROM	
PS2M0C092801-00	Pro Sound 2 Program	AS-03356-0512 Pro Sound 2 Sound Board

Monte Carlo Illumination


Monte Carlo Illumination	
Part #	Description
E-00120-0269	Socket, Lamp, PCB, T3-1/4
E-00125-0089	Lamp, Incadescent, #159
E-00128-0120	Lamp, #193, T3-1/4, 14V, Wedge Base
E-00411-0008	Flourescent Starter FS2
E-00412-0013	Lamp, Flourescent, F15T8/CW
E-00413-0001	Lamp, Neon

Wheel Control Unit AS-02159-0001

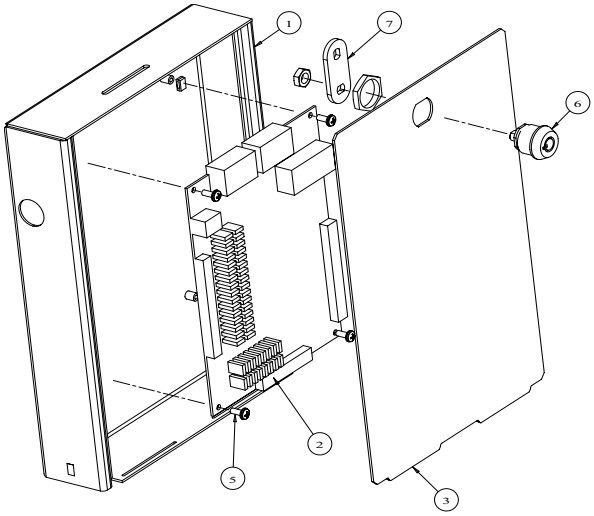


ITEM	QTY	BALLY PART NO.	DESCRIPTION
6	1	P-00758-0094	CAM, BILL ACCEPTOR, STACKER, M-0281-132
5	1	M-00281-162A	LOCK, NO CAM, DOOR/BILL ACC.
4	4	LSPP-00632-1106	SCREW, MACH W/LOCK PHIL PAN. HD.
3	1	P-06719-0007	RCU DOOR
2	1	AS-03356-0535	RCU BOARD
1	1	P-06719-0006	RCU BOX

Monte Carlo Filigree
AS-02157-SERIES

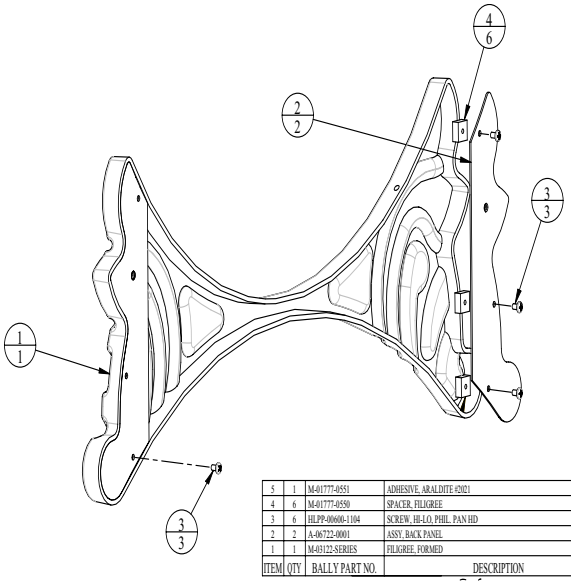

ITEM	QTY	BALLY PART NO.	DESCRIPTION
5	1	M-01777-9551	ADHESIVE, ARALDITE #2021
4	6	M-01777-9550	SPACER, FILIGREE
3	6	HLPP-00600-1104	SCREW, HI-LO, PHIL, PAN HD
2	2	A-06722-0001	ASSY, BACK PANEL
1	1	M-03122-SERIES	FILIGREE, FORMED


Lamp Sequencer Assembly
E-00664-0616

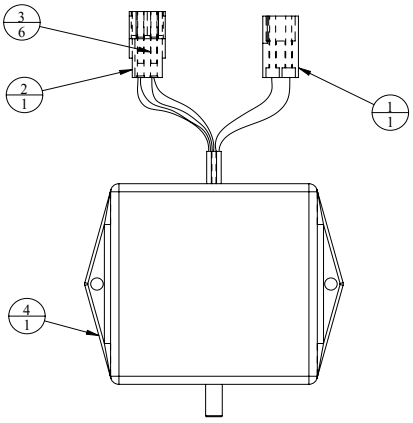


ITEM	QTY	BALLY PART NO.	DESCRIPTION
4	1	E-00664-0616	3 LAMP SEQUENCER
3	6	E-00661-0003	PIN, MOLEX
2	1	E-00660-0400	CONNECTOR, 4 PIN, MOLEX
1	1	E-00660-0200	CONNECTOR, MOLEX PLUG

WIRING TABLE			
WIRE COLOR	WIRE USE	2 PIN CONNECTOR PIN ASSIGNMENTS	4 PIN CONNECTOR PIN ASSIGNMENTS
BLACK	AC IN	1	---
BLACK/WHITE	AC IN	2	---
WHITE	LAMP COMMON	---	4
RED	LAMP 1	---	1
ORANGE	LAMP 2	---	2
BLUE	LAMP 3	---	3

Transformer 110V
(AS-02155-0001)
Transformer 220V
(AS-02155-0002)

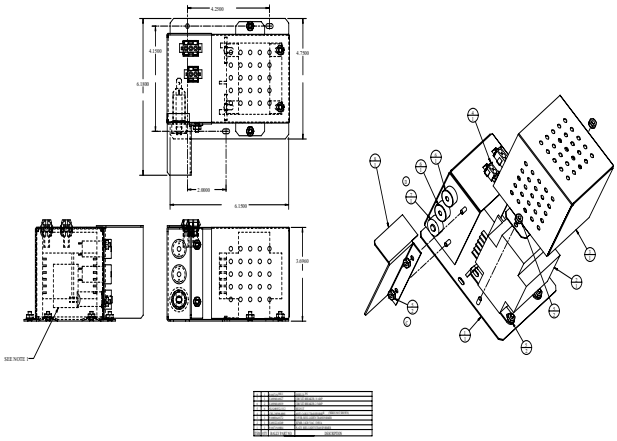


Starter/Ballast Assembly, 60 Hz
AS-02161-0001

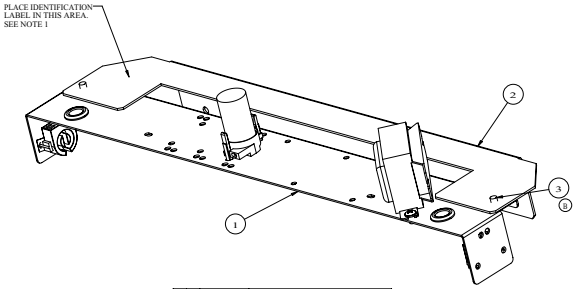

©2004 Bally Gaming and Systems

Monte Carlo Top Box Assemblies

Monte Carlo Top Box Assemblies	
Part #	Description
K-01400-0130	110 V, BLK/GLD
K-01400-0230	220 V, BLK/GLD
K-01400-1130	110 V, BLK/CHR
K-01400-1230	220 V, BLK/CHR

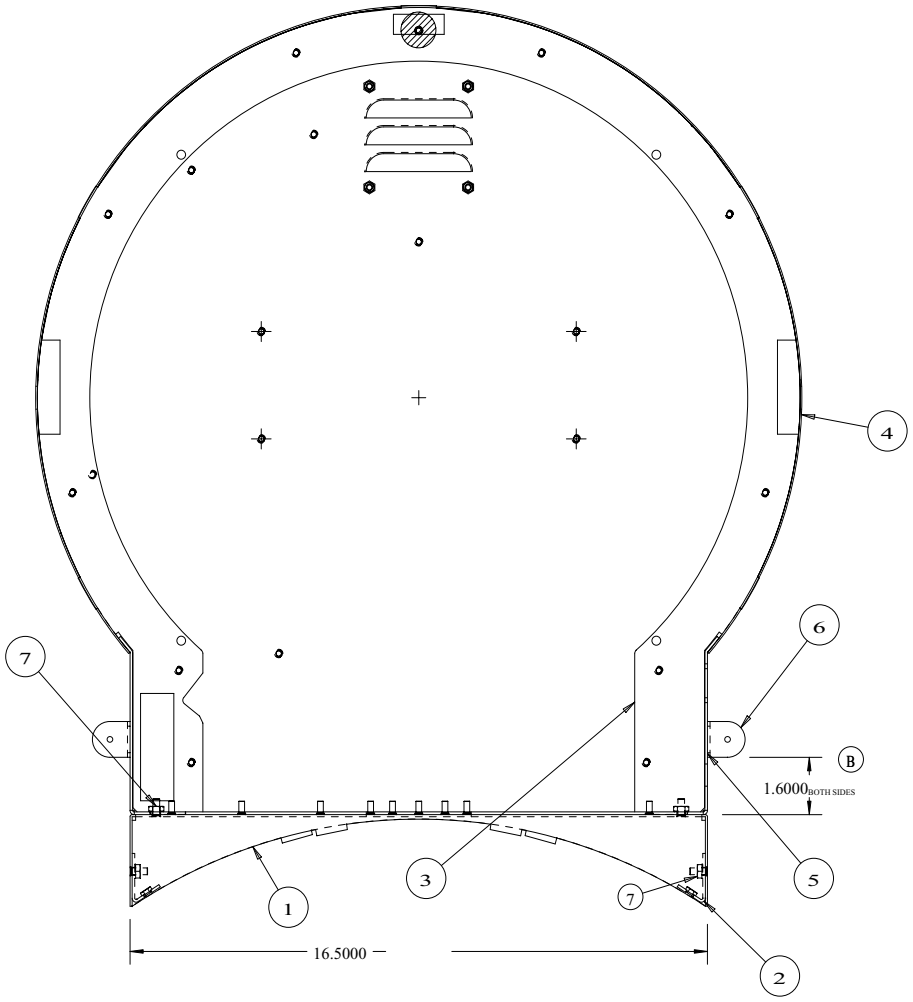

A - 06718 - 0 X XX


SEE TABLE A, PC-SPEC-0001
FOR POWDER COATING.

BASE PLATE, ITEM 1 (E)
0- P-06714-0006, MONTE CARLO
1- P-06714-0009, IT'S SATURDAY NIGHT

ITEM	QTY	BALLY PART NO.	DESCRIPTION
7	10	NLS-01032-1112	HEX NUT
6	2	P-06718-0006	MOUNTING TAB
5	1	P-06718-0005	BASE, HOUSING
4	1	P-06718-0004	WRAP, TOP
3	1	P-06718-0002	FRONT, HOUSING
2	2	P-06714-0008	BRACKET, TOP PLT MTG
1	1	P-06714-0006	PLATE, MTG., CABINET TOP


©2004 Bally Gaming and Systems

Neon Light Assembly
AS-02154-0001

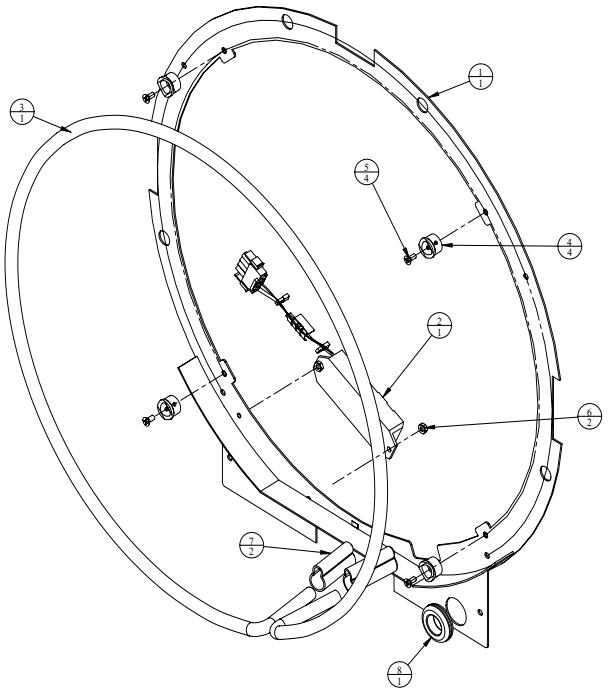


ITEM	QTY	BALLY PART NO.	DESCRIPTION
9	4	WIP-ES204-2000	WIRE, COPPER, 20 GA, BARE
8	1	R-00111-0062	GROMMET, 3/4 ID
7	2	P-00150-0307	INSULATOR, NEON TUBE
6	2	NLS-00632-1112	HEX NUT
5	4	MSPX-00832-1106	SCREW, MACHINE PHIL, FLAT HD, 82 DEG
4	4	M-03119-0004	SUPPORT, NEON
3	1	E-00413-0001	TUBE, NEON
2	1	AS-02982-0046	ASSY, NEON POWER SUPPLY
1	1	A-08719-0001	NEON FRAME

Ball and Wheel Assembly
AS-02163-0001

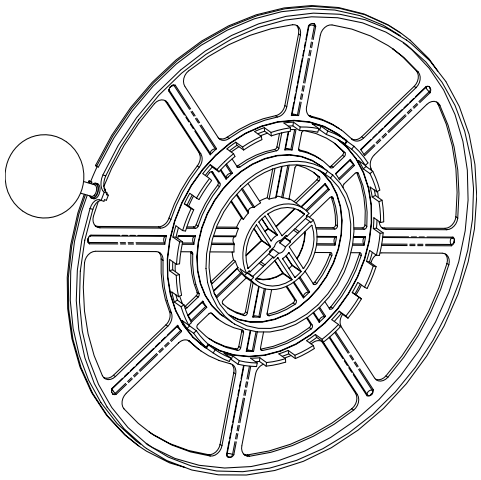



ITEM	QTY	BALLY PART NO.	DESCRIPTION
3	1	TFPP-00440-1104	SCREW, 4-40 X 1/4 THD.FORM PHIL PAN HD.
2	1	M-03092-0005	REEL,9.0 DIA, FLAT
1	1	A-06720-0001	ASSY, WHEEL BALL

Wheel Graphics
C-R0751

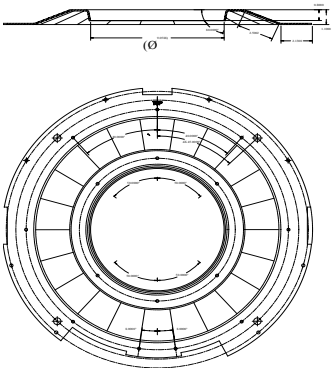

Light Wheel Assembly
AS-02162-0001

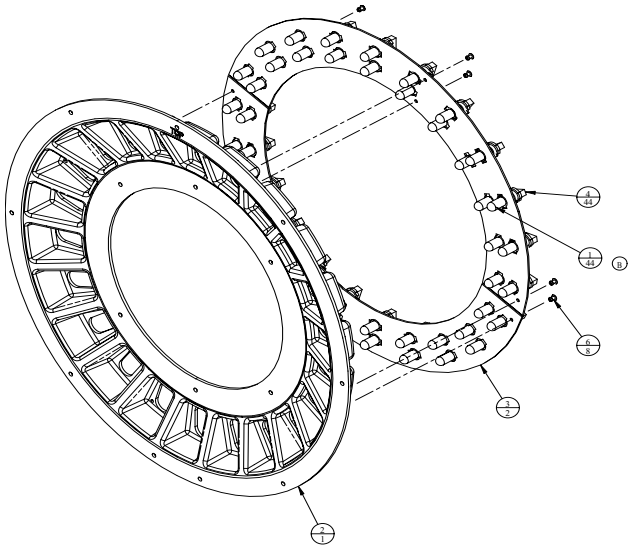


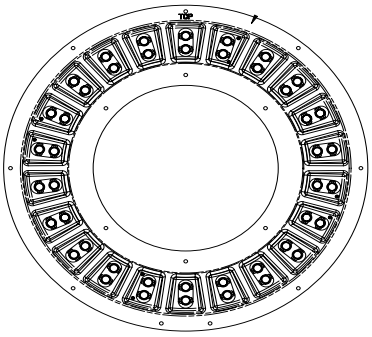

ITEM	QTY	BALLY PART NO.	DESCRIPTION
6	8	M-00180-0182	1/8 POP RIVET
4	44	E-00120-0269	SOCKET, LAMP, PCB, T3-1/4
3	2	AS-03356-0545	111 LIGHT BOARD
2	1	M-02094-0178	LIGHT CAP, VACUUM FORMED
1	44	E-00125-0123	LAMP, INCANDESCENT, 6638

©2004 Bally Gaming and Systems


Wheel Motor Assembly
AS-02151-0001

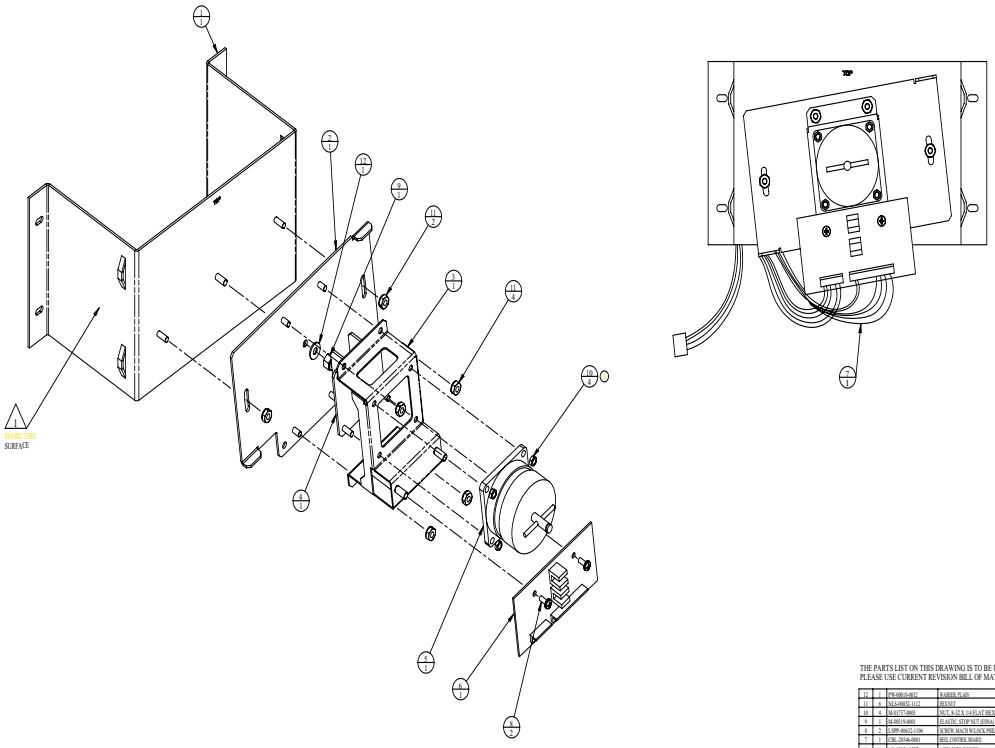

THE PARTS LIST ON THIS DRAWING IS TO BE USED FOR REFERENCE ONLY.
PLEASE USE CURRENT REVISION BILL OF MATERIAL.


ITEM	QTY	BALLY PART NO.	DESCRIPTION
12	3	PW-08010-8812	WASHER-PLAIN
11	6	NS-S-08032-1112	HEXNUT
10	4	M-01757-0008	NUT, N.Y.L.O.C 1/4 FLAT HEX.
9	1	M-00019-0001	ELASTIC STOP NUT-(USNA)
8	2	S-SPP-00025-1106	SCREW, MACH W/LOCK PHIL PAN HD
7	1	CBL-20166-0001	REEL CONTROL BOARD
6	1	AS-01556-0527	ASSY, REEL DRIVER
5	1	AS-04236-0003	ASSY, MOTOR AND COUPLING
4	1	P-00719-0012	HEAT SINK, REEL MTR
3	1	P-09519-0063	BKT, REEL MOTOR MT., WIRE
2	1	P-09519-0053	BKT, REEL MOUNT
1	1	P-00719-0005	MOTOR MOUNT

Monte Carlo Top Box Door
(AS-02153-SERIES)

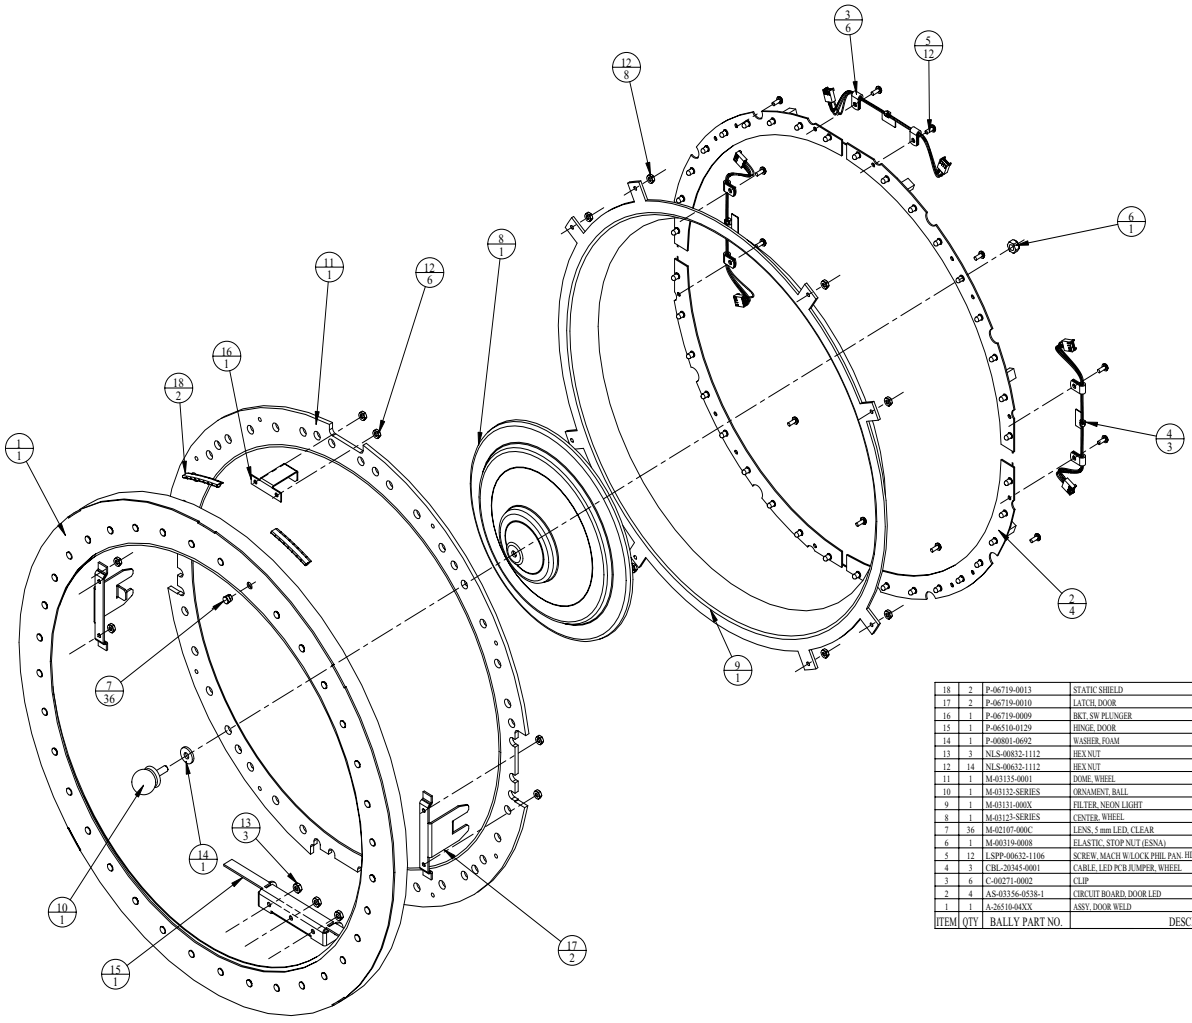

ITEM	QTY	BALLY PART NO.	DESCRIPTION
18	2	P-06719-0013	STATIC SHIELD
17	2	P-06719-0010	LATCH, DOOR
16	1	P-06719-0009	BKT, SW PLUNGER
15	1	P-06510-0129	HINGE, DOOR
14	1	P-00801-0692	WASHER, FOAM
13	3	NLS-00832-1112	HEX NUT
12	14	NLS-00632-1112	HEX NUT
11	1	M-03135-0001	DOME, WHEEL
10	1	M-03132-SERIES	ORNAMENT, BALL
9	1	M-03131-000X	FILTER, NEON LIGHT
8	1	M-03123-SERIES	CENTER, WHEEL
7	36	M-02107-000C	LENS, 5 mm LED, CLEAR
6	1	M-00319-0008	ELASTIC, STOP NUT (ESNA)
5	12	LSPP-00632-1106	SCREW, MACH W/LOCK PHIL PAN. HD.
4	3	CBL-20345-0001	CABLE, LED PCB JUMPER, WHEEL
3	6	C-00271-0002	CLIP
2	4	AS-03356-0538-1	CIRCUIT BOARD, DOOR LED
1	1	A-26510-04XX	ASSY, DOOR WELD


Hinge Mounting Bracket
P-06510-0125





ITEM	QTY	BALLY PART NO.	DESCRIPTION
3	1	P-06510-0125-3	COVER, BKT
2	1	P-06510-0125-2	SUPPORT, HINGE
1	1	P-06510-0125-1	BKT, HINGE MTG

©2004 Bally Gaming and Systems

Monte Carlo Marquee Light
AS-02150-SERIES

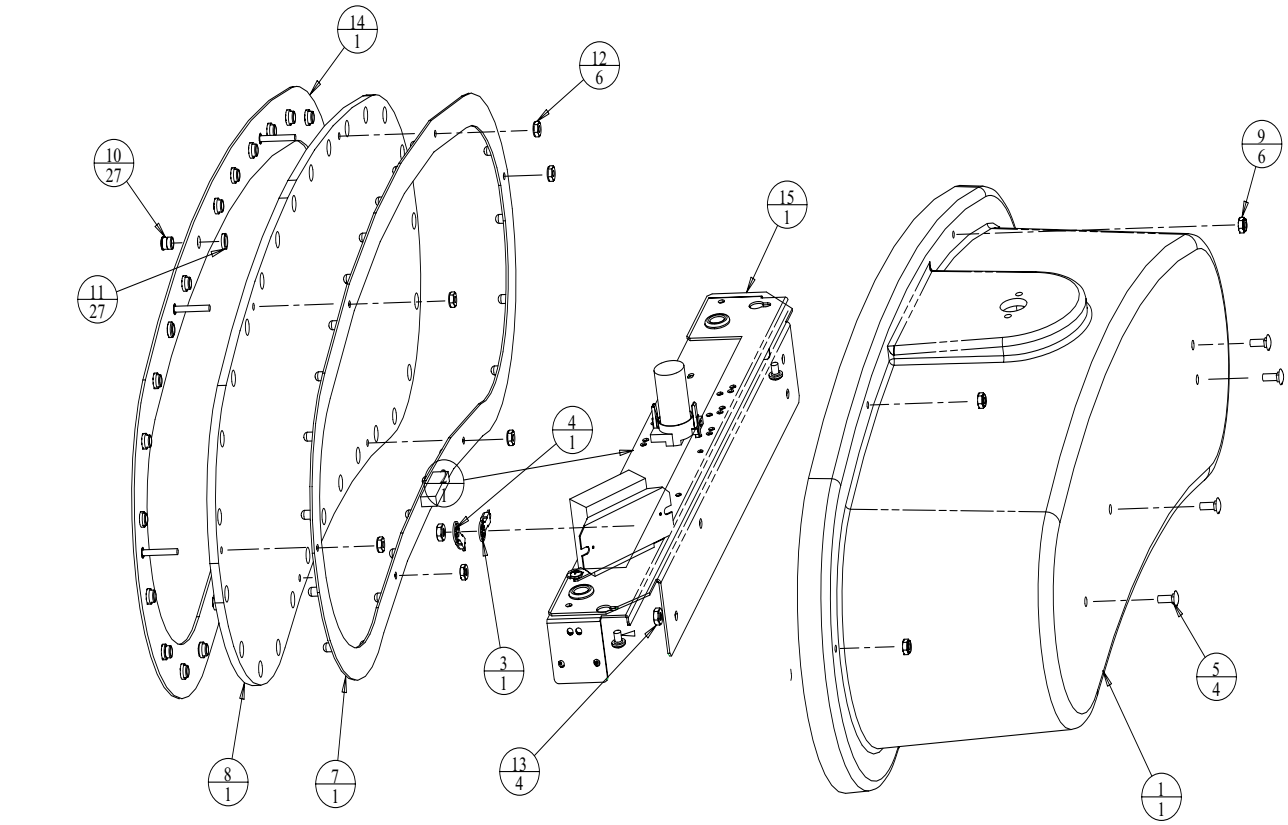

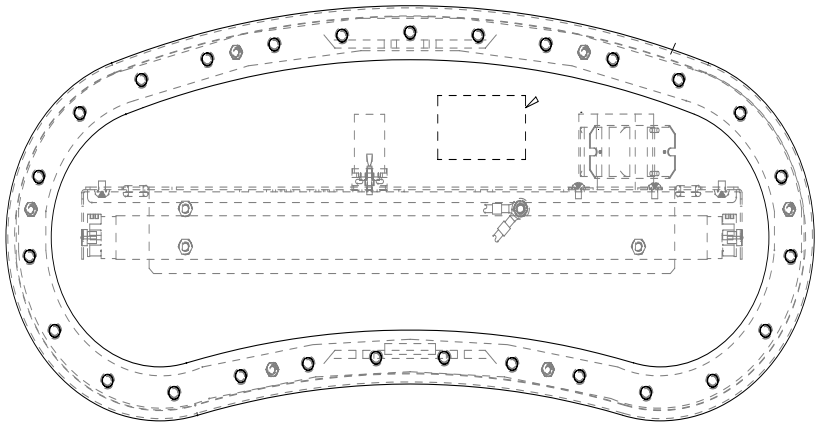


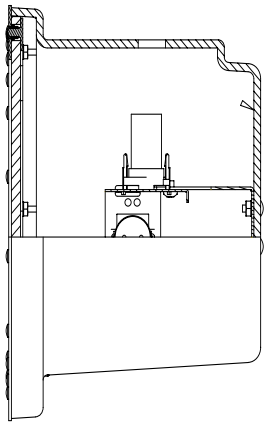

16	2	TFPP-01032-1104	SCREW, 10-32 1/4 THD. FORM PHIL PAN HD
15	1	P-09319-0526	BKT, LIGHT MTG
14	1	P-06720-00XX	TRIM, HOUSING, W/STUDS, PLATED
13	4	NLS-00832-1112	HEX NUT
12	6	NLS-00832-1112	HEX NUT
11	27	M-02108-0001	RETAINER, LED LENS, 5 MM
10	27	M-02107-000C	LENS, 5 MM LED, CLEAR
9	6	M-00319-0006	ELASTIC, STOP NUT (ESNA)
8	1	G-R0752	GLASS, TOPPER, SILK (REF)
7	1	AS-03356-0546	ASSY, CIRCUIT BOARD, MARQUEE
6	1	E-00412-0013	LAMP, FLOURESCENTF1ST8/CW
5	4	CBOR-00832-1808	#8 CARRAIGE BOLT 1/2" LG
4	1	AS-03106-0006	GROUND STRAP, 6" LENGTH
3	1	AS-03106-0004	GROUD STRAP, 12" LENGTH
2	1	AS-02335-0080	ASY, SKT/ST/BL.60HZ
1	1	M-02200-0001	HOUSING, PLASTIC
ITEM	QTY	BALLY PART NO.	DESCRIPTION


©2004 Bally Gaming and Systems

CTE/WTE
P-08600-S655

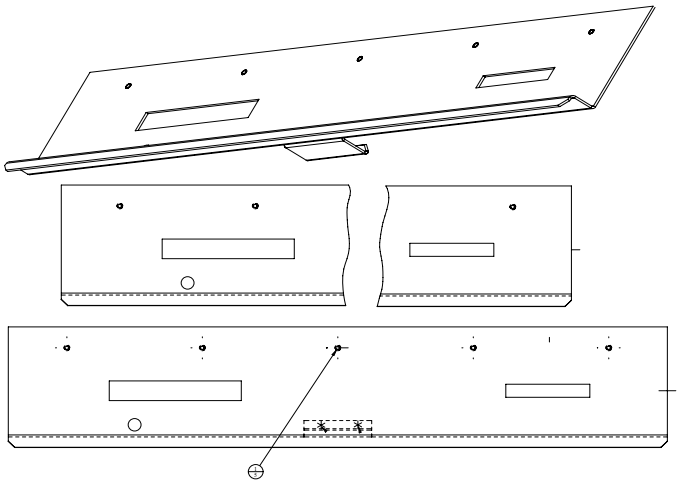

ITEM	QTY	BALLY PART NO.	DESCRIPTION
3	1	P-08600-S655	PANEL,MONTE CARLO,MAG/POT,CTE/WTE
2	1	P-06004-0048	LATCH HOOK, SYSTEM PANEL
1	5	FH-440-6	FLUSH HEAD PEM STUD

MAG/OPT
P-08600-S654

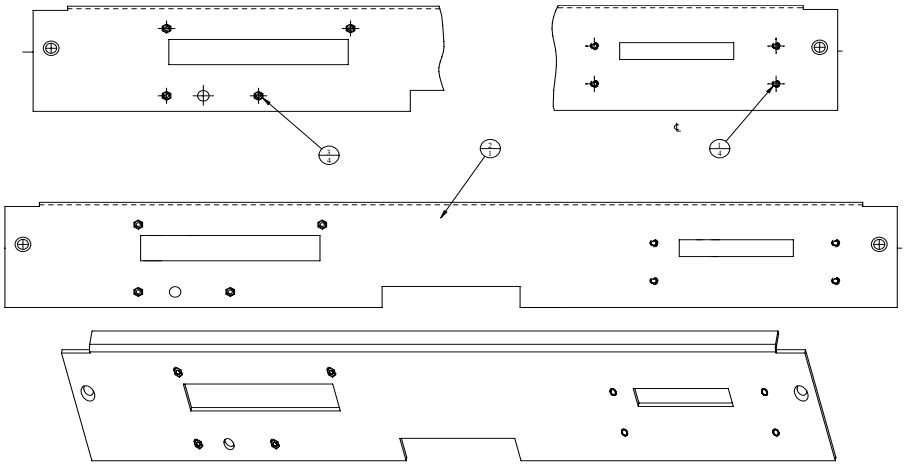

ITEM	QTY	BALLY PART NO.	DESCRIPTION
3	4	SO-440-14	PEM STANDOFF
2	1	P-08600-S654	PANEL,MTG,MONTE CARLO,MAG/OPT
1	4	FH-440-6	FLUSH HEAD PEM STUD


©2004 Bally Gaming and Systems

Monte Carlo Wiring

Monte Carlo Cables


Monte Carlo Cables		
Part #	Description	Page #
CBL-20345-0001	LED Jumper, Wheel	
CBL-20346-0001	Wheel Control	
CBL-30531-0001	Deluxe Pro Sound 2	
CBL-30589-0001	Cabinet Top	20
CBL-30590-0001	Power, Wheel Box	19
CBL-30598-0001	Transformer, 110V	14
CBL-30599-0001	Wheel/RCU/Light	17
CBL-30600-0001	Power	15

Transformer, 110V
CBL-30598-0001

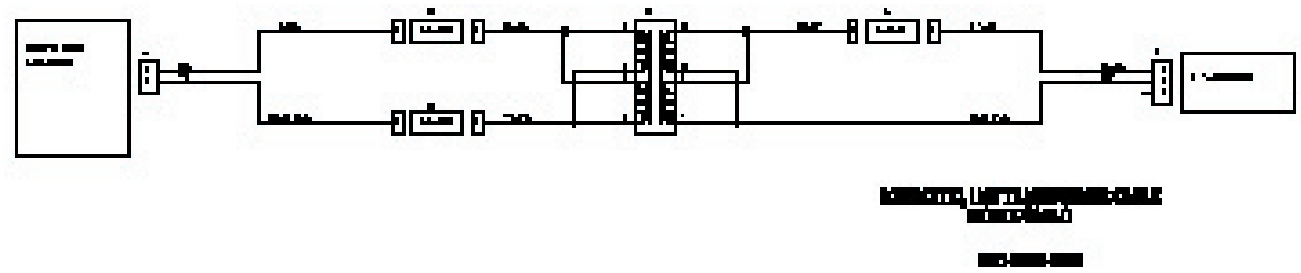


MATERIAL LIST

1	E-00804-0003	CONNECTOR, HOUSING CAP, 3 CIRCUIT	1
2	E-00804-0002	CONNECTOR, HOUSING CAP, 2 CIRCUIT	1
3	E-00807-0000	CONTACT, AMP SOCKET, 24-18 AWG	2
4	E-00807-0008	CONTACT, AMP PIN, 20-14 AWG	2
5	P-00405-0092	TERMINAL, FLAG, AMP, .250, 22-18 AWG	8
6	P-00405-0060	TERMINAL, FASTON, .250, 22-18 AWG	4
7	P-00405-0055	TERMINAL, FASTON, .250, 16-14 AWG	2
8	E-00647-0020	MARKER TIE	1
9	E-00647-0004	CABLE TIE, 4"	-

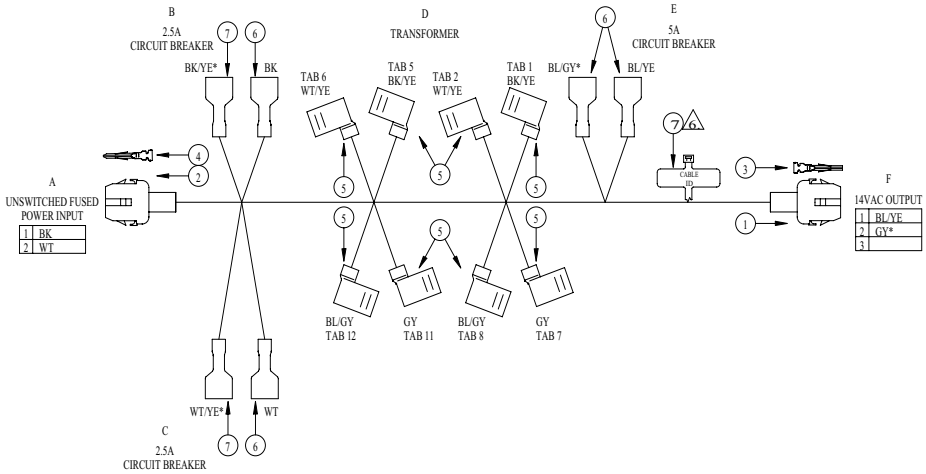

RUN LIST

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BK	A-1	B-1	3.00"	18	
2	BK/YE	D-1	B-2*	5.00"	18	
3	BK/YE	B-2*	D-5	5.00"	18	
4	WT	A-2	C-1	4.00"	18	
5	WT/YE	D-2	C-2*	8.00"	18	
6	WT/YE	C-2*	D-6	6.00"	18	
7	BL/YE	E-2	F-1	4.50"	22	
8	BL/GY	D-8	E-1*	5.00"	22	
9	BL/GY	E-1*	D-12	7.00"	22	
10	GY	D-7	F-2*	6.00"	22	
11	GY	F-2*	D-11	8.00"	22	

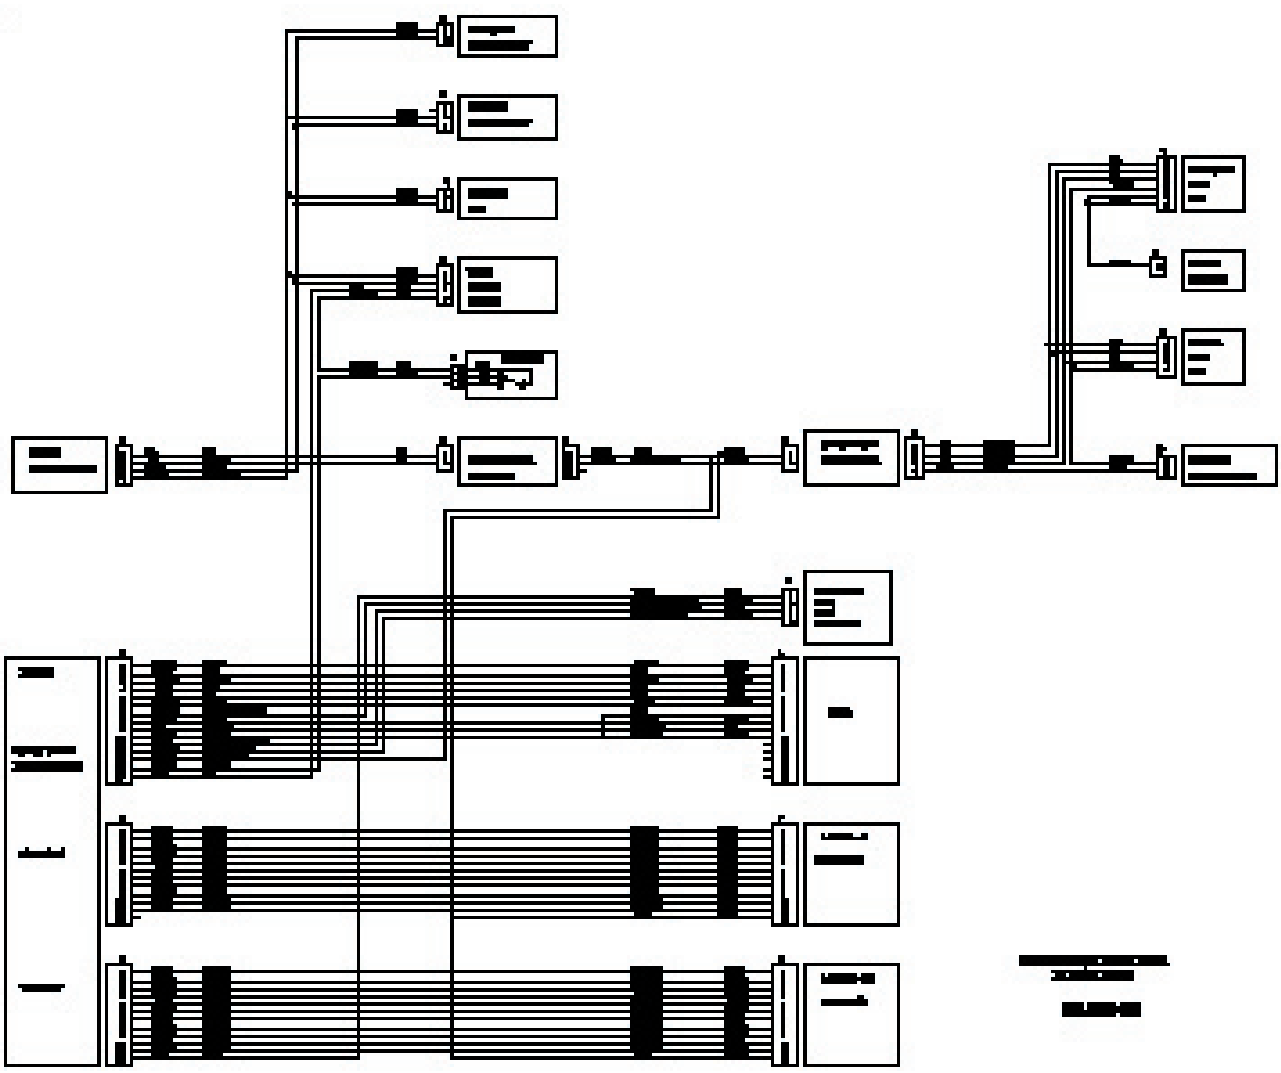

(Continued)

©2004 Bally Gaming and Systems


Power (cont.)
CBL-30600-0001

WIRE RUNNING LIST


WIRE	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BK	E-1	N-2	30.00"	18	SPIRAL
2	BK/RD	E-2	P-2*	15.00"	18	SPIRAL
3	BK/RD	P-2*	O-3*	15.00"	18	SPIRAL
4	BK/RD	O-3*	R-3*	5.00"	18	SPIRAL
5	BK/RD	R-3*	W-3	20.00"	18	SPIRAL
6	WT	E-3	N-3	30.00"	18	SPIRAL
7	WT/RD	E-4	P-3*	15.00"	18	SPIRAL
8	WT/RD	P-3*	O-2*	15.00"	18	SPIRAL
9	WT/RD	O-2*	R-2*	5.00"	18	SPIRAL
10	WT/RD	R-2*	W-2	20.00"	18	SPIRAL
11	BK-1	E-4	S-1	45.00"	22	
12	BK/OR	A-1	P-1	15.00"	22	
13	BK/OR-1	B-4	C-4	25.00"	22	
14	BK/OR	A-2	P-2	25.00"	22	
15	BK/VT	A-3	P-3	25.00"	22	
16	BK/GN	A-4	P-4	25.00"	22	
17	BK/BL	A-5	P-5	25.00"	22	
18	BK/WT	B-14	S-5	15.00"	22	
19	BR/BK	A-6	P-6	25.00"	22	
20	BR/RD	A-7	P-7	25.00"	22	
21	BR/OR	A-8	P-8	25.00"	22	
22	BR/VT	A-9	P-9	25.00"	22	
23	BR/GN	A-10	P-10	25.00"	22	
24	BR/BL	A-11	P-11	25.00"	22	
25	BR/VT	A-12	P-12	25.00"	22	
26	RD	J-1	G-3*	15.00"	22	
27	RD	G-3*	I-1	30.00"	22	
28	RD-1	B-15	F-1	15.00"	22	
29	RD/BK	C-1	K-1	30.00"	22	
30	RD/OR	C-2	K-2	30.00"	22	
31	RD/YL	C-3	K-3	30.00"	22	
32	RD/VT-1	B-7	V-1	30.00"	22	
33	RD/GN	C-4	K-4	30.00"	22	
34	RD/BL	B-5	J-5	15.00"	22	
35	RD/VT	C-5	K-5	30.00"	22	
36	OR	J-2	G-2*	15.00"	22	
37	OR	G-2*	I-3	30.00"	22	
38	OR/BL	C-6	K-6	30.00"	22	
39	OR/BR	C-7	K-7	30.00"	22	
40	OR/RD	B-1	J-1	15.00"	22	
41	OR/RD-1	B-12	V-2	30.00"	22	
42	OR/VT	C-8	K-8	30.00"	22	
43	OR/GN	C-9	K-9	30.00"	22	
44	OR/BK	C-10	K-10	30.00"	22	
45	OR/VT	C-11	K-11	30.00"	22	
46	YL/BL	B-4	J-4	15.00"	22	
47	GN/YL	G-5	I-2*	15.00"	22	
48	GN/VT	C-12	K-12	30.00"	22	
49	BL	J-3	G-5*	15.00"	22	
50	BL	G-5*	I-5	30.00"	22	
51	BL-1	C-13	V-3	30.00"	22	
52	BL/BK	B-13	V-5	30.00"	22	
53	BL/YL	K-13	I-7*	15.00"	22	
54	BL/YL	I-7*	M-7*	15.00"	22	
55	BL/YL	M-7*	P-5*	30.00"	22	
56	BL/GN	B-2	J-2	15.00"	22	
57	GY	B-3	C-3	15.00"	22	
58	GY/OR	B-15	H-7*	14.00"	22	
59	GY/OR	H-7*	M-2	15.00"	22	
60	GY/YL	B-10	I-7*	15.00"	22	
61	GY/YL	I-7*	L-8	3.00"	22	
62	WT-1	B-11	C-6	15.00"	22	
63	WT/BK	I-6	N-7*	30.00"	22	
64	WT/BL	N-7*	I-4	15.00"	22	
65	WT/RD	B-3	I-3	15.00"	22	

MATERIALS LIST

REF	PART NUMBER	DESCRIPTION	QTY
1	E-00765-0015	PLUG, MINI-MATE-N-LOCK, 15 CIRCUIT	1
2	E-00765-0125	PLUG, MINI-MATE-N-LOCK, 12 CIRCUIT	1
3	E-00765-0525	RECEPTACLE, MINI-MATE-N-LOK, 5 CIRCUIT	3
4	E-00808-0017	CONNECTOR, HOUSING PLUG, 17 CIRCUIT	1
5	E-00808-0084	CONNECTOR, HOUSING PLUG, 4 CIRCUIT	1
6	E-00808-0085	CONNECTOR, HOUSING PLUG, 5 CIRCUIT	5
7	E-00808-0087	CONNECTOR, HOUSING PLUG, 7 CIRCUIT	2
8	E-00808-0084	CONNECTOR, HOUSING CAP, 4 CIRCUIT	1
9	E-00808-0087	CONNECTOR, HOUSING CAP, 7 CIRCUIT	1
10	E-00962-0000	CONNECTOR, MOLEX RECEPTACLE, 0993, 4CIRCUIT	2
11	E-00962-0200	CONNECTOR, MOLEX RECEPTACLE, 0993, 3CIRCUIT	1
12	E-00963-0200	CONNECTOR, PLUG, MOLEX, 0993, 3CIRCUIT	1
13	E-01063-0537	CONNECTOR, MOLEX KK, PLUG, PCB, ANGLED, 0.100, 15CKT	2
14	E-01063-0431	CONNECTOR, MOLEX KK, PLUG, PCB, ANGLED, 0.100, 4CKT	1
15	E-01063-0429	CONNECTOR, MOLEX KK, PLUG, PCB, ANGLED, 0.100, 4CKT	1
16	E-08765-0200	PIN, MINI-MATE-N-LOCK, 22-18 AWG	57
17	E-08765-0100	SOCKET, MINI-MATE-N-LOK, 22-18 AWG	11
18	E-08907-0006	CONTACT, AMP PIN, 16-14 AWG	16
19	E-08907-0008	CONTACT, AMP SOCKET, 16-14 AWG	8
20	E-08907-0007	CONTACT, AMP SOCKET, 20-18 AWG	4
21	E-00643-0001	CONTACT, MOLEX SOCKET, 0993, 18-22 AWG	10
22	E-00642-0001	CONTACT, MOLEX SOCKET, 0993, 14-20 AWG	7
23	E-08765-0000	CONTACT, MOLEX KK, 22-26 AWG	34
24	E-08405-0004	TERMINAL, FASTON, .187 X .020, 22-18 AWG	5
25	E-08405-0119	TERMINAL, RING, 22-18 AWG, #10 STUD	2
26	ML1777-540006	SPIRAL WRAP	-
27	E-00627-0470	MARKER TIE	4
28	E-00627-0004	CABLE TIE, 3.250"W X 7"LG	-

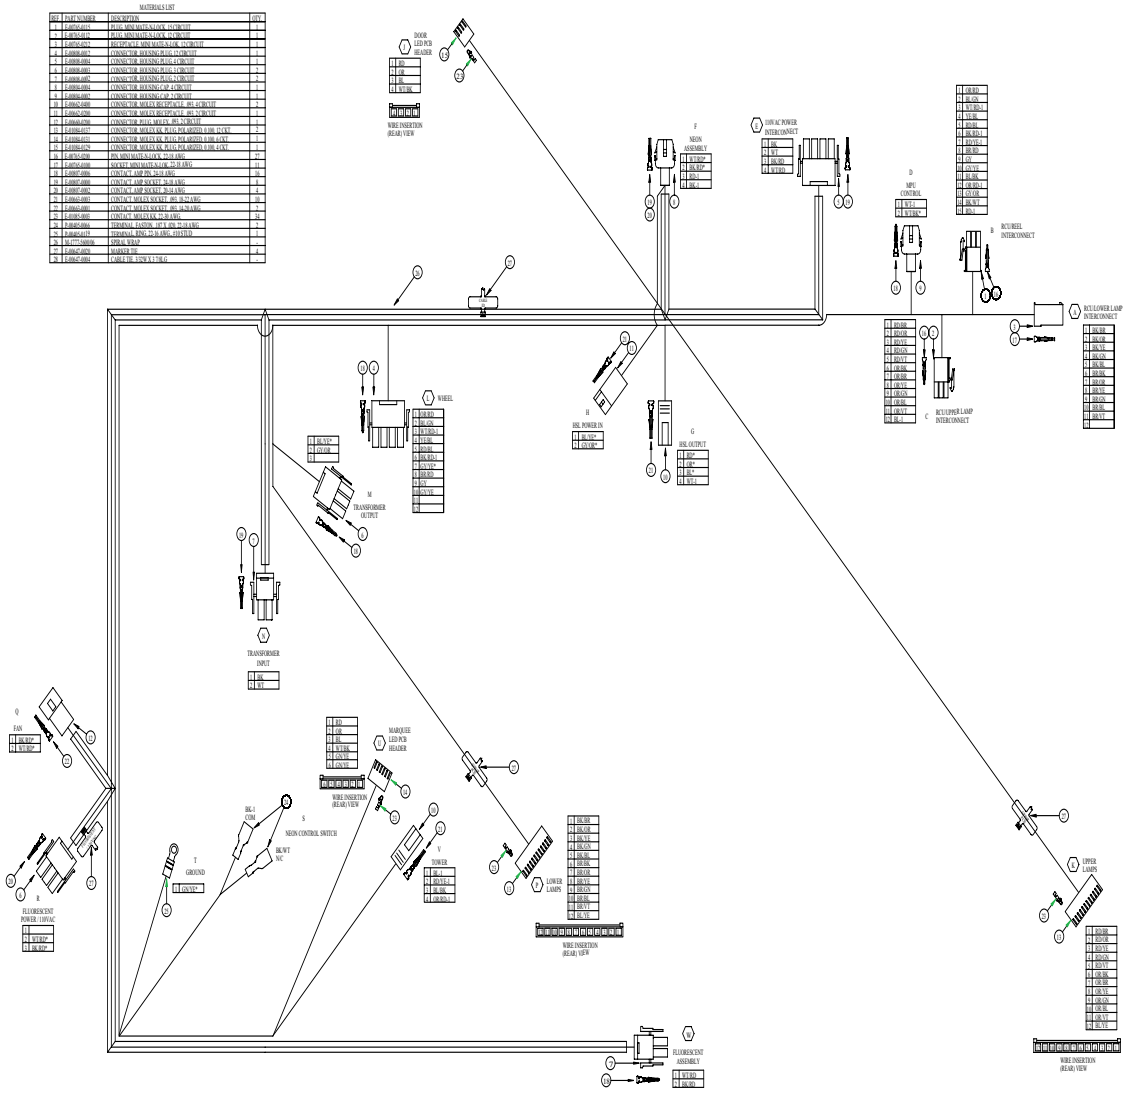


Wheel/RCU/Light
CBL-30599-0001

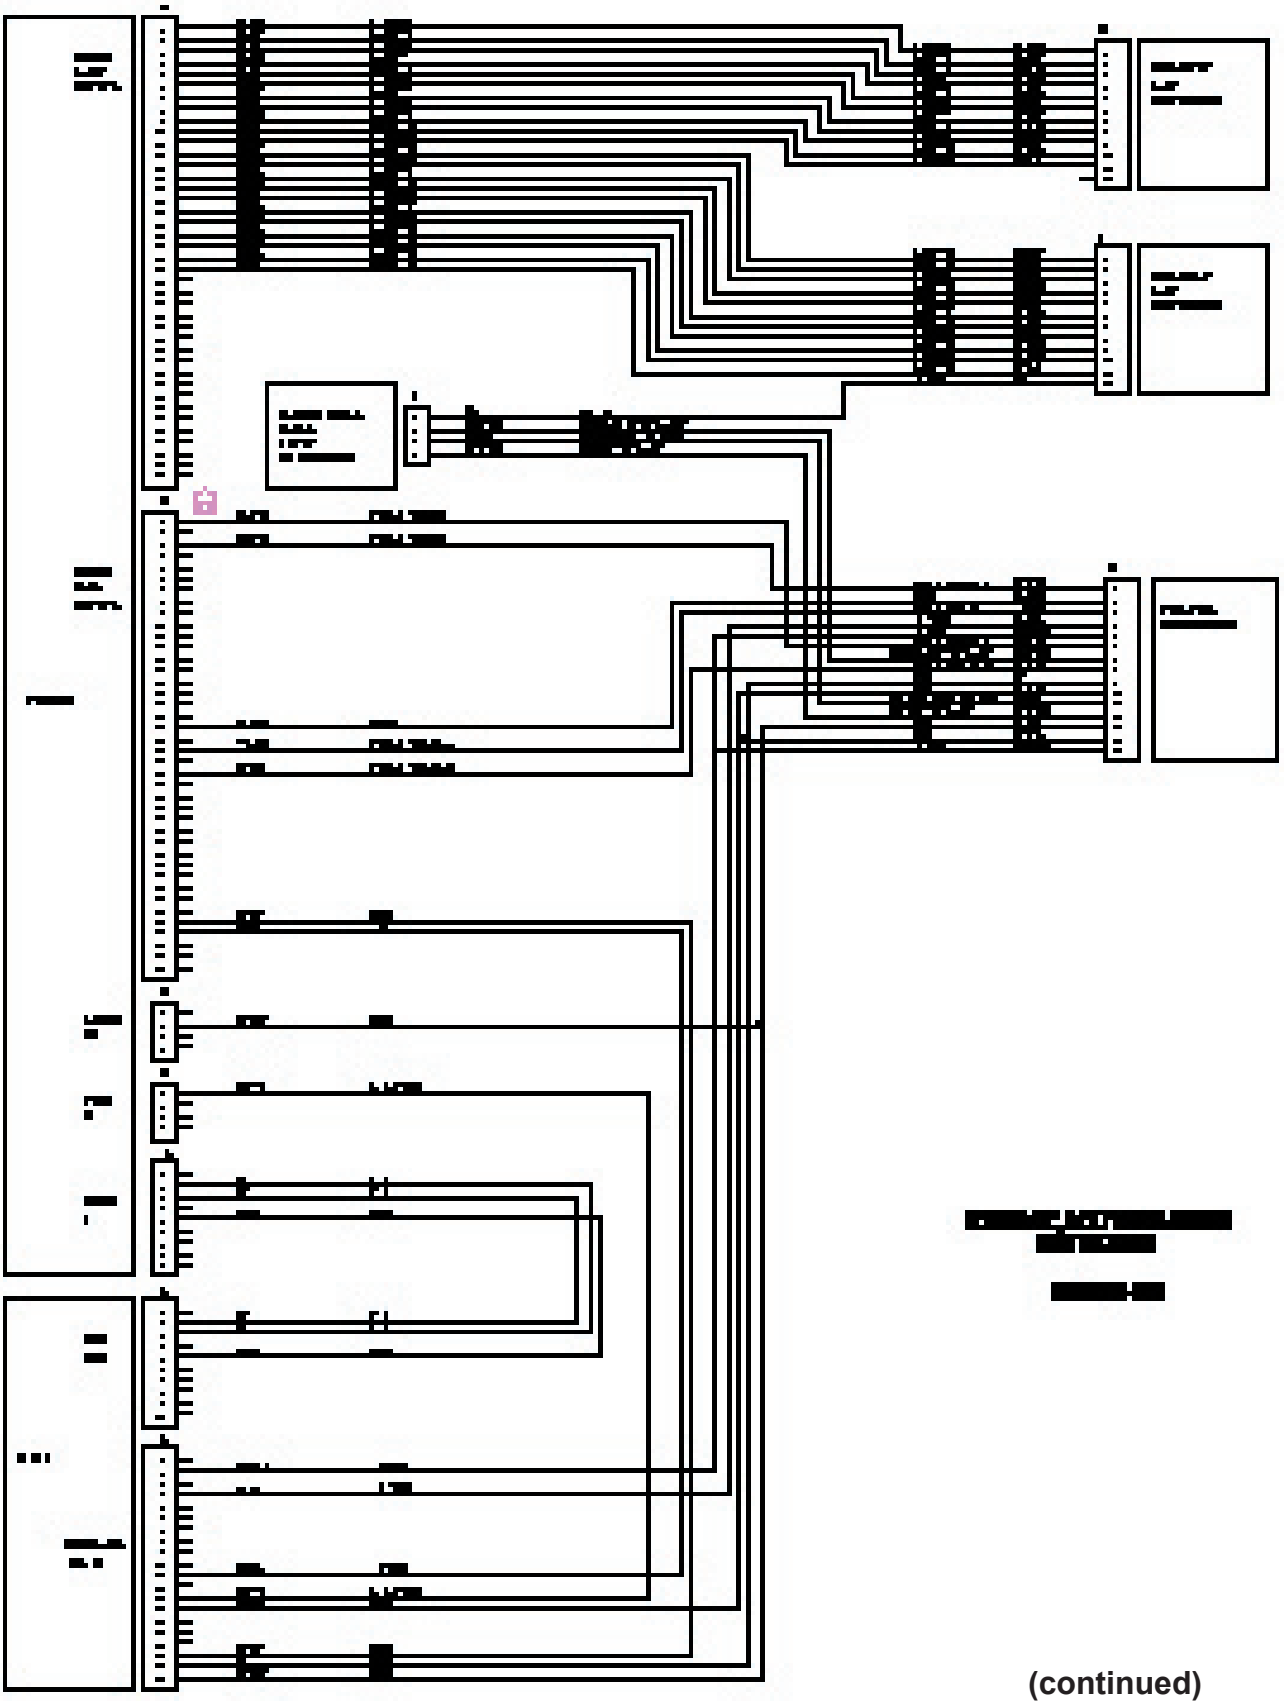


(continued)

©2004 Bally Gaming and Systems


Wheel/RCU/Light (cont.)
CBL-30599-0001

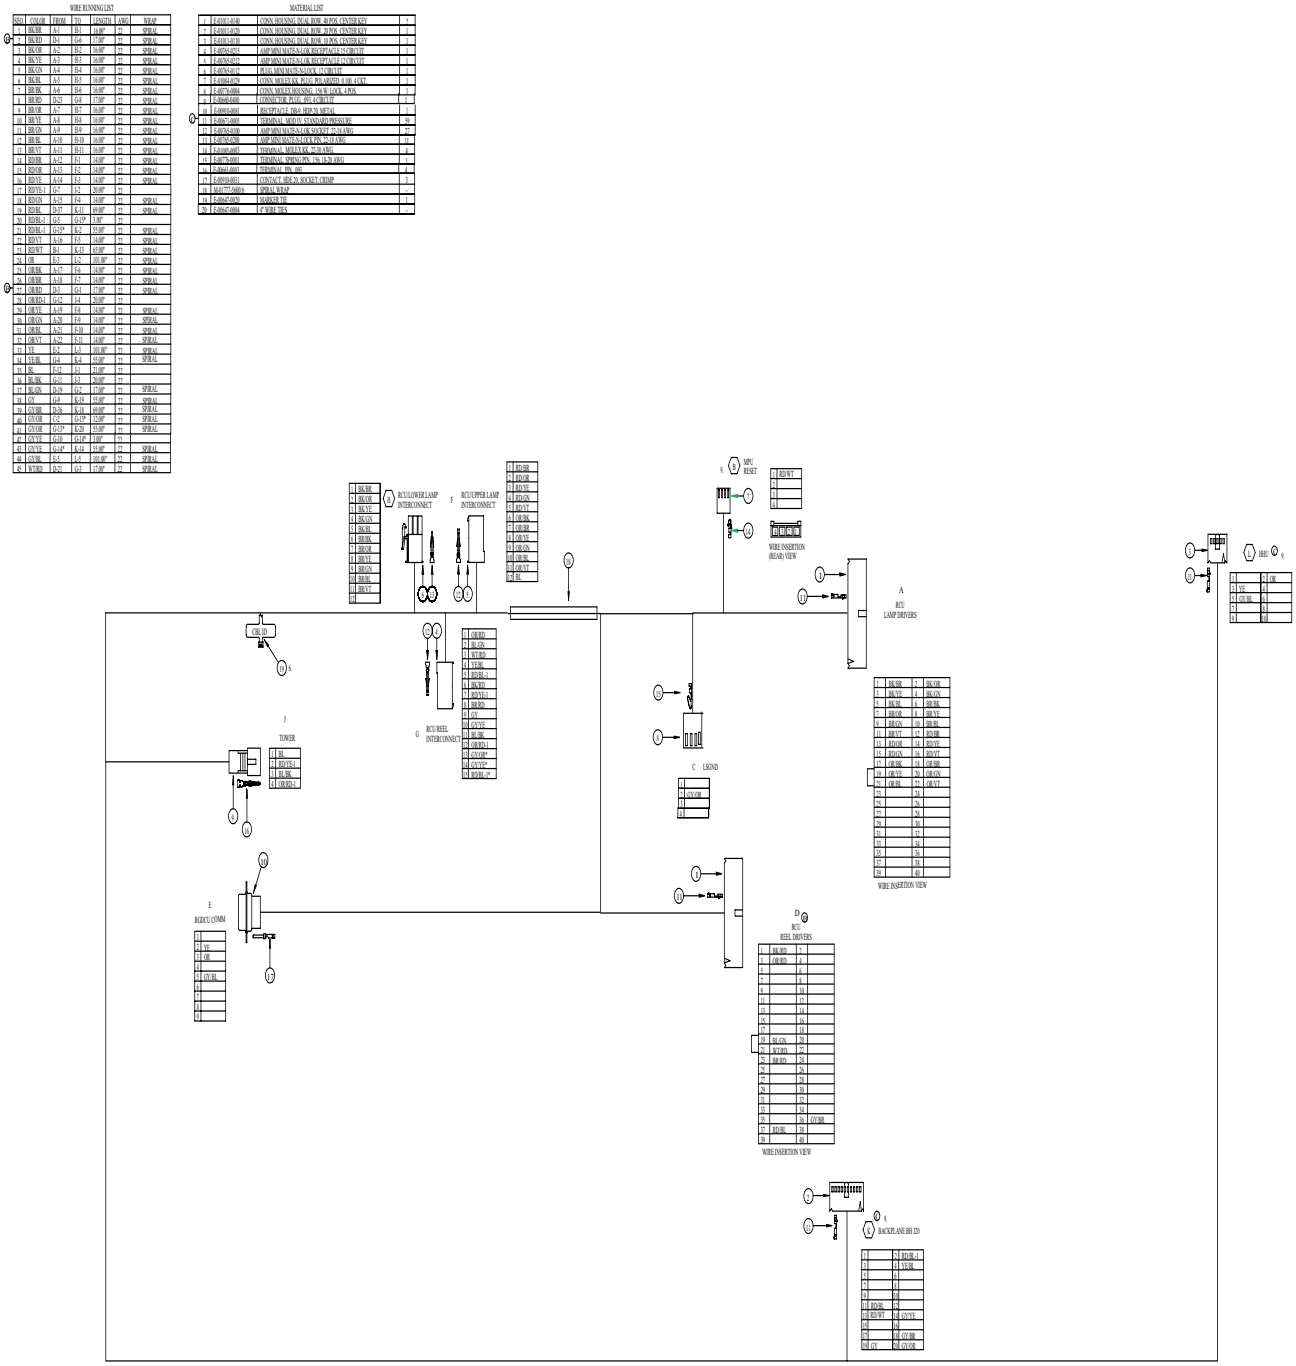

Wheel Box Power
CBL-30590-0001

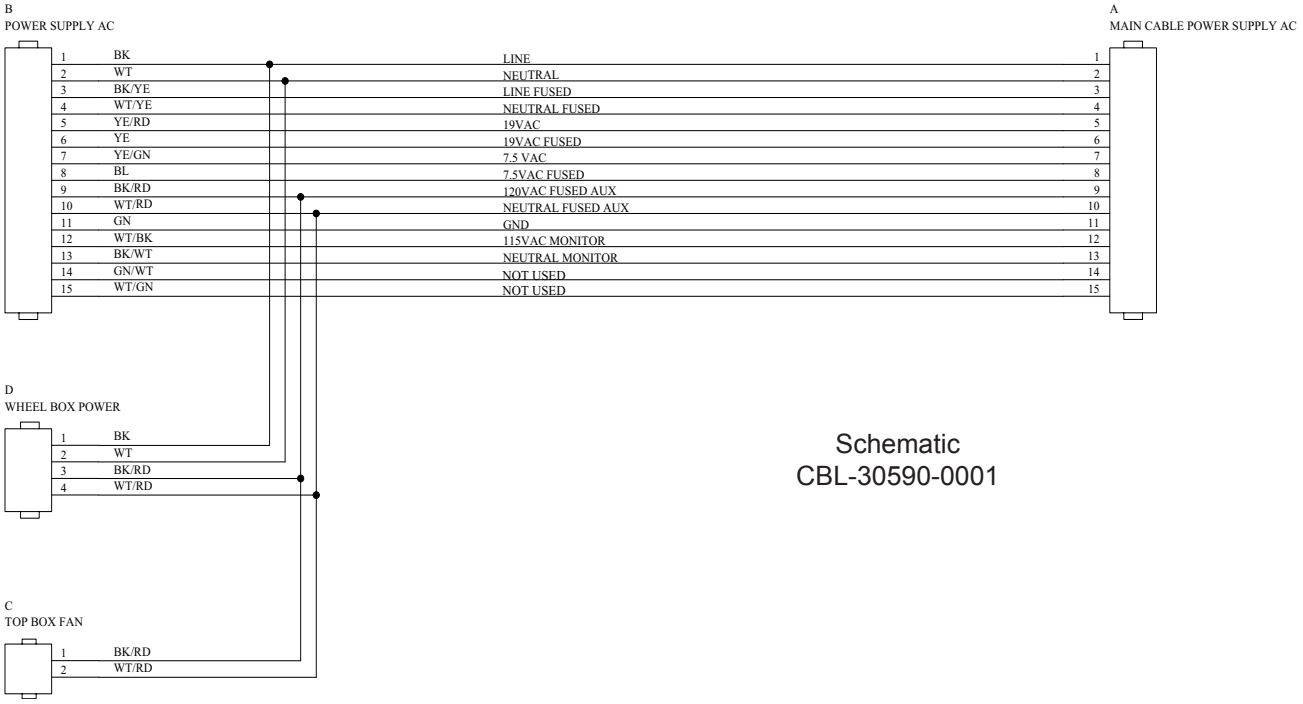

Schematic
CBL-30590-0001

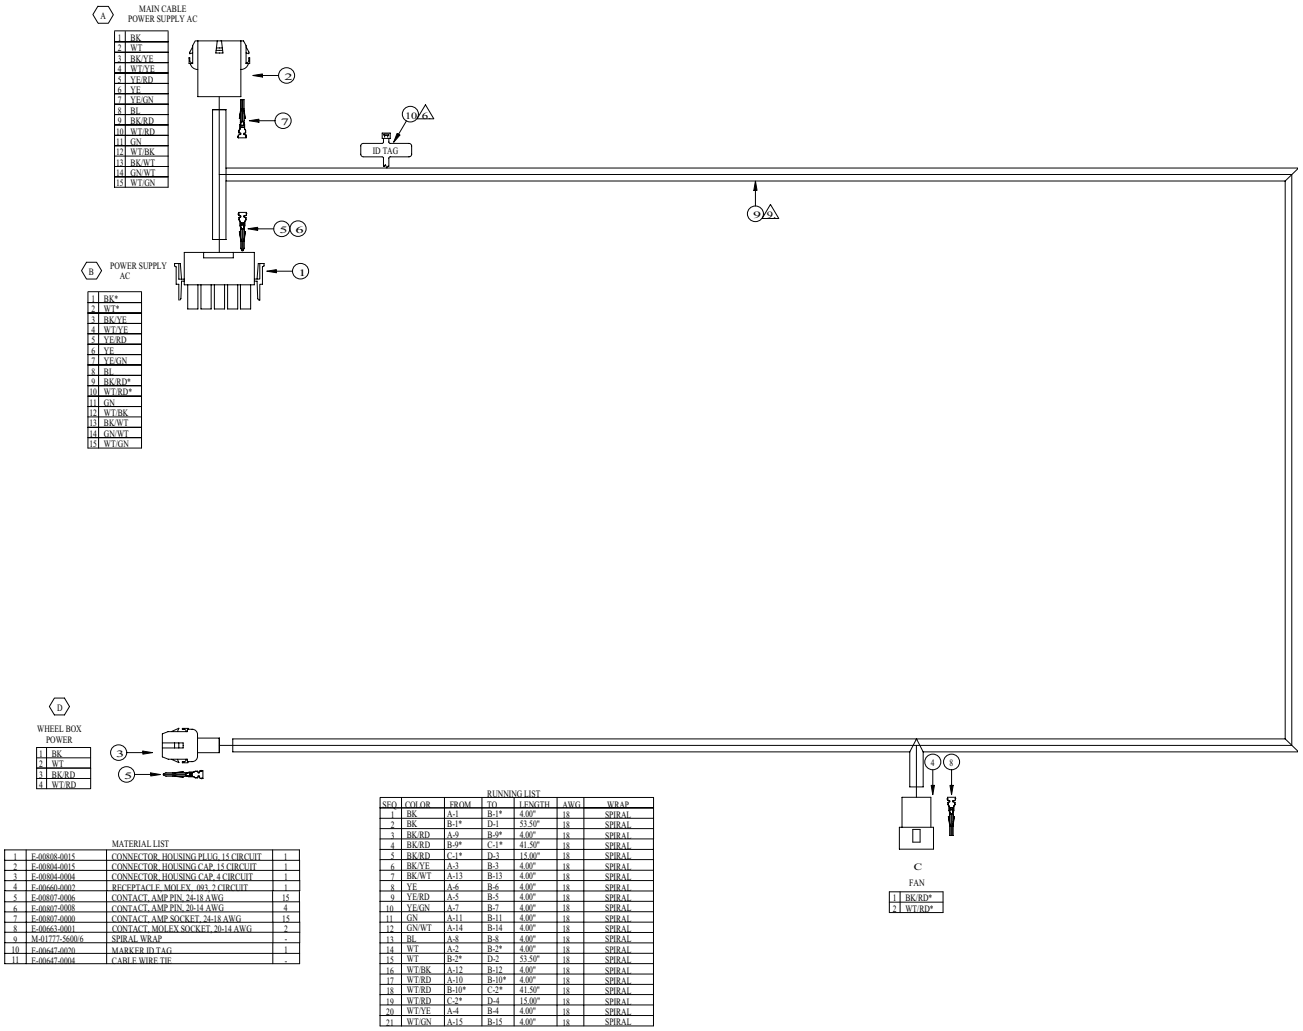

MATERIAL LIST


1	E-00808-0015	CONNECTOR, HOUSING PLUG, 15 CIRCUIT	1
2	E-00804-0015	CONNECTOR, HOUSING CAP, 15 CIRCUIT	1
3	E-00804-0004	CONNECTOR, HOUSING CAP, 4 CIRCUIT	1
4	E-00660-0007	RECEPTACLE, MOLEX, .093, 7 CIRCUIT	1
5	E-00807-0006	CONTACT, AMP PIN, 24-18 AWG	15
6	E-00807-0008	CONTACT, AMP PIN, 20-14 AWG	4
7	E-00807-0000	CONTACT, AMP SOCKET, 24-18 AWG	15
8	E-00663-0001	CONTACT, MOLEX SOCKET, 20-14 AWG	2
9	M-01777-S6001	SPIRAL WRAP	-
10	E-00647-0070	MARKER ID TAG	1
11	E-00647-0004	CABLE WIRE TIE	-


RUNNING LIST

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BK	A-1	B-1*	4.00"	18	SPIRAL
2	BK	B-1*	D-1	53.50"	18	SPIRAL
3	BK/RD	A-9	B-9*	4.00"	18	SPIRAL
4	BK/RD	B-9*	C-1*	41.50"	18	SPIRAL
5	BK/RD	C-1*	D-3	15.00"	18	SPIRAL
6	BK/YE	A-3	B-3	4.00"	18	SPIRAL
7	BK/WT	A-13	B-13	4.00"	18	SPIRAL
8	YE	A-6	B-6	4.00"	18	SPIRAL
9	YE/RD	A-5	B-5	4.00"	18	SPIRAL
10	YE/GN	A-7	B-7	4.00"	18	SPIRAL
11	GN	A-11	B-11	4.00"	18	SPIRAL
12	GN/WT	A-14	B-14	4.00"	18	SPIRAL
13	BL	A-8	B-8	4.00"	18	SPIRAL
14	WT	A-2	B-2*	4.00"	18	SPIRAL
15	WT	B-2*	D-2	53.50"	18	SPIRAL
16	WT/BK	A-12	B-12	4.00"	18	SPIRAL
17	WT/RD	A-10	B-10*	4.00"	18	SPIRAL
18	WT/RD	B-10*	C-2*	41.50"	18	SPIRAL
19	WT/RD	C-2*	D-4	15.00"	18	SPIRAL
20	WT/YE	A-4	B-4	4.00"	18	SPIRAL
21	WT/GN	A-15	B-15	4.00"	18	SPIRAL

©2004 Bally Gaming and Systems

Cabinet Top
CBL-30589-0001

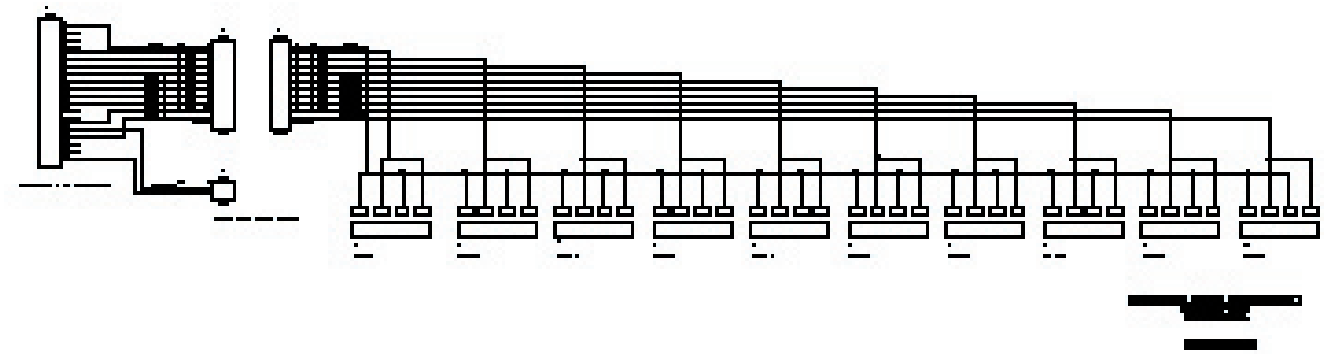

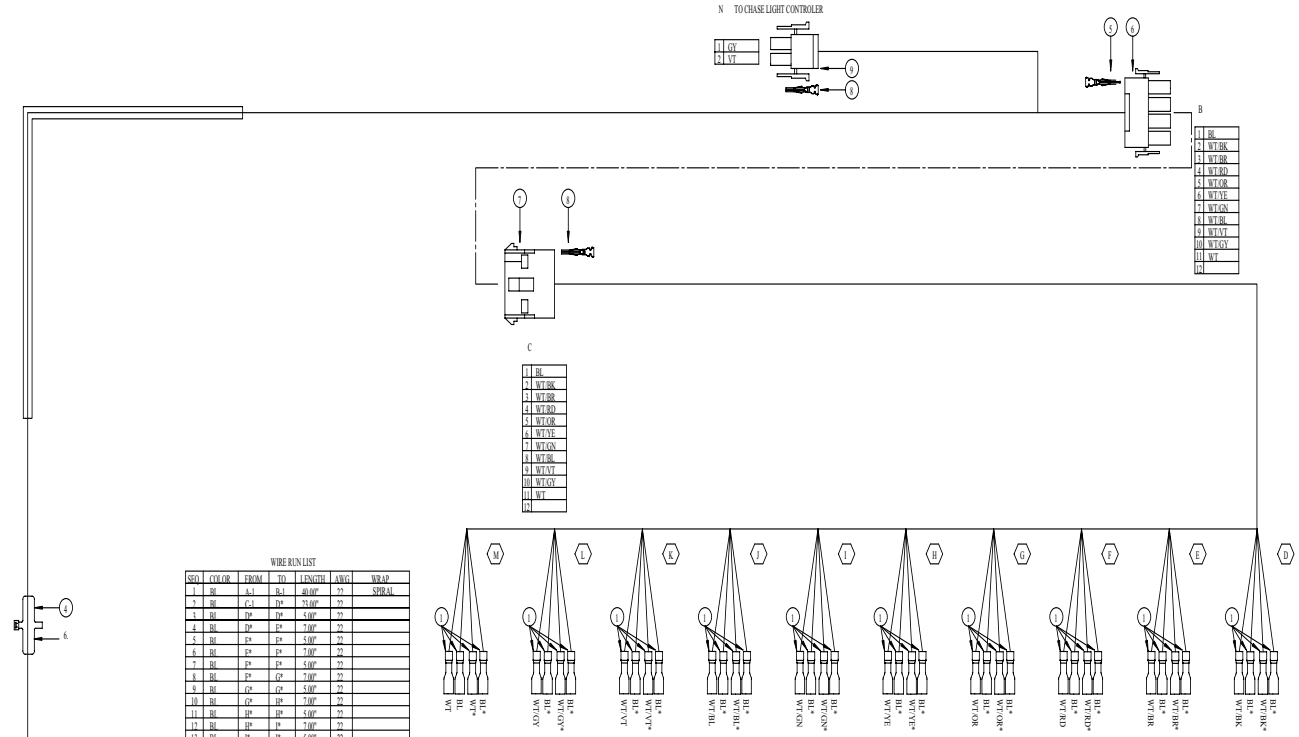


WIRE RUN LIST

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BL	A-1	B-1	40.00"	22	SPIRAL
2	BL	C-1	D*	22.00"	22	
3	BL	D*	D*	5.00"	22	
4	BL	D*	E*	7.00"	22	
5	BL	E*	E*	5.00"	22	
6	BL	E*	F*	7.00"	22	
7	BL	F*	F*	5.00"	22	
8	BL	F*	G*	7.00"	22	
9	BL	G*	G*	5.00"	22	
10	BL	G*	H*	7.00"	22	
11	BL	H*	H*	5.00"	22	
12	BL	H*	I*	7.00"	22	
13	BL	I*	I*	5.00"	22	
14	BL	I*	J*	7.00"	22	
15	BL	J*	J*	5.00"	22	
16	BL	J*	K*	7.00"	22	
17	BL	K*	K*	5.00"	22	
18	BL	K*	L*	7.00"	22	
19	BL	L*	L*	5.00"	22	
20	BL	L*	M*	7.00"	22	
21	BL	M*	M	5.00"	22	
22	WT/BK	A-5	B-2	40.00"	22	SPIRAL
23	WT/BK	C-2	D*	23.00"	22	
24	WT/BK	D*	D	5.00"	22	
25	WT/BR	A-6	B-3	40.00"	22	SPIRAL
26	WT/BR	C-3	E*	25.00"	22	
27	WT/BR	E*	E	5.00"	22	
28	WT/RD	A-7	B-4	40.00"	22	SPIRAL
29	WT/RD	C-4	F*	27.00"	22	
30	WT/RD	F*	F	5.00"	22	
31	WT/OR	A-8	B-5	40.00"	22	SPIRAL
32	WT/OR	C-5	G*	29.00"	22	
33	WT/OR	G*	G	5.00"	22	
34	WT/YE	A-9	B-6	40.00"	22	SPIRAL
35	WT/YE	C-6	H*	31.00"	22	
36	WT/YE	H*	H	5.00"	22	
37	WT/GN	A-10	B-7	40.00"	22	SPIRAL
38	WT/GN	C-7	I*	33.00"	22	
39	WT/GN	I*	I	5.00"	22	
40	WT/BL	A-11	B-8	40.00"	22	SPIRAL
41	WT/BL	C-8	J*	35.00"	22	
42	WT/BL	J*	J	5.00"	22	
43	WT/VT	A-12	B-9	40.00"	22	SPIRAL
44	WT/VT	C-9	K*	37.00"	22	
45	WT/VT	K*	K	5.00"	22	
46	WT/GY	A-15	B-10	40.00"	22	SPIRAL
47	WT/GY	C-10	L*	39.00"	22	
48	WT/GY	L*	L	5.00"	22	
49	WT	A-17	B-11	40.00"	22	SPIRAL
50	WT	B-11	M*	41.00"	22	
51	WT	M*	M	5.00"	22	
52	GT	A-20	N-1	44.00"	22	SPIRAL
53	VT	A-16	N-2	44.00"	22	SPIRAL


REF	PART NUMBER	DESCRIPTION	QTY
1	P-00405-0094	FASTON, .110X.810, 18-22 AWG	40
2	E-10011-0170	AMP MOD IV HOUSING, CENTER KEY, 20 CIRCUIT	1
3	E-00671-0003	AMP MOD IV TERMINAL	13
4	E-00647-0020	MARKER TIE	1
5	E-00807-0006	AMP, PIN,24-18 AWG	11
6	E-00808-0012	AMP UNIVERSAL MATE-N-LOK 12 CIRCUIT PLUG	1
7	E-00804-0017	AMP UNIVERSAL MATE-N-LOK 12 CIRCUIT CAP	1
8	E-00807-0000	AMP, SOCKET 24-18 AWG	13
9	E-00808-0002	AMP UNIVERSAL MATE-N-LOK 2 CIRCUIT PLUG	1
10	E-00647-0004	CABLE TIE	*AJN

*AS NEEDED

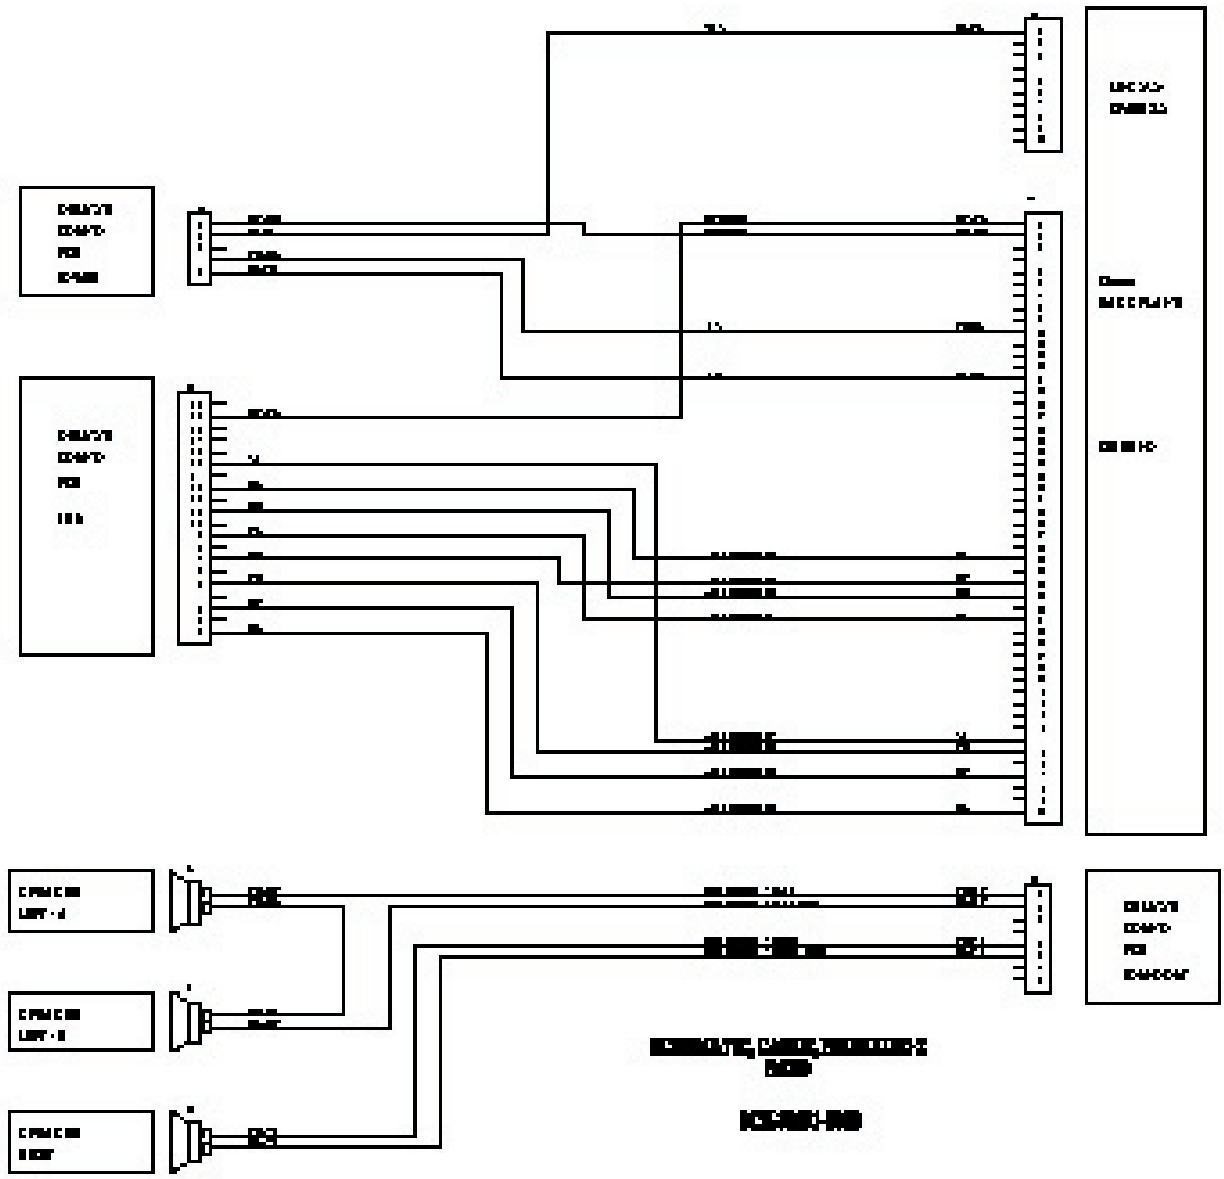

(continued)

©2004 Bally Gaming and Systems

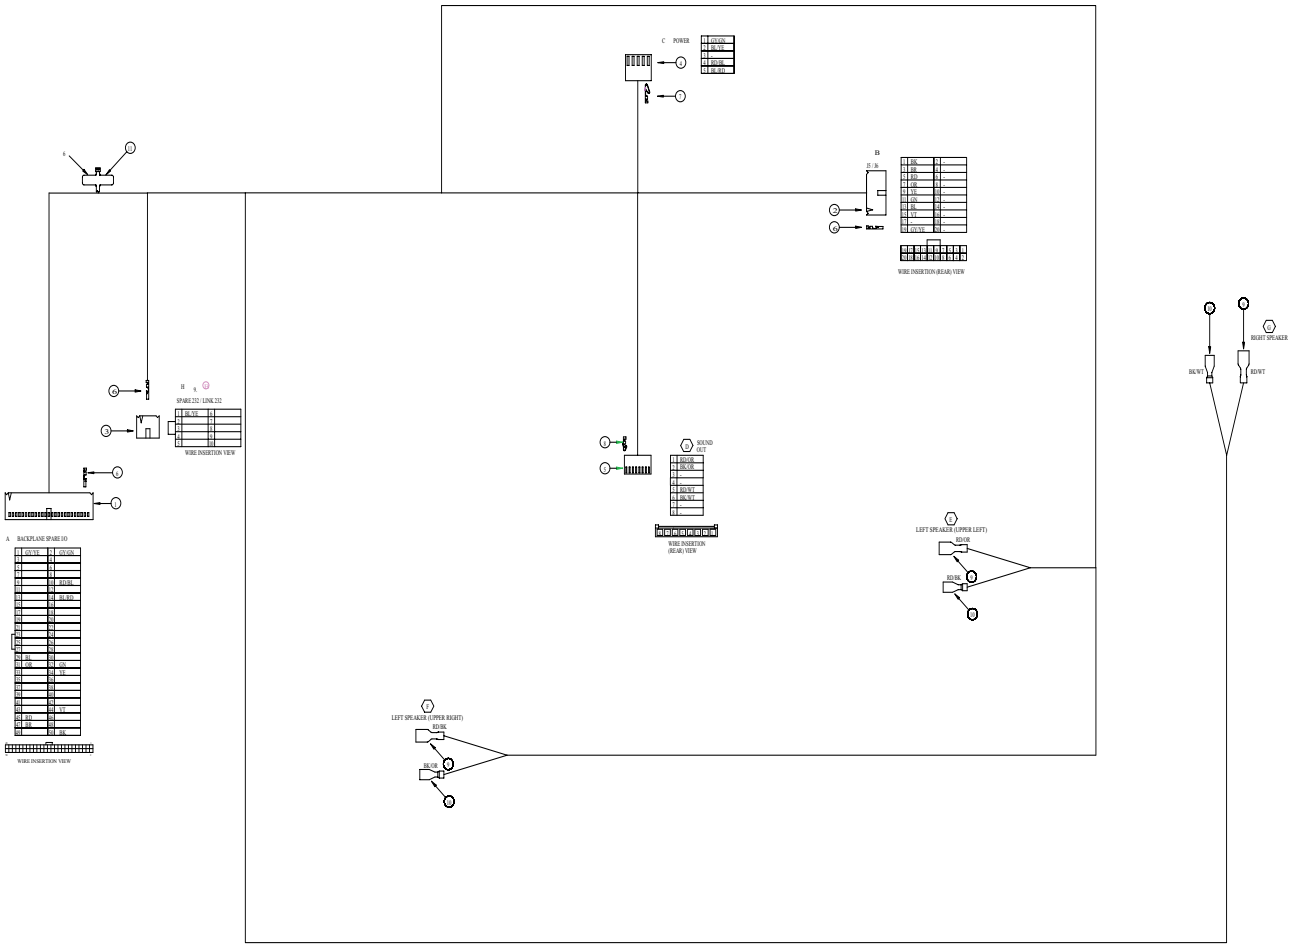

PARTS LIST

REF	PART NUMBER	DESCRIPTION	QTY
1	E-010511-0150	HOUSING, DUAL ROW, 50 POS., CENTER KEY	1
2	E-010511-0170	HOUSING, DUAL ROW, 34 POS., CENTER KEY	1
3	E-010511-0110	HOUSING, DUAL ROW, 10 POS., CENTER KEY	1
4	E-007276-0002	HOUSING, MOLEX, 15A W/LOCK, CIRCK.	1
5	E-010944-0151	HOUSING, MOLEX/OLEX, PLUG, POLARIZED, 0.100, 1 CKT.	1
6	E-006271-0002	TERMINAL, MOLEX, 24-30 AWG	75
7	E-007276-0001	TERMINAL, MOLEX, EX., 18-24 AWG	3
8	E-010945-0001	TERMINAL, MOLEX LK., 180, 22-26 AWG	4
9	P-030051-0006	TERMINAL, FASTON, .187 X .020, 22-18 AWG	3
10	P-030051-0008	TERMINAL, FASTON, .110 X .020, 22-18 AWG	3
11	E-006427-0029	MARKER TIE, I.D. TAG	1
12	E-006427-0004	CABLE TIE 4"	-

RUNNING LIST

SIZE	COLOR	FROM	TO	LENGTH	AWG
1	BK	A-26	A-1	36.00"	22
2	BR/OR	A-N	A-2	36.00"	22
3	BL/WT	A-6	G-2	85.00"	22
4	BR	A-42	B-1	36.00"	22
5	RD	A-45	B-2	35.00"	22
6	BR/BK	A-7	B-4	36.00"	22
7	BR/OR	D-1	E-1	36.00"	22
8	BR/RD	A-31	G-4	35.00"	22
9	BR/WT	D-5	G-5	85.00"	22
10	OR	A-32	B-7	34.00"	22
11	YE	A-34	B-9	34.00"	22
12	GN	A-35	B-11	33.00"	22
13	BL	A-36	B-13	34.00"	22
14	BL/RD	A-44	C-5	35.00"	22
15	BL/YE	B-5	C-3	34.00"	22
16	VT	A-48	B-15	34.00"	22
17	GY/YE	A-5	B-19	33.00"	22
18	GY/GN	A-7	C-1	35.00"	22

Wheel Control
CBL-20346-0001



1	BR/BK
2	BR/GN
3	BR/RD
4	YE/BL
5	RD
6	BR/WT
7	BR/YE
8	BR
9	GY
10	GY/RD
11	
12	

1	
2	YE/BL
3	BR/RD
4	BR
5	BR/YE
6	BR/GN
7	BR/BK
8	BR/WT
9	
10	
11	KEY
12	
13	RD
14	GY/RD
15	GY
16	


MATERIALS LIST

1	E-00804-0012	CONNECTOR, HOUSING CAP, 12 PIN	1
2	E-00737-0016	CONNECTOR, IDC, MTA-100, 22AWG, 16 CIRCUIT	1
3	E-00807	TERMINAL, AMP SOCKET, 24-18 AWG	10
4	E-00775-0016	COVER, MTA-100, 16 POSITION	1
5	E-00774	KEY PLUG, MTA-100	1
6	E-00647-0020	MARKER TIE	1
7	E-00647-0004	CABLE TIE, 4"	-

WIRE RUNNING LIST

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BR	A-8	B-4	12.50"	22	NONE
2	BR/BK	A-1	B-7	12.50"	22	NONE
3	BR/RD	A-3	B-3	12.50"	22	NONE
4	BR/YE	A-7	B-5	12.50"	22	NONE
5	BR/GN	A-2	B-6	12.50"	22	NONE
6	BR/WT	A-6	B-8	12.50"	22	NONE
7	RD	A-5	B-13	12.50"	22	NONE
8	YE/BL	A-4	B-2	12.50"	22	NONE
9	GY	A-9	B-15	12.50"	22	NONE
10	GY/RD	A-10	B-14	12.50"	22	NONE

Wheel LED PCB Jumper
CBL-20345-0001

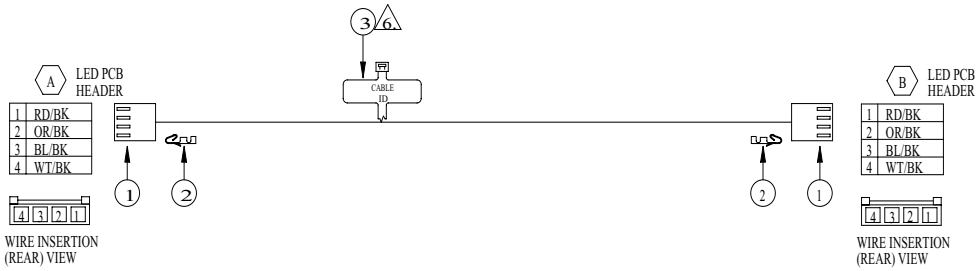

1	RD/BK
2	OR/BK
3	BL/BK
4	WT/BK

RUN LIST

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	RD/BK	A-1	B-1	8.50"	22	
2	OR/BK	A-2	B-2	8.50"	22	
3	BL/BK	A-3	B-3	8.50"	22	
4	WT/BK	A-4	B-4	8.50"	22	


1	E-01084-0129	CONN, MOLEX KK, PLUG, POLARIZED, 0.100, 4 CKT.	2
2	E-01085-0003	TERMINAL, MOLEX KK, 22-30 AWG.	8
3	E-00647-0020	MARKER TIE, ID TAG	1
4	E-00647-0004	TIE WRAP, 3/32 X 3 7/8	-

©2004 Bally Gaming and Systems

Monte Carlo Circuit Boards


Monte Carlo Circuit Boards		
Part #	Description	Page #
AS-03356-0527	Wheel Driver	30
AS-03356-0535	Wheel Control Unit	26
AS-03356-0538	LED Board Assembly	24
AS-03356-0545	11-Light Board Assembly	29
AS-03356-0546	Marquee Board Assembly	28

9-LED PCB Assembly
AS-03356-0538

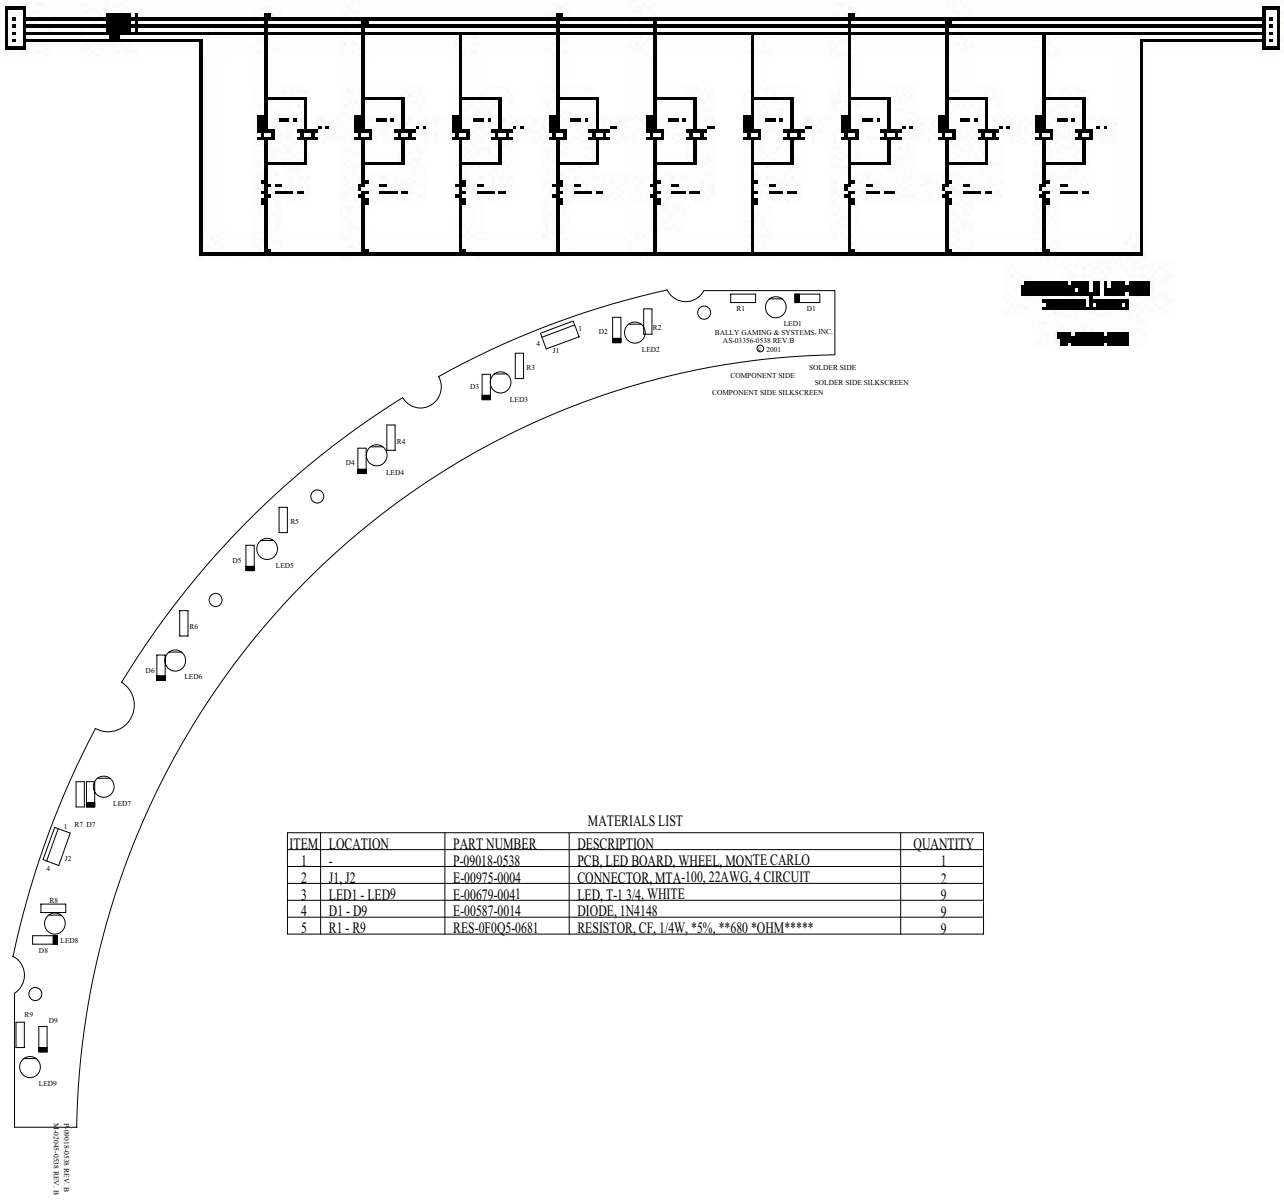

MATERIALS LIST


ITEM	LOCATION	PART NUMBER	DESCRIPTION	QUANTITY
1	-	P-09018-0538	PCB, LED BOARD, WHEEL, MONTE CARLO	1
2	J1, J2	E-00975-0004	CONNECTOR, MTA-100, 22AWG, 4 CIRCUIT	2
3	LED1 - LED9	E-00679-0041	LED, T-1 3/4, WHITE	9
4	D1 - D9	E-00587-0014	DIODE, 1N4148	9
5	R1 - R9	RES-0F0Q5-0681	RESISTOR, CF, 1/4W, *5%, **680 *OHM*****	9

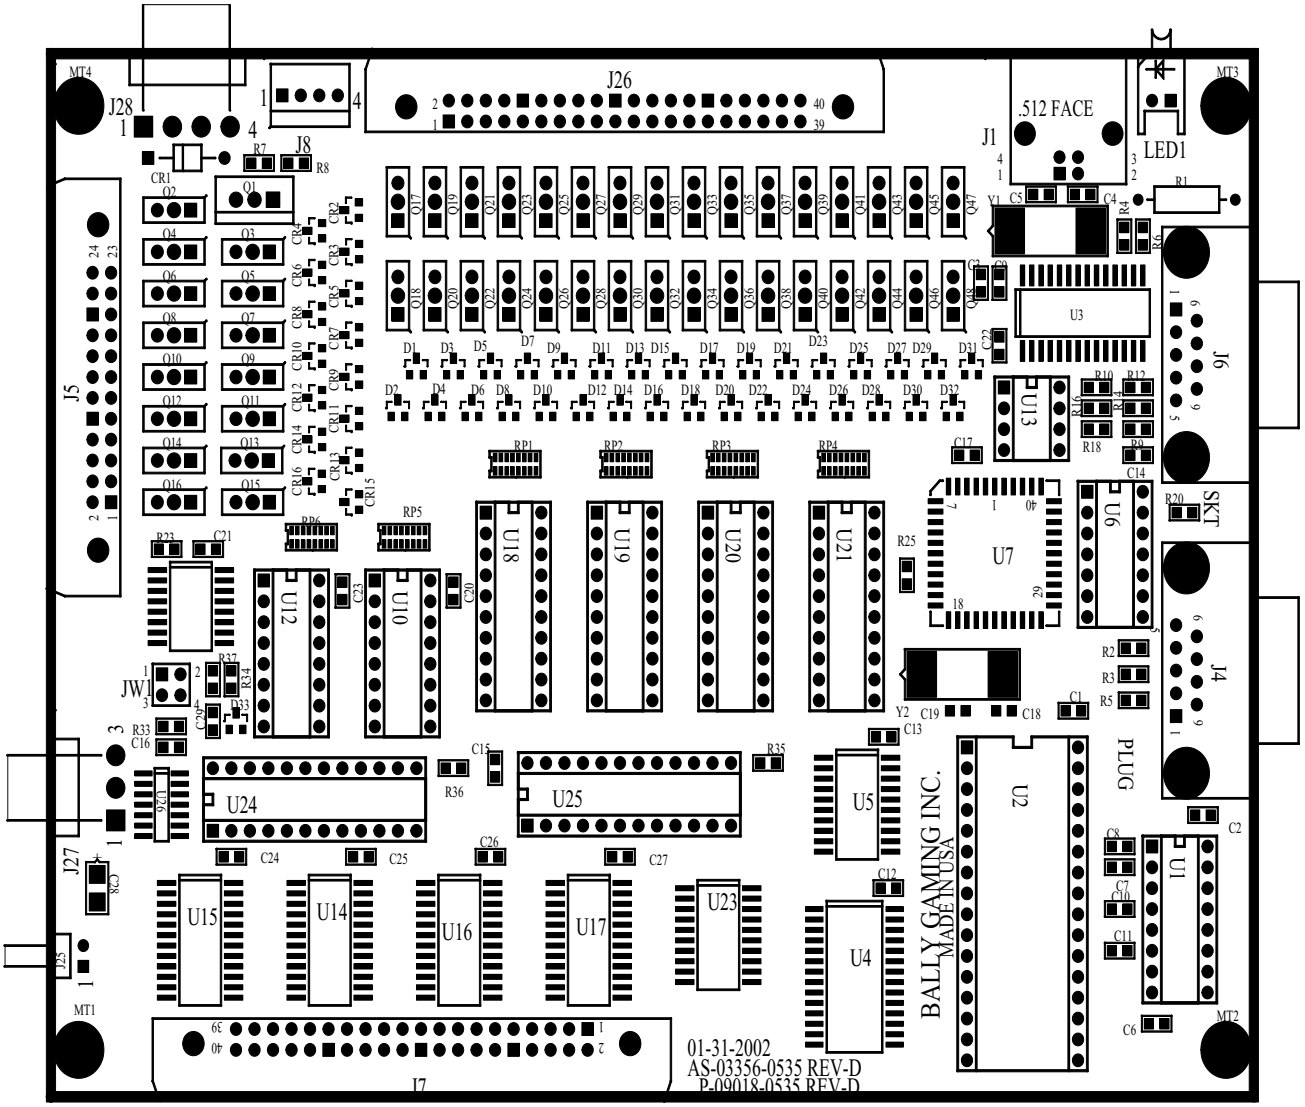

(continued)


©2004 Bally Gaming and Systems

Wheel Control Unit (cont.)
AS-03356-0535

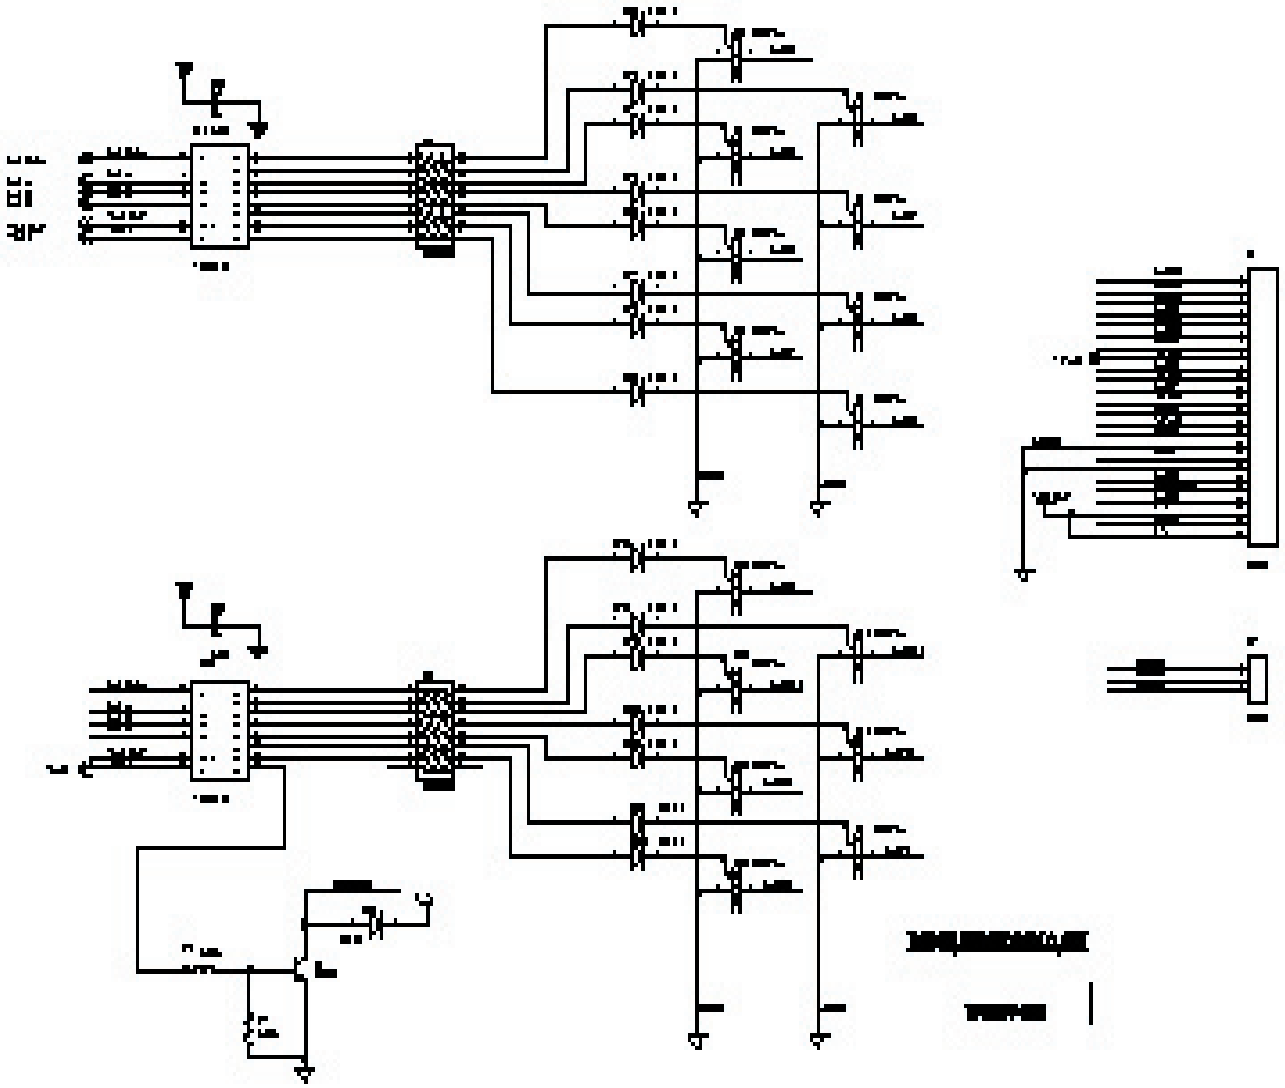


(continued)


©2004 Bally Gaming and Systems

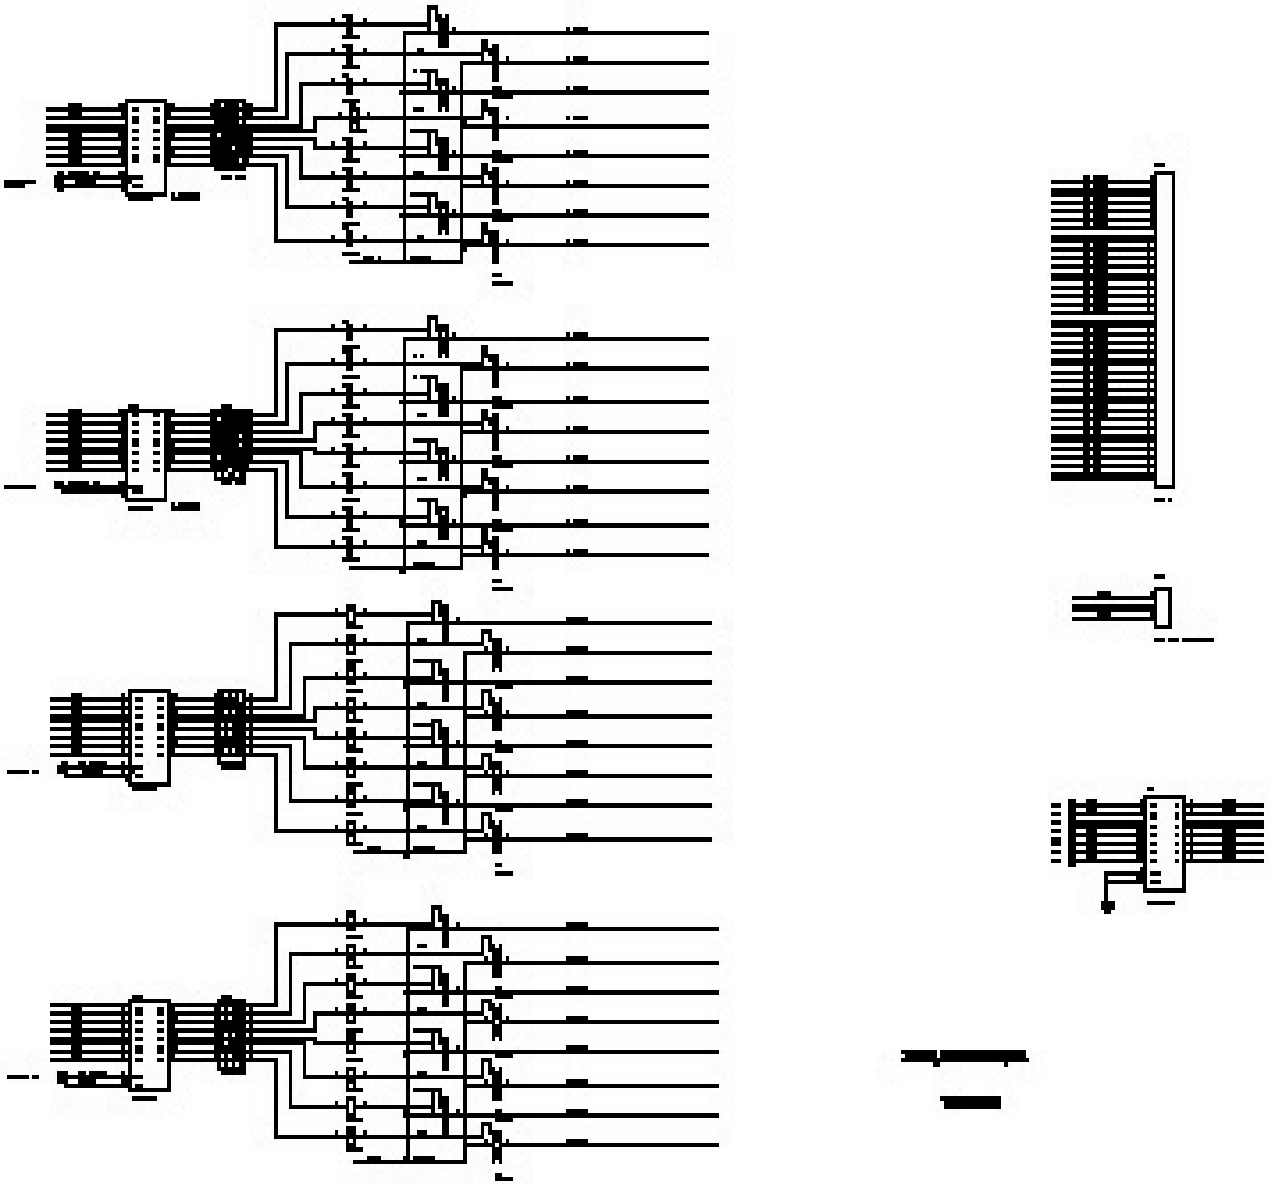

©2004 Bally Gaming and Systems

Marquee Board Assembly
AS-03356-0546

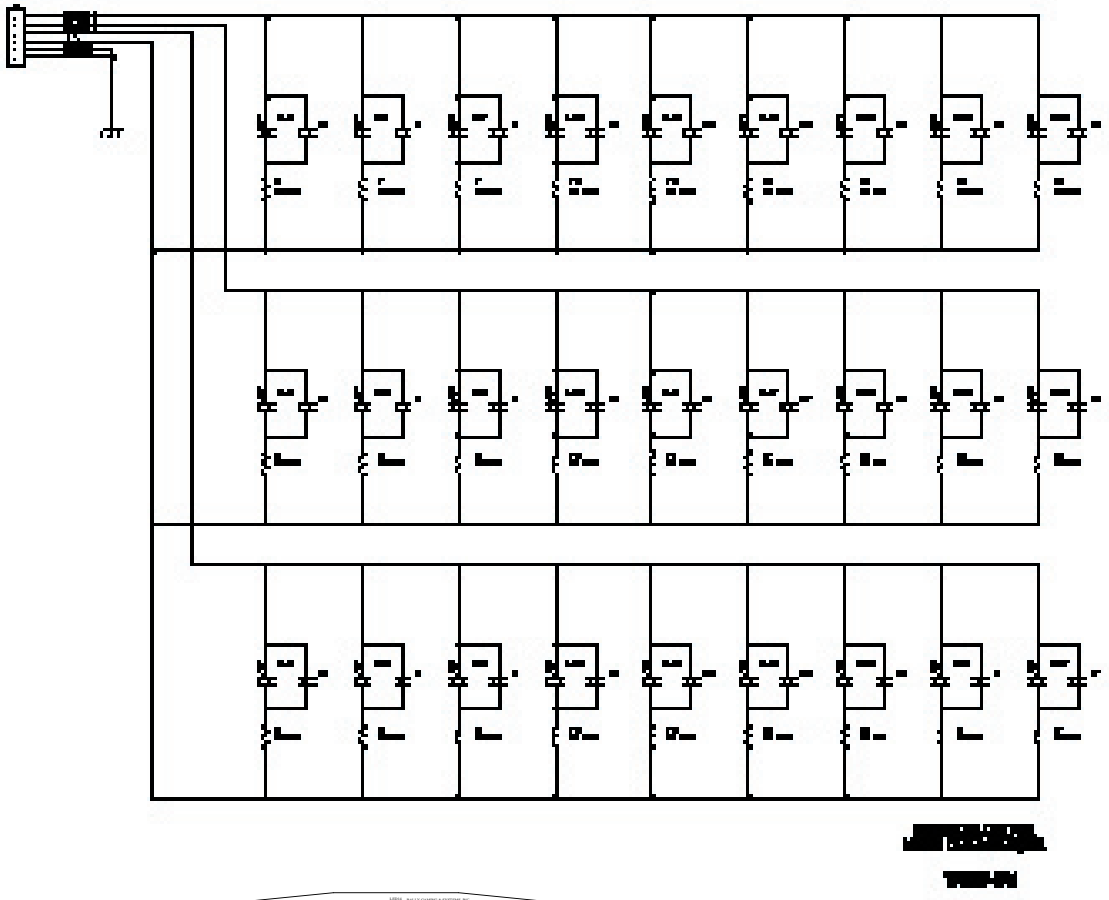


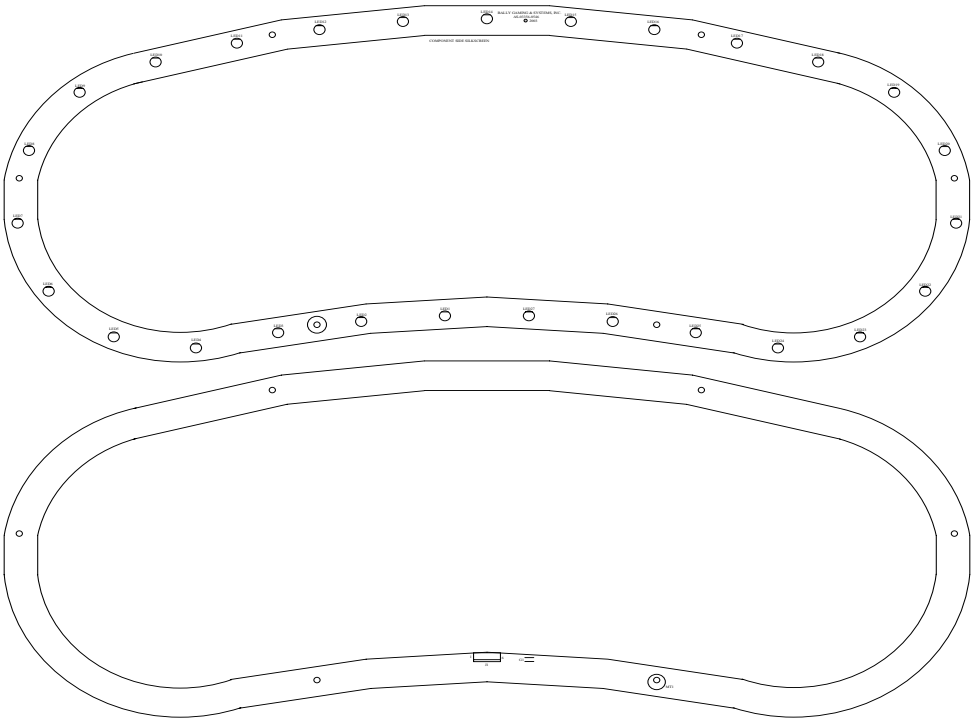


MATERIALS LIST

ITEM	LOCATION	PART NUMBER	DESCRIPTION	QUANTITY
1	-	P-03618-0546	PCB, LED PCB, MARQUEE, MONTE CARLO	1
2	J1	F-00999-0006	CONNECTOR, FRICTION LOCK HEADER, .100, 6 PIN	1
3	LED1 - LED27	F-00679-0041	LED, T-1 3/4, WHITE	27
4	D1 - D27	F-DSS87-0002	DIODE, SM, HIGH CONDUCTANCE ULTRA FAST, MMBD4148	27
5	R1 - R27	RAM-09QX5-0631	RESISTOR, SM, THK, 1/16, 10%, **ohm, NiSM	27
6	J11	P-00405-0154	**6 SERIES FASTON TAB - PCB, AMP P/N 63849-1	1

11-Light Board Assembly
AS-03356-0545

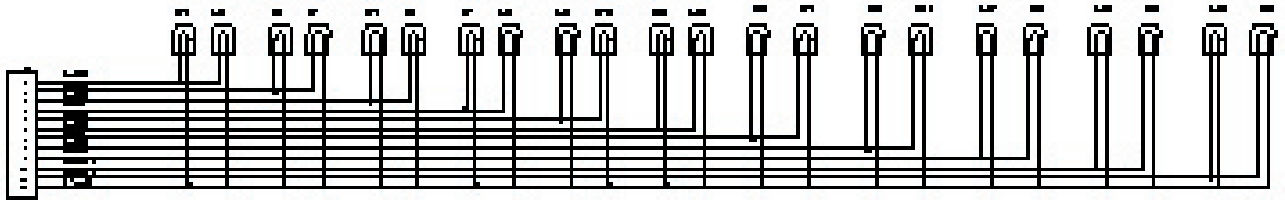

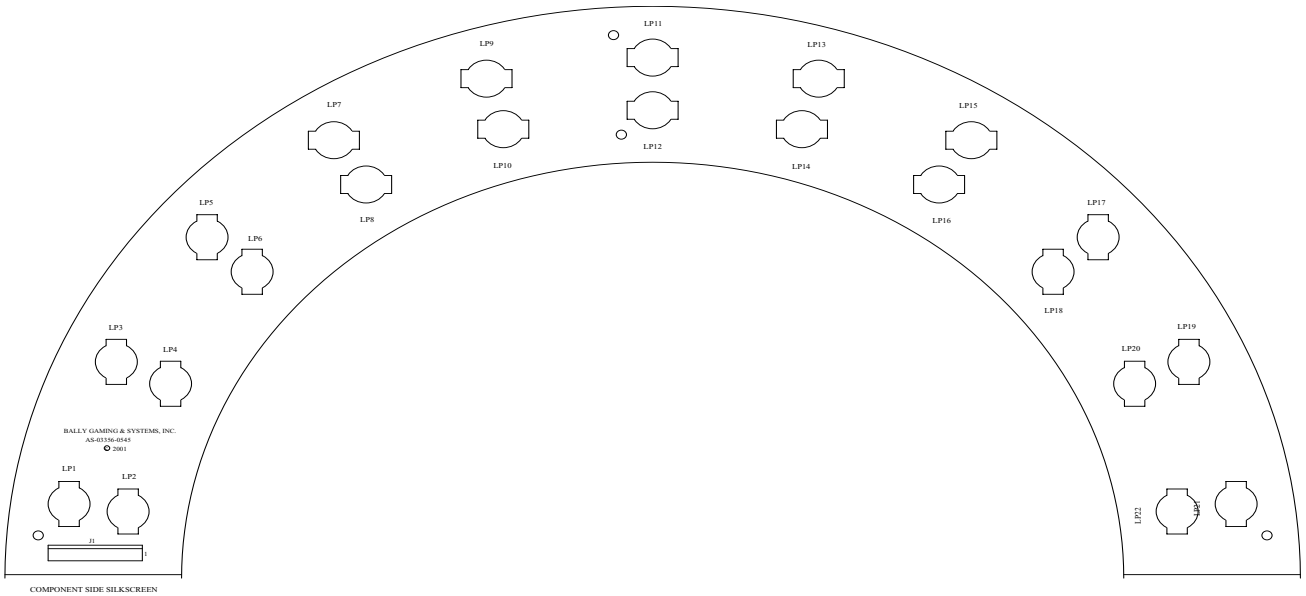


COMPONENT SIDE SILKSCREEN

MATERIALS LIST

ITEM	LOCATION	PART NUMBER	DESCRIPTION	QUANTITY
1	-	P-09018-0545	PCB, 11 LIGHT BOARD, MONTE CARLO	1
2	J1	E-00989-0012	POST HEADER, 12 PIN	1

©2004 Bally Gaming and Systems

Wheel Driver
AS-03356-0527

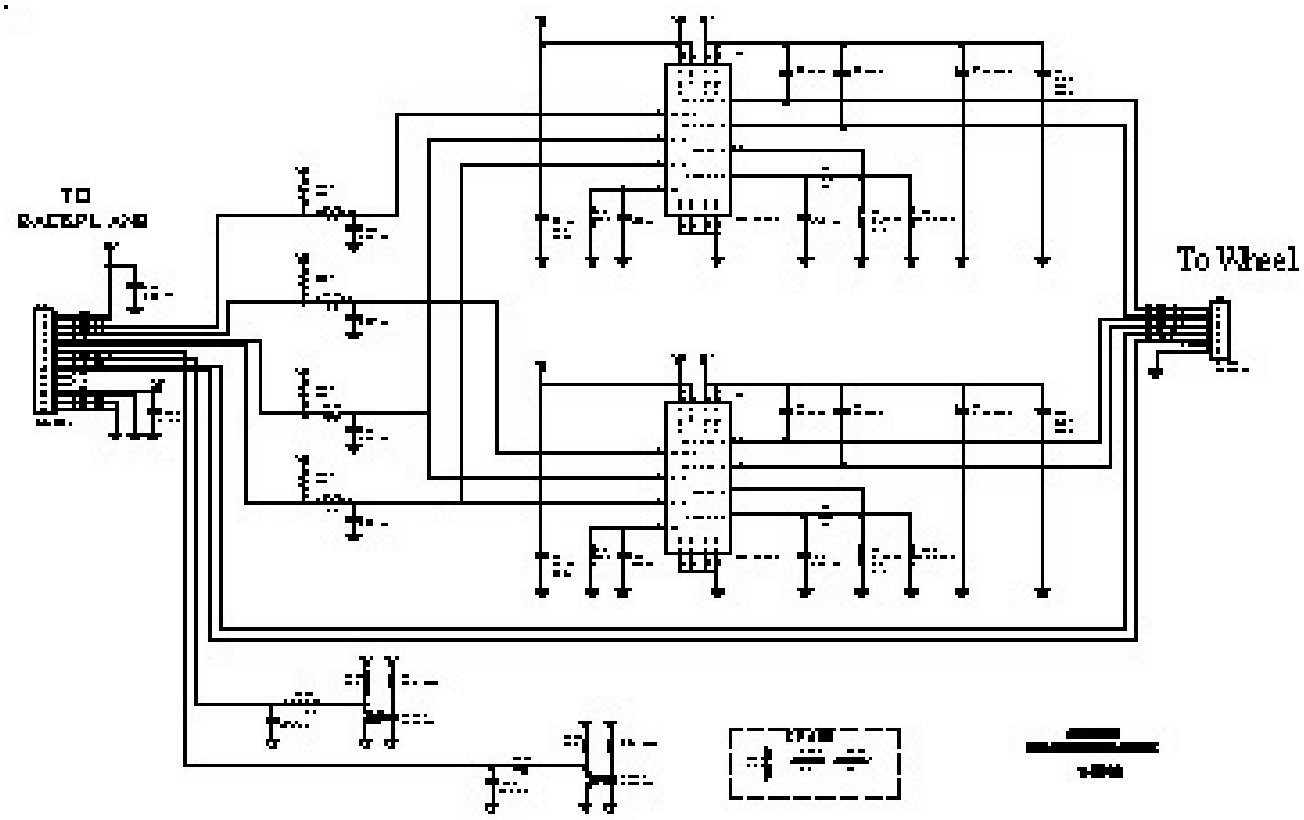

©2004 Bally Gaming and Systems