

Exp No: 4

7 SEGMENT DISPLAY USING AT89C51 USING PROTEUS

AIM:

To write an assembly language program for 7 Segment Display Using AT89C51 using Keil and Proteus

SOFTWARE REQUIRED:

- Proteus 8 software.

PROGRAM:

```
ORG 000H
UP:MOV P2,#0C0H
ACALL DELAY
MOV P2,#0F9H
ACALL DELAY
MOV P2,#0A4H
ACALL DELAY
MOV P2,#0B0H
ACALL DELAY
MOV P2,#99H
ACALL DELAY
MOV P2,#92H
ACALL DELAY
MOV P2,#82H
ACALL DELAY
```

MOV P2,#0F8H

ACALL DELAY

MOV P2, #80H

ACALL DELAY

MOV P2,#90H

ACALL DELAY

DELAY: MOV R5,#10

H1:MOV R4,#180

H2:MOV R3,#255

H3:DJNZ R3,H3


DJNZ R4,H2

DJNZ R5,H1

RET

END

OUTPUT:

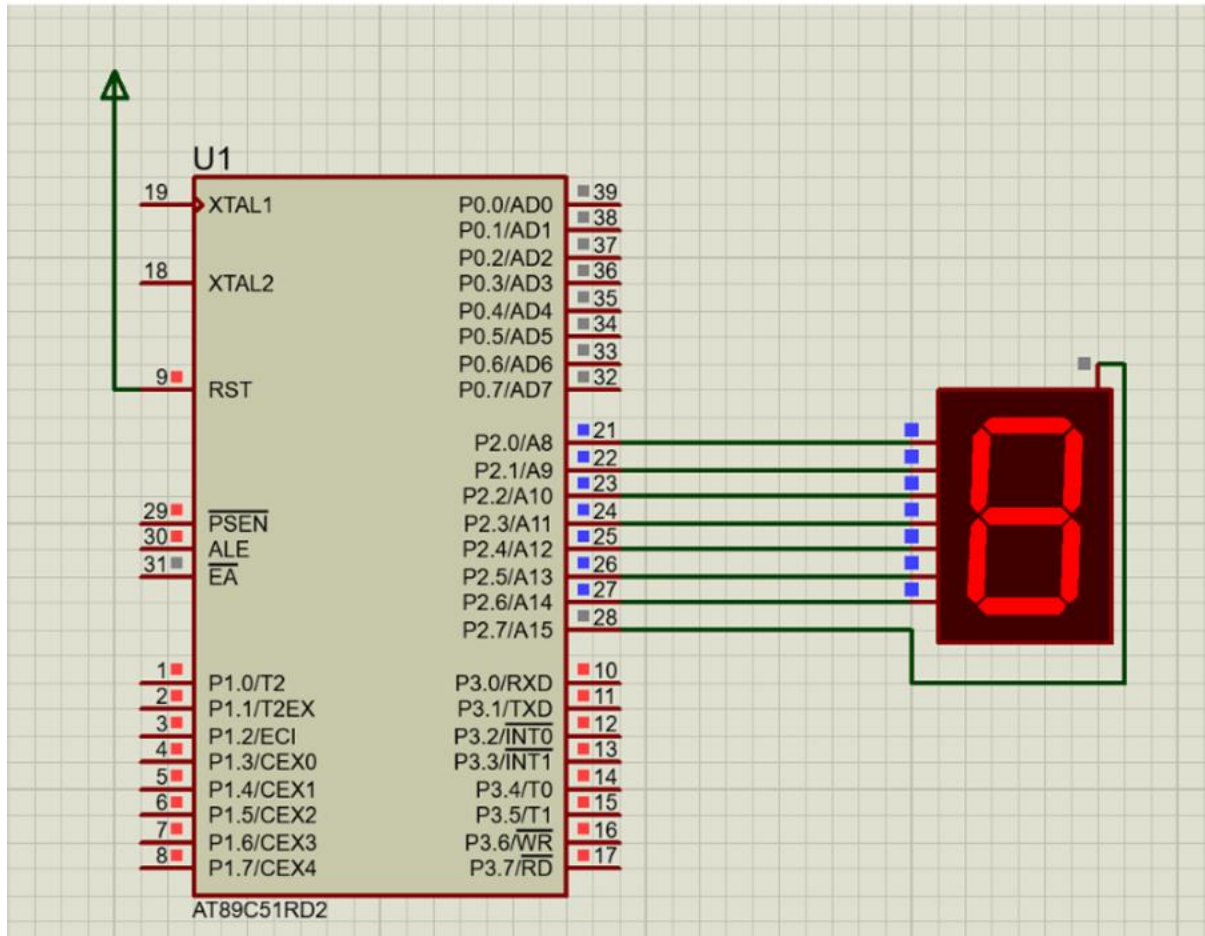

RESULT:

Thus the program has been successfully verified and executed