

Technical Data Sheet Chip Infrared LED With Right Angle Lens

IR12-21C/TR8

Features

- Small double-end package
- Low forward voltage
- Good spectral matching to Si photo detector
- Pb free
- The product itself will remain within RoHS compliant version.



Descriptions

IR12-21C/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with right angle lens. The device is spectrally matched with silicon photodiode and phototransistor.

Applications

- PCB mounted infrared sensor
- Infrared emitting for miniature light barrier
- Floppy disk drive
- Optoelectronic switch
- Smoke detector


Device Selection Guide


LED Part No.	Chip	Lens Color
LED I alt No.	Material	Lens Color
IR12-21C/TR8	GaAlAs	Water Clear


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 1 of 10




Package Dimensions








For reflow soldering (propose)





Notes: 1.All dimensions are in millimeters

2.Tolerances unless dimensions ±0.1mm

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_{F}	65	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature *1	T_{sol}	260	$^{\circ}\!\mathbb{C}$
Power Dissipation at(or below)	P_d	130	mW
25°C Free Air Temperature			

Notes: *1:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 2 of 10



Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units	
	Ie	$I_F=20mA$	0.5	0.8			
Radiant Intensity		$I_F\!\!=\!\!100mA$ Pulse Width \leq 100 μ s ,Duty \leq 1%	1	4.0		mW/sr	
Peak Wavelength	λp	I _F =20mA	1	940		nm	
Spectral Bandwidth	Δλ	I _F =20mA	1	45		nm	
	V_{F}	I _F =20mA		1.2	1.5		
Forward Voltage		$I_F \!\!=\! 100 mA$ Pulse Width $\leq 100 \mu\text{s}$,Duty $\leq 1\%$		1.4	1.8	V	
		$I_F=1A$		2.6	4.0		
Reverse Current	I_R	V _R =5V			10	μΑ	
View Angle	2 \theta 1/2	I _F =20mA		160		deg	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 3 of 10



Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs.

Ambient Temperature




Fig.2 Spectral Distribution




Fig.3 Peak Emission Wavelength Ambient Temperature





Fig.4 Forward Current vs. Forward Voltage



Everlight Electronics Co., Ltd.

Device No: DTR-012-001

http://www.everlight.com

Prepared date: 09-03-2008

Rev 3

Page: 4 of 10

Prepared by : Jaine Tsai



Typical Electro-Optical Characteristics Curves

Fig.5 Relative Intensity vs.
Forward Current





Fig.6 Relative Radiant Intensity vs.



Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 5 of 10


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

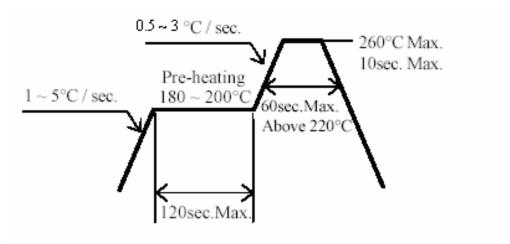

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 6 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

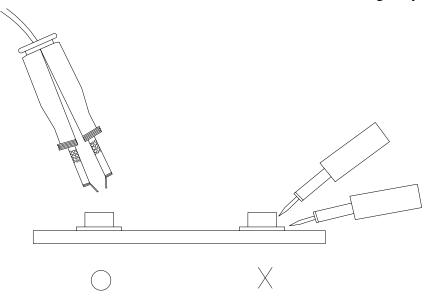

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 7 of 10



Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%


LTPD: 10%

NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW Soldering	TEMP. : 260°C±5°C	6Mins	22pcs		0/1
		10secs			$I_R \ge U \times 2$	
2	Temperature Cycle	$H: +100^{\circ}C$ 15mins	50Cycles	22pcs	Ie≦Lx0.8	0/1
		5mins			$V_F \ge U \times 1.2$	
		L:-40°C 1 5mins				
3	Thermal Shock	H :+100°C ▲ 5mins	50Cycles	22pcs	U: Upper	0/1
		↓ 10secs	-		Specification	
		L :-10°C 5mins			Limit	
4	High Temperature	TEMP. : +100°C	1000hrs	22pcs	L: Lower	0/1
	Storage				Specification	
5	Low Temperature	TEMP. : -40°C	1000hrs	22pcs	Limit	0/1
	Storage					
6	DC Operating Life	I _F =20mA	1000hrs	22pcs		0/1
7	High Temperature/	85°C / 85% R.H	1000hrs	22pcs		0/1
	High Humidity					

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 8 of 10




Package Dimensions

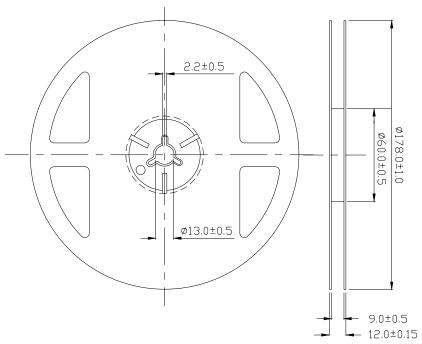

Taping Dimensions

Progressive direction

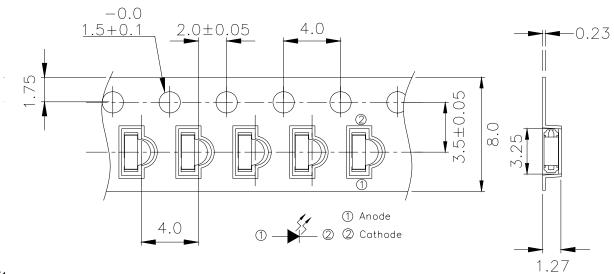

Unit:mm

Everlight Electronics Co., Ltd.

Device No: DTR-012-001

http://www.everlight.com

Prepared date : 09-03-2008

Rev 3

Page: 9 of 10

Prepared by : Jaine Tsai



Packing Quantity Specification

1.2000Pcs/1Volume, 1Volume/1Bag

2.10Boxes/1Carton

Label Form Specification



CPN: Customer's Production Number

P/N: Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 3 Page: 10 of 10