

ASSIGNMENT 3 ALB Date: 32654

Q1


A: T = Temperature, P = Pressure,
M = Master switch, W = Warning Light

T	P	M	W
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

B: ~~W = TP + M~~

$$W = TP + M$$

C:

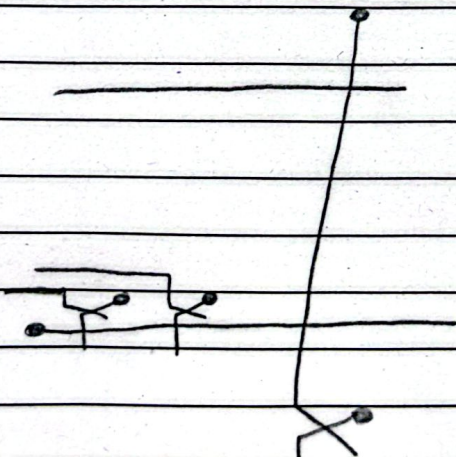

Date: _____


Q2

A: W = Water level, R = Rain, B = Battery

W	R	B	F
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	1

B: $F = W + RB$

C:

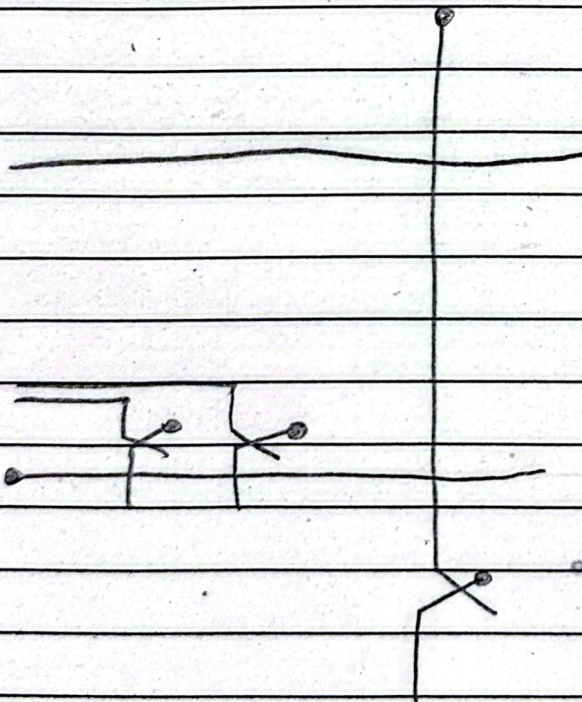

Date: _____

Q3


A: ϕ = Seewer temperature,

A = Ambient temperature, M = Maintenance

ϕ	A	M	F
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	0
1	1	0	1
1	1	1	1

B: $F = \phi (M' + A) / \phi M' + \phi A$

C:

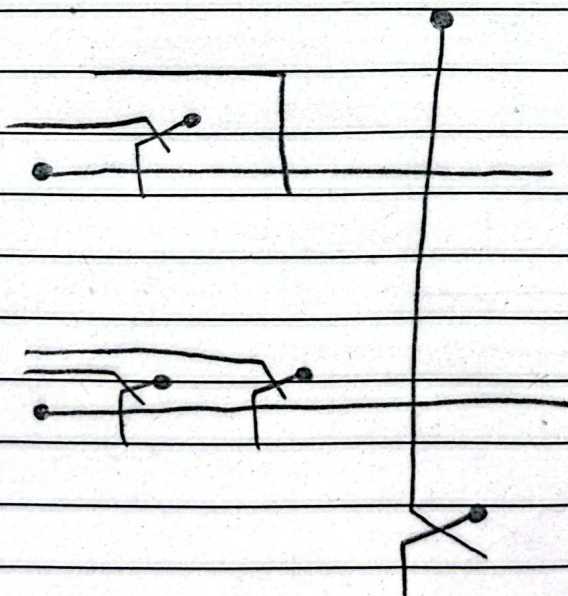

MIGHTY PAPER PRODUCT

Date: _____

Q4


A: M: Manager's key, C: Cashier's key,

T: Time lock

M	C	T	F
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	0
1	1	1	1

B: $F = T(M+C)$

C:

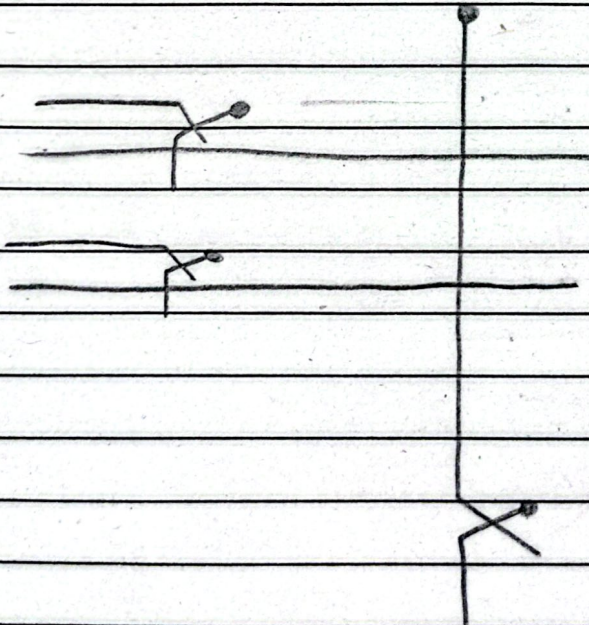

Date: _____


Q5

A: T = Temperature, H = Humidity,
M = Manual button.

T	H	M	F
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

B: $F = T + H + M$

C:

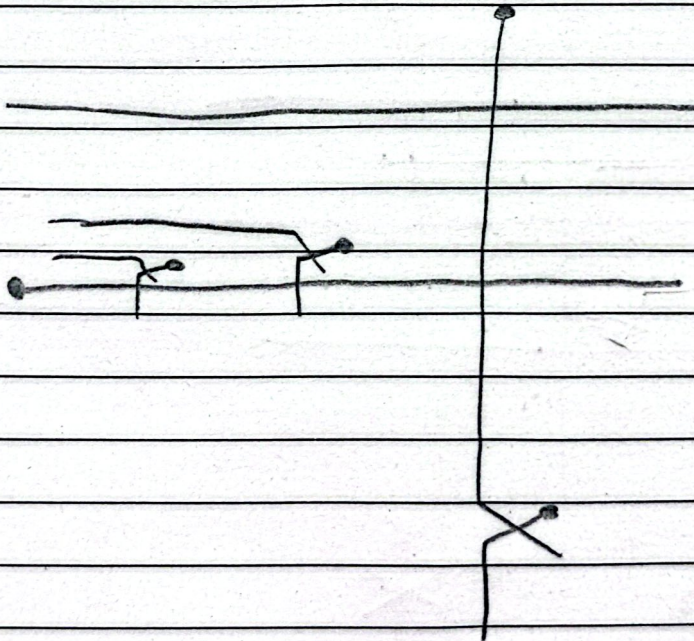

MIGHTY PAPER PRODUCT

Date: _____

Q6


A: w = Weight, D = Dimension,

M = Metal detector

w	D	M	F
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

B: $F = wD + M$

C:

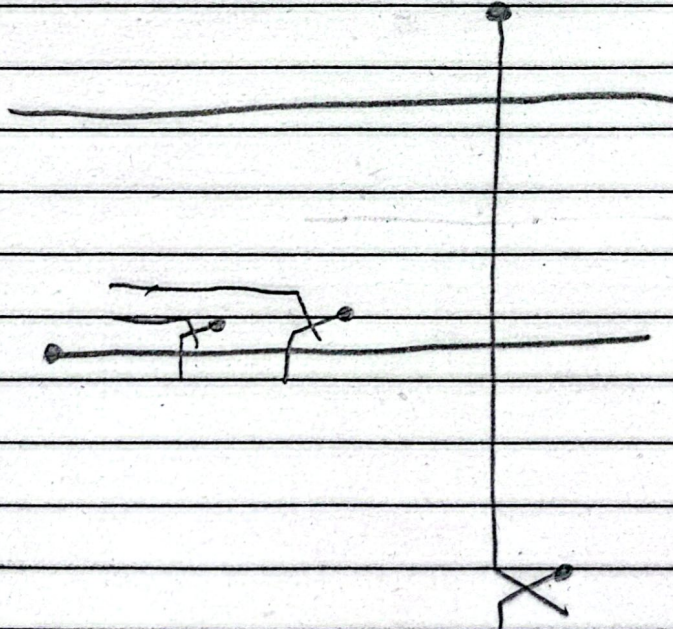

Date: _____

Q7


A: L = Lases, w = weight limit,

B = Bumper

L	w	B	F
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	1

B: $F = L + B$

C:

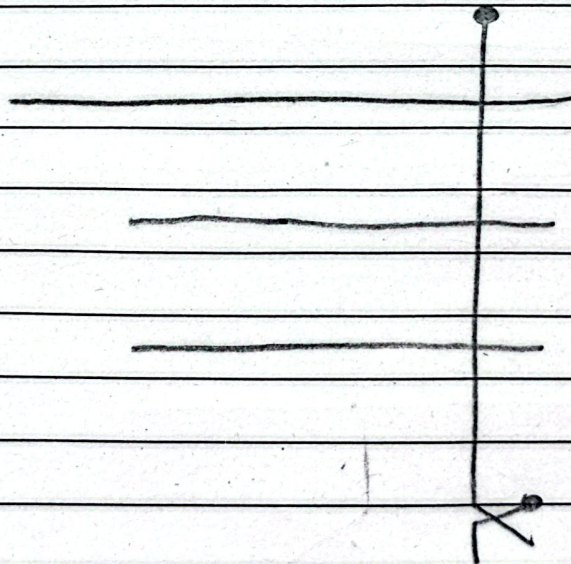


Date: _____

Q8:

A: S = Smoke, H = Heat, M = Manual pull

S	H	M	F
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

B: $I = SH + M$

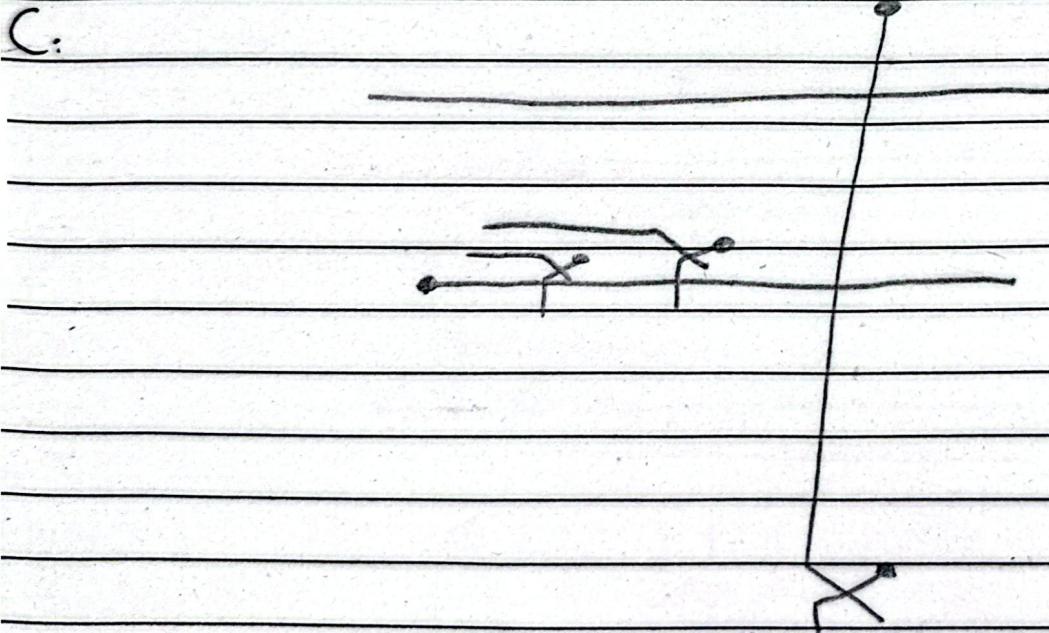

MIGHTY PAPER PRODUCT

Date: _____


QA

A: L = Light, C = Chickens inside, R = Rain

L	C	R	F
0	0	0	0
0	0	1	0
0	1	0	1
0	1	1	1
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

B: $F = C(L' + R)$

C:

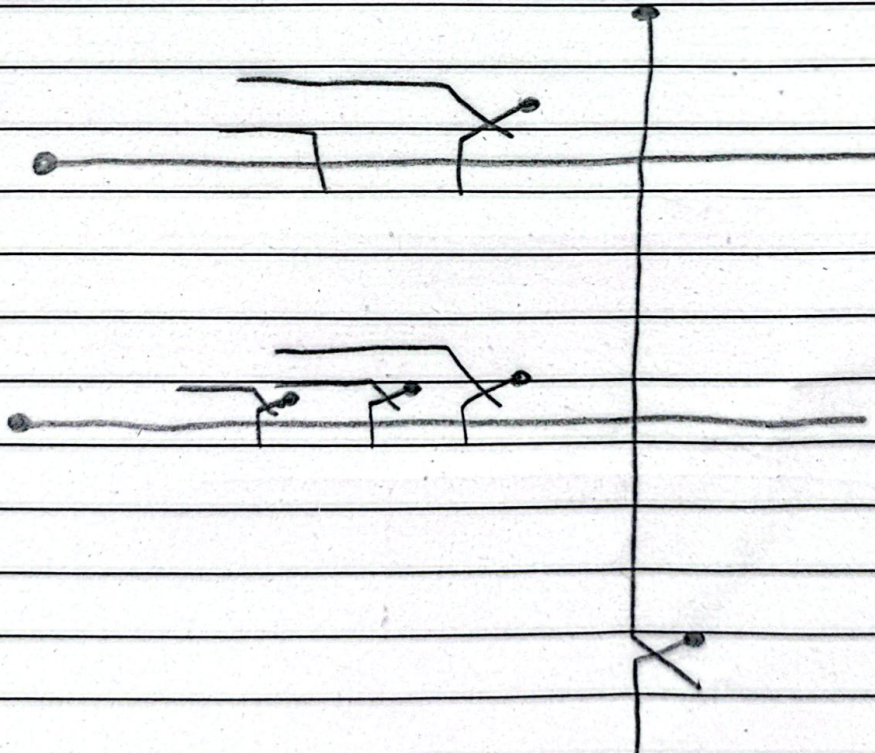

MIGHTY PAPER PRODUCT

Date: _____

Q10

A: B = Battery low, D = Distance, w = wind

B	D	w	F
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

B: $F = BD + Bw$

$F = B(D + w)$

C:

