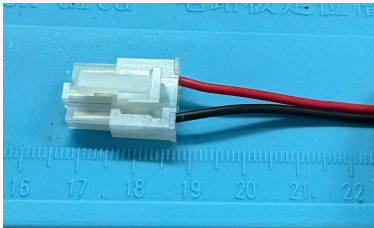



YYZ Pixel V2 Legacy Power Adapter 01

Diagram

50 mm adapter cable from legacy YYZ-PIXEL POWER-OUT to JST VH. Molex Mini-Fit Jr. 3-circuit receptacle to JST VH 2-position receptacle. Connects +5V and GND only.

J1		
Molex: 39-01-4030		
Molex Mini-Fit Jr.	receptacle	3-pin
+5V	1	
NC	2	
GND	3	
		
Molex Mini-Fit Jr. 03R		
Additional components		
2 x #4 (Female crimp contact)		
for: legacy YYZ-PIXEL POWER-OUT		

W1		
2x	18 AWG	50.0 mm
J1:1:+5V	RD:+5V	J2:1:+5V
J1:3:GND	BK:GND	J2:2:GND
Finished Cable Length: 50 mm +/- 5 mm. • Measure length between the rear wire-exit faces of the two connector housings. • Use manufacturer-approved crimp tooling, or equivalent production crimp tooling. • Test assembly for continuity and polarity.		

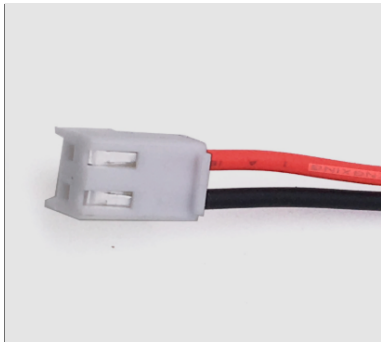J2		
JST: VHR-2N		
JST VH	F cable receptacle	2-pin
1	+5V	
2	GND	
		
Additional components		
2 x #3 (Crimp contact)		
for: YYZ-PIXEL_V2 end		

Bill of Materials

Id	Description	Qty	Unit	Designators	Manufacturer	MPN
1	Connector, JST VH, F cable receptacle, 2 pins	1		J2	JST	VHR-2N
2	Connector, Molex Mini-Fit Jr., receptacle, 3 pins	1		J1	Molex	39-01-4030
3	Crimp contact	2		J2	JST	SVH-21T-P1.1
4	Female crimp contact	2		J1	Molex	39-00-0039
5	Wire, 18 AWG, BK	50	mm	W1		
6	Wire, 18 AWG, RD	50	mm	W1		