

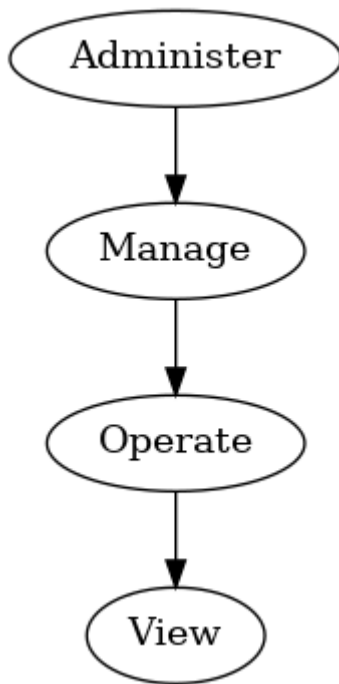


Figure 62. Access Control Privilege Levels

Individual clusters SHALL define whether attributes are readable, writable, or both readable and writable. Clusters also SHALL define which privilege is minimally required to be able to perform a particular read or write action on those attributes, or invoke particular commands. Device type specifications MAY further restrict the privilege required.

The Access Control Cluster SHALL require the Administer privilege to observe and modify the Access Control Cluster itself. The Administer privilege SHALL NOT be used on Access Control Entries which use the Group auth mode.

E.g. A Fan Control Cluster may require Operate privilege to write to a level attribute (low/medium/high), and to configure each level's RPM setting via a command. The Fan Control Cluster may also expose a current RPM attribute, which requires only View privilege to read. Clients granted Operate privilege will be able to both change the level, and configure each level's RPM. Clients granted View privilege will be able to read the current RPM, but will not be granted sufficient privilege to change the level or configure each level's RPM.

E.g. A Fan Control Cluster may be included in a more industrial device type. To ensure proper operation, this device type may restrict configuration of fan level RPM settings to require Manage privilege. Clients granted Manage privilege will have sufficient privilege to configure each level's RPM; clients granted Operate privilege will not be able to perform such configuration, but will still be able to change the level. This additional restriction would apply only to the Fan Control Cluster as included in this particular device type; a client granted Operate privilege may still be able to perform configuration in Fan Control Clusters included in other device types on the same Node.