Remote OPT – installation and commissioning introduction

Danelec

Danelec

Partner Site →

Enhanced Danelec Safety Insights with Remote OPT

Danelec Commercial Information #15649

With Danelec Safety Insights, and your core expertise as a Danelec partner, you can offer proactive maintenance, decrease downtime, and help shipowners & technical managers with ensuring compliance.

Remote access to the Danelec VDR

Your expertise, combined with Danelec's large installed base, makes the digital solution Safety Insights the logical next step for ensuring a functional and compliant VDR system. This is achieved through remote access and manages of the customers' VDRs.

Better planning as a recurring service to shipowners

Danelec VDR Safety Insights empowers you, as a service partner, to take the next significant step in maintaining the Danelec VDR system. By establishing or extending service agreements with owners, you can reduce their planning burden while potentially increasing operating time of the VDRs. In addition, this enhances your customer stickiness by allowing you to potentially identify problems with connected sensors, further embedding your role as a trusted service partner.

AGENDA:

1. Installation overview
2. IT form
3. VDR settings
4. VRS settings
5. Finalization
6. Troubleshooting
7. Safety Insight platform

Installation overview

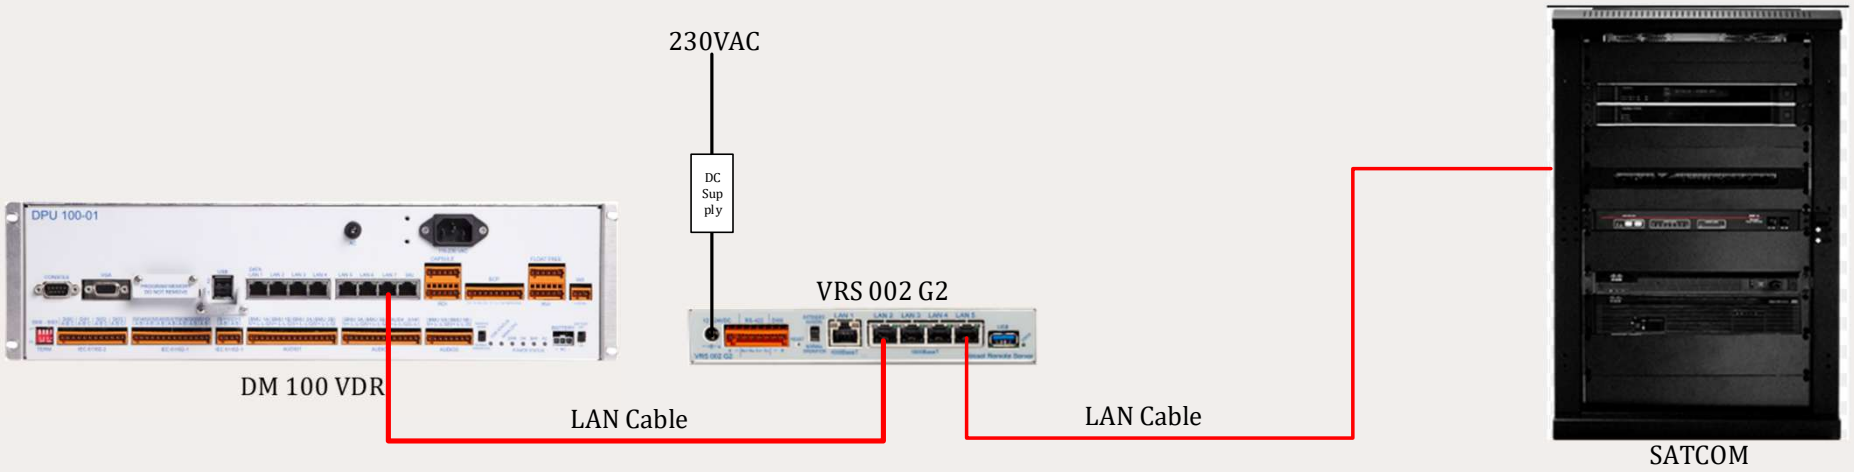

Remote OPT is supported with Danelec DM100 series.

Remote OPT Supported Danelec VDRs
DM100 VDR G2
DM100 S-VDR G2
DM100 L-VDR G2
DM100 VDR
DM100 L-VDR

IT Form

The IT details needs to be collected from an owner's IT department before attendence.

The IT form can be found on the Danelec Partner Portal

Downloads

↓

Sales resources

↓

Safety Insights Vessel IT form

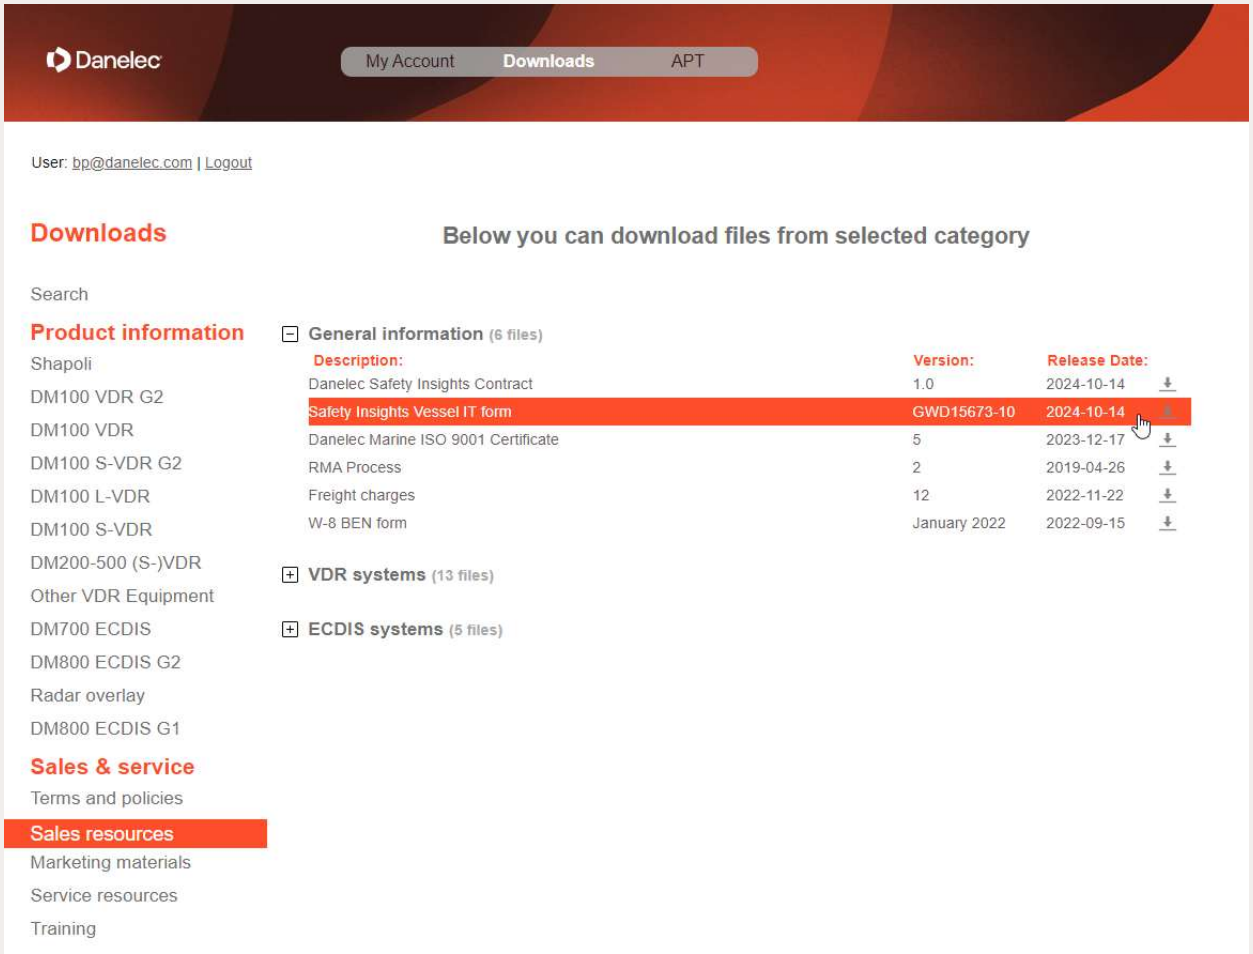

VDR settings

- The VDR software must be equal or higher than 2.35

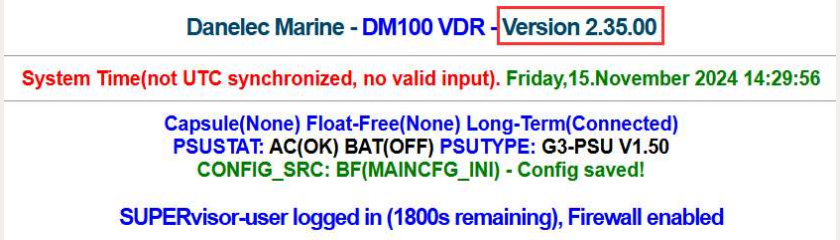

- Enable Multicast

- Allocate not occupied VDR LAN port with IP: 10.0.0.100. In this example LAN ports 3-7 can be used for the VRS connection.

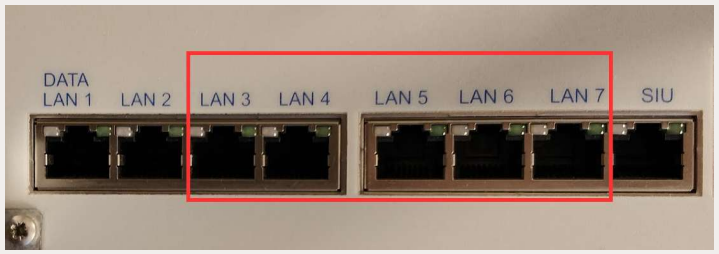

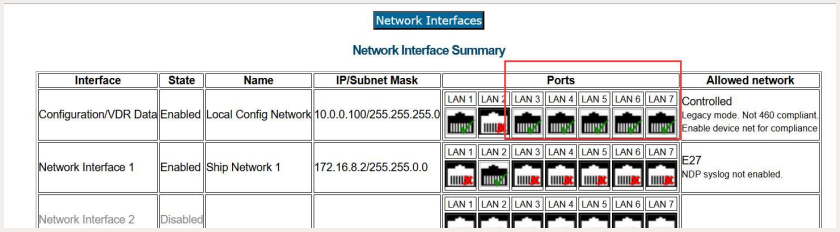

VRS settings

- VRS LAN 1 should be used for VRS configuration
- Web interface is available with https://10.1.0.80
- Default username and password: admin/Danelec1#
- In VRS with old software version username and password is admin/admin

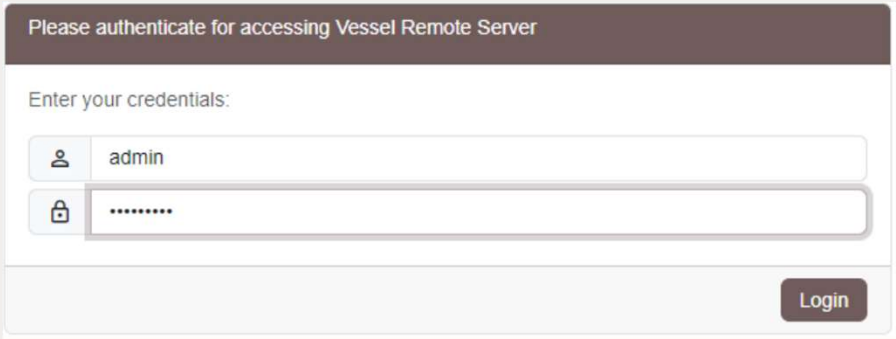

VRS settings

- Press button Start the Setup Process to proceed with quick setup guide.

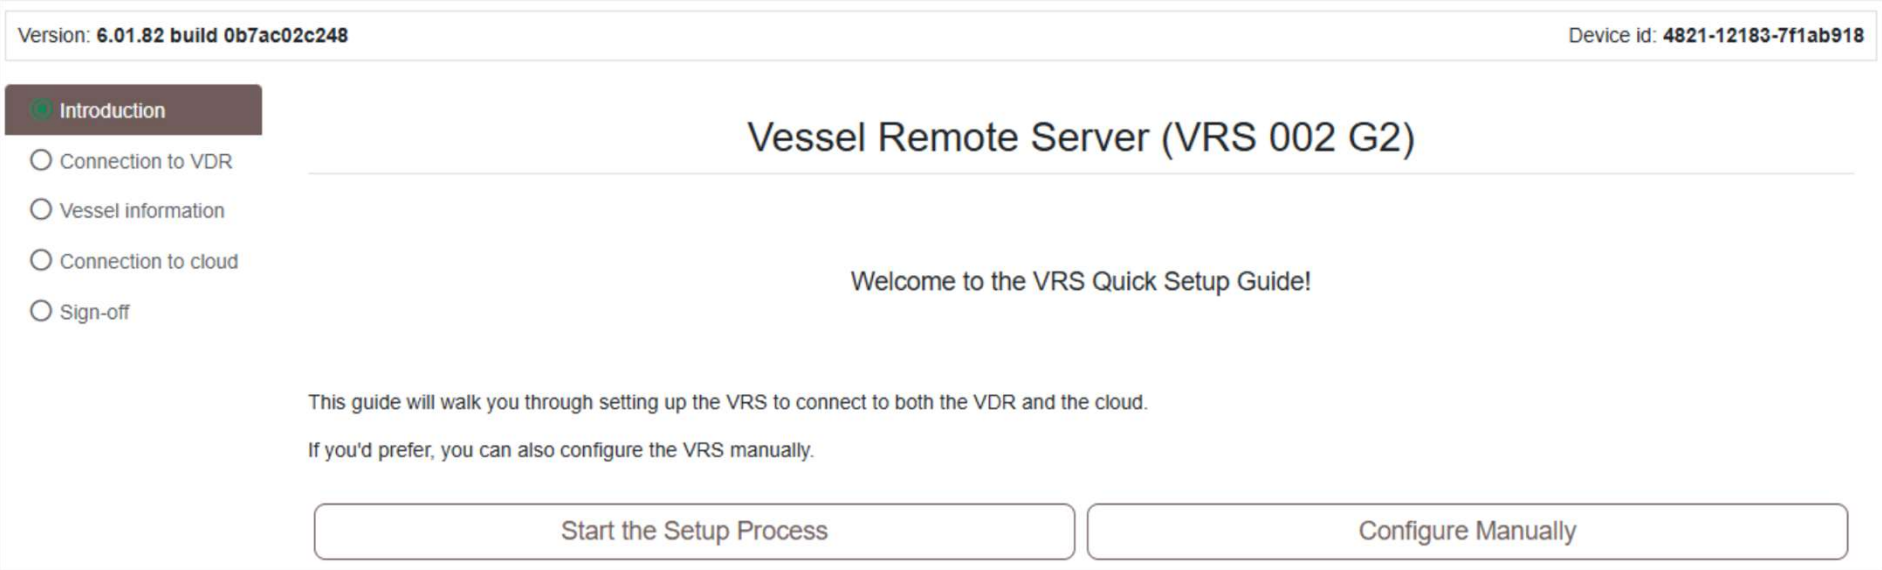

VRS settings

- Verify the VDR connection.

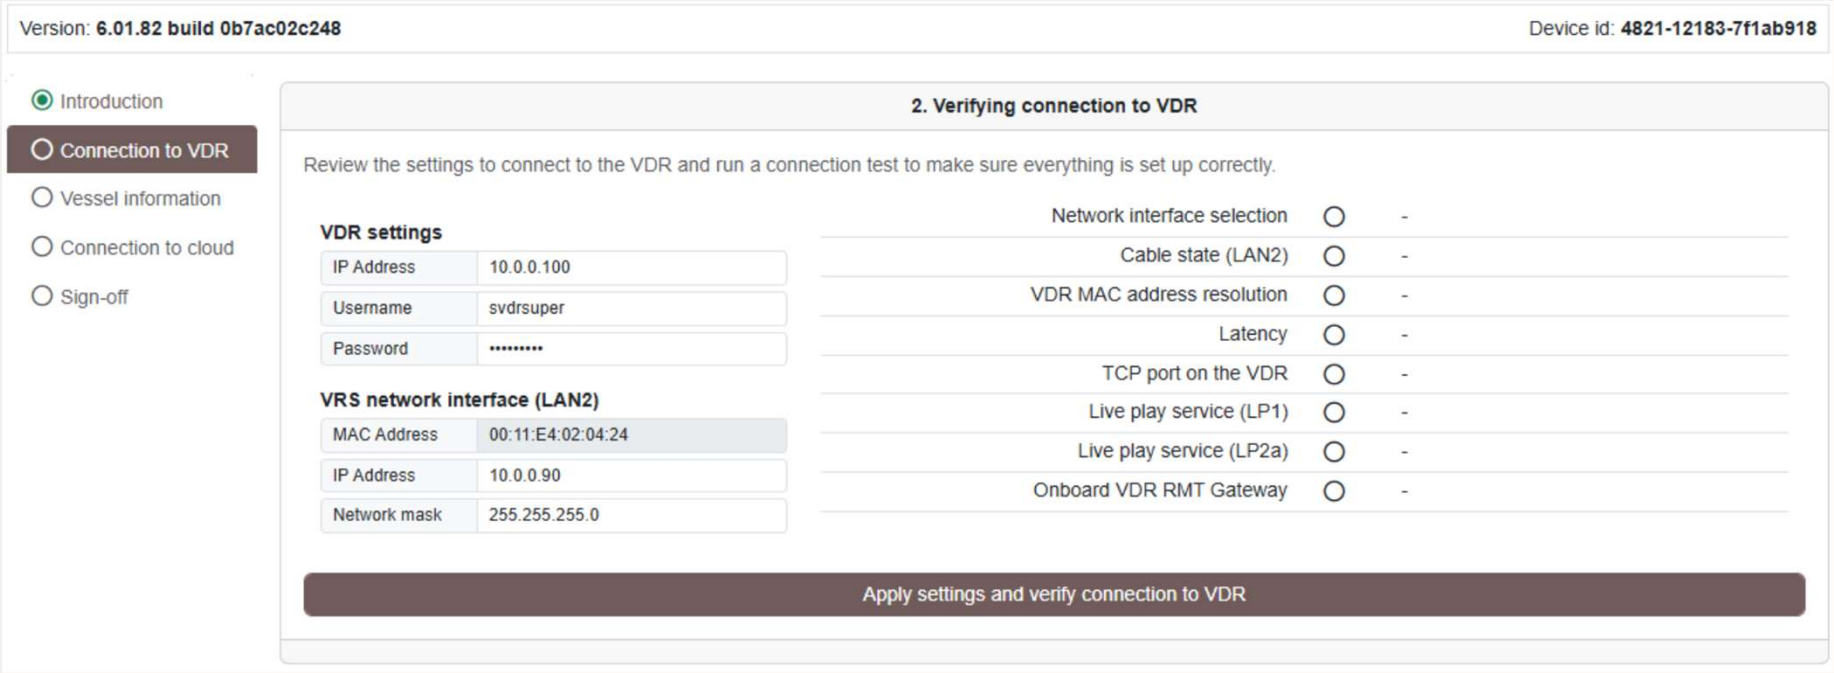

VRS settings

- Verify the VDR connection.

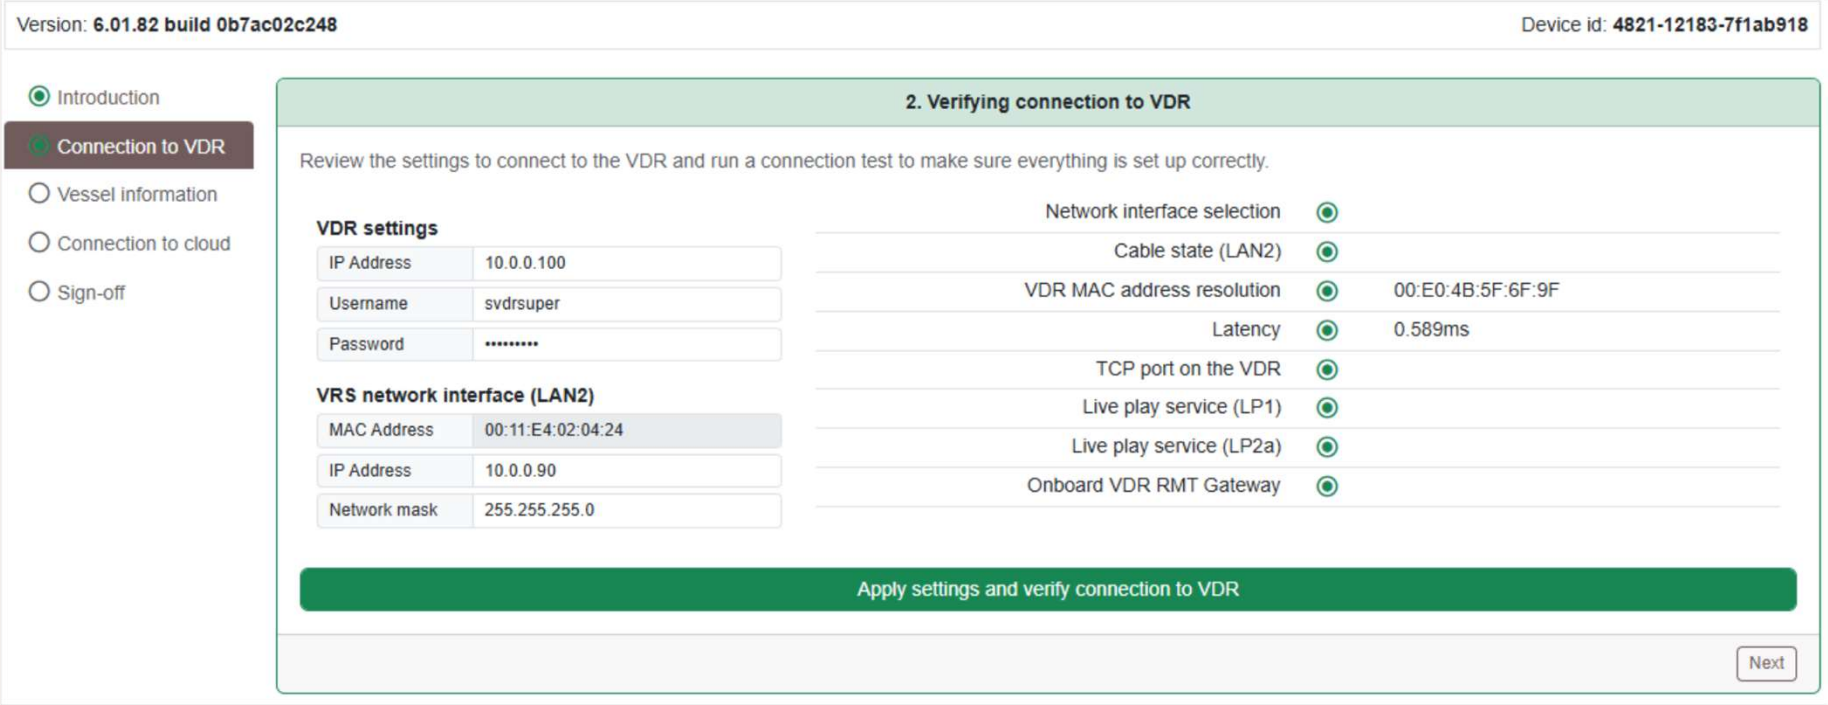

VRS settings

- Vessel information

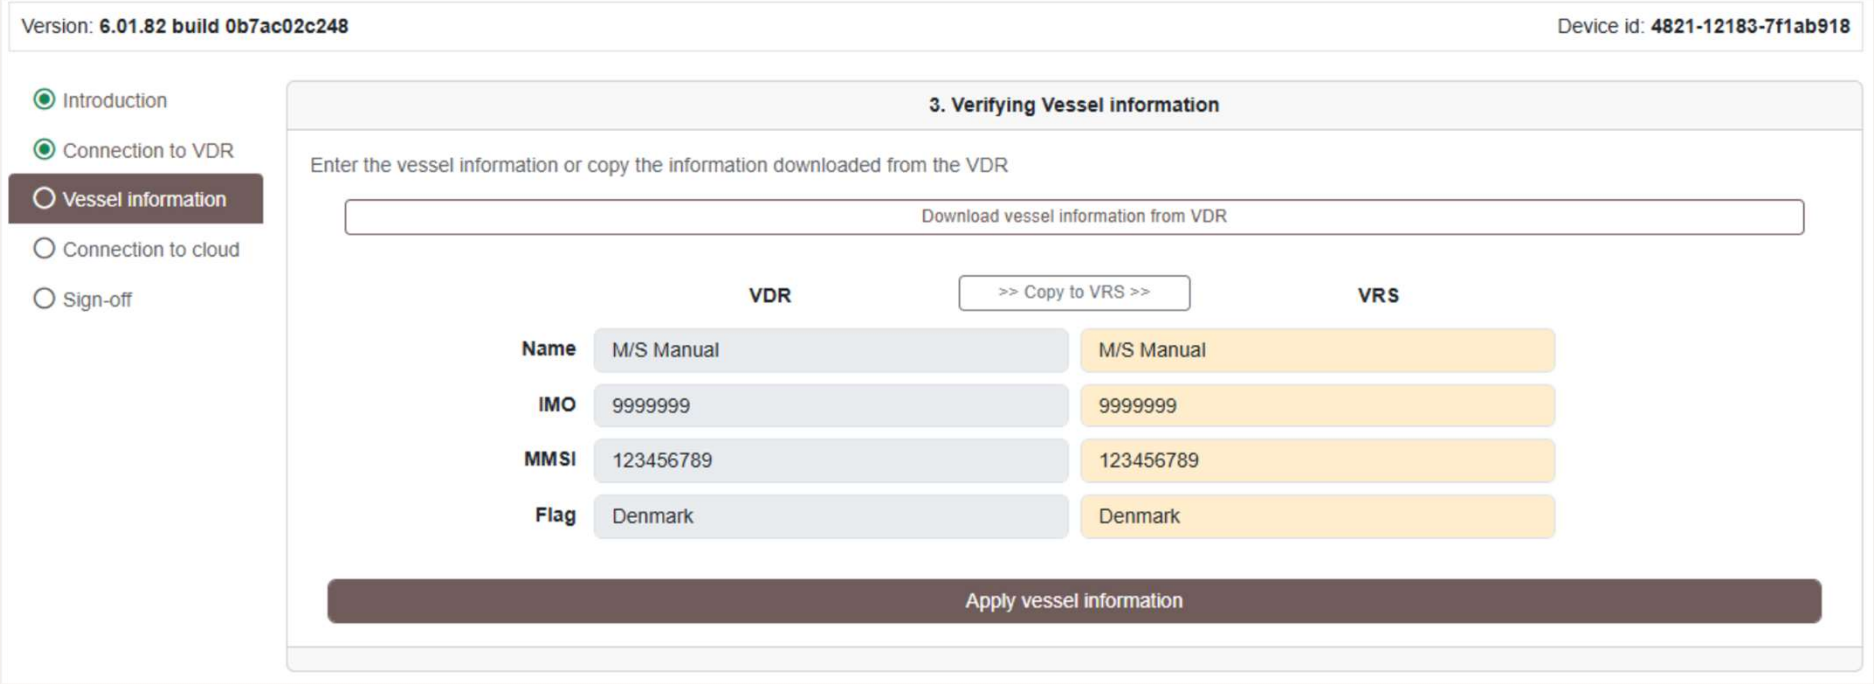

VRS settings

- Connection to cloud

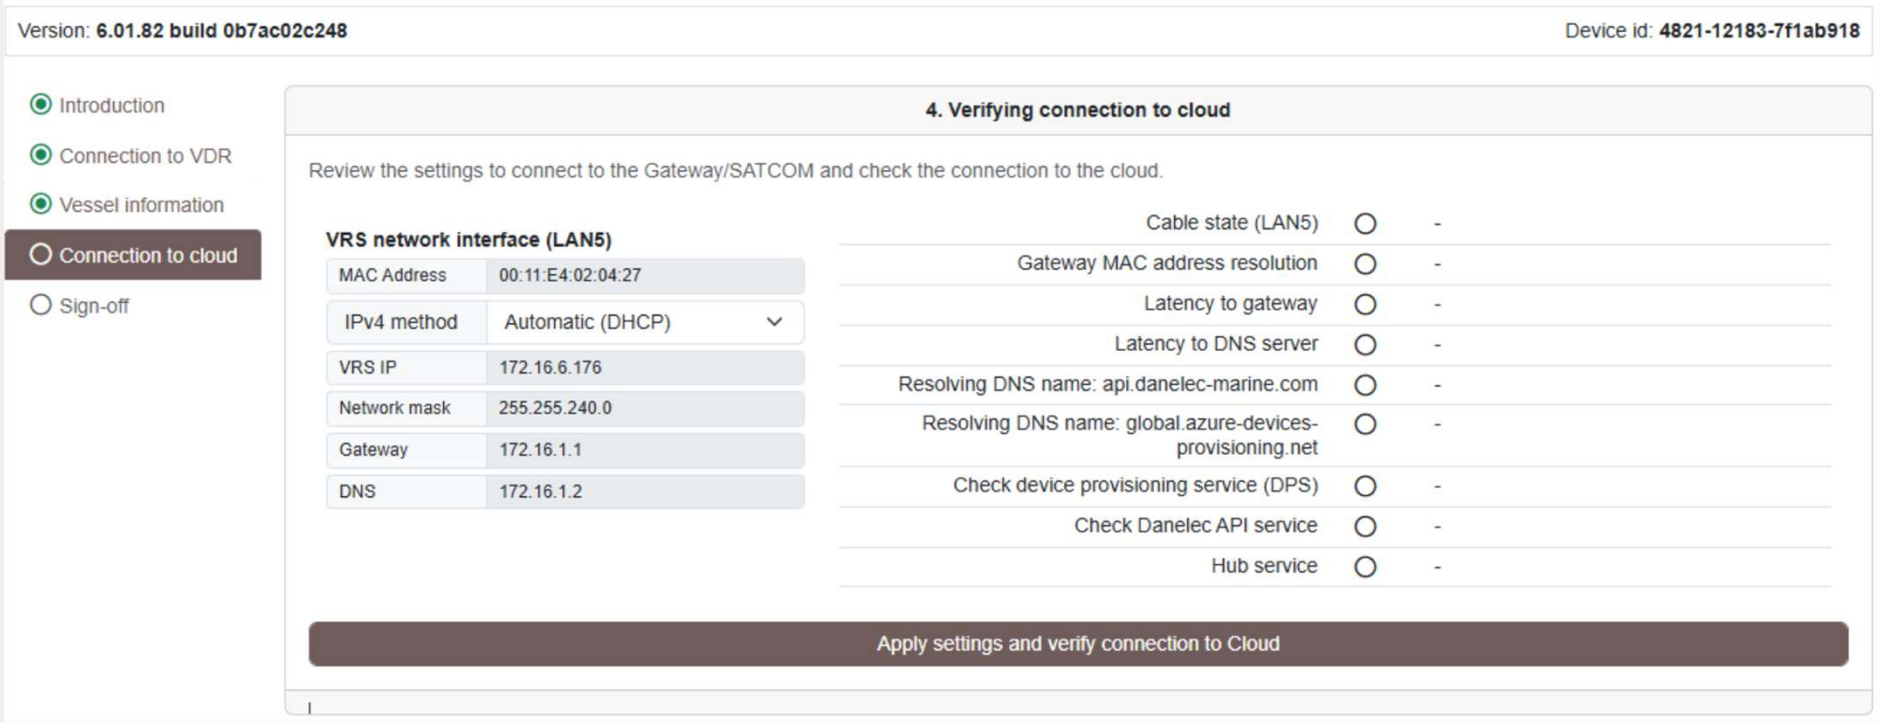

VRS settings

- Connection to cloud

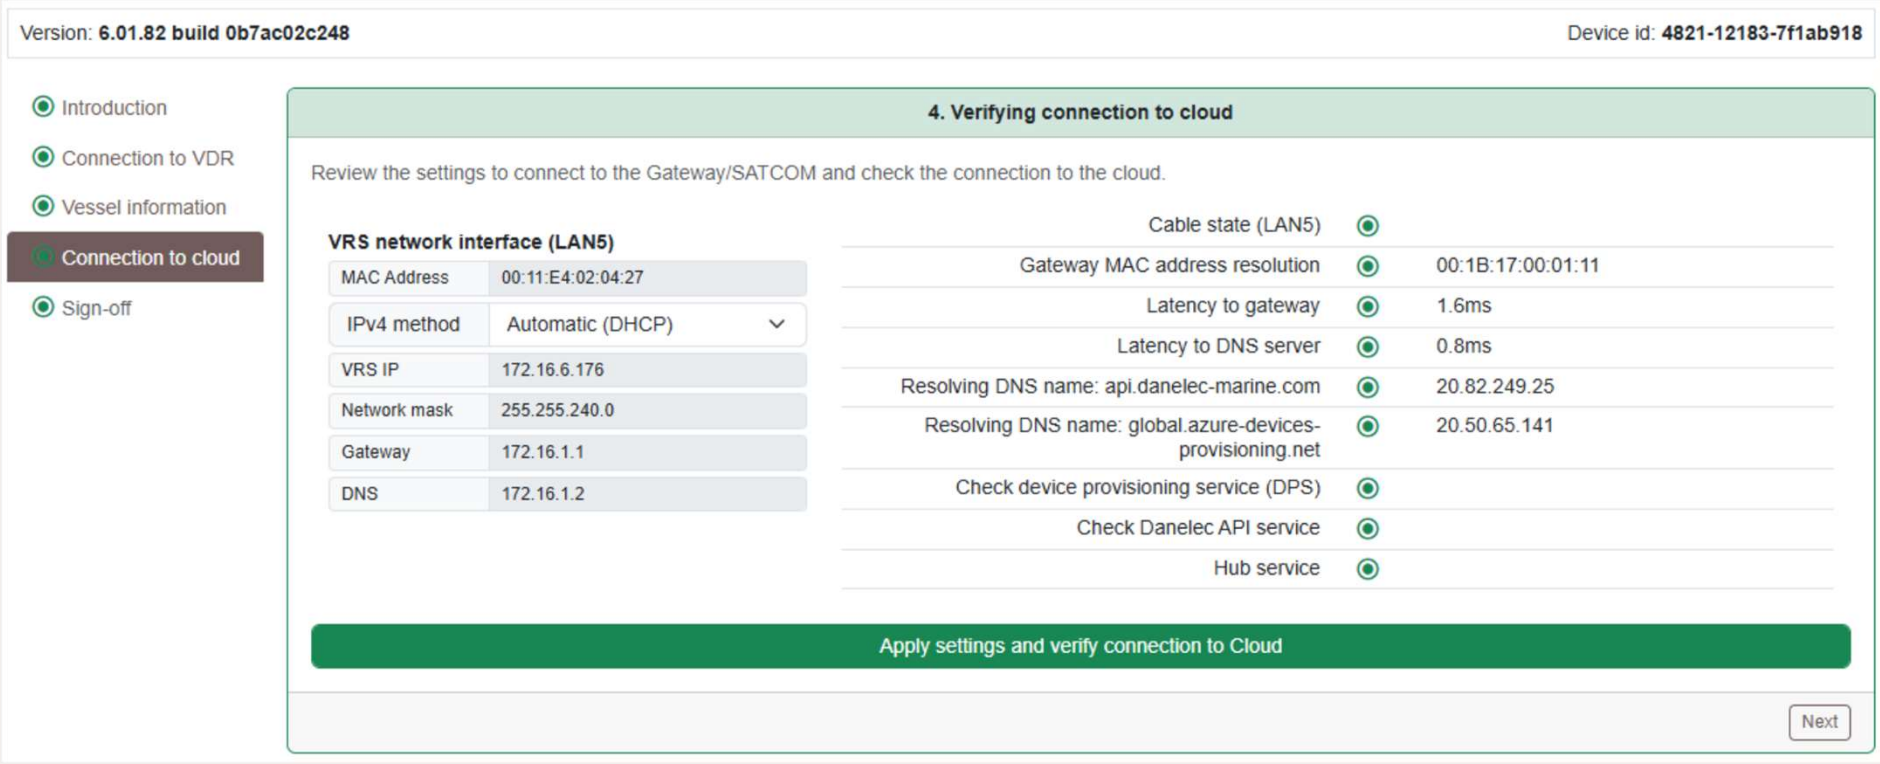

VRS settings

- Finalization

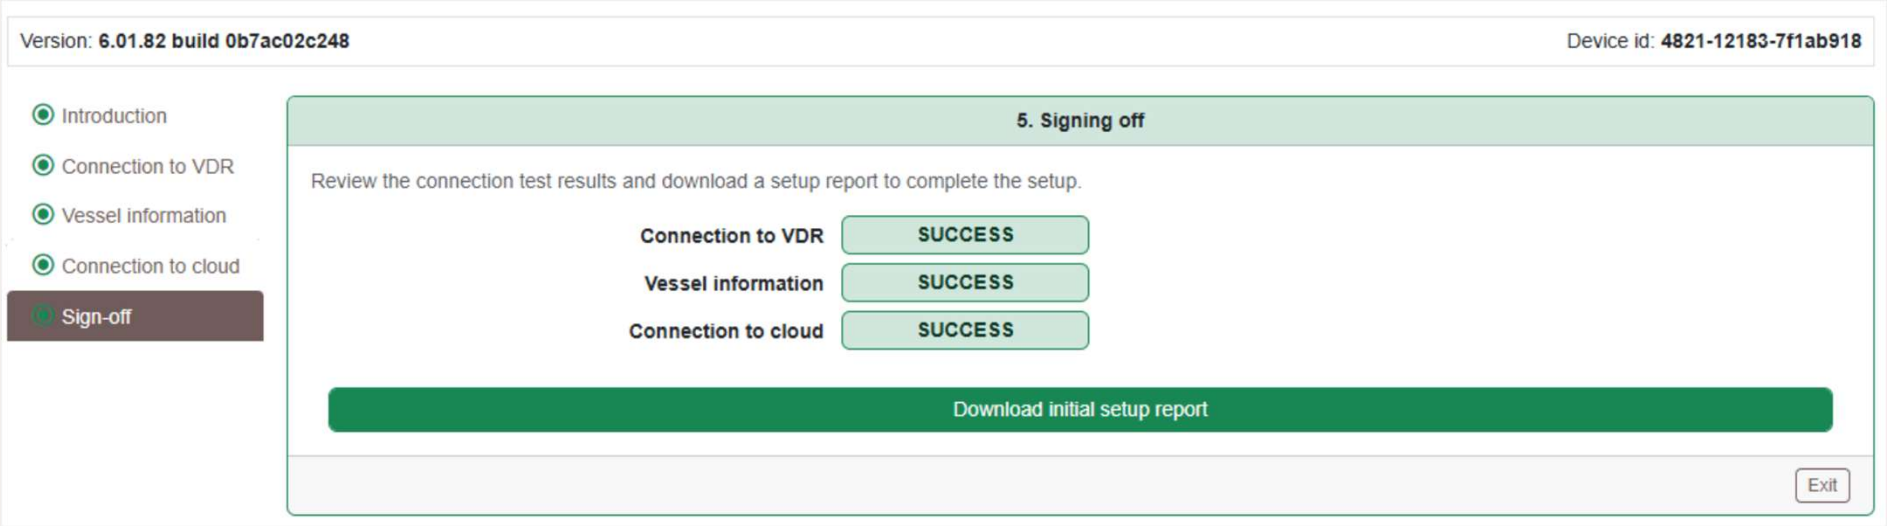

- Download VDR dump for support
- Pictures
- All collected data should be send to dsiready@danelec.com email address.

VRS settings

- Finalization

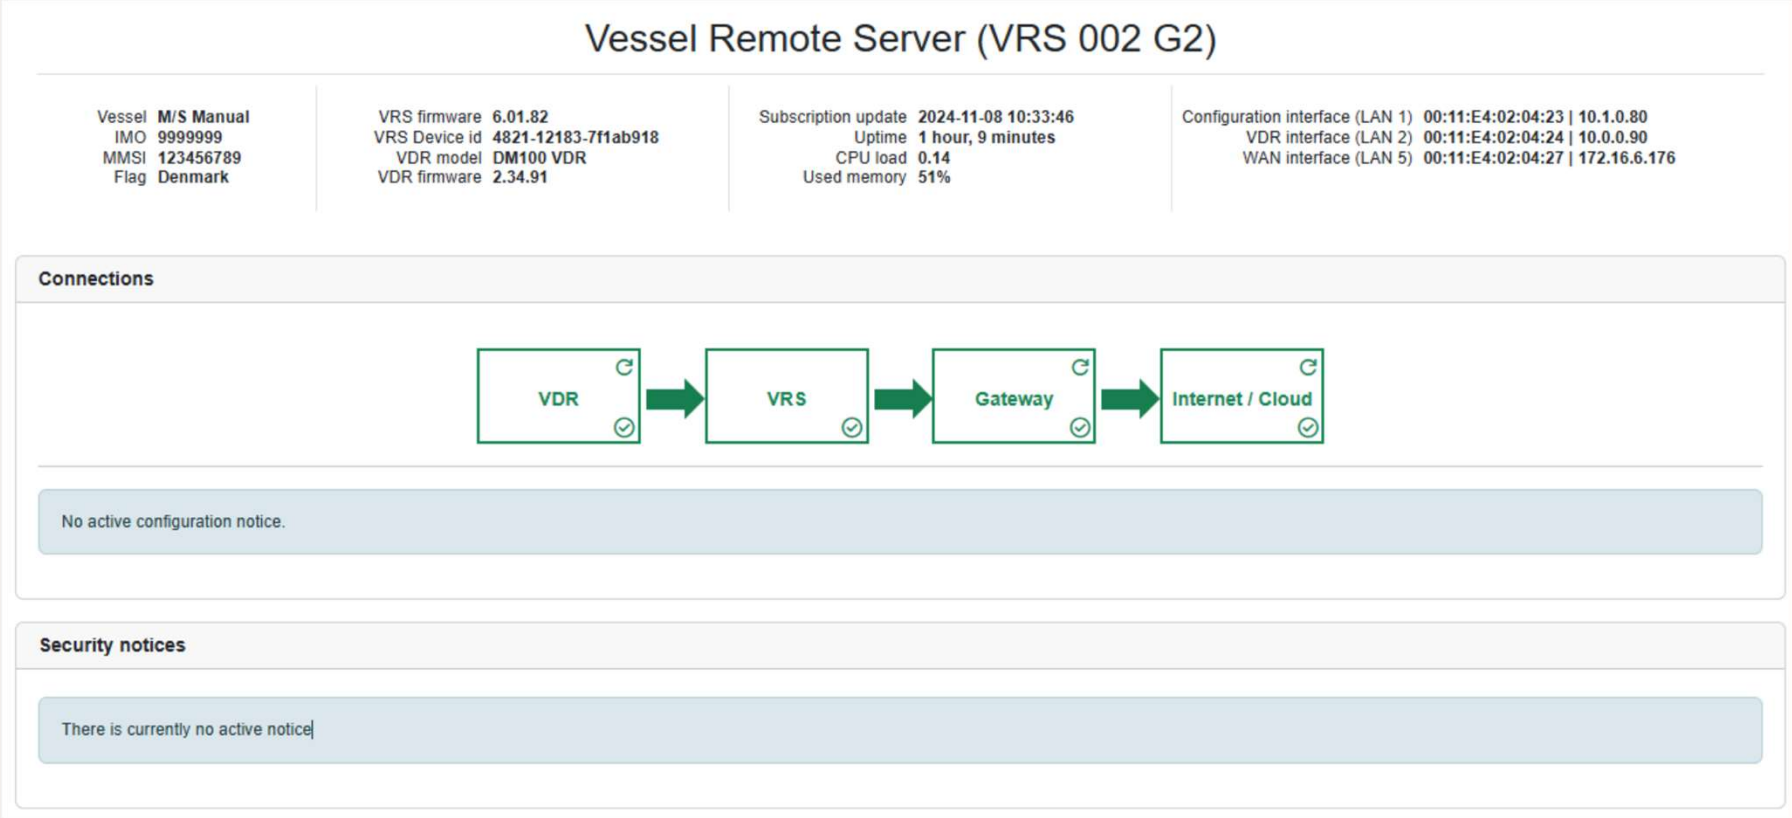

VRS settings

- The VRS software must be equal or higher than 6.01.00.

Status

↓

System

↓

Devices

- Upgrade the software if needed

System

↓

Maintenance

↓

Update firmware

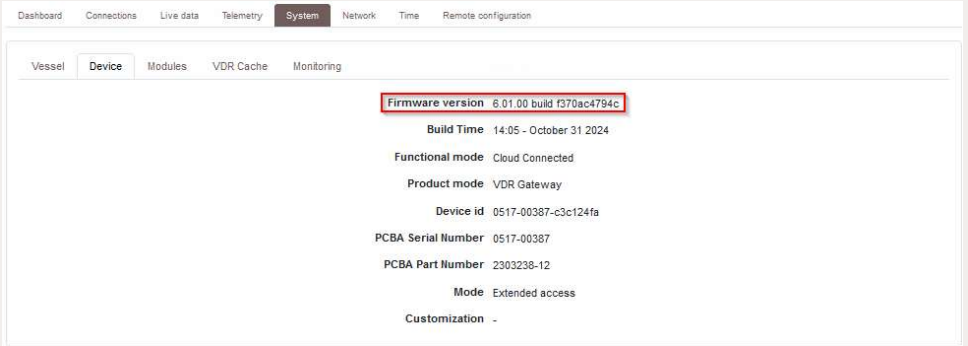

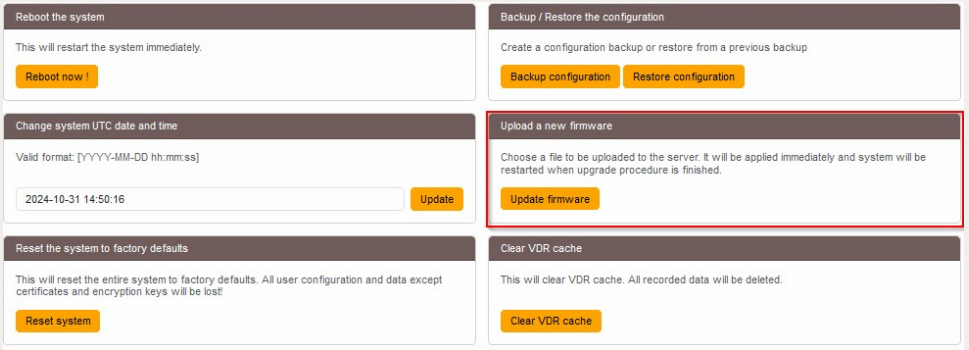

The default VRS password will change to **Danelec1#** after the software upgrade.

Troubleshooting

✕ VDR communication test fail

- Check the cable between the VDR and VRS. The LAN 2 port on the VRS should be used as default.
- Check status of LEDs on the VDR and VRS LAN ports – should blink.
- Check the network settings in the VDR. The used LAN port should be active and have IP 10.0.0.100 assigned.
- The VDR and VRS software should be the latest available on Danelec Partner Side.
- Check the VDR username and password defined in the VRS configuration.

Troubleshooting

✕ VRS communication test fail

- Check the cable between the VRS and local ship network. The LAN 5 on the VRS should be used as default.
- Check status of LEDs on the VRS LAN port – should blink.
- Check with the owner's IT department if IT settings are implemented in the local ship network – refer to the IT form (point 2.1).
- Reboot the VRS
- If VRS LAN 5 is set to use DHCP, check if IP was assigned to the VRS.

Status

Network

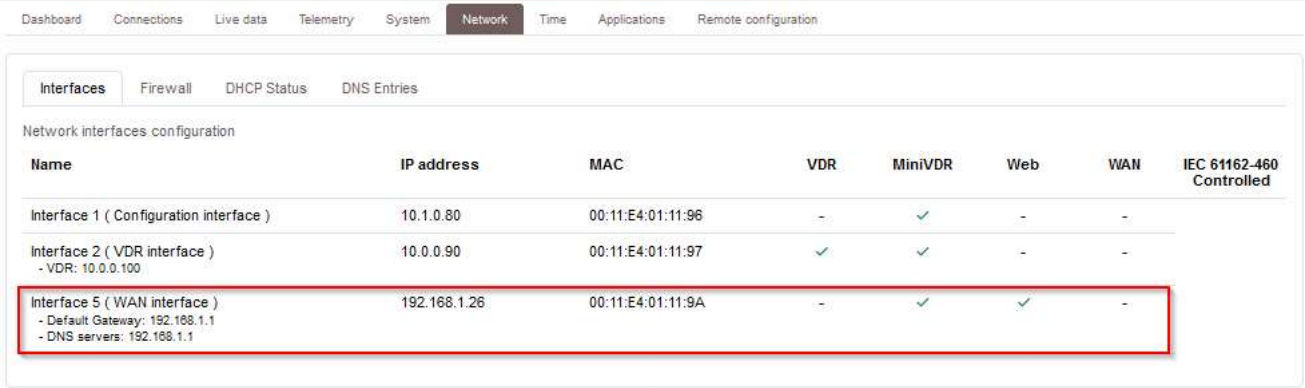

Name	IP address	MAC	VDR	MiniVDR	Web	WAN	IEC 61162-460 Controlled
Interface 1 (Configuration interface)	10.1.0.80	00:11:E4:01:11:96	-	✓	-	-	
Interface 2 (VDR interface) - VDR: 10.0.0.100	10.0.0.90	00:11:E4:01:11:97	✓	✓	-	-	
Interface 5 (WAN interface) - Default Gateway: 192.168.1.1 - DNS servers: 192.168.1.1	192.168.1.26	00:11:E4:01:11:9A	-	✓	✓	-	

Safety Insights - Fleet Overview with VDR Status

Vessels at a glance

Vessels Overview →

VDR alert status

Vessel	Product	Date	VDR Status	Position	
Buffin Mistral 0240001	DM100 S-VDR G2	28/10/2024		56.038685 Lat	12.680217 Long
[illegible]	DM100 VDR	27/10/2024		-18.041283 Lat	-37.029890 Long
[illegible]	DM100 VDR	27/10/2024		34.724820 Lat	24.135199 Long
[illegible]	DM100 VDR G2	28/10/2024		37.438800 Lat	24.940332 Long
[illegible]	DM100 VDR	27/10/2024		- Lat	- Long

Latest updates

Vessel	Product	Date	Type	Status
[illegible]	DM100 VDR	22/10/2024	APT	Passed
[illegible]	DM100 VDR	21/10/2024	APT	Passed
[illegible]	DM100 VDR	08/10/2024	APT	Passed
[illegible]	DM100 VDR G2	04/10/2024	APT	Passed
[illegible]	DM100 VDR	25/09/2024	APT	Passed

APT certificates

Vessel	Product	Valid Until
Aden Endurance 0240000	DM100 S-VDR G2	Expired
[illegible]	DM100 VDR	Expired
[illegible]	DM100 VDR	Expired
[illegible]	DM100 VDR	Expired
[illegible]	DM100 VDR	in 3 days

Comprehensive Monitoring

← Vessel Overview

BUFFIN MISTRAL

IMO no.	MMSI no.	Ship Status	Position		Relation
0240001	000240001	In Service/Commission	56.038685 Lat	12.680217 Long	Danelec Sales Demo Company

Installed Product

DM100 S-VDR G2

Installed on or before 22, Nov 2022

View Product

Alert status: 14 days overview (Last sync date 28/10-24 05:00 UTC)

Additional Information

! Items need attention

	HRU for Float-free Capsule Expiration Date 03/01/2025	Fixed Capsule Beacon Expiration Date Missing
VDR Battery Expiration Date 01/02/2028	Fixed Capsule Beacon Replacement Date ! 01/07/2023 !	

Danelec

Remote Configuration – fix issues that requires a configuration change

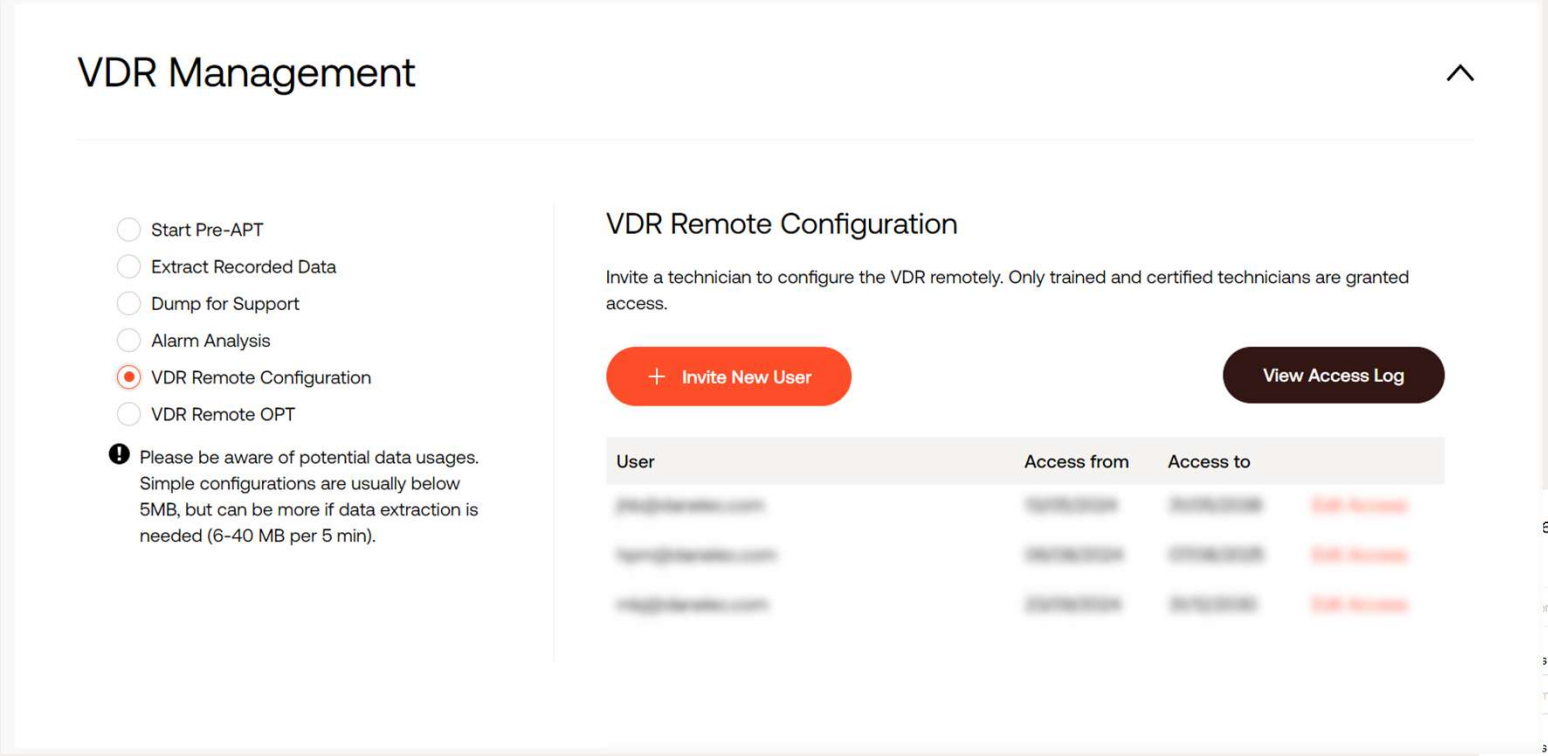

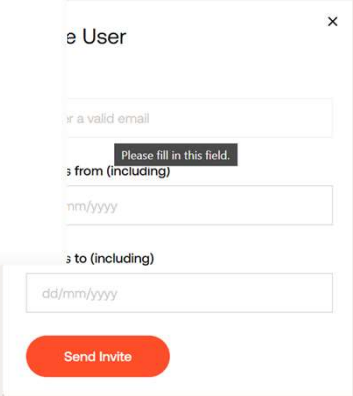

Remote OPT

Easy compliance MSC.333(90) – section 5.1.3

Danelec — Operational Performance Test Report

General Information

VDR Model: DM100G2
VDR Serial Number: A50851-001058
Vessel Name: M/S Test
Vessel IMO Number: 1234567
Vessel MMSI Number: 123456789
Authority of commissioning: Danelec Marine A/S
Battery Expiry Date: 2028-08-22
OPT based on data from: Long-Term
Number of detected errors: 1
Date for OPT: 2024-08-29 08:49:34

FRM Information

Final Recording Medium

Fixed Capsule		
Data recorded	102 Hours, 22 Min	passed
Minimum compliant period: 48 Hours		
Float-Free		
Data recorded	102 Hours, 22 Min	passed
Minimum compliant period: 48 Hours		
Long-Term		
Data recorded	44 Days, 1 Hours, 12 Min	passed
Minimum compliant period: 30 Days		

Bridge Audio

Microphone Test

Bridge Center/Chart table		
BMU 1A	Passed	passed
BMU 1B	Passed	passed
Bridge Port		
BMU 2A	Passed	passed
BMU 2B	Passed	passed
Bridge Stbd		
BMU 3A	Passed	passed
BMU 3B	Passed	passed
Radio Room		
AUD 4	Passed	passed

Report Id: 66BDC4446C6F4D49 Page 1

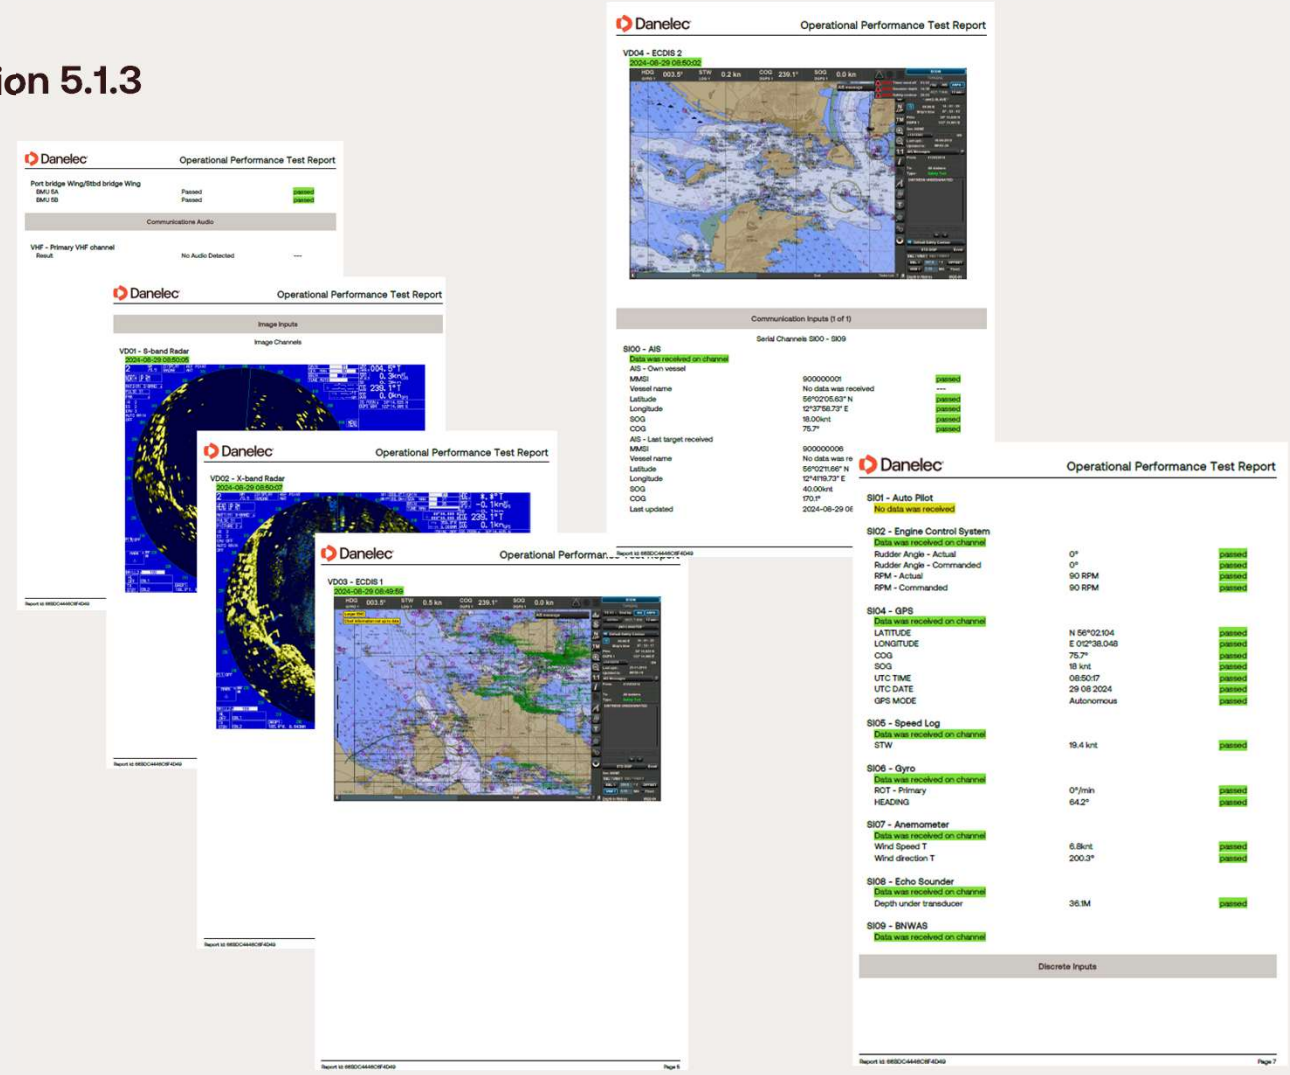

Thank you.