

## **DC-DC Converters**

For powering 13 V systems in industrial electric vehicles  $\mathbf{M} \mathbf{\infty} \mathbf{V}^{\text{on}}$ 

# Datasheet











#### **Features**

- CE mark and UL recognized
- Ingress Protection: IP69K water / dust proof
- Compliant to salt spray standard EN 60068-2-11
- Wide input voltage range:
  - $\circ$  24 V to 36 V battery models: 16.8 V<sub>DC</sub> to 43.5 V<sub>DC</sub>  $\circ$  48 V to 90 V battery models: 33.6 V<sub>DC</sub> to 108 V<sub>DC</sub>
- Output short circuit protection
- Input reverse polarity protection
- Operating temperature range: -35 °C to +85 °C

DC Input (X1)	48 V - 90 V	48 V - 90 V	24 V - 36 V
	600 W	400 W	400 W
Nominal input voltage	48 V - 90 V		24 V - 36 V
Input voltage range	33.6 V - 108 V		16.8 V – 43.5 V
Extended operating range <sup>1</sup>	24 V - 33.6 V 108 V - 120 V		12 V - 16.8 V 43.5 V - 56 V
Maximum input current	32 A	22 A	39 A
No load input current <sup>2</sup>	< 75 mA	< 45 mA	< 60 mA
Inrush Pulse	< 1.5 A <sup>2</sup> s		

DC Output (X2)	48 V – 90 V	48 V – 90 V	24 V - 36 V	
	600 W	400 W	400 W	
Output Power	600 W 400 W			
Nominal output voltage	13 V			
Minimum output voltage <sup>3</sup>	12.5 V			
Maximum output current	46.2 A	30.8 A		
Start-up time under full load <sup>4</sup>	< 500 ms			
Noise (peak to peak)	< 0.5 V			
Typical Efficiency <sup>5</sup>	91%	89%	86%	
Line regulation <sup>3</sup>	±1%			
Line regulation (maximum) <sup>6</sup>	±3%			
Load regulation	±4%			
Load regulation response <sup>7</sup>	100 ms			
Step load regulation <sup>8</sup>	±10% ±5%			

<sup>1</sup> For a maximum of 5 minutes at nominal output power  $\,$ 

<sup>2</sup> At nominal battery voltage

<sup>3</sup> At input voltage range. When operating in the extended lower input range the minimum output voltage is 12V

<sup>4</sup> Measured with a resistive load

<sup>5</sup> For 50% to 100% load

<sup>6</sup> At extended input voltage range

<sup>7</sup> Slew rate 1 A/µs

<sup>8</sup> Load step:  $10\% \rightarrow 90\%$ ,  $90\% \rightarrow 10\%$ 



Environmental conditions			
Test	In Accordance with standard	Test Details	
Temperature change	EN 60068-2-14	Duration: 240 h and 20 cycles minimum.	
remperature change	LN 00000-2-14	Cycle between -35 °C and 85 °C	
Constant warm tamps	EN 60068-2-2	Duration: 96h	
Constant warm temperature	EN 00000-2-2	Test temperature: 85 °C	
		Duration: 20 cycles	
		Operation mode: In operation	
		Test temperature: 85 °C	
		Test duration: 1 h fully tempered + 15 minutes	
Temperature shock	EN 60068-2-14 Transfer duration: < 5 s	Transfer duration: < 5 s	
		Test medium: Water 0 °C, 5% dissolved salt content	
		Time under water: 5 minutes	
		Water volumes: At least 5 times the component volume	
		No water ingress	
		Max air temperature: 55 °C	
		Number of cycles: 6	
		Operation mode: 1 h in operation 1 h without function	
Humidity/Heat cyclic	EN 60068-2-30	Air humidity: 93%	
	Cycles duration: 24 h  Temperature change ≥5 K/min  Minimum air temperature 25 °C	Cycles duration: 24 h	
		Temperature change ≥5 K/min	
		Minimum air temperature 25 °C	
		Load: 10 g	
		Frequency range: (10-500) Hz	
Vibrations, sinusoidal	EN 60068-2-6	Length of time subject to load: 3 axes, 9 hr (50 cycles) per axis	
		Form: sinusoidal	
		Operation mode: operational	
		Shock load: 10 g	
Continuous shock	EN 60068-2-29	Duration: 16 ms	
		Number of impacts: 10000 shocks	
Shocks		Shock load: 30 g	
	EN 60068-2-27	Duration: 6 ms	
		3 shocks per direction, 6 directions	
Salt spray	ISO 9227 (NSS)	35 °C, 96 hours	
	EN 60068-2-11		
Ingress Protection	IP69K	Per ISO 20653	
Operating temperature <sup>1</sup>	-	-35 °C to +85 °C (-22 °F to +185 °F)	
Storage temperature	-	-40 °C to +85 °C (-40 °F to +185 °F)	



Protection and Reliability	48 V – 90 V	48 V – 90 V	24 V - 36 V	
	600 W	400 W	400 W	
Over current protection	49.0 A	40	.5 A	
Over temperature protection		Yes		
Short circuit protection		Yes		
Reverse input protection	-12	-120 V -50		
No spark on contact		Yes		
MTBF <sup>1</sup>	1,000,000 h	1,000,000 h 1,100,000 h		
Insulation voltage				
DC Input - DC Output		1.77kV <sub>AC</sub> / 2.5kV <sub>DC</sub>		
DC Input - Housing		1.77kV <sub>AC</sub> / 2.5kV <sub>DC</sub>		
DC Output - Housing		1.2kV <sub>AC</sub> / 1.7kV <sub>DC</sub>		

Mechanical Data	48 V – 90 V	48 V - 90 V	24 V - 36 V	
	600 W	400 W	400 W	
Dimensions (W x H x D)	115 x 71 x 203 mm	115 x 61 x 203 mm		
	(4.5 x 2.8 x 8 inch)	(4.5 x 2.4 x 8 inch)		
Weight	2.1 Kg (4.63 lb)	1.6 Kg (3.53 lb)	1.7Kg (3.75 lb)	
Case material	Aluminium			
Cooling	Conduction via heatsinking			

Approvals and Compliance	
Safety marks	<sub>C</sub> UR <sub>US</sub> , CE, UKCA
Safety <sup>2</sup>	IEC 62368-1
EMC <sup>3</sup>	EN 12895, CISPR 25/EN 55025 EN 61000-4-4, ISO 10605, ISO 11452-2, ISO 11452-4, ISO 11452-8

Connector pin assignments				
	Connector	Input/output	Pin	Assignment
- + - 1 2 X2 O	X1 Inp	Input	1	Positive (+)
			2	0 V (GND)
	X2 Output	Output	1	Positive (+)
	AZ	Output	2	0 V (GND)


Example Mating Connectors <sup>4</sup>	
X1	FEP 42122900
X2	FEP 42161000

- 1 Telcordia SR-332 at 50 °C (122 °F)
- 2 Designed to allow industrial truck approval to UL 583 and EN 1175
- 3 EMC suitability must be evaluated in the end-use application
- 4 It is the user's responsibility to select connector material based on the safety standard they are aiming to comply with.

4



#### **Dimensional drawing**

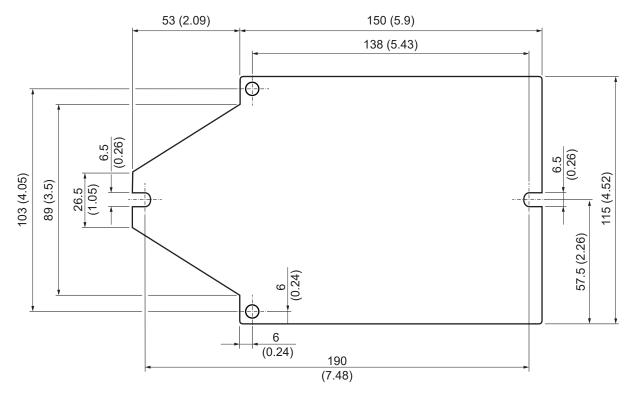


Dimensions in mm (inch)

### **Mounting instructions**

Make sure to install the DC-DC converter on a metal cooling surface, whose temperature should not exceed +70 °C (+158 °F). Use the provided gap pad between the DC-DC converter and the metal cooling surface in order to maintain good thermal contact. This avoids over heating of the DC-DC converter. Use M6 stainless steel screws with a minimum length of 12 mm and a maximum head diameter of 10.5 mm. The recommended torque is 4.6 Nm (40.7 in-lb). The correct torque should be established for each use case.

#### Parallel operation

Two or more DC-DC converters can be connected in parallel. Droop current sharing method is adopted to aid current sharing but good current sharing is only possible with very similar output impedance and with the output voltages closely aligned. Current sharing suitability must be fully evaluated in the end-use application.

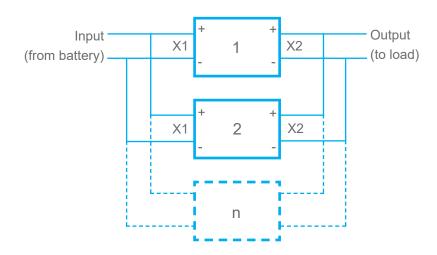





### Delta Energy Systems (Germany) GmbH

Tscheulinstrasse 21, 79331 Teningen E-mail: IEV.sales@deltaww.com

More information <u>www.deltaww.com</u>