# Historical Response Selection for Sampled FX Net-Position Peaks

*A fixed comparison and an exploratory state-retrieval extension*

Working paper - 21 October 2026

**Abstract**

Using one foreign-exchange market maker's sampled aggregate client-flow positions from 2014–2017, we compare empirical quantile forecasts for the maximum absolute source-reported USD net position over the current and next H records. We vary historical episode selection and response representation. An original fixed comparison is extended by signed-state nearest-neighbor retrieval after the evaluation interval had been inspected. The primary comparisons use 6,625 common issue origins, a .95 quantile preference and fully completed labels; the extension selects 360 or 180 episodes from a rolling pool of 720. At H=6, historical headrooms have 2.08% lower mean pinball loss than raw current-anchor scenarios, with more breaches and larger overruns; the ranking reverses at H=24. For native-peak quantiles floored at the current magnitude, the extension's fixed primary nearest360 rule lowers loss by 31.83% against recent360, but remains worse than the original full-window headroom and scenario rules. All 12 matched retrieval loss contrasts are negative, while every matched scenario contrast has more breaches and greater mean positive overrun. Elementary common-set bounds explain how nearby starting positions can make representations agree without certifying accuracy. The findings identify finite-record forecast tradeoffs, with exploratory retrieval evidence and no population superiority inference. The recorded proxy and passive forecasts do not establish conditional coverage, independent external validity or policy, profit and funding effects.

## 1. Introduction

A sampled net position can reach a large magnitude and finish near its starting level. We study the largest absolute source-reported USD net position at issue and over the next H records, using sampled aggregate client flow from one foreign-exchange market maker. A forecast level is breached when at least one recorded position exceeds it in magnitude. H counts subsequent records rather than elapsed hours. The object is recorded net-position scale, rather than a complete hedged book or a funding requirement.

We compare two choices in this passive forecasting task: which completed historical episodes to use and how to represent their responses. We ask how replacing recent episodes with equally many episodes closest to the current signed position changes realized losses, overruns and unused allowance. The representations use native peaks (K), headrooms above each episode's starting magnitude (F), or signed increments reanchored at the current position (S), under a stipulated .95 quantile preference. Signed distance distinguishes opposite starts of equal magnitude; magnitude matching alone need not align native and reanchored reports.

The original fixed comparison evaluates headrooms, reanchored increment envelopes and three simple references on 6,625 common issue origins. The extension was designed after those results had been inspected; its complete menu and primary contrast were recorded before the added forecasts were calculated. It crosses three representations with five historical sets. The primary contrast compares floored native-peak quantiles from the 360 nearest signed starting positions and the 360 most recent origins, selected from the same 720 fully completed episodes, at a six-record horizon. A second fixed count and a 24-record horizon provide sensitivity evidence. These remain exploratory comparisons on the inspected interval.

Common-set bounds connect differences between the three reports to historical starting-position distances. Exact signed-anchor matches make all three agree in real arithmetic. Nearest selection minimizes the largest selected signed distance among equal-count subsets; changes in actual report gaps and loss remain empirical questions. We report loss alongside issued levels, breaches, overrun, unused allowance, selected age and anchor distances. Construction agreement itself supplies no accuracy guarantee.

In the original primary comparison, F lowers loss by 2.08% relative to S, with more breaches and larger overruns; the ranking reverses at H=24. The extension lowers primary K loss by 31.83% relative to equal-count recent retrieval, a weak baseline, while leaving the original full-window leaders ahead. Every matched S retrieval gain accompanies

more breaches and greater mean positive overrun. The loss gains therefore have distinct breach and severity consequences across representations.

## 2. Closest work and mature method transfer

The closest empirical lineage is Wisniewski, Lindsay and Lindsay (2020), who already use nearest-neighbor and other regression engines on this source, with lagged positions and calendar or trading-session features, to forecast next-step signed-position intervals. Their comparisons include quantile, conformal and normalized-conformal variants; reported pinball scores average the two endpoint-quantile losses. Chapter 6 of Wisniewski's thesis continues same-source endpoint prediction with normalized and regularized constructions (Wisniewski, 2024). We instead evaluate an absolute multi-record maximum including the issue record under a single upper-quantile loss. Identical marginal distributions at each future record can yield different peak quantiles when their dependence changes. Published endpoint numbers therefore cannot benchmark this response. Suitable quantile engines could be refitted to completed peak or headroom labels; that same-target, richer-feature comparison remains unrun here.

Financial path extrema are established forecasting and risk objects. MaxVaR studies the worst mark-to-market loss relative to initial wealth over a monitoring horizon (Boudoukh, Richardson, Stanton and Whitelaw, 2004). Maximum cumulative payment-cash deficits (van den Hoogen, 2017) and maximum collateral-adjusted contingent exposure with marking decisions (Liao and Theodosopoulos, 2005) address other peak-related financial questions. The present application differs in its sampled two-sided net-position response, state and units, rather than originating financial peak forecasting.

The transferred operations are also mature. Hull and White (1998) update historical shocks using predicted volatility; Barone-Adesi, Giannopoulos and Vosper (1999) resample standardized innovation vectors to generate recursive conditional paths before revaluing derivative portfolios. S instead translates raw observed net-position increments, without a fitted volatility filter or dynamics model. Biau and Patra (2011) aggregate truncated nearest-neighbor quantile experts using growing samples. Their stated long-run average-loss guarantee assumes stationary and ergodic data with moment and distributional regularity. Our fixed-window, one-state rule with delayed overlapping labels defines a different procedure; it inherits neither that consistency result nor coverage.

Two mature conditional routes provide further comparators. CAViaR models a time-varying conditional quantile through an autoregressive specification estimated by regression quantiles (Engle and Manganelli, 2004). SPCI predicts conditional residual quantiles from residual histories; its analyzed quantile-random-forest construction has an asymptotic conditional interval-coverage result under specified conditions (Xu and Xie, 2023). Transferring either route would require a declared single upper peak or headroom quantile, issue-known features and residuals whose H-record labels have completed. The possible zero-headroom atom, overlapping labels and source gaps require checking the chosen model and guarantee assumptions. Neither method is fitted here, and their published empirical results do not benchmark this response. They identify unrun same-target competitors, without validating the present fixed-pool retrieval rule.

The contribution is a bounded application comparison: a multi-record peak response, completed-label timing, signed single-anchor retrieval crossed with response representation, and elementary common-set bounds explaining when those representations approach one another. It introduces neither nearest neighbors to this source nor a new estimator, independent dealer record or comparison against the strongest conditional models.

## 3. Data, recorded response and completed information

The input is the one-hour member of version 2 of the Net Position Time Series Dataset, with 18,576 records from 5 February 2014 01:00 through 24 January 2017 00:00. Wisniewski et al. (2020) describe sampled aggregate client-flow positions across five liquid FX pairs. Only datetime and NetPosUsd are used. A netted USD scalar does not reconstruct currency-level gross positions, hedge transactions, collateral or cash movements. The source's timezone and historical publication/vintage convention are unverified.

There are 18,420 one-hour and 155 forty-nine-hour adjacent gaps. We retain the file's chronology without sorting, deleting paths across gaps or interpolating missing intervals. Consequently H counts subsequent records, rather than

elapsed hours. Using zero-based observation indices, let $N_t$ be the signed source-reported position, observed before issue. Define

$$B_t=|N_t|;\quad P_{t,H}=\max_{0\le h\le H}|N_{t+h}|;\quad G_{t,H}=P_{t,H}-B_t.$$

Including h=0 gives the known floor $B_t$ and nonnegative headroom G. The peak includes an interior recorded spike even if the final position returns to its starting value. It does not bound an unobserved excursion between records. The retrospective issue convention treats $N_t$ as available immediately before issue, rather than establishing historical live-publication availability.

At issue t an original n-row pool contains origins t−H−n+1 through t−H. The extension fixes n=720, giving $I_t=\{t-H-719,...,t-H\}$. Each of its 720 historical origins i has a response ending at i+H≤t. The latest eligible response window ends at t and includes the already observed issue record. Earlier evaluation outcomes enter later pools only after completion. Adjacent peaks and rolling pools overlap; completed-label eligibility does not make them independent.

The 720 response-end indices i+H range from t−719 through t at both horizons, although their starting origins differ. For example, at the first issue t=11927, candidate origins are 11202–11921 for H=6 and 11184–11903 for H=24; both sets of historical responses end at indices 11208–11927. The new response ends at 11933 or 11951, respectively. These indices illustrate the fixed timing rule, not additional data or forecast results.

For each eligible origin retain its native peak $P_{i,H}$, headroom $G_{i,H}$ and directional increment extrema

$$a_{i,H}=\min_{0\le h\le H}(N_{i+h}-N_i);\quad b_{i,H}=\max_{0\le h\le H}(N_{i+h}-N_i);\quad a_{i,H}\le 0\le b_{i,H}.$$

These extrema remain paired by episode and determine the absolute peak after raw translation of the sampled increment path. They are not merely its two endpoints. Forming each translated absolute peak before the quantile operation generally differs from taking separate directional quantiles. This deterministic sufficiency does not specify the next path's conditional law.

## 4. Historical selection and response representation

The extension uses five fixed sets at each issue. The reduced counts, 360 and 180, retain half and a quarter of the candidate pool and were fixed before the extension's losses were calculated. Recent sets take the last m eligible origins. Nearest sets take the m smallest signed-state distances $|N_i-N_t|$, preferring the most recent origin when distances tie. Historical response values and future query outcomes never resolve distance ties. Selected paired rows retain chronological order.

*Table 1. Fixed historical sets drawn from the same 720 completed candidate episodes. The rank is k=ceil((m+1)19/20).*

| Set | Membership | m | k |
|---|---|---|---|
| full720 | All eligible | 720 | 685 |
| recent360 | Most recent | 360 | 343 |
| nearest360 | Nearest signed state | 360 | 343 |
| recent180 | Most recent | 180 | 172 |
| nearest180 | Nearest signed state | 180 | 172 |

For a selected set J of m rows, $Q_k$ denotes the kth unweighted order statistic with duplicates retained and no interpolation or jitter. We use the available ranks in Table 1. Appendix C gives their empirical quantile interpretation; the rank convention does not establish coverage for the dependent historical pool.

The three response representations issue the following levels, with H suppressed on historical labels:

$$F_J=B_t+Q_k\{P_i-|N_i|: i \text{ in } J\}.$$

$$S_J=B_t+Q_k\{\max(N_t+b_i,-N_t-a_i)-B_t: i \text{ in } J\}.$$

$$K_J=\max\{B_t,Q_k\{P_i: i \text{ in } J\}\}.$$

F retains headroom relative to historical starting magnitude; S translates signed increments to the current position; K retains native peaks subject to the current floor. K is the method labeled L in the original artifacts. The files call an issued forecast level C its 'capacity'; throughout the paper this is a passive reported level. All three already use current information: F/K use $B_t$, and S also uses signed $N_t$. Retrieval changes historical membership. Equal-count recent and nearest sets may differ in age, scale, regimes and dependence.

F has the algebraic form of an upper residual-quantile endpoint around the fixed baseline $f(N)=|N|$. Because $P_{i,H} \geq |N_i|$, its residual $G_{i,H}$ is also the absolute prediction error of that baseline. This identity does not implement the fitted, split-calibration and symmetric-interval procedure of Wisniewski et al. (2020), nor establish conformal validity for the overlapping archive.

The original five-rule comparison also includes the radius reference $R=B_t+Q_k\{\max(b_i,-a_i)\}$ and the known-floor reference $P0=B_t$, on its full n-row pool. The extension implements only F/S/K. Appendix C specifies the stored arithmetic and operation order.

An elementary construction bound explains what matching can control. For one common nonempty set J and the same valid rank, put $r_{abs}=\max_{i \text{ in } J}||N_i|-B_t|$ and $r_{signed}=\max_{i \text{ in } J}|N_i-N_t|$. In real arithmetic,

$$|F_J-K_J| \leq r_{abs}; \quad |S_J-K_J| \leq r_{signed}; \quad |F_J-S_J| \leq r_{abs}+r_{signed} \leq 2r_{signed}.$$

Appendix A proves the bounds using floor projection and order-statistic stability. If every selected signed anchor equals the query, all three reports agree; if only every selected magnitude equals the query magnitude, F=K while S can differ. Plateaus can also give equal F/S reports at distant anchors. Nearest retrieval minimizes the largest selected signed distance among equally sized subsets, but need not minimize actual report differences or loss. These common-set bounds do not compare forecasts built from different selected histories, and they contain no statement about future calibration.

## 5. Design histories, score and reporting

The original specification was recorded at 05:46:37 UTC on 21 October 2026 and publicly committed before its target-specific forecasts and losses were calculated. It fixes H=6, n=720, $\tau$=19/20 as primary, with six one-factor changes: H=12 or 24, n=480 or 1440, and $\tau$=.90 or .99. The five rules and seven settings yield 35 original summary rows. This is a retrospective specification exercise with prior source-literature knowledge, not external preregistration or prospective collection.

The extension was conceived after those results had been inspected. Its human-readable protocol and hash-pinned machine specification were publicly recorded in commits 63703b9 and 69d5bb6 before the added forecasts. They fix H=6 and 24, the five sets in Table 1 and F/S/K: 15 configurations per horizon, 30 in total. The six full720 F/S/K rows repeat original F/S/L references. Recording the extension before execution limits further discretion but cannot turn the old interval into an unseen holdout.

Both designs use the same 6,625 issue origins: zero-based observation indices 11927 through 18551 inclusive, from naive source timestamp 1 January 2016 00:00 through 23 January 2017 00:00. The common original full-menu rule retains the future records required by H=24. Earlier evaluation labels become usable later only when completed. Changing H alters both the future peak and the eligible historical origin indices, so cross-horizon comparisons do not isolate the maximum operator alone.

For stored error e=P−C, pinball loss is

$$\rho_\tau(e)=\tau \max(e,0)+(1-\tau)\max(-e,0); \quad \tau=19/20 \text{ in the extension.}$$

The underprediction weight is nineteen times the overprediction weight. The score retains the source's USD units and expresses a stipulated forecast preference, rather than an estimated funding or shortage cost. With a finite first absolute moment, expected pinball loss is minimized by its possibly nonunique $\tau$-quantiles, allowing atoms. Other strictly consistent scores can target the same $\tau$ while valuing errors differently (Gneiting, 2011). We report rankings under the fixed pinball score. Scoring consistency does not make a historical report conditionally correct. Original rows with different $\tau$ express different objectives and are not pooled into an across-preference winner.

Reported means and paired differences are equal-weight averages over the 6,625 listed origins. The original primary contrast is mean loss(F) minus mean loss(S) in its primary setting. The extension's separate primary contrast is mean loss(nearest360 K) minus mean loss(recent360 K), at H=6; a nonnegative mean would fail its finite-record improvement criterion. H=24 repeats retrieval in a context adverse to the original F/S comparison, and m=180 is fixed sensitivity. Neither may replace an unfavorable primary contrast. All 12 nearest-minus-recent and 10 same-set F-minus-S contrasts are reported regardless of sign.

For an issued level C≥B, extra allowance is C−B. Positive overrun and unused allowance give the score decomposition

$$O=(P-C)^{+};\quad U=(C-P)^{+};\quad \rho_{\tau}(P-C)=\tau O+(1-\tau)U, \text{ where } z^{+}=\max(z,0).$$

Every configuration reports mean loss, level and extra allowance; strict breach count/rate; mean O; conditional overrun with its own breach denominator; and mean U. Strict breach is P>C, with no tolerance changing its sign. Conditional overrun averages O only over that rule's breach events; zero breaches make it undefined. The target can have an atom at B, so even a true quantile's strict exceedance need not equal 1−τ. Nominal breach proximity is not a calibration certificate.

Geometry reports both anchor radii, mean selected age in records, the mean absolute F/S gap and exact equal-capacity counts. Monthly nearest360 K-minus-recent360 K contrasts retain all 13 inclusive calendar months at H=6 and 24; groups below 30 origins retain counts/status while suppressing metrics. These are descriptive groups, not independent replications or an adaptive strategy. No new population test, confidence interval or bootstrap is attached to the extension. Original block-resampling profiles concern only the original full720 F/S contrast; Appendix B preserves their descriptive status.

## 6. Original comparison: score advantage with adverse tradeoffs

*Table 2. Original primary H=6, n=720, τ=.95 results. Monetary columns are means over all 6,625 origins, in source-reported USD millions; breaches are counts and rates are percentages. K is the original L.*

| Rule | Loss | Level | Breaches | Breach % | Overrun | Unused |
|---|---|---|---|---|---|---|
| F | 0.441774 | 22.645674 | 332 | 5.011 | 0.166531 | 5.671391 |
| S | 0.451149 | 23.829232 | 254 | 3.834 | 0.116728 | 6.805145 |
| R | 0.527544 | 26.400452 | 122 | 1.842 | 0.064562 | 9.324199 |
| K (old L) | 0.925885 | 31.731323 | 489 | 7.381 | 0.196359 | 14.786868 |
| P0 | 1.813620 | 15.231741 | 5102 | 77.011 | 1.909073 | 0.000000 |

Historical headrooms F have mean loss USD 441,774.04 versus USD 451,148.90 for raw reanchored scenarios S. The paired mean is −USD 9,374.86, or −2.08% of S loss. It is aggregated from per-origin loss differences before display rounding. All original sensitivities and methods are retained in Appendix B and the public aggregates.

The lower score accompanies 332 strict breaches for F versus 254 for S, and greater mean positive overrun (USD 166,531.06 versus USD 116,728.04). Conditional overrun is USD 3.323097 million over 332 events for F and USD 3.044580 million over 254 for S. At the stipulated weights, changes in mean positive overrun and mean unused allowance contribute +USD 0.047313 million and −USD 0.056688 million to the mean score difference, respectively. It is a score tradeoff rather than safety dominance or a measured financial saving.

R has fewer breaches and smaller unconditional overrun, but larger mean capacity and score. K has the greatest mean capacity yet 489 breaches, illustrating why an average capacity ordering does not imply pathwise dominance. P0 has zero extra and unused allowance, but 5,102 breaches and the largest loss. Conditional means must be read with these different event sets, rather than ranked as if they describe the same tail observations.

The F/S direction reverses at H=24: F loss is USD 777,068.84 and S loss USD 748,383.54, with paired mean +USD 28,685.30. The τ=.90 difference is also positive but small (+USD 144.23), retained without rounding it to zero or declaring equivalence. Original monthly means favor F eight times and S five times. Low and middle pre-cutoff

magnitude groups favor S, while the high group favors F and accounts for 5,445 of 6,625 origins. Those descriptive composition patterns do not identify a causal state effect or constitute a formal stationarity test.

All four original geometric-block resampled-mean ranges cross zero. They are descriptive profiles, not population confidence intervals, superiority probabilities or proof of equality. The original H24 reversal and these limits remain unchanged by a later favorable retrieval contrast, which asks a different question.

## 7. Exploratory historical selection

The primary paired mean is negative on this inspected interval. At H=6, m=360, nearest360 K loss is USD 594,811.09 versus USD 872,515.55 for recent360 K; the direct paired difference is −USD 277,704.47, a 31.83% reduction relative to recent360 K. Both original full720 F and S remain lower. At H=24, nearest360 K improves over recent360 K from USD 1,246,630.42 to USD 960,696.45, while original full720 S remains lower at USD 748,383.54. The large relative gain therefore improves a weak native-level baseline, without establishing a new best forecast.

*Table 3. Complete extension mean loss menu and same-set F-minus-S paired mean, in source-reported USD millions. Full720 rows repeat original references. Differences are computed before display rounding.*

| H | Historical set | F loss | S loss | K loss | F−S mean |
|---|---|---|---|---|---|
| 6 | full720 | 0.441774 | 0.451149 | 0.925885 | -0.009375 |
| 6 | recent360 | 0.454089 | 0.467678 | 0.872516 | -0.013589 |
| 6 | nearest360 | 0.448664 | 0.448731 | 0.594811 | -0.000067 |
| 6 | recent180 | 0.485866 | 0.478940 | 0.785878 | +0.006926 |
| 6 | nearest180 | 0.468133 | 0.459592 | 0.525471 | +0.008541 |
| 24 | full720 | 0.777069 | 0.748384 | 1.197833 | +0.028685 |
| 24 | recent360 | 0.807496 | 0.824047 | 1.246630 | -0.016551 |
| 24 | nearest360 | 0.791192 | 0.770354 | 0.960696 | +0.020838 |
| 24 | recent180 | 0.858214 | 0.895718 | 1.284092 | -0.037504 |
| 24 | nearest180 | 0.847734 | 0.827305 | 0.963931 | +0.020429 |

All 12 fixed nearest-minus-recent score contrasts are negative (Figure 2). Absolute reductions are largest for K in each horizon/count pair: about USD 260,407–320,161, compared with USD 18,947–68,413 for S and USD 5,425–17,733 for F. These are correlated comparisons sharing outcomes and historical pools, not 12 independent confirmations. Nearest360 S at H=6 slightly improves its full720 S counterpart. Nevertheless, no added configuration beats the better original full720 F/S rule at the corresponding H: F at H=6 and S at H=24. This observed menu comparison is not a new prespecified model-selection criterion.

For the primary K pair, mean capacity falls from USD 29.854484 million to USD 25.224925 million; mean unused allowance falls from USD 12.950501 million to USD 8.274716 million. Breaches fall from 637 to 507 (9.615% to 7.653%), and mean positive overrun falls from USD 236,832.10 to USD 190,605.57. The weighted components are −USD 0.043915 million from mean positive overrun and −USD 0.233789 million from mean unused allowance; the larger reduction comes from the latter. Conditional overrun nevertheless rises from USD 2.463128 million over 637 events to USD 2.490655 million over 507. The denominators and breach sets differ. The improved empirical breach rate remains above the nominal 5% reference; this descriptive comparison is not a population calibration test. None of these quantities is an observed funding payment or conditional-calibration result.

At both counts and horizons, nearest S retrieval has lower loss than recent retrieval, with more strict breaches and greater mean positive overrun. At H=24, m=360, nearest S loss falls from USD 824,046.89 to USD 770,353.74, breaches rise from 320 to 430, and mean positive overrun from USD 190,842.79 to USD 283,299.56. Reduced mean unused allowance outweighs added overrun under the stipulated score; the 12 score gains do not establish uniform risk reduction.

For F, nearest retrieval reduces breach counts and mean positive overrun in all four matched comparisons, but conditional mean overrun rises in all four. At H=24, m=180, it rises from USD 4.650289 million over 588 breaches to USD 5.349645 million over 454. These conditional means summarize different breach sets; they do not identify an increase in severity on the same events.

At a fixed count, nearest membership guarantees a weakly smaller signed radius in the finite selection problem. Report gaps, exact equalities and score rankings remain empirical outcomes. At H=6, m=360, mean signed radius falls from USD 30.399817 million for recent retrieval to USD 12.365836 million for nearest retrieval, mean absolute F/S gap from USD 1.256683 million to USD 0.477250 million, and exact equal-capacity count rises from 1,804 to 4,297. The paired F−S loss mean becomes −USD 66.78, rather than recent360's −USD 13,589.40. Its small magnitude is an observed difference, not statistical equivalence.

At H=24, m=360, the smaller nearest F/S report gap coexists with a loss-order reversal: recent360 favors F by USD 16,550.54, whereas nearest360 favors S by USD 20,837.78. Reducing nearest count from 360 to 180 makes radii and F/S gaps smaller at both H but makes both F and S losses larger. Thus geometric agreement cannot select a predictive optimum. The complete geometry and age table is retained in Appendix B.

Nearest rows are older on average than equal-count recent rows: at m=360, mean ages are 328.35 versus 185.50 records at H=6 and 352.09 versus 203.50 at H=24; at m=180, they are 301.27 versus 95.50 and 331.82 versus 113.50, respectively. These membership rules jointly change proximity, age and potentially regime, scale and dependence; the contrast does not isolate a proximity effect.

The monthly nearest360 K-minus-recent360 K contrast favors nearest retrieval in 12 of 13 months at each H (Figure 3). January 2016 is adverse at both: +USD 3,379.20 for H=6 and +USD 520,447.46 for H=24. All month counts exceed the fixed display threshold. Origin-count-weighted monthly means reconcile to the global paired means; months remain descriptive groups within the same record, and the adverse month is not excluded.

## 8. Interpretation and limits

Nearest-state selection lowers scores against equal-count recent history throughout the fixed menu, while the better original full-window reference at each horizon remains ahead. Every matched S gain accompanies more breaches and greater mean positive overrun. All matched F comparisons and primary K reduce both, but conditional mean overrun rises on method-specific breach sets. Selection changes age and membership together with proximity, so the comparison does not isolate a state-information effect. Richer-feature quantile models, conditional quantile methods and fitted filtered historical simulation remain unrun same-target comparators.

The geometric bounds constrain common-set representation differences, without identifying an accurate forecast or the future conditional envelope law. Appendix A's hypothetical replay under known linear dynamics gives a horizon-dependent anchor correction; raw translation retains the full anchor difference at every step. This illustration fits no coefficient and establishes no inventory-control mechanism for the source.

In Avellaneda and Stoikov's (2008) dealer model, quote offsets affect fill intensities and future share inventory. Using forecasts to change quotes may therefore change the process being forecast. The source's policies are unobserved, and the passive comparison evaluates no such intervention. The stipulated 19:1 weights let less unused allowance offset greater overrun; funding prices and shortage costs are unobserved. Even accurate proxy forecasts would not establish cash adequacy, gross exposure, P&L or the effects of changing quotes, hedges or risk limits.

Reexecution and a same-hash download support reproducibility on this one aggregate 2014–2017 record. The same-source thesis supplies no independent dealer or regime evidence. External validation requires another inventory record audited for aggregation, units, sampling and release timing; price returns and weekly position reports measure different objects.

Overlapping maxima, shared histories and persistent positions create dependence; selected counts are not independent tail samples. The averages alone do not establish expected performance elsewhere. No argument establishes that selected responses estimate the future peak's conditional law given the signed state, or that this state is sufficient. The fixed pool differs from the growing-sample strategy behind the cited nearest-neighbor guarantee; geometry, ranks and breach frequencies establish no coverage. The original resampling retains unverified inferential premises and supplies

no extension uncertainty (Appendix B). The extension remains exploratory because its evaluation interval had already been inspected.

## 9. Conclusion

Historical selection and response representation produce distinct forecast tradeoffs for sampled client-flow net-position peaks. Original headroom pooling lowers primary loss by 2.08% relative to raw scenario reanchoring, with more breaches and greater overrun; the ranking reverses at H=24. Exploratory state retrieval improves equal-count recent rules, including a 31.83% primary reduction for the weak native-peak baseline, while the original full-window leaders remain ahead. Every matched scenario gain accompanies more breaches and greater mean positive overrun. Geometry explains construction agreement without deciding predictive accuracy. Independent dealer records and same-target conditional benchmarks are needed to assess transfer beyond this application.

## Appendix A. Finite geometry and its predictive limits

### A.1. Common-set projection bounds

These are elementary finite-array arguments, rather than new asymptotic or coverage results. Fix a nonempty common selected set J, an available rank $1\le k\le|J|$, query $x=N_t$, floor $B=|x|$ and completed historical windows. All identities in this appendix concern real arithmetic. Write $B_i=|N_i|$, $d_{i,h}=N_{i+h}-N_i$, with $d_{i,0}=0$, and define

$$A_i=B+P_i-B_i;\quad T_i=\max_{0\le h\le H}|x+d_{i,h}|;\quad C_B(z)=\max(B,z).$$

Both $A_i$ and $T_i$ are at least B. The projection $C_B$ is nondecreasing and 1-Lipschitz. It commutes with a finite order statistic, as does a common translation. Hence $F_J=Q_k(A)$, $S_J=Q_k(T)$ and $K_J=Q_k(C_B(P))$. Since $C_B(A_i)=A_i$,

$$|A_i-C_B(P_i)|\le|A_i-P_i|=|B-B_i|.$$

The reverse triangle inequality bounds each path value's change under a starting-position translation by $|x-N_i|$. Taking a maximum gives $|T_i-P_i|\le|x-N_i|$. Applying the same floor projection preserves that bound because $T_i\ge B$. Finally, paired order statistics are nonexpansive in the maximum coordinate difference: if $|u_i-v_i|\le r$ for every i, then $u_i\le v_i+r$ and conversely; monotonicity and common translation give $|Q_k(u)-Q_k(v)|\le r$. These observations prove the two K bounds in Section 4. The triangle inequality and $||N_i|-|x||\le|N_i-x|$ prove the stated F/S bound. Keeping the rank fixed while changing one side's historical rows does not by itself justify these common-set comparison bounds.

Among all size-m subsets, selecting the m smallest signed distances minimizes the largest selected distance: any alternative must include an element at least as far away as the mth ordered distance. This finite minimax fact, with the declared tie convention, concerns the signed radius. It does not minimize the absolute-anchor radius, the sum of the two radii, the actual report gap or a forecast loss. For every fixed realized y, pinball loss is $\max(\tau,1-\tau)$-Lipschitz in its report, so a report-gap bound also bounds the absolute loss difference. Such stability supplies no sign for the realized or expected loss difference.

### A.2. Envelope plateaus and the role of signed anchors

Put $u_i=b_i\ge0$ and $v_i=-a_i\ge0$. The headroom of an increment envelope at any anchor z is

$$g_i(z)=\max(z+u_i,-z+v_i)-|z|;\ \text{for } z\ge0 \text{ it equals } \max(u_i,v_i-2z),\ \text{and for } z\le0 \text{ it equals } \max(u_i+2z,v_i).$$

F pools each envelope's headroom at its historical anchor, $g_i(N_i)$; S pools its headroom at the query, $g_i(x)$. The branches agree at zero and together make $g_i$ 2-Lipschitz, with range lying in $[\min(u_i,v_i),\max(u_i,v_i)]$. Apply the distance and range bounds to each paired row, then use the same-rank order-statistic stability from A.1 to obtain

$$|F_J-S_J|\le\max_{i\text{ in }J}\min\{2|x-N_i|,|u_i-v_i|\}.$$

For example, $u_i=v_i$ in every row makes $F_J=S_J$ at arbitrary anchors. Nonnegative query/source anchors together with $u_i\ge v_i$ in every row also suffice; the nonpositive analogue uses $v_i\ge u_i$. These are sufficient conditions, not a characterization: pooled order statistics can coincide even when paired rows differ. The range bound also gives $F_J,S_J\le R_J$, where $R_J=B+Q_k\{\max(u_i,v_i):i\text{ in }J\}$. This is a theoretical same-set ordering; no R retrieval configuration is evaluated in the extension, and the ordering does not make $R_J$ preferable under a given loss.

If every $B_i \le B$, then $A_i \ge C_B(P_i)$ and $F_J \ge K_J$. If every $B_i \ge B$, then $C_B(P_i) = P_i \ge A_i$ and $F_J \le K_J$. Equal absolute anchors force $F = K$ but leave signs relevant to $S$. A coherent full-pool example uses $c > 0$, $H = 1$, $n = 720$, $\tau = 19/20$, $t = 721$ and $N_s = (-1)^{s+1} c$ for $0 \le s \le 721$. The pool uses completed labels at origins $J = \{1,...,720\}$, with 360 anchors of each sign and current $N_t = c$. All native peaks equal $c$ and headrooms equal zero, so $F = K = c$. Raw reanchoring gives 360 peaks $c$ and 360 peaks $3c$; rank 685 gives $S = 3c$. Thus $r_{abs} = 0$ while $r_{signed} = 2c$ and $|S - K| = 2c$. This artificial path respects maturity and an available corrected rank; it is not an empirical claim or a claim about which rows nearest retrieval selects.

### A.3. The same observed history allows opposite loss rankings

Choose $d > 0$, $H \ge 1$, $0 < \tau < 1$ and $n$ large enough that $k = \text{ceil}((n+1)\tau) \le n$. Set $t = H + n - 1$ and $N_s = d(t - s)$ for $0 \le s \le t$, using $J = \{0,...,n-1\}$. Every selected response ends by $t$. Each historical peak is its own positive starting value, so $G_i = 0$ and $F = 0$. Each increment path equals $-dh$; reanchoring at $N_t = 0$ gives $S = Hd$. Two continuations of this identical observed history yield:

*Table A1. Artificial coherent continuations. Symbols are constructed quantities, not source-record estimates.*

| Future $N(t+h)$, $1 \le h \le H$ | Actual peak | F loss | S loss |
|---|---|---|---|
| 0 | 0 | 0 | $(1-\tau)Hd$ |
| $-dh$ | $Hd$ | $\tau Hd$ | 0 |

Either report can therefore have strictly smaller realized loss under a compatible future. A report ordering also need not hold universally. Consider the artificial history $(0,-4,-1,2)$, with $H = 1$, $n = 3$, $\tau = 3/4$, issue $t = 3$ and $J = \{0,1,2\}$. The current anchor and floor are $x = B = 2$; all three historical windows are completed. Table A2 shows the native and raw-reanchored paths.

*Table A2. Completed $H = 1$ windows from one artificial history, in arbitrary position units. $P$ is the native peak, $G$ the native headroom and $T$ the peak after reanchoring at $x = 2$. These values are not source-record estimates.*

| i | Historical pair | P | G | Reanchored pair | T |
|---|---|---|---|---|---|
| 0 | 0, −4 | 4 | 4 | 2, −2 | 2 |
| 1 | −4, −1 | 4 | 0 | 2, 5 | 5 |
| 2 | −1, 2 | 2 | 1 | 2, 5 | 5 |

The available corrected rank is $\text{ceil}((3+1)3/4) = 3$. The third order statistics of $G$, $T - B$ and $P$ are 4, 3 and 4, respectively, so $F = 6$, $S = 5$ and $K = 4$. The small pool and $\tau = 3/4$ belong only to this illustration. It contains no observation after issue and gives no realized query loss. These constructions establish logical limits, not the conditional law of the recorded series or a population ranking. A deterministic construction can refute an unconditional mathematical assertion while supplying no empirical validation for either rule.

### A.4. Raw translation versus replay under known dynamics

For interpretation only, suppose $N_{s+1} = \mu + \varphi(N_s - \mu) + \varepsilon_{s+1}$, with a common known center and coefficient. Replay a historical window's ordered innovations from query $x$. Denote that replay by $M$ and raw translation by $W$. Subtracting the two recursions and using induction gives

$$M_{i,h}(x) = N_{i+h} + \varphi^h (x - N_i); \quad W_{i,h}(x) = N_{i+h} + (x - N_i).$$

Taking the maximum absolute path value yields

$$|\max_h |W_{i,h}(x)| - \max_h |M_{i,h}(x)|| \le \max_{0 \le h \le H} |1 - \varphi^h| \, |x - N_i|.$$

For $0 \le \varphi \le 1$ the coefficient is $1 - \varphi^H$; at $\varphi = 1$ the paths coincide. The identity needs no innovation law, while treating past innovations as representative of future conditional innovations is a separate assumption. Neither the recursion nor that assumption is fitted or validated here. The extrema suffice to evaluate the peak after raw translation, but generally not after the dynamic correction, which depends on path order. Conditional validity of historical envelopes remains a separate question.

## Appendix B. Complete settings and descriptive diagnostics

The following tables retain favorable, adverse and small differences. Monetary entries are source-reported USD millions, rounded only for display. Paired means come directly from their accepted aggregate columns; the tables do not recompute forecasts, select settings or create new tests. K denotes original L. Original settings change one factor from H=6, n=720, τ=.95: h12/h24 change H, n480/n1440 change n, and tau90/tau99 change τ. All use the same 6,625 issue origins. Different τ values express different score preferences.

*Table B1. Complete original mean loss grid. Δ is the stored paired mean F minus S; negative favors F within that setting.*

| Setting | F | S | R | K | P0 | Δ F−S |
|---|---|---|---|---|---|---|
| main | 0.441774 | 0.451149 | 0.527544 | 0.925885 | 1.813620 | -0.009375 |
| h12 | 0.592518 | 0.604781 | 0.689604 | 1.058614 | 2.950594 | -0.012263 |
| h24 | 0.777069 | 0.748384 | 0.803106 | 1.197833 | 4.630827 | +0.028685 |
| n480 | 0.449843 | 0.460816 | 0.532515 | 0.885243 | 1.813620 | -0.010973 |
| n1440 | 0.443793 | 0.448275 | 0.526979 | 0.931562 | 1.813620 | -0.004482 |
| tau90 | 0.659643 | 0.659499 | 0.763481 | 1.477201 | 1.718166 | +0.000144 |
| tau99 | 0.154991 | 0.158998 | 0.175486 | 0.288834 | 1.889983 | -0.004007 |

The original groups were fixed using issue-time information except the explicitly retrospective future-gap panel. Magnitude cutoffs use absolute positions strictly before the evaluation interval; neither cutoff is reestimated within an evaluation group. Sign and magnitude panels have unequal membership. The index-modulo-six panel is a mechanical phase diagnostic rather than a six-hour sampling experiment. A group below 30 origins retains its count and suppression status; an empty current-zero group does not have a zero mean loss.

*Table B2. All original noncalendar paired diagnostic groups. Δ is F minus S at the original primary setting. 'Not displayed' denotes insufficient membership, not an estimated zero.*

| Panel | Group | Origins | Δ F−S |
|---|---|---|---|
| Sign | negative | 5592 | -0.010808 |
| Sign | zero | 0 | Not displayed |
| Sign | positive | 1033 | -0.001618 |
| Magnitude | low | 420 | +0.023570 |
| Magnitude | middle | 760 | +0.016090 |
| Magnitude | high | 5445 | -0.015470 |
| Index mod 6 | 0 | 1104 | -0.012793 |
| Index mod 6 | 1 | 1104 | -0.016473 |
| Index mod 6 | 2 | 1104 | -0.005393 |
| Index mod 6 | 3 | 1104 | -0.005242 |
| Index mod 6 | 4 | 1104 | -0.005957 |
| Index mod 6 | 5 | 1105 | -0.010390 |
| Future gaps | gap_free | 6289 | -0.006642 |
| Future gaps | has_gap | 336 | -0.060535 |

Gap-crossing groups classify the realized future path and cannot be used as an issue-time filter. The 336 gap-crossing origins contain only one F breach and one S breach; their conditional severities rest on one event each. Calendar panels use naive source timestamps. Table B3 retains the original F/S month contrast and breach counts alongside the extension's nearest360 K-minus-recent360 K month contrasts at H=6 and 24; they are separate contrasts, not interchangeable strategies.

*Table B3. All months: original H=6 F-minus-S and exploratory nearest360 K-minus-recent360 K paired mean loss differences. Monetary entries are in USD millions; breach counts belong to original F and S. Every month meets the display threshold.*

| Month | Origins | Original Δ | F breaches | S breaches | K Δ H6 | K Δ H24 |
|---|---|---|---|---|---|---|
| 2016-01 | 504 | -0.017183 | 29 | 18 | +0.003379 | +0.520447 |
| 2016-02 | 504 | -0.015726 | 21 | 18 | -0.366978 | -0.406803 |
| 2016-03 | 552 | +0.040380 | 42 | 31 | -0.211499 | -0.086232 |
| 2016-04 | 502 | +0.020270 | 37 | 24 | -0.522837 | -0.589971 |
| 2016-05 | 530 | -0.031114 | 10 | 7 | -0.432595 | -0.352734 |
| 2016-06 | 528 | -0.035273 | 16 | 7 | -0.236362 | -0.105785 |
| 2016-07 | 504 | +0.006976 | 34 | 27 | -0.213175 | -0.494943 |
| 2016-08 | 552 | -0.047937 | 14 | 12 | -0.494498 | -0.685697 |
| 2016-09 | 526 | +0.002870 | 31 | 29 | -0.236850 | -0.338212 |
| 2016-10 | 506 | -0.007725 | 39 | 36 | -0.230552 | -0.135516 |
| 2016-11 | 528 | +0.007843 | 25 | 24 | -0.220045 | -0.310768 |
| 2016-12 | 526 | -0.032346 | 15 | 11 | -0.323571 | -0.422938 |
| 2017-01 | 363 | -0.012823 | 19 | 10 | -0.041940 | -0.286619 |

*Table B4. All extension geometry rows. Mean per-origin anchor radii and mean absolute report gaps are in USD millions; age is mean t−i in records, not hours; equality counts are exact stored F=S comparisons.*

| H | Set | Abs radius | Signed radius | \|F−S\| | Equal | Age |
|---|---|---|---|---|---|---|
| 6 | full720 | 28.439284 | 36.604661 | 1.212343 | 809 | 365.50 |
| 6 | recent360 | 24.262721 | 30.399817 | 1.256683 | 1804 | 185.50 |
| 6 | nearest360 | 11.346111 | 12.365836 | 0.477250 | 4297 | 328.35 |
| 6 | recent180 | 20.063962 | 24.372598 | 1.249574 | 2914 | 95.50 |
| 6 | nearest180 | 6.506279 | 7.065549 | 0.313294 | 5100 | 301.27 |
| 24 | full720 | 28.603627 | 36.864344 | 1.836659 | 1234 | 383.50 |
| 24 | recent360 | 24.420571 | 30.694525 | 2.824054 | 2412 | 203.50 |
| 24 | nearest360 | 11.566355 | 12.627357 | 0.703643 | 4350 | 352.09 |
| 24 | recent180 | 20.576841 | 25.146348 | 3.169128 | 3342 | 113.50 |
| 24 | nearest180 | 6.782036 | 7.387771 | 0.680282 | 5062 | 331.82 |

All ten geometry rows pass the per-origin declared tolerance checks. Nine aggregate maximum excesses are zero; H24/nearest180 records a maximum excess of 1.862645149230957e−9 USD, reflecting floating-point arithmetic rather than an exact-real violation. Its maximum recorded arithmetic tolerance is 1.041112061415106e−6 USD. Comparing these two aggregate maxima alone is not the per-origin verification; the issuer checks every origin and the accepted run records that check. Tolerances do not change breach flags, exact-capacity equality or loss signs.

The original descriptive resampling operates on the single already realized primary F-minus-S loss-difference sequence. For each length ℓ in {120,240,720,1440}, it uses 999 circular resamples: start uniformly at an origin, draw a positive geometric block length with mean ℓ, continue circularly, and truncate only the final block to length M=6,625. Each length uses NumPy PCG64 with SeedSequence([20261020,ℓ]). The table reports ddof=1 resampled standard deviation and noninterpolated order statistics 25 and 975. Constant input is preserved exactly; no recentering or model refitting is performed.

*Table B5. All four original resampled-mean profiles, in USD millions where monetary. Expected block counts include the final truncated block. The displayed ranges are not population confidence intervals.*

| ℓ | ℓ/M | E blocks | Rep. mean | Rep. SD | Order 25 | Order 975 |
|---|---|---|---|---|---|---|
| 120 | 0.0181 | 56.2 | -0.009774 | 0.009310 | -0.028186 | +0.008559 |
| 240 | 0.0362 | 28.6 | -0.009835 | 0.008948 | -0.028279 | +0.008127 |
| 720 | 0.1087 | 10.2 | -0.009471 | 0.007557 | -0.025106 | +0.004780 |
| 1440 | 0.2174 | 5.6 | -0.009475 | 0.006679 | -0.023037 | +0.003596 |

The block mechanism follows Politis and Romano (1994). Their Theorem 2 gives a scalar-mean sampling-distribution result under strict stationarity, specified moment and dependence restrictions, positive long-run variance and block-length asymptotics. Those premises have not been established for the process generating this forecast-loss sequence. Large fixed ℓ/M also leaves few blocks. Here the profiles describe a fixed resampling mechanism's sensitivity on this record. They are not applied to any added nearest-state contrast, and their endpoints are neither null-test cutoffs nor superiority probabilities.

## Appendix C. Rank, arithmetic and replication conventions

For m sorted responses $z_{(1)} \le ... \le z_{(m)}$, the corrected rank is k=ceil((m+1)τ). If k>m, this implementation stops rather than inserting an infinite report or changing the rank. All declared cells have an available rank. The original seven ranks are 685,685,685,457,1369,649,714 in the Table B1 order. In the extension τ=19/20 and m in {720,360,180}, so mτ in {684,342,171} is an integer. The empirical pinball-minimizer interval is $[z_{(m\tau)}, z_{(m\tau+1)}]$, including ties; the configured corrected rank chooses its upper endpoint. This particular relationship is not asserted for the original τ=.99 cell, nor does any empirical-minimizer identity establish future coverage.

All forecasts use stored float64 values, duplicate-preserving order statistics and the original operation order. For S, the translated peak is computed first, B is subtracted before ranking, and B is added afterward. Replacing this with a mathematically equivalent differently rounded expression can alter stored capacity ties, strict flags and scores. The scientific tables use direct error P−C; the paired summary uses compensated aggregation of per-origin loss differences, rather than subtracting displayed or independently rounded global means. Empty CSV values and JSON nulls have documented undefined reasons. Finite numerical reconciliation tolerances are kept separate from event definitions.

The extension's per-origin geometry tolerance is 64ε times the maximum of one, current floor, historical anchor magnitudes, native peaks, all three reports and the two anchor radii. The input source, specification and code identities are checked before accepting a run and rechecked after computation. Membership is computed from signed source positions at the completed historical origins; absolute magnitude alone cannot authenticate their signs. Selected age and radii are descriptive properties of that membership, not extra tuned predictors.

The input is version 2's one-hour member, 1hourNetPositionsKaggle.csv, with 18,576 records and 1,286,391 bytes. Its accepted SHA-256 is b8e92c54a76b49990b028252d6a89195e92193990e72f10228f2280a11a967fa. The public Net Position Time Series Dataset is identified by the Kaggle owner/slug davidlindsay1979/net-position-time-series-dataset. The source fingerprint, member/version, acquisition checks and result/code manifests allow identity verification. Public availability is not taken as permission to redistribute the raw observations; this repository supplies acquisition instructions and analysis code.

The original accepted computation took 8.02145 seconds, with peak sampled process RSS 80,936,960 bytes and one observed OS thread. The extension's sole accepted calculation took 10.307238 seconds on its internal process clock, with peak sampled RSS 64,602,112 bytes and one observed thread over 675 snapshots. A process-completion measurement reported 10.35 seconds and maximum RSS 64,634,880 bytes; its scope and precision differ from the internal measurement. These are execution observations under the single-process CPU budget, not general runtime benchmarks. The extension reused the exact accepted local input and did not download or redistribute observations.

The original results remain in results/summary.csv, paired-comparison.csv, stability.csv and diagnostics.csv with their original manifest. The separately frozen extension has summary.csv (30 rows), geometry.csv (10), comparisons.csv (22), monthly.csv (26) and manifest.json under results/revision-20261021/. Six shared reference rows reproduce the

original F/S/L numeric columns exactly, with K mapped to L. Reproducing these values on the same hash-identified source verifies execution, not external validation. The root README documents separate acquisition, scientific execution, aggregate-only figure construction and manuscript rebuilding. Document rendering reads approved text and figure assets rather than running financial experiments.

## References


Avellaneda, M. and S. Stoikov (2008). High-frequency trading in a limit order book. *Quantitative Finance* 8(3), 217–224. DOI:10.1080/14697680701381228.

Barone-Adesi, G., K. Giannopoulos and L. Vosper (1999). VaR without correlations for portfolios of derivative securities. *Journal of Futures Markets* 19(5), 583–602. DOI:10.1002/(SICI)1096-9934(199908)19:5<583::AID-FUT5>3.0.CO;2-S. Consulted body: USI Quaderno 99-04, revised March 1999; final-body equivalence is unverified.

Biau, G. and B. Patra (2011). Sequential Quantile Prediction of Time Series. *IEEE Transactions on Information Theory* 57(3), 1664–1674. DOI:10.1109/TIT.2011.2104610. Consulted body: arXiv:0908.2503v2, 31 May 2010; final-body equivalence is unverified.

Boudoukh, J., M. Richardson, R. Stanton and R.F. Whitelaw (2004). MaxVaR: Long-Horizon Value at Risk in a Mark-to-Market Environment. *Journal of Investment Management* 2(3), 14–19. Consulted author manuscript; its cover is undated and final-body equivalence is unverified.

Engle, R.F. and S. Manganelli (2004). CAViaR: Conditional Autoregressive Value at Risk by Regression Quantiles. *Journal of Business & Economic Statistics* 22(4), 367–381. DOI:10.1198/073500104000000370. Consulted body: author-hosted published PDF.

Gneiting, T. (2011). Making and Evaluating Point Forecasts. *Journal of the American Statistical Association* 106(494), 746–762. DOI:10.1198/jasa.2011.r10138.

van den Hoogen, S. (2017). Intraday liquidity risk estimation using transaction data: an extreme value theory approach. MSc Applied Mathematics thesis, Delft University of Technology, August 2017. Institutional source.

Hull, J. and A. White (1998). Incorporating volatility updating into the historical simulation method for value-at-risk. *Journal of Risk* 1(1), 5–19. DOI:10.21314/jor.1998.001. Consulted body: the author's October 1998 manuscript; final-body equivalence is unverified.

Liao, J. and T.V. Theodosopoulos (2005). Study on optimal timing of mark-to-market for contingent credit risk control. arXiv:math/0506077v1, 4 June 2005. The PDF names Theodore V. Theodosopoulos; arXiv metadata uses Ted Theodosopoulos.

Politis, D.N. and J.P. Romano (1994). The Stationary Bootstrap. *Journal of the American Statistical Association* 89(428), 1303–1313. DOI:10.1080/01621459.1994.10476870.

Wisniewski, W., D. Lindsay and S. Lindsay (2020). Application of Conformal Prediction Interval Estimations to Market Makers' Net Positions. Proceedings of the Ninth Symposium on Conformal and Probabilistic Prediction and Applications, *Proceedings of Machine Learning Research* 128, 285–301. Official proceedings.

Wisniewski, W.J. (2024). Net Position and Retail Trader Behaviour: Implications for Market Makers' Risk Management Strategies. Doctoral thesis, Royal Holloway, University of London. Institutional original. The institutional award year is 2024; the inspected cover is dated 2023.

Xu, C. and Y. Xie (2023). Sequential Predictive Conformal Inference for Time Series. Proceedings of the 40th International Conference on Machine Learning, *Proceedings of Machine Learning Research* 202, 38707–38727. Official proceedings.

davidlindsay1979. *Net Position Time Series Dataset*, version 2. Kaggle. Dataset record. Source identity verified 21 October 2026; raw redistribution permission remains unverified.

## Figure captions

*Figure 1. Original paired mean pinball-loss differences, F minus S, over 6,625 common issue origins, in source-reported USD millions. F pools historical headrooms; S reanchors raw increment paths. H counts subsequent records, n counts completed historical episodes and τ is the score's quantile preference. Negative values favor F within the fixed setting. Different preferences are not pooled into an overall winner.*

*Figure 2. All 12 fixed exploratory nearest-minus-recent loss contrasts. Negative values favor nearest retrieval at the same horizon, count and representation. The marked primary is H6, m360, K; none of these contrasts establishes superiority over the original full-window leaders.*


*Figure 3. Monthly nearest360 K-minus-recent360 K contrasts at H=6 and 24, including adverse January 2016. H=6 is primary; H=24 is sensitivity. Counts are source-record origins. Calendar groups are descriptive, not independent validations or switching regimes.*

# Original comparison: all seven fixed settings

Mean pinball loss difference | F minus S | negative favors F within the setting

6,625 common issue origins in every row; source-reported USD million units

| Setting | H | n | tau | F minus S (USD million) |
|---|---|---|---|---|
| main (primary) | 6 | 720 | 0.95 | -0.009375 |
| h12 | 12 | 720 | 0.95 | -0.012263 |
| h24 | 24 | 720 | 0.95 | +0.028685 |
| n480 | 6 | 480 | 0.95 | -0.010973 |
| n1440 | 6 | 1440 | 0.95 | -0.004482 |
| tau90 | 6 | 720 | 0.90 | +0.000144 |
| tau99 | 6 | 720 | 0.99 | -0.004007 |

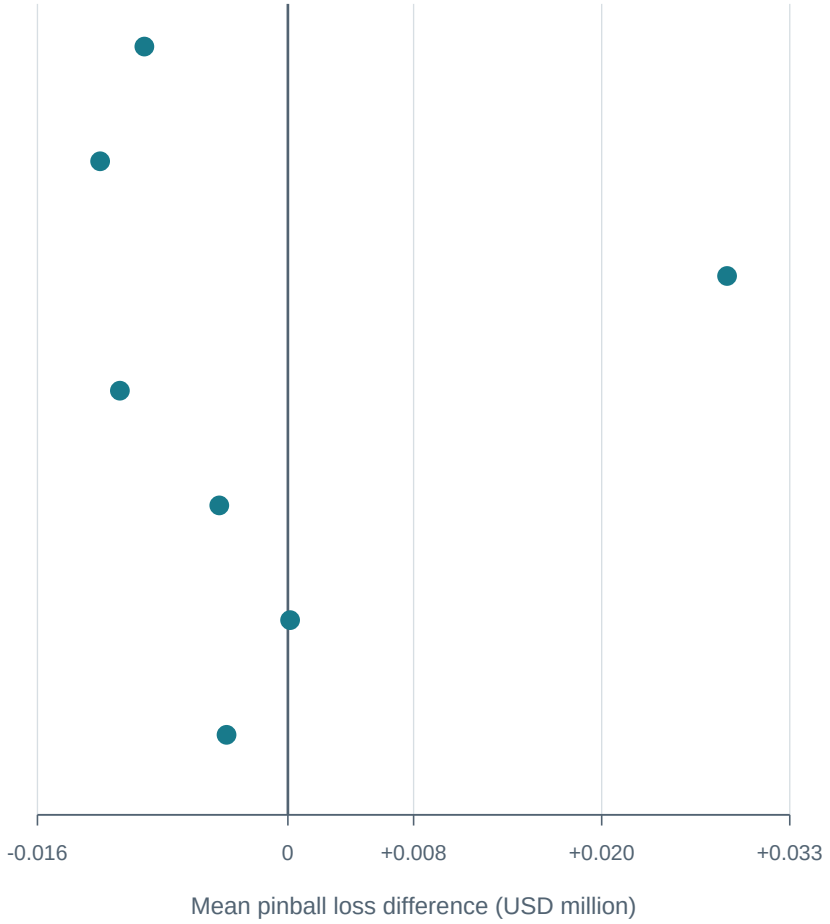


F pools historical headrooms; S reanchors raw increment paths at the current signed state.

H counts subsequent records; n counts completed historical episodes; tau is the score's quantile preference.

Preferences are not pooled into an overall winner. Weighted score differences are not cash savings.


Source: accepted original paired-comparison.csv | zero denotes equal recorded mean loss; no uncertainty intervals

# Nearest versus recent: all frozen loss contrasts

Exploratory paired means | nearest minus recent | negative favors nearest


## H = 6 records

6,625 paired origins in every row

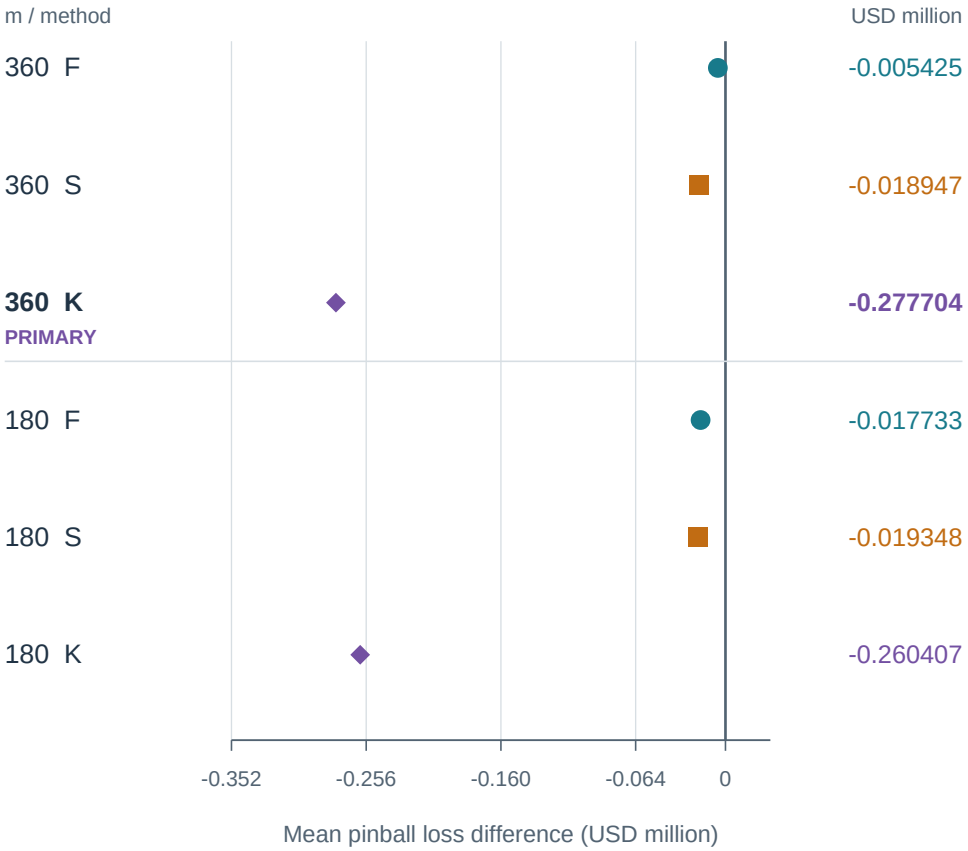


## H = 24 records

6,625 paired origins in every row

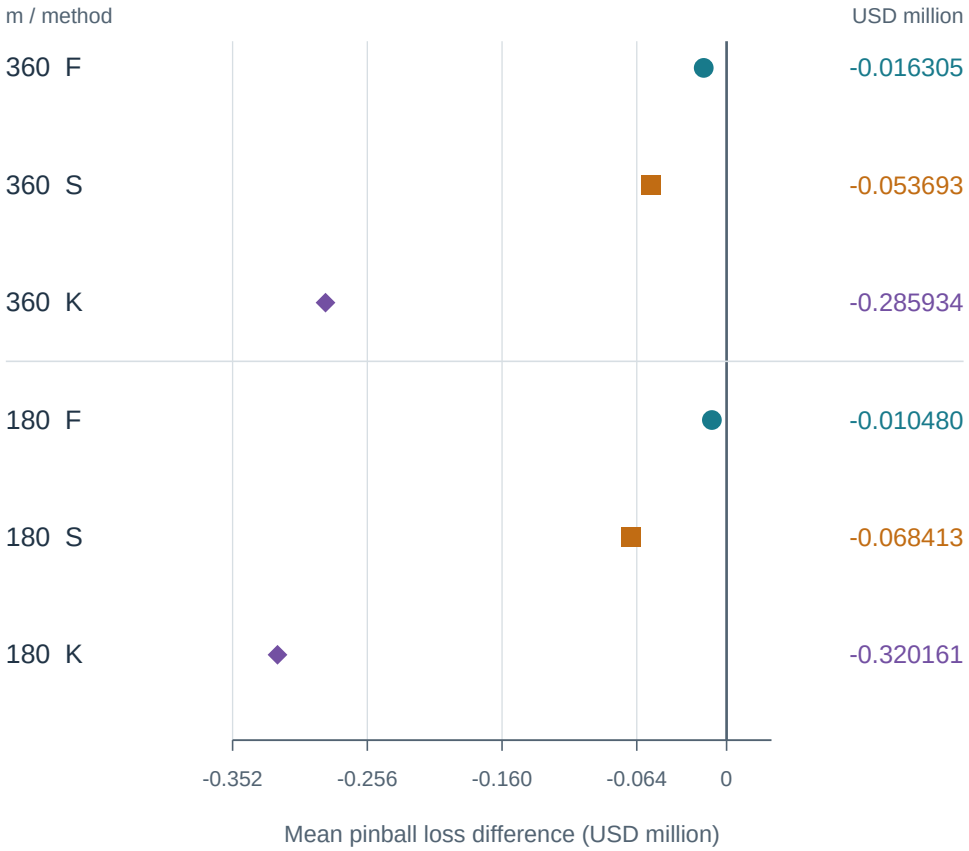


F S K


PRIMARY marks H=6, m=360, K, fixed before extension execution; it does not imply an overall ranking.

All 12 contrasts use the already inspected interval. No uncertainty intervals are displayed.

Source: accepted public comparisons.csv | exploratory-state-selection-20261021

# Monthly K retrieval contrasts: descriptive / exploratory

Exploratory paired means | nearest360 K minus recent360 K | negative favors nearest

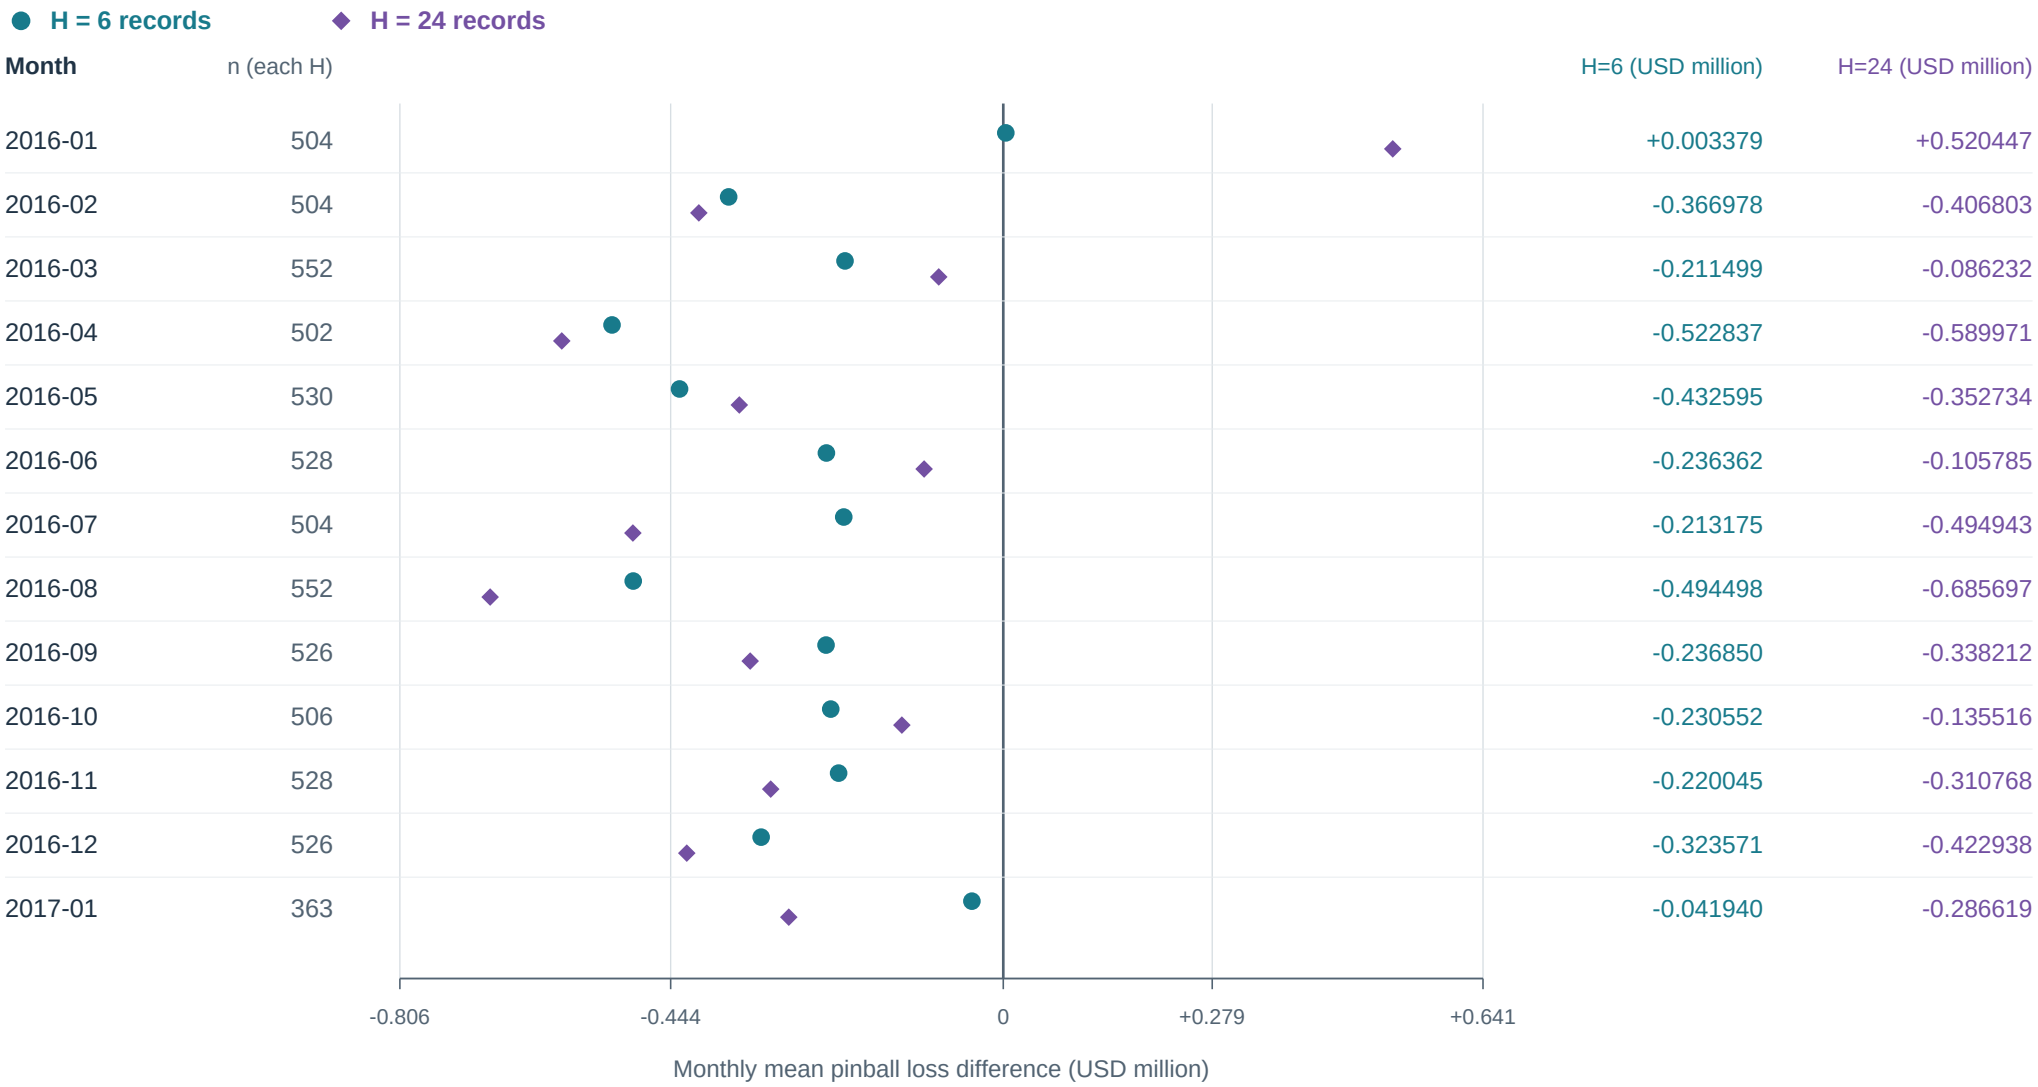


All 13 calendar months are retained, including positive January 2016 at both horizons.

Descriptive summaries of inspected records: H=6 primary; H=24 sensitivity. Zero marks equal mean pinball loss.

Source: accepted public monthly.csv | nearest360 K minus recent360 K