
This is a guide/tutorial on installing Vivado 2025.2 and with the correct parts we'll need for this project. This will need 62 GB of open space but will only take up 45 GB of space in the end.

Go to this link:
https://www.amd.com/en/support/downloads/adaptive-socs-and-fpgas/development-tools/2025-2.html

Scroll down until you see what's boxed in the image below and click on it.

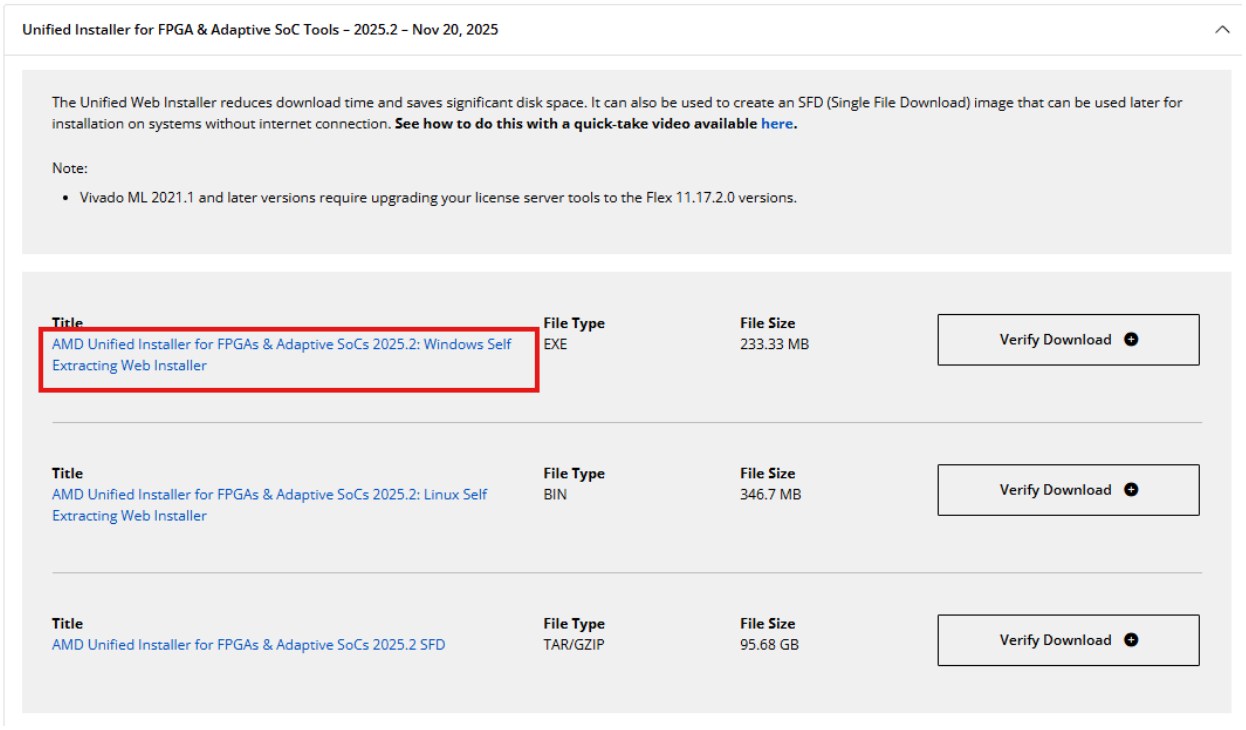

You might be shown a login screen after you click on the link. Login if you've used Vivado before or create a new account. I personally used my UTD email for this since it does ask for a company name but I'm like 67% sure you can use a personal gmail anyways.

Download Center - Name and Address Verification

U.S. Government Export Approval

- U.S. export regulations require that your First Name, Last Name, Company Name and Shipping Address be verified before AMD can fulfill your download request. **Please provide accurate and complete information**.
- Addresses with Post Office Boxes and names/addresses with Non-Roman Characters with accents such as grave, tilde or colon **are not supported** by US export compliance systems.

First Name *
[redacted]
Last Name *
[redacted]
E-mail *
[redacted]
Company Name *
[redacted]
Address 1 *
[redacted]
Address 2
Location *
[redacted]
State/Province *
[redacted]
City *
[redacted]
Postal Code *
[redacted]
Phone
Job Function *
Student


Filename:
FPGAs_AdaptiveSoCs_Unified_SDI_2025.2_1114_2157_Win64.exe

If you are downloading the Vivado / Vitis unified installer, you will receive a follow-up confirmation email with a notice regarding our Developer Program.

You can read about how we handle your personal data, your personal data rights, and how you can contact us in our privacy notice.


Download

Once you fill out all the information, click download and start downloading the .exe file

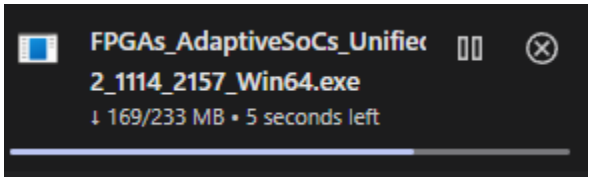


Once it's done downloading, double click it and if it asks to make changes to your device, press "Yes" It'll also ask if it can access some network stuff, press "Allow"

You should see a UI pop up, make sure to just press “Continue” on the pop up as we don’t want to use 2026.1. After that press next.

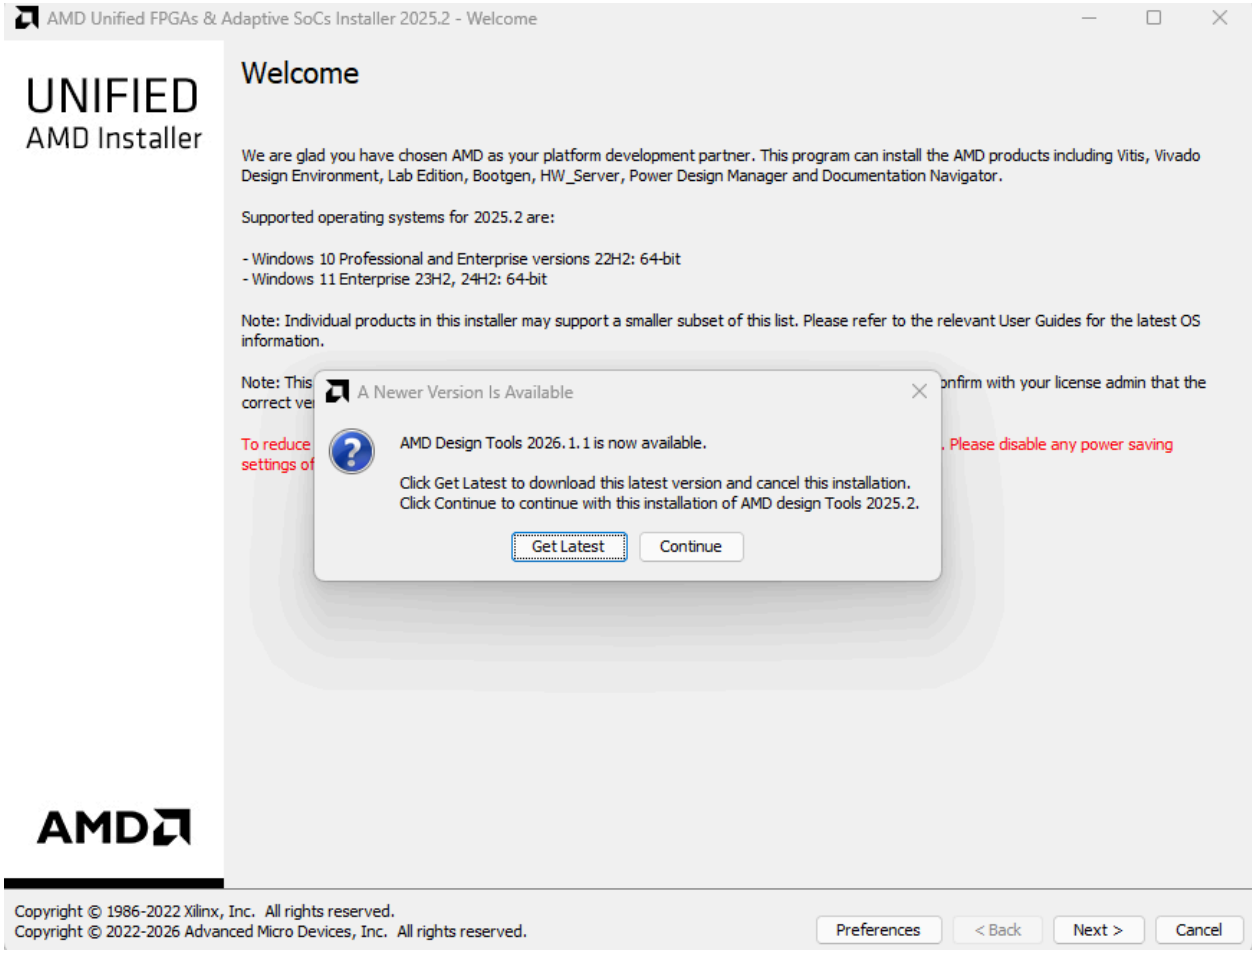


Type in your email and password that you used to login before and press Next

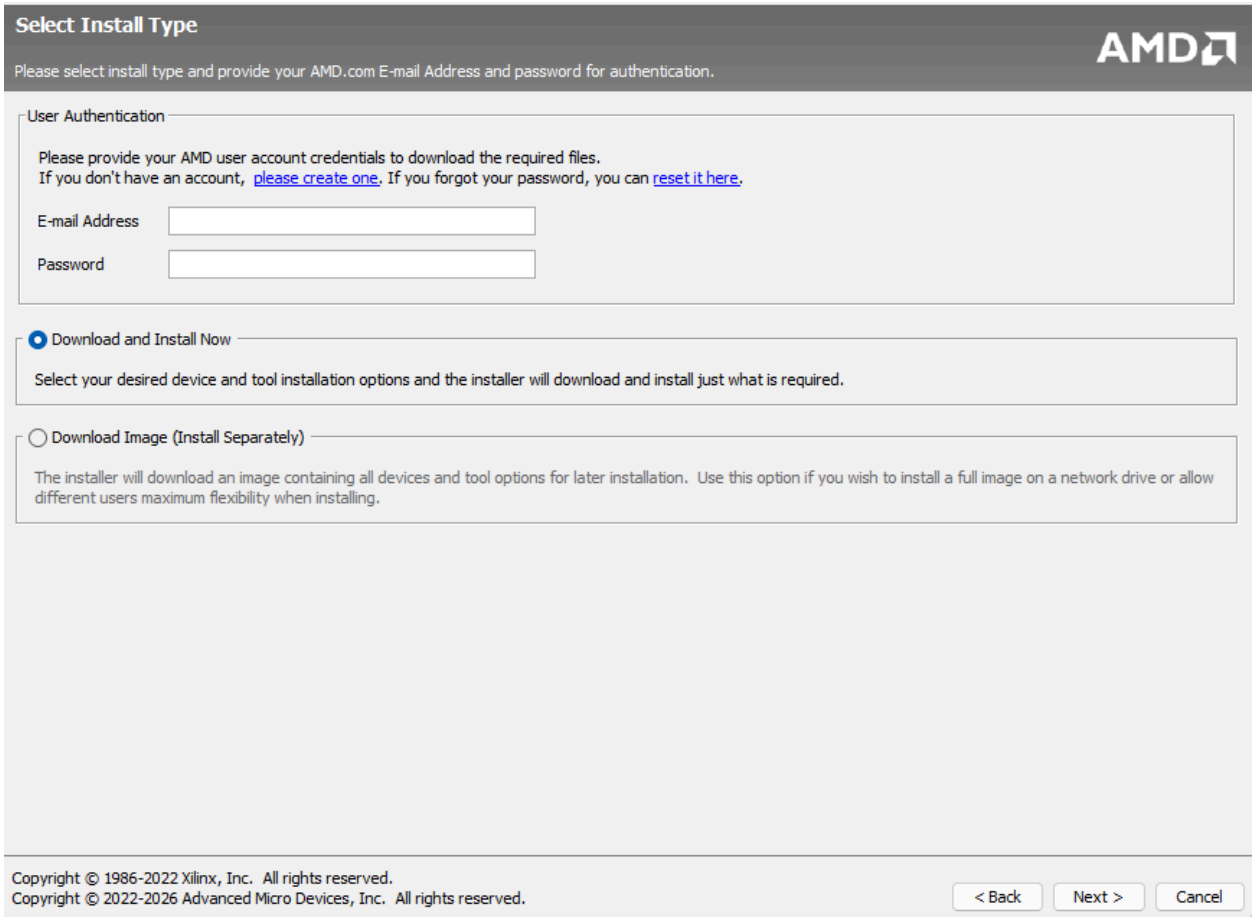


On the next screen, please make sure to select Vivado and not Vitis




On the next screen, make sure to select “Vivado ML Standard”

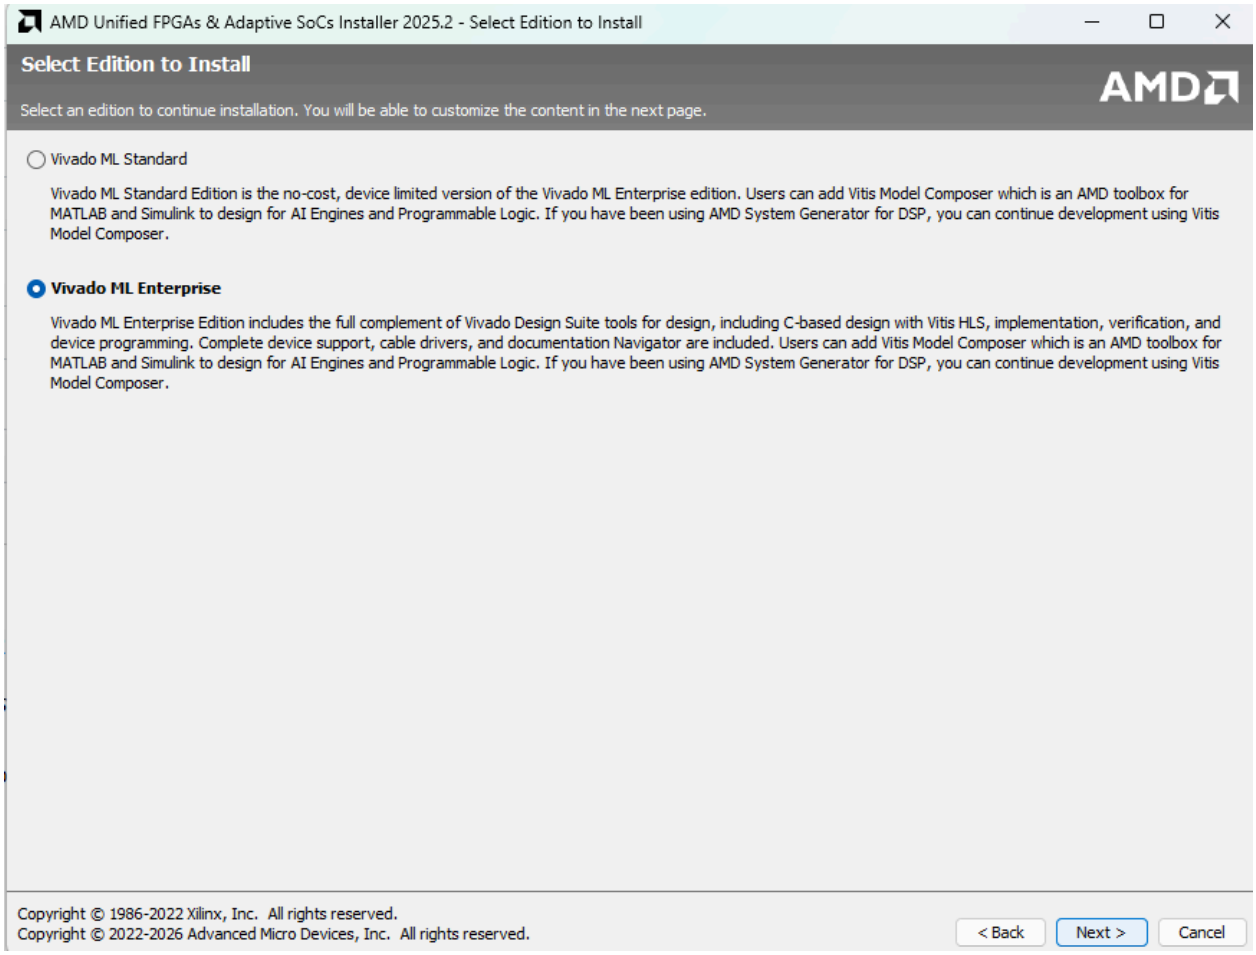


On the next screen, make sure to check exactly what I have below. We're using the Cora Z7 07S which is under the Zynq-7000 All Programmable SoC FPGA family and we don't need any other FPGA family for this. After this click Next.

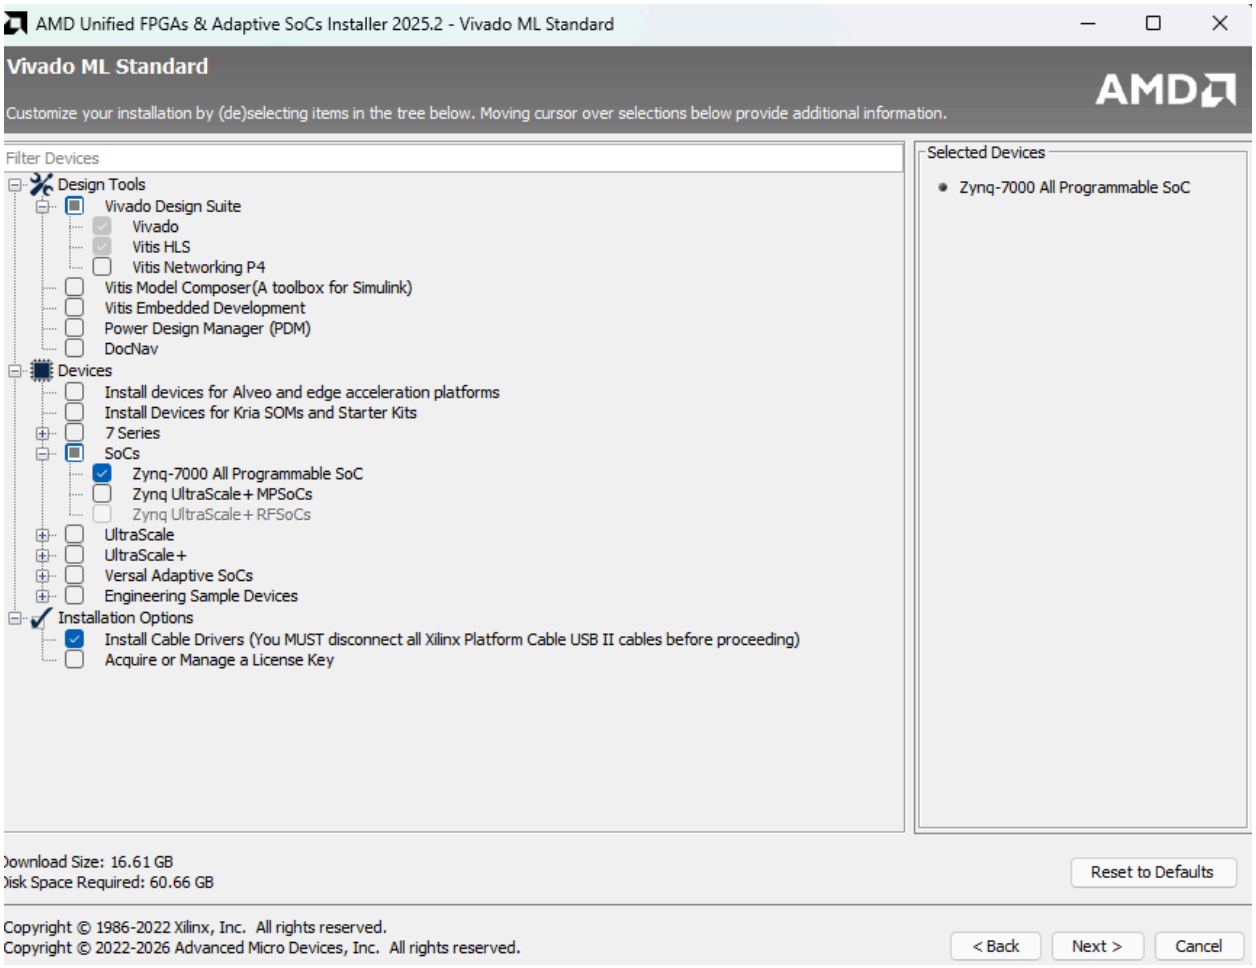


Next screen is just an agreement thing, agree to all and click Next

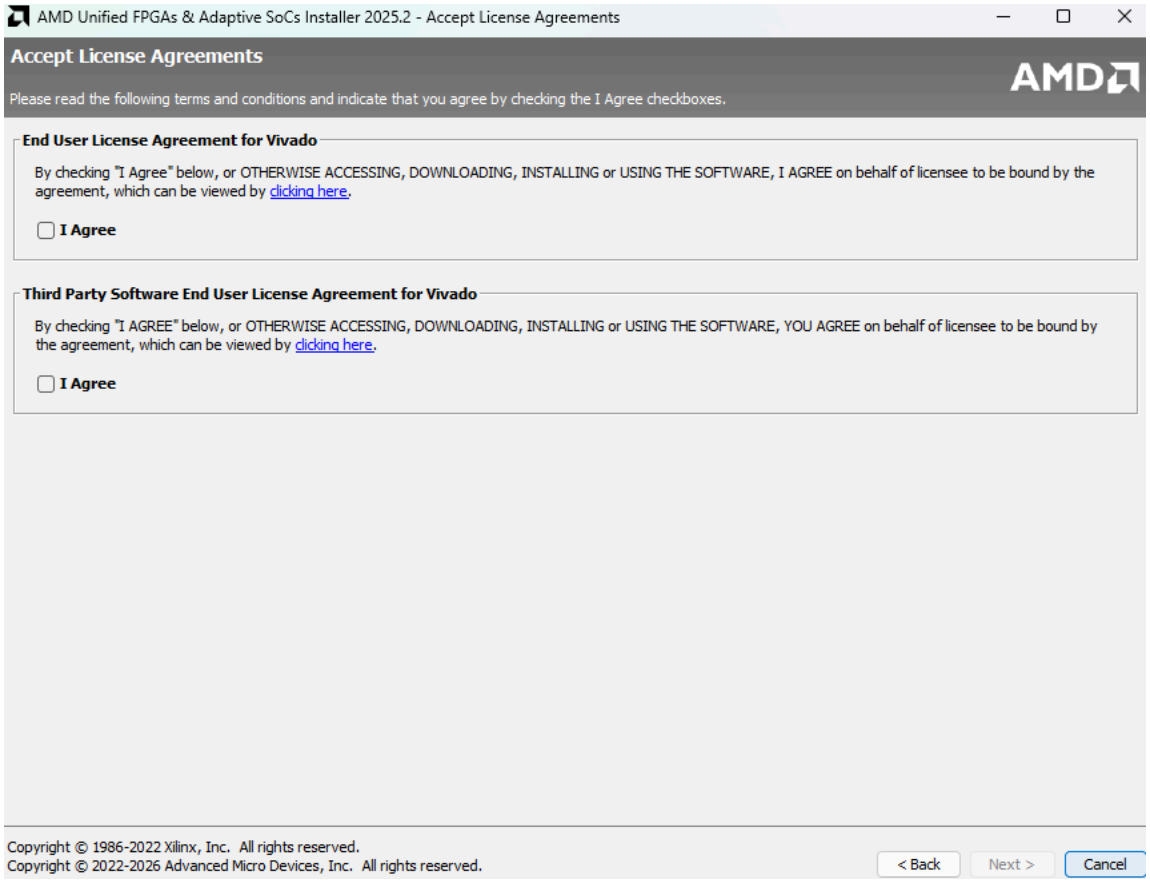

Next screen should look something like this, please make sure you have enough space for it as well

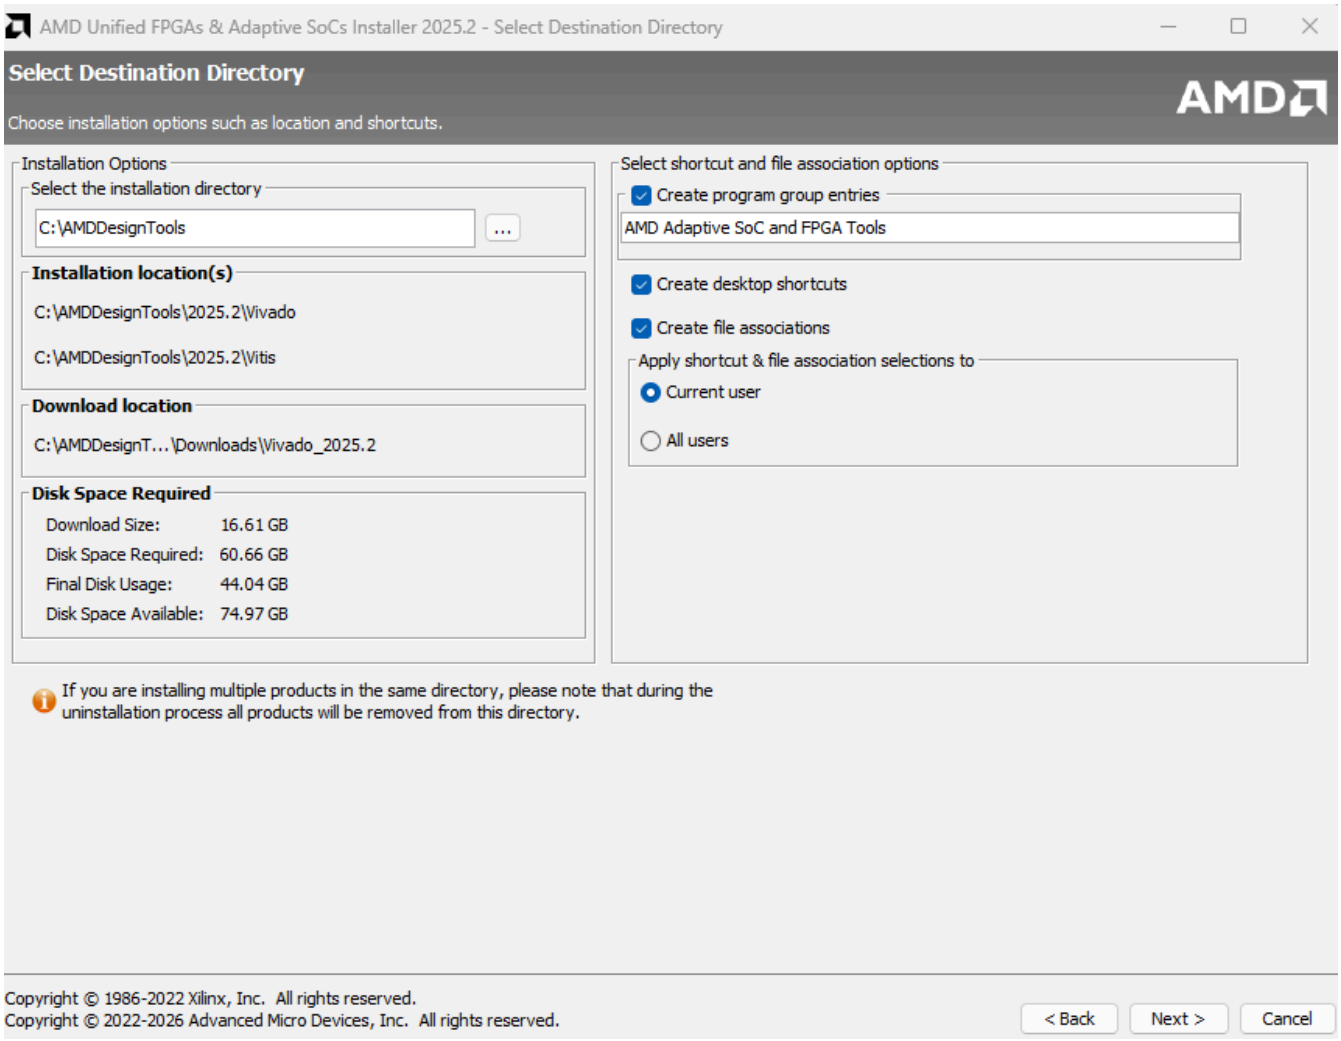

On the next screen, click install and give it some time since it is a big download

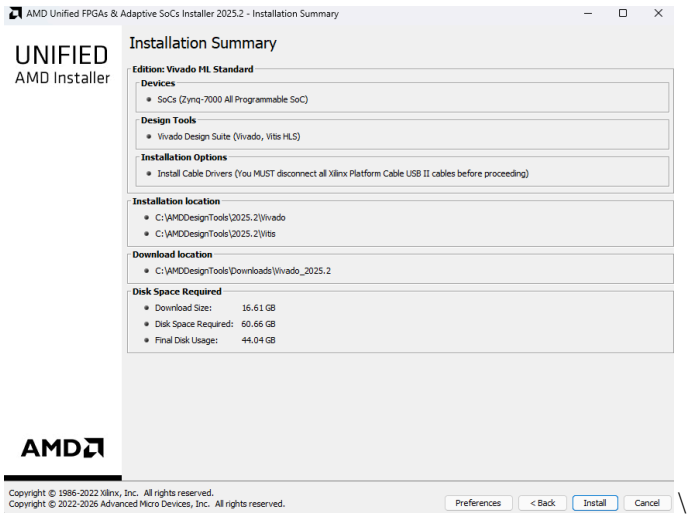

After the excruciatingly long download, press OK and now you have Vivado installed with the tooling we need!

