

PULSAR

GRIDx SmartPay

Mobile App User Manual

Complete guide to the GRIDx Smart Meter mobile application

Version 1.0 | Android Application | March 2026

Bluetooth

Wi-Fi

4G/LTE

Touch

Contents

Getting Started

Download, install, and first launch

Page 3

01

Account Setup

Register, login, and password recovery

Page 4

02

Home Dashboard

Main screen overview and navigation

Page 5

03

Bluetooth Connection

Scanning and connecting to your meter

Page 6

04

Geyser Control

Manual, schedule, and timer modes

Page 7

Token & Recharge

Send tokens and view history

Page 8

06

Energy Statistics

Hourly, weekly, and monthly charts

Page 9

07

Settings & Security

BLE password and device management

Page 10

08

Emergency Services

One-touch safety buttons

Page 11

09

Getting Started with GRIDx SmartPay

System Requirements


- Android 8.0 (Oreo) or higher
- Bluetooth 4.0+ (BLE) support
- GPS/Location services enabled
- Internet connection for statistics & login
- GRIDx Smart Meter installed at your premises

Installation Steps


- 1 Download the GRIDx SmartPay app from Google Play Store
- 2 Open the app - you'll see the Welcome screen
- 3 Tap 'SIGN UP' to create your account
- 4 Fill in your details and meter number (DRN)
- 5 Wait for meter validation (up to 5 minutes)
- 6 Once validated, you're ready to go!

TIP

Your Meter Number (DRN) is displayed on the meter's touch screen under INFO page.

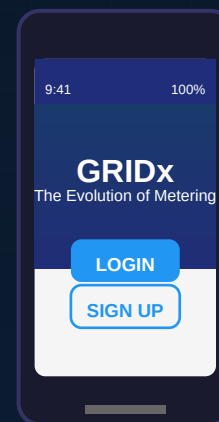

Welcome Screen

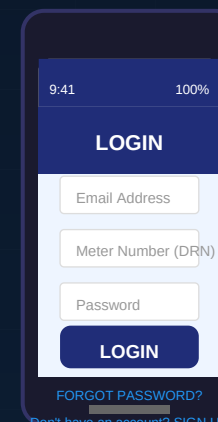

Login Screen

Creating Your Account

Registration


- Enter your email address, full name
- Provide your Meter Number (DRN) from the device
- Enter phone number for SMS features
- Create a strong password (6+ characters)
- Meter validation runs automatically after signup
- Validation polls the server for up to 5 minutes

Login

- Enter your registered email address
- Enter your Meter Number (DRN)
- Enter your password
- Tap the eye icon to show/hide password

Forgot Password (3 Steps)


- Step 1: Enter your email, tap 'Send Code'
- Step 2: Enter the 6-digit PIN from your email
- Step 3: Set your new password and confirm

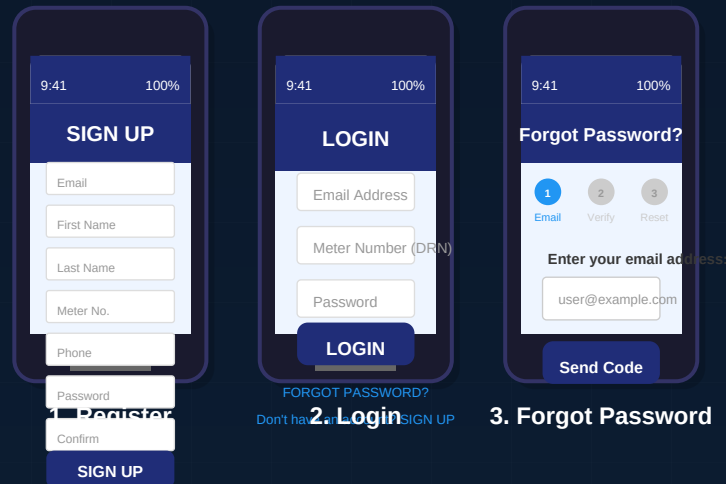

WARNING

The verification PIN expires after 10 minutes. Check your spam folder if you don't see the email.

Dashboard Overview

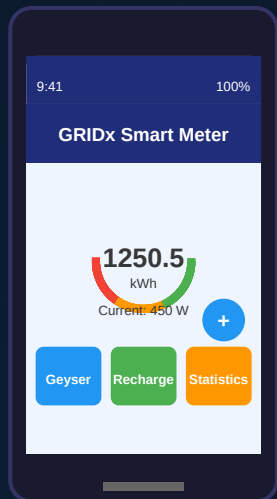

Home Dashboard

Circular Energy Gauge

Shows remaining energy credit (kWh)
Rainbow gradient: Red (low) to Green (full)
Updates in real-time when BLE is connected

Power Consumption

Current power draw in Watts (W)
Total remaining units in kWh
Geyser ON/OFF status with timestamp

Quick Access Buttons

Geyser Control - manage your water heater
Recharge - enter tokens to add credit
Statistics - view energy usage charts

Menu (+ Button)

Bluetooth - scan and connect to meter
Wi-Fi - connection settings
Settings - change BLE password
Logout - sign out of your account

IMPORTANT

Buttons are grayed out when no BLE connection. Connect to your meter first!

Connecting via Bluetooth (BLE)

Before You Connect


- Make sure Bluetooth is turned ON on your phone
- Enable Location/GPS services (required for BLE scanning)
- Stand within 10 meters of your GRIDx meter
- Grant all requested permissions when prompted

How to Connect

- 1 Tap the (+) menu button on the Home screen
- 2 Select the Bluetooth icon
- 3 Tap 'SCAN' to search for nearby GRIDx meters
- 4 Wait for your meter to appear (prefixed 'GRIDx-')
- 5 Tap on your meter name to connect
- 6 Green 'Connected' badge confirms successful pairing
- 7 Return to Home - buttons are now active!

TIP

Signal bars show connection strength. Move closer if signal is weak (fewer bars).

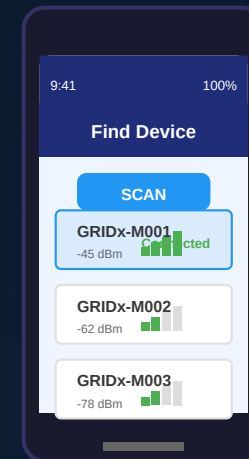

BLE Scanner

Signal Strength


- 4 bars = Excellent (-30 to -50 dBm)
- 3 bars = Good (-50 to -65 dBm)
- 2 bars = Fair (-65 to -80 dBm)
- 1 bar = Weak (below -80 dBm)

Auto-Reconnect

- App polls meter every 5 seconds
- Dashboard updates in real-time
- If disconnected, re-scan to connect
- Only one meter can be active at a time


Geyser (Water Heater) Control

Control your geyser in three ways: Manual, Schedule, or Timer. Switch between modes using the bottom tabs.

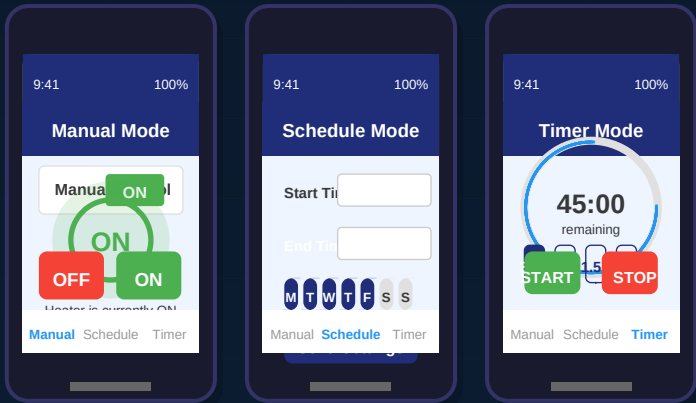

Manual Mode	Schedule Mode	Timer Mode
Manual Mode Tap ON/OFF to control geyser See live status with power usage display in Manual Mode	Schedule Mode Set start/end times Select active days (Multiple schedules supported)	Timer Mode Quick presets: 30m, 1h, 1.5h, 2h Custom time with hour/minute input Geyser turns OFF when timer expires

Token Management & Recharge

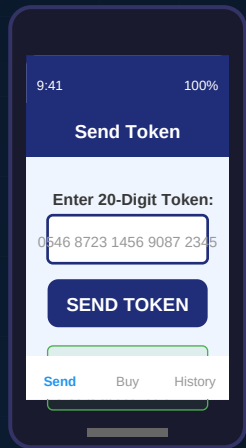

Send Token

Sending a Token

- 1 Navigate to Recharge from the Home screen
- 2 Select the 'Send Token' tab
- 3 Enter your 20-digit prepaid token number
- 4 Tap 'SEND TOKEN' to transfer to your meter
- 5 Wait for confirmation (green success message)
- 6 Credits are added to your meter balance instantly

Token Methods

BLE (Bluetooth)

Send token from app to meter directly via BLE connection

SMS

Text your token to the meter's registered phone number

Keypad

Enter the 20-digit token directly on the meter's touch screen

Web Platform

Send tokens remotely via gridx-meters.com web portal

Token History

- View all previously entered tokens
- Shows amount credited and date/time
- Success/failure status for each token
- Stored locally on your device

NOTE

Tokens are 20-digit STS standard numbers. Each token can only be used once.

Energy Consumption Statistics

Track your electricity usage with detailed charts. Three views: Hourly (Live), Weekly (Daily), and Monthly.

Hourly Usage (Live)


- 24-hour bar chart for today
- Color-coded: green/orange/red
- Total consumption & peak hour
- Auto-refreshes every 30 seconds

Weekly Usage (Daily)

- 7-day bar chart (Mon-Sun)
- Compare daily consumption
- Weekly total & daily average
- Identifies usage patterns

Monthly Usage

- 12-month bar chart (Jan-Dec)
- Year-at-a-glance overview
- Yearly total & monthly average
- Seasonal trend analysis

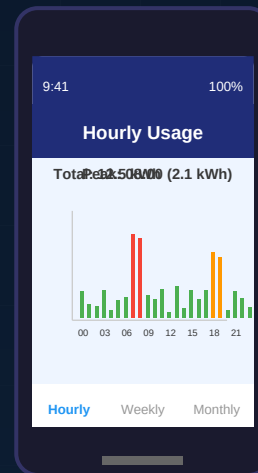

Energy Statistics

Reading the Charts

- Each bar = energy for that period
- Taller bars = more consumption
- Green bars = normal usage
- Orange/Red bars = high usage
- Tap chart for detailed values

Understanding Values

- Wh = Watt-hours (hourly view)
- kWh = Kilowatt-hours (daily/monthly)
- Peak Hour = highest usage time
- Total = sum of all bars shown

Average = total / number of periods

NOTE

Statistics require internet connection. Data is fetched from the GRIDx cloud platform.

Settings & Security

Change BLE Password

- 1 Tap (+) menu on Home screen, then Settings icon
- 2 Your meter number is shown (read-only)
- 3 Enter your current (old) password
- 4 Enter your new password
- 5 Confirm the new password
- 6 Tap 'UPDATE PASSWORD'
- 7 Success message confirms the change

IMPORTANT

The BLE password protects your meter from unauthorized Bluetooth access. Change it regularly!

Device Information

- Meter Number (DRN) - unique device identifier
- SIM Number - cellular connectivity reference
- Firmware Version - current software version
- Current (A) - live amperage reading
- Voltage (V) - live voltage reading
- Active Power (W) - real-time power draw
- Temperature - internal meter temperature

Authorized Phone Numbers

- Up to 5 phone numbers can be registered
- Only authorized numbers can send SMS commands
- Add numbers via the meter's touch screen
- Use international format (+264...)
- Remove numbers individually or clear all

Permissions Required

- Bluetooth - for meter communication
- Location/GPS - required for BLE scanning
- Internet - for login, stats, and cloud sync
- Notifications - for alerts and updates

Emergency Services

Your GRIDx meter has three emergency buttons on the touch screen for immediate assistance.



Police

Emergency police dispatch

- Press the Police button once
- Screen shows: 'Press again to confirm'
- Press again within seconds to confirm
- A police emergency request is sent
- Alert reaches registered contacts
- If pressed by mistake, don't press again



Ambulance

Medical emergency response

- Press the Ambulance button once
- Screen shows: 'Press again to confirm'
- Press again to confirm the emergency
- An ambulance request is dispatched
- Medical emergency alert is broadcast
- Cancel by not pressing the second time



Fire Brigade

Fire emergency alert

- Press the Firefighter button once
- Screen shows: 'Press again to confirm'
- Press again to confirm fire emergency
- A fire brigade request is sent out
- Fire department is alerted immediately
- False alarm? Don't press the second time

IMPORTANT: Only press these buttons in real emergencies. The two-press system prevents accidental alerts. If you press by mistake, do not confirm (second press) - the request will cancel automatically.

Troubleshooting Guide

Can't find meter during BLE scan

- Ensure Bluetooth is ON in phone settings
- Enable Location/GPS services
- Stand within 10 meters of the meter
- Restart the app and try scanning again
- Check if another phone is already connected

Geyser turns off after turning on

- Ensure you're on the latest firmware
- The timer may be overriding manual mode
- Switch to Manual mode before toggling
- Wait for BLE confirmation before retrying

Token is rejected

- Verify you entered all 20 digits correctly
- Each token can only be used once
- Check if token was meant for your meter
- Ensure BLE connection is active

Statistics not loading

- Check your internet connection (Wi-Fi/data)
- Statistics require server connectivity
- Pull-to-refresh or switch tabs and back
- Login again if session has expired

App crashes or freezes

- Force close and reopen the app
- Clear app cache in Android settings
- Ensure Android version is 8.0 or higher
- Update to the latest app version

Forgot BLE password

- Default password may be set during install
- Contact your utility provider for reset
- Password can be changed via the meter screen
- A factory reset may be needed (contact support)

Need More Help?

Contact support at info@gridx-meters.com | Visit www.gridx-meters.com | Call your utility provider