ISO²-CMOS MT8870D/MT8870D-1 Integrated DTMF Receiver



Features

Complete DTMF Receiver

· Low power consumption

· Internal gain setting amplifier

Adjustable guard time

· Central office quality

· Power-down mode

Inhibit mode

 Backward compatible with MT8870C/MT8870C-1

Applications

- Receiver system for British Telecom (BT) or CEPT Spec (MT8870D-1)
- · Paging systems
- · Repeater systems/mobile radio
- Credit card systems
- · Remote control
- Personal computers
- · Telephone answering machine

ISSUE 5

March 1997

Ordering Information

MT8870DE/DE-1 18 Pin Plastic DIP MT8870DS/DS-1 18 Pin SOIC MT8870DN/DN-1 20 Pin SSOP -40 °C to +85 °C

Description

The MT8870D/MT8870D-1 is a complete DTMF receiver integrating both the bandsplit filter and digital decoder functions. The filter section uses switched capacitor techniques for high and low group filters; the decoder uses digital counting techniques to detect and decode all 16 DTMF tonepairs into a 4-bit code. External component count is minimized by on chip provision of a differential input amplifier, clock oscillator and latched three-state bus interface.

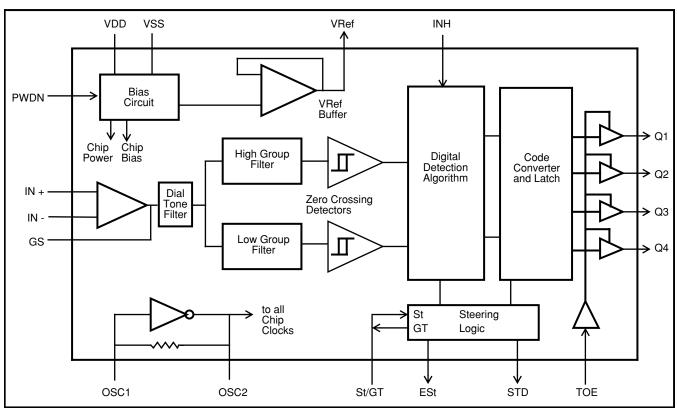


Figure 1 - Functional Block Diagram

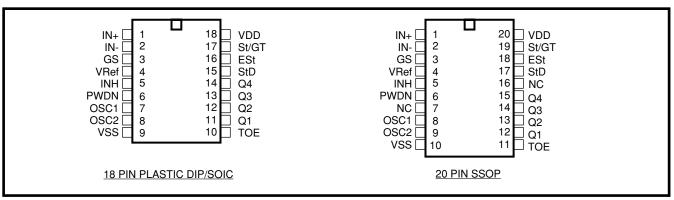


Figure 2 - Pin Connections

Pin Description

Pir	า #		
18	20	Name	Description
1	1	IN+	Non-Inverting Op-Amp (Input).
2	2	IN-	Inverting Op-Amp (Input).
3	3	GS	Gain Select. Gives access to output of front end differential amplifier for connection of feedback resistor.
4	4	V_{Ref}	Reference Voltage (Output). Nominally V _{DD} /2 is used to bias inputs at mid-rail (see Fig. 6 and Fig. 10).
5	5	INH	Inhibit (Input). Logic high inhibits the detection of tones representing characters A, B, C and D. This pin input is internally pulled down.
6	6	PWDN	Power Down (Input). Active high. Powers down the device and inhibits the oscillator. This pin input is internally pulled down.
7	8	OSC1	Clock (Input).
8	9	OSC2	Clock (Output). A 3.579545 MHz crystal connected between pins OSC1 and OSC2 completes the internal oscillator circuit.
9	10	V _{SS}	Ground (Input). 0V typical.
10	11	TOE	Three State Output Enable (Input). Logic high enables the outputs Q1-Q4. This pin is pulled up internally.
11- 14	12- 15	Q1-Q4	Three State Data (Output). When enabled by TOE, provide the code corresponding to the last valid tone-pair received (see Table 1). When TOE is logic low, the data outputs are high impedance.
15	17	StD	Delayed Steering (Output). Presents a logic high when a received tone-pair has been registered and the output latch updated; returns to logic low when the voltage on St/GT falls below V _{TSt} .
16	18	ESt	Early Steering (Output). Presents a logic high once the digital algorithm has detected a valid tone pair (signal condition). Any momentary loss of signal condition will cause ESt to return to a logic low.
17	19	St/GT	Steering Input/Guard time (Output) Bidirectional. A voltage greater than V_{TSt} detected at St causes the device to register the detected tone pair and update the output latch. A voltage less than V_{TSt} frees the device to accept a new tone pair. The GT output acts to reset the external steering time-constant; its state is a function of ESt and the voltage on St.
18	20	V_{DD}	Positive power supply (Input). +5V typical.
	7, 16	NC	No Connection.

Functional Description

The MT8870D/MT8870D-1 monolithic DTMF receiver offers small size, low power consumption and high performance. Its architecture consists of a bandsplit filter section, which separates the high and low group tones, followed by a digital counting section which verifies the frequency and duration of the received tones before passing the corresponding code to the output bus.

Filter Section

Separation of the low-group and high group tones is achieved by applying the DTMF signal to the inputs of two sixth-order switched capacitor bandpass filters, the bandwidths of which correspond to the low and high group frequencies. The filter section also incorporates notches at 350 and 440 Hz for exceptional dial tone rejection (see Figure 3). Each filter output is followed by a single order switched capacitor filter section which smooths the signals prior to limiting. Limiting is performed by high-gain comparators which are provided with hysteresis to prevent detection of unwanted low-level signals. The outputs of the comparators provide full rail logic swings at the frequencies of the incoming DTMF signals.

Decoder Section

Following the filter section is a decoder employing digital counting techniques to determine the frequencies of the incoming tones and to verify that they correspond to standard DTMF frequencies. A complex averaging algorithm protects against tone simulation by extraneous signals such as voice while




Figure 4 - Basic Steering Circuit

providing tolerance to small frequency deviations and variations. This averaging algorithm has been developed to ensure an optimum combination of immunity to talk-off and tolerance to the presence of interfering frequencies (third tones) and noise. When the detector recognizes the presence of two valid tones (this is referred to as the "signal condition" in some industry specifications) the "Early Steering" (ESt) output will go to an active state. Any subsequent loss of signal condition will cause ESt to assume an inactive state (see "Steering Circuit").

Steering Circuit

Before registration of a decoded tone pair, the receiver checks for a valid signal duration (referred to as character recognition condition). This check is performed by an external RC time constant driven by ESt. A logic high on ESt causes v_c (see Figure 4) to rise as the capacitor discharges. Provided signal

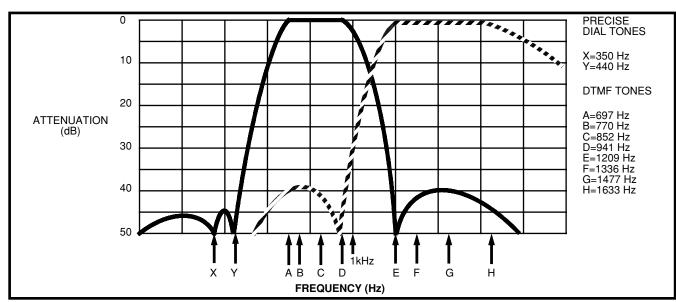


Figure 3 - Filter Response

condition is maintained (ESt remains high) for the validation period (t_{GTP}), v_c reaches the threshold (V_{TSt}) of the steering logic to register the tone pair, latching its corresponding 4-bit code (see Table 1) into the output latch. At this point the GT output is activated and drives v_c to V_{DD}. GT continues to drive high as long as ESt remains high. Finally, after a short delay to allow the output latch to settle, the delayed steering output flag (StD) goes high, signalling that a received tone pair has been registered. The contents of the output latch are made available on the 4-bit output bus by raising the three state control input (TOE) to a logic high. The steering circuit works in reverse to validate the interdigit pause between signals. Thus, as well as rejecting signals too short to be considered valid, the receiver will tolerate signal interruptions (dropout) too short to be considered a valid pause. This facility, together with the capability of selecting the steering time constants externally, allows the designer to tailor performance to meet a wide variety of system requirements.

Guard Time Adjustment

In many situations not requiring selection of tone duration and interdigital pause, the simple steering circuit shown in Figure 4 is applicable. Component values are chosen according to the formula:

$$t_{REC} = t_{DP} + t_{GTP}$$

 $t_{ID} = t_{DA} + t_{GTA}$

The value of t_{DP} is a device parameter (see Figure 11) and t_{REC} is the minimum signal duration to be recognized by the receiver. A value for C of 0.1 μF is

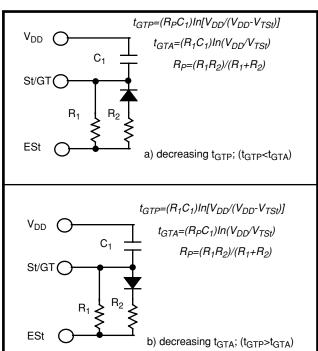


Figure 5 - Guard Time Adjustment

Digit	TOE	INH	ESt	Q ₄	Q ₃	Q ₂	Q ₁
ANY	L	Х	Н	Z	Z	Z	Z
1	Н	Х	Н	0	0	0	1
2	Н	Х	Н	0	0	1	0
3	Н	Х	Н	0	0	1	1
4	Н	Х	Н	0	1	0	0
5	Н	Х	Н	0	1	0	1
6	Н	Х	Н	0	1	1	0
7	Н	Х	Н	0	1	1	1
8	Н	Х	Н	1	0	0	0
9	Н	Х	Н	1	0	0	1
0	Н	Х	Н	1	0	1	0
*	Н	Х	Н	1	0	1	1
#	Н	Х	Н	1	1	0	0
Α	Н	L	Н	1	1	0	1
В	Н	L	Н	1	1	1	0
С	Н	L	Н	1	1	1	1
D	Н	L	Н	0	0	0	0
Α	Н	Н	L				
В	Н	Н	L		cted, th		
С	Н	Н	L		s detect		as iiie
D	Н	Н	L				

Table 1. Functional Decode Table
L=LOGIC LOW, H=LOGIC HIGH, Z=HIGH IMPEDANCE
X = DON'T CARE

recommended for most applications, leaving R to be selected by the designer.

Different steering arrangements may be used to select independently the guard times for tone present (t_{GTP}) and tone absent (t_{GTA}). This may be necessary to meet system specifications which place both accept and reject limits on both tone duration and interdigital pause. Guard time adjustment also allows the designer to tailor system parameters such as talk off and noise immunity. Increasing t_{BEC} improves talk-off performance since it reduces the probability that tones simulated by speech will maintain signal condition long enough to be registered. Alternatively, a relatively short t_{REC} with a long t_{DO} would be appropriate for extremely noisy environments where fast acquisition time and immunity to tone drop-outs are required. Design information for guard time adjustment is shown in Figure 5.

Power-down and Inhibit Mode

A logic high applied to pin 6 (PWDN) will power down the device to minimize the power consumption in a standby mode. It stops the oscillator and the functions of the filters.

Inhibit mode is enabled by a logic high input to the pin 5 (INH). It inhibits the detection of tones representing characters A, B, C, and D. The output code will remain the same as the previous detected code (see Table 1).

Differential Input Configuration

The input arrangement of the MT8870D/MT8870D-1 provides a differential-input operational amplifier as well as a bias source (V_{Ref}) which is used to bias the inputs at mid-rail. Provision is made for connection of a feedback resistor to the op-amp output (GS) for adjustment of gain. In a single-ended configuration, the input pins are connected as shown in Figure 10 with the op-amp connected for unity gain and V_{Ref} biasing the input at $^{1}/_{2}V_{DD}$. Figure 6 shows the differential configuration, which permits the adjustment of gain with the feedback resistor R_{5} .

Crystal Oscillator

The internal clock circuit is completed with the addition of an external 3.579545 MHz crystal and is normally connected as shown in Figure 10 (Single-Ended Input Configuration). However, it is possible to configure several MT8870D/MT8870D-1 devices employing only a single oscillator crystal. The oscillator output of the first device in the chain is coupled through a 30 pF capacitor to the oscillator input (OSC1) of the next device. Subsequent devices are connected in a similar fashion. Refer to Figure 7 for details. The problems associated with unbalanced loading are not a concern with the arrangement shown, i.e., precision balancing capacitors are not required.

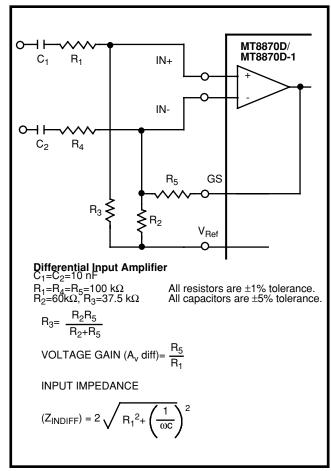


Figure 6 - Differential Input Configuration




Figure 7 - Oscillator Connection

Parameter	Unit	Resonator		
R1	Ohms	10.752		
L1	mH	.432		
C1	pF	4.984		
C0	pF	37.915		
Qm	-	896.37		
Δf	%	±0.2%		

Table 2. Recommended Resonator Specifications
Note: Qm=quality factor of RLC model, i.e., 1/2Π/R1C1.

Applications

RECEIVER SYSTEM FOR BRITISH TELECOM SPEC POR 1151

The circuit shown in Fig. 9 illustrates the use of MT8870D-1 device in a typical receiver system. BT Spec defines the input signals less than -34 dBm as the non-operate level. This condition can be attained by choosing a suitable values of R_1 and R_2 to provide 3 dB attenuation, such that -34 dBm input signal will correspond to -37 dBm at the gain setting pin GS of MT8870D-1. As shown in the diagram, the component values of R_3 and C_2 are the guard time requirements when the total component tolerance is 6%. For better performance, it is recommended to use the non-symmetric guard time circuit in Fig. 8.




Figure 8 - Non-Symmetric Guard Time Circuit

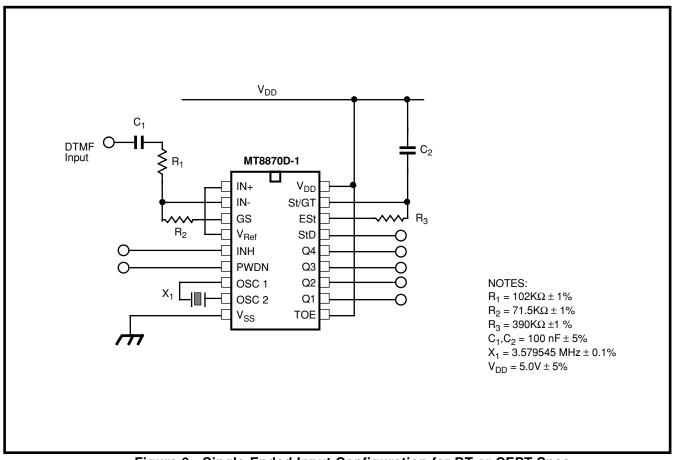


Figure 9 - Single-Ended Input Configuration for BT or CEPT Spec

Absolute Maximum Ratings[†]

	Parameter	Symbol	Min	Max	Units
1	DC Power Supply Voltage	V_{DD}		7	V
2	Voltage on any pin	V _I	V _{SS} -0.3	V _{DD} +0.3	V
3	Current at any pin (other than supply)	l _l		10	mA
4	Storage temperature	T _{STG}	-65	+150	°C
5	Package power dissipation	P_{D}		500	mW

 $[\]dagger$ Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied. Derate above 75 $^{\circ}\text{C}$ at 16 mW / $^{\circ}\text{C}$. All leads soldered to board.

Recommended Operating Conditions - Voltages are with respect to ground (VSS) unless otherwise stated.

	Parameter	Sym	Min	Typ [‡]	Max	Units	Test Conditions
1	DC Power Supply Voltage	V_{DD}	4.75	5.0	5.25	V	
2	Operating Temperature	T _O	-40		+85	°C	
3	Crystal/Clock Frequency	fc		3.579545		MHz	
4	Crystal/Clock Freq.Tolerance	Δfc		±0.1		%	

[‡] Typical figures are at 25°C and are for design aid only: not guaranteed and not subject to production testing.

DC Electrical Characteristics - V_{DD} =5.0 $V\pm$ 5%, V_{SS} =0V, -40 $^{\circ}$ C \leq T_O \leq +85 $^{\circ}$ C, unless otherwise stated.

		Characteristics	Sym	Min	Typ [‡]	Max	Units	Test Conditions
1	S	Standby supply current	I_{DDQ}		10	25	μΑ	PWDN=V _{DD}
2	P	Operating supply current	I _{DD}		3.0	9.0	mA	
3	P L Y	Power consumption	P _O		15		mW	fc=3.579545 MHz
4		High level input	V _{IH}	3.5			V	V _{DD} =5.0V
5		Low level input voltage	V _{IL}			1.5	٧	V _{DD} =5.0V
6		Input leakage current	I _{IH} /I _{IL}		0.1		μΑ	$V_{IN}=V_{SS}$ or V_{DD}
7	N P U	Pull up (source) current	I _{SO}		7.5	20	μΑ	TOE (pin 10)=0, V _{DD} =5.0V
8	T S	Pull down (sink) current	I _{SI}		15	45	μΑ	INH=5.0V, PWDN=5.0V, V _{DD} =5.0V
9		Input impedance (IN+, IN-)	R _{IN}		10		МΩ	@ 1 kHz
10		Steering threshold voltage	V _{TSt}	2.2	2.4	2.5	V	V _{DD} = 5.0V
11		Low level output voltage	V _{OL}			V _{SS} +0.03	V	No load
12	0	High level output voltage	V _{OH}	V _{DD} -0.03			V	No load
13	T	Output low (sink) current	I _{OL}	1.0	2.5		mA	V _{OUT} =0.4 V
14	P U	Output high (source) current	I _{OH}	0.4	8.0		mA	V _{OUT} =4.6 V
15	T S	V _{Ref} output voltage	V _{Ref}	2.3	2.5	2.7	V	No load, V _{DD} = 5.0V
16		V _{Ref} output resistance	R _{OR}		1		kΩ	

[‡] Typical figures are at 25°C and are for design aid only: not guaranteed and not subject to production testing.

MT8870D/MT8870D-1 ISO²-CMOS

Operating Characteristics - V_{DD} =5.0 $V\pm5\%$, V_{SS} =0V, -40 $^{\circ}$ C \leq T_{O} \leq +85 $^{\circ}$ C ,unless otherwise stated. **Gain Setting Amplifier**

	Characteristics	Sym	Min	Typ [‡]	Max	Units	Test Conditions
1	Input leakage current	I _{IN}			100	nA	$V_{SS} \le V_{IN} \le V_{DD}$
2	Input resistance	R _{IN}	10			MΩ	
3	Input offset voltage	V _{OS}			25	mV	
4	Power supply rejection	PSRR	50			dB	1 kHz
5	Common mode rejection	CMRR	40			dB	$0.75 \text{ V} \le \text{V}_{\text{IN}} \le 4.25 \text{ V}$ biased at V_{Ref} =2.5 V
6	DC open loop voltage gain	A _{VOL}	32			dB	
7	Unity gain bandwidth	f _C	0.30			MHz	
8	Output voltage swing	V _O	4.0			V _{pp}	Load ≥ 100 k Ω to V _{SS} @ GS
9	Maximum capacitive load (GS)	C _L			100	pF	
10	Resistive load (GS)	R _L			50	kΩ	
11	Common mode range	V _{CM}	2.5			V _{pp}	No Load

MT8870D AC Electrical Characteristics - V_{DD} =5.0V $\pm 5\%$, V_{SS} =0V, -40°C $\leq T_{O} \leq$ +85°C , using Test Circuit shown in Figure 10.

	Characteristics	Sym	Min	Typ [‡]	Max	Units	Notes*
Г	Valid input signal levels (each		-29		+1	dBm	1,2,3,5,6,9
'	tone of composite signal)		27.5		869	${\sf mV}_{\sf RMS}$	1,2,3,5,6,9
2	Negative twist accept				8	dB	2,3,6,9,12
3	Positive twist accept				8	dB	2,3,6,9,12
4	Frequency deviation accept		±1.5% ± 2 Hz				2,3,5,9
5	Frequency deviation reject		±3.5%				2,3,5,9
6	Third tone tolerance			-16		dB	2,3,4,5,9,10
7	Noise tolerance			-12		dB	2,3,4,5,7,9,10
8	Dial tone tolerance			+22		dB	2,3,4,5,8,9,11

[‡] Typical figures are at 25 °C and are for design aid only: not guaranteed and not subject to production testing.

*NOTES

- 1. dBm= decibels above or below a reference power of 1 mW into a 600 ohm load.
 2. Digit sequence consists of all DTMF tones.
 3. Tone duration= 40 ms, tone pause= 40 ms.
 4. Signal condition consists of nominal DTMF frequencies.

- 5. Both tones in composite signal have an equal amplitude.
 6. Tone pair is deviated by ±1.5 %± 2 Hz.
 7. Bandwidth limited (3 kHz) Gaussian noise.

- 9. For an error rate of better than 1 in 10,000.

 10. Referenced to lowest level frequency component in DTMF signal.

 11. Referenced to the minimum valid accept level.

 12. Guaranteed by design and characterization.

 $\textbf{MT8870D-1} \quad \textbf{AC Electrical Characteristics} \quad V_{DD} = 5.0 V \pm 5\%, \ V_{SS} = 0 \text{V}, \ -40 ^{\circ}\text{C} \leq \text{T}_{O} \leq +85 ^{\circ}\text{C} \text{ , using Test Circuit shown}$ in Figure 10.

	Characteristics	Sym	Min	Typ [‡]	Max	Units	Notes*
	Valid input signal levels (each		-31		+1	dBm	Tested at V _{DD} =5.0V
ľ	tone of composite signal)		21.8		869	mV _{RMS}	1,2,3,5,6,9
2	Input Signal Lavel Paicet		-37			dBm	Tested at V _{DD} =5.0V
2	Input Signal Level Reject		10.9			mV _{RMS}	1,2,3,5,6,9
3	Negative twist accept				8	dB	2,3,6,9,13
4	Positive twist accept				8	dB	2,3,6,9,13
5	Frequency deviation accept		±1.5%± 2 Hz				2,3,5,9
6	Frequency deviation reject		±3.5%				2,3,5,9
7	Third zone tolerance			-18.5		dB	2,3,4,5,9,12
8	Noise tolerance			-12		dB	2,3,4,5,7,9,10
9	Dial tone tolerance			+22		dB	2,3,4,5,8,9,11

[‡] Typical figures are at 25 °C and are for design aid only: not guaranteed and not subject to production testing.

- 1. dBm= decibels above or below a reference power of 1 mW into a 600 ohm load.

- dBm= decibels above or below a reference power of 1 mW into a 600 ohm load.
 Digit sequence consists of all DTMF tones.
 Tone duration= 40 ms, tone pause= 40 ms.
 Signal condition consists of nominal DTMF frequencies.
 Both tones in composite signal have an equal amplitude.
 Tone pair is deviated by ±1.5 %±2 Hz.
 Bandwidth limited (3 kHz) Gaussian noise.
 The precise dial tone frequencies are (350 Hz and 440 Hz) ±2 %.
 For an error rate of better than 1 in 10,000.
 Referenced to lowest level frequency component in DTMF signal.
 Referenced to the minimum valid accept level.
 Referenced to Fig. 10 input DTMF tone level at -25dBm (-28dBm at GS Pin) interference frequency range between 480-3400Hz.
 Guaranteed by design and characterization.

AC Electrical Characteristics - V_{DD} =5.0 $V\pm5\%$, V_{SS} =0V, -40 $^{\circ}$ C \leq To \leq +85 $^{\circ}$ C , using Test Circuit shown in Figure 10.

		Characteristics	Sym	Min	Typ [‡]	Max	Units	Conditions
1		Tone present detect time	t _{DP}	5	11	14	ms	Note 1
2	Т	Tone absent detect time	t _{DA}	0.5	4	8.5	ms	Note 1
3	I M	Tone duration accept	t _{REC}			40	ms	Note 2
4	I N	Tone duration reject	t _{REC}	20			ms	Note 2
5	G	Interdigit pause accept	t _{ID}			40	ms	Note 2
6		Interdigit pause reject	t _{DO}	20			ms	Note 2
7		Propagation delay (St to Q) Propagation delay (St to StD) Output data set up (Q to StD) Propagation delay (TOE to Q ENABLE)			8	11	μs	TOE=V _{DD}
8	_				12	16	μs	TOE=V _{DD}
9	Т				3.4		μs	TOE=V _{DD}
10	U				50		ns	load of 10 k Ω , 50 pF
11	S	Propagation delay (TOE to Q DISABLE)	t _{PTD}		300		ns	load of 10 k Ω , 50 pF
12	Р	Power-up time	t _{PU}		30		ms	Note 3
13	D W N	Power-down time			20		ms	
14		Crystal/clock frequency	f _C	3.5759	3.5795	3.5831	MHz	
15	С	Clock input fall time				110	ns	Ext. clock
16	0					110	ns	Ext. clock
17	C K	Clock input duty cycle	DC _{CL}	40	50	60	%	Ext. clock
18		Capacitive load (OSC2)	C _{LO}			30	pF	

[‡] Typical figures are at 25°C and are for design aid only: not guaranteed and not subject to production testing.

*NOTES:

- Used for guard-time calculation purposes only.
- These, user adjustable parameters, are not device specifications. The adjustable settings of these minimums and maximums are recommendations based upon network requirements. With valid tone present at input, t_{PU} equals time from PDWN going low until ESt going high. 2.
- 3.


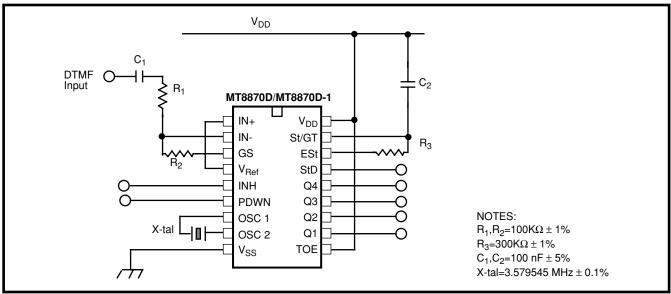


Figure 10 - Single-Ended Input Configuration

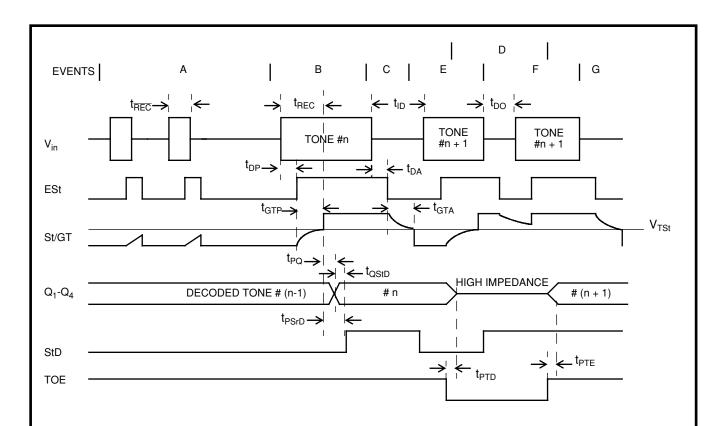

EXPLANATION OF EVENTS

- A) TONE BURSTS DETECTED, TONE DURATION INVALID, OUTPUTS NOT UPDATED.
- B) TONE #n DETECTED, TONE DURATION VALID, TONE DECODED AND LATCHED IN OUTPUTS
- C) END OF TONE #n DETECTED, TONE ABSENT DURATION VALID, OUTPUTS REMIAN LATCHED UNTIL NEXT VALID TONE.
- D) OUTPUTS SWITCHED TO HIGH IMPEDANCE STATE.
- E) TONE #n + 1 DETECTED, TONE DURATION VALID, TONE DECODED AND LATCHED IN OUTPUTS (CURRENTLY HIGH IMPEDANCE).
- F) ACCEPTABLE DROPOUT OF TONE #n + 1, TONE ABSENT DURATION INVALID, OUTPUTS REMAIN LATCHED.
- G) END OF TONE #n + 1 DETECTED, TONE ABSENT DURATION VALID, OUTPUTS REMAIN LATCHED UNTIL NEXT VALID TONE.

EXPLANATION OF SYMBOLS


- V_{in} DTMF COMPOSITE INPUT SIGNAL.
- EST EARLY STEERING OUTPUT. INDICATES DETECTION OF VALID TONE FREQUENCIES.
- St/GT STEERING INPUT/GUARD TIME OUTPUT. DRIVES EXTERNAL RC TIMING CIRCUIT.
- Q₁-Q₄ 4-BIT DECODED TONE OUTPUT.
- StD DELAYED STEERING OUTPUT. INDICATES THAT VALID FREQUENCIES HAVE BEEN PRESENT/ABSENT FOR THE REQUIRED GUARD TIME THUS CONSTITUTING A VALID SIGNAL.
- TOE TONE OUTPUT ENABLE (INPUT). A LOW LEVEL SHIFTS Q1-Q4 TO ITS HIGH IMPEDANCE STATE.
- $t_{\overline{REC}}$ MAXIMUM DTMF SIGNAL DURATION NOT DETECED AS VALID
- t_{REC} MINIMUM DTMF SIGNAL DURATION REQUIRED FOR VALID RECOGNITION
- t_{ID} MAXIMUM TIME BETWEEN VALID DTMF SIGNALS.
- t_{DO} MAXIMUM ALLOWABLE DROP OUT DURING VALID DTMF SIGNAL.
- t_{DP} TIME TO DETECT THE PRESENCE OF VALID DTMF SIGNALS.
- $t_{\mbox{\scriptsize DA}}$ TIME TO DETECT THE ABSENCE OF VALID DTMF SIGNALS.
- t_{GTP} GUARD TIME, TONE PRESENT.
- t_{GTA} GUARD TIME, TONE ABSENT.

Figure 11 - Timing Diagram

MT8870D/MT8870D-1 ISO²-CMOS

Notes:


Package Outlines

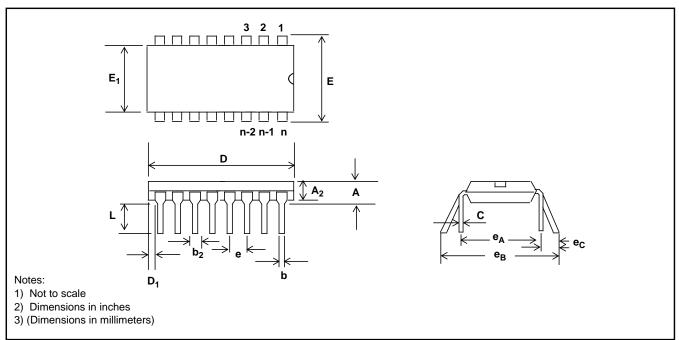

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	8-1	Pin	16-	Pin	18-	Pin	20-	Pin	
DIM	Pla	stic	Pla	stic	Pla	stic	Plastic		
	Min	Max	Min	Max	Min	Max	Min	Max	
Α		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)	
A ₂	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	
b	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	
b ₂	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	
С	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014(0.356)	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014 (0.356)	
D	0.355 (9.02)	0.400 (10.16)	0.780 (19.81)	0.800 (20.32)	0.880 (22.35)	0.920 (23.37)	0.980 (24.89)	1.060 (26.9)	
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		
E	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	
E ₁	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	
е	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	
e _A	0.300 BS	SC (7.62)	0.300 BS	SC (7.62)	0.300 BS	SC (7.62)	0.300 BSC (7.62)		
L	0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)	
e _B		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)	
e _C	0	0.060 (1.52)	0	0.060 (1.52)	0	0.060 (1.52)	0	0.060 (1.52)	

NOTE: Controlling dimensions in parenthesis () are in millimeters.

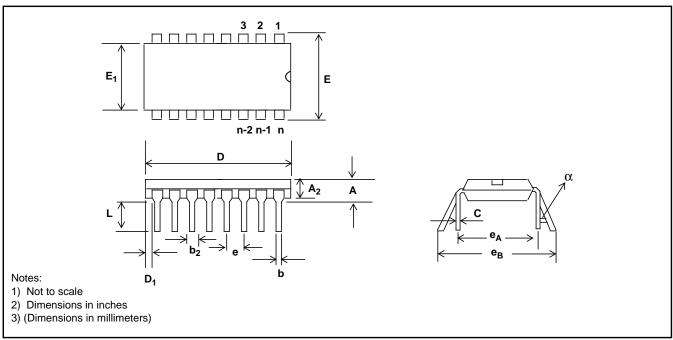

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	22-Pin		24-	Pin	28-	Pin	40-	Pin
DIM	Pla	stic	Pla	stic	Pla	stic	Plastic	
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.210 (5.33)		0.250 (6.35)		0.250 (6.35)		0.250 (6.35)
A ₂	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)
b	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)
b ₂	0.045 (1.15)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)
С	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)
D	1.050 (26.67)	1.120 (28.44)	1.150 (29.3)	1.290 (32.7)	1.380 (35.1)	1.565 (39.7)	1.980 (50.3)	2.095 (53.2)
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)	
E	0.390 (9.91)	0.430 (10.92)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)
E			0.290 (7.37)	.330 (8.38)				
E ₁	0.330 (8.39)	0.380 (9.65)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)
E ₁			0.246 (6.25)	0.254 (6.45)				
е	0.100 BS	SC (2.54)						
e _A	0.400 BS	C (10.16)	0.600 BS	C (15.24)	0.600 BS	C (15.24)	0.600 BS	C (15.24)
e _A			0.300 BS	SC (7.62)				
e _B				0.430 (10.92)				
L	0.115 (2.93)	0.160 (4.06)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)
α		15°		15°		15°		15°

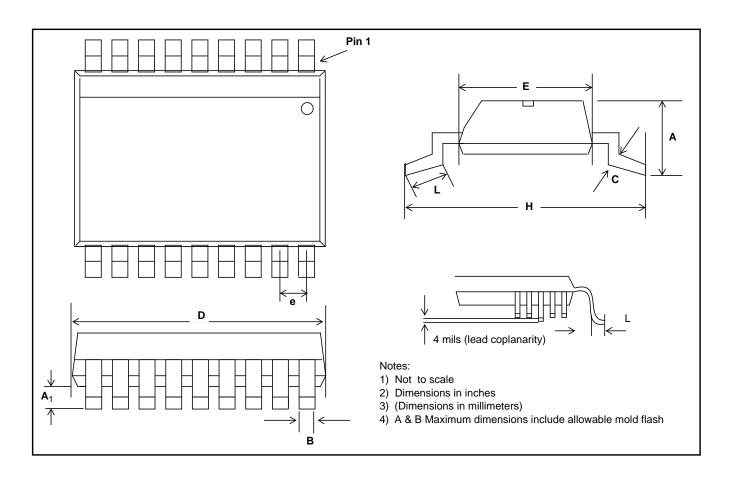

DIM	16-	Pin	18-	Pin	20-	Pin	24-	Pin	28-Pin	
DIIVI	Min	Max								
Α	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104
	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)
A ₁	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012
	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)
В	0.013	0.020	0.013	0.030	0.013	0.020	0.013	0.020	0.013	0.020
	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)
С	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013
	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)
D	0.398	0.413	0.447	0.4625	0.496	0.512	0.5985	0.614	0.697	0.7125
	(10.1)	(10.5)	(11.35)	(11.75)	(12.60)	(13.00)	(15.2)	(15.6)	(17.7)	(18.1)
E	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299
	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)
е	0.050 BSC									
	(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)	
Н	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419
	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)
L	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050
	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)


Lead SOIC Package - S Suffix

NOTES: 1. Controlling dimensions in parenthesis () are in millimeters. 2. Converted inch dimensions are not necessarily exact.

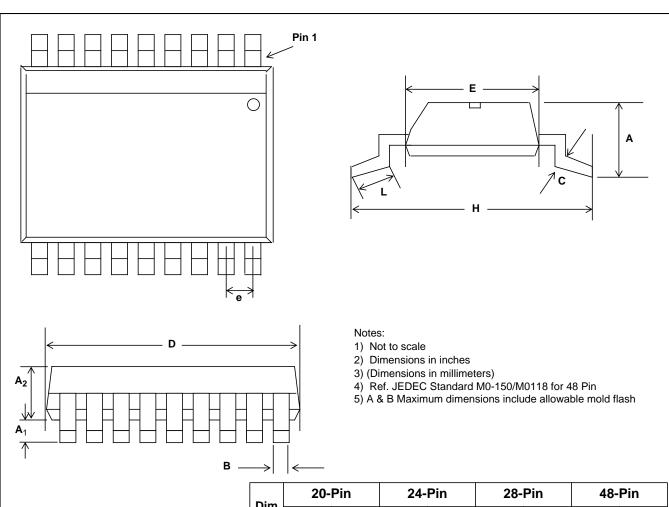

Dim	20-	Pin	24-	Pin	28-	Pin	48-	Pin
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.079 (2)	-	0.079 (2)		0.079 (2)	0.095 (2.41)	0.110 (2.79)
A ₁	0.002 (0.05)		0.002 (0.05)		0.002 (0.05)		0.008 (0.2)	0.016 (0.406)
В	0.0087	0.013	0.0087	0.013	0.0087	0.013	0.008	0.0135
	(0.22)	(0.33)	(0.22)	(0.33)	(0.22)	(0.33)	(0.2)	(0.342)
С		0.008 (0.21)		0.008 (0.21)		0.008 (0.21)		0.010 (0.25)
D	0.27	0.295	0.31	0.33	0.39	0.42	0.62	0.63
	(6.9)	(7.5)	(7.9)	(8.5)	(9.9)	(10.5)	(15.75)	(16.00)
E	0.2	0.22	0.2	0.22	0.2	0.22	0.291	0.299
	(5.0)	(5.6)	(5.0)	(5.6)	(5.0)	(5.6)	(7.39)	(7.59)
е	0.025 BSC		0.025 BSC		0.025 BSC		0.025 BSC	
	(0.635 BSC)		(0.635 BSC)		(0.635 BSC)		(0.635 BSC)	
A ₂	0.065	0.073	0.065	0.073	0.065	0.073	0.089	0.099
	(1.65)	(1.85)	(1.65)	(1.85)	(1.65)	(1.85)	(2.26)	(2.52)
Н	0.29	0.32	0.29	0.32	0.29	0.32	0.395	0.42
	(7.4)	(8.2)	(7.4)	(8.2)	(7.4)	(8.2)	(10.03)	(10.67)
L	0.022 0.037		0.022	0.037	0.022	0.037	0.02	0.04
	(0.55) (0.95)		(0.55)	(0.95)	(0.55)	(0.95)	(0.51)	(1.02)


Package Outlines

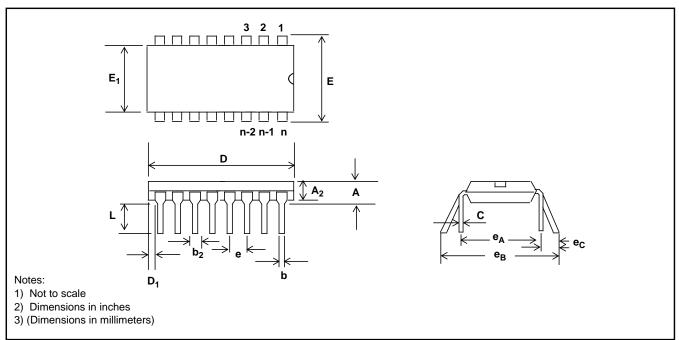

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	8-1	Pin	16-	Pin	18-	Pin	20-	Pin
DIM	Pla	stic	Plastic		Plastic		Plastic	
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)
A ₂	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)
b	0.014 (0.356)	0.356) 0.022 (0.558) 0.014 (0.356) 0.022 (0.558) 0.014 (0.356) 0.022 (0.558		0.022 (0.558)	0.014 (0.356)	0.022 (0.558)		
b ₂	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)
С	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014(0.356)	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014 (0.356)
D	0.355 (9.02)	0.400 (10.16)	0.780 (19.81)	0.800 (20.32)	0.880 (22.35)	0.920 (23.37)	0.980 (24.89)	1.060 (26.9)
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)	
E	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)
E ₁	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)
е	0.100 BS	0.100 BSC (2.54)		0.100 BSC (2.54)		0.100 BSC (2.54)		SC (2.54)
e _A	0.300 BSC (7.62)		0.300 BS	SC (7.62)	0.300 BS	SC (7.62)	0.300 BS	SC (7.62)
L	0.115 (2.92) 0.150 (3.8		0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)
e _B		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)
e _C	0	0 0.060 (1.52)		0.060 (1.52)	0	0.060 (1.52)	0	0.060 (1.52)

NOTE: Controlling dimensions in parenthesis () are in millimeters.

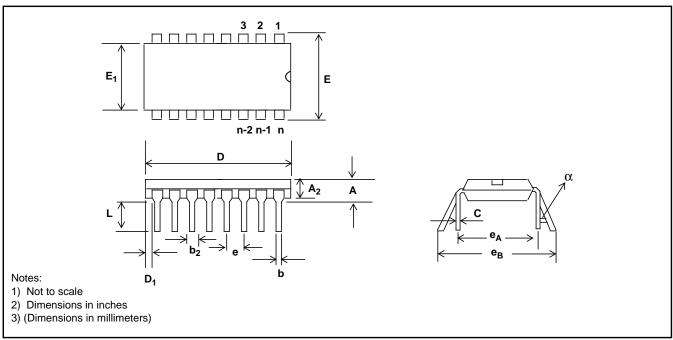

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	22-	Pin	24-	Pin	28-	Pin	40-	Pin
DIM	Pla	stic	Plastic		Pla	stic	Plastic	
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.210 (5.33)		0.250 (6.35)		0.250 (6.35)		0.250 (6.35)
A ₂	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)
b	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)
b ₂	0.045 (1.15)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)
С	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)
D	1.050 (26.67)	1.120 (28.44)	1.150 (29.3)	1.290 (32.7)	1.380 (35.1)	1.565 (39.7)	1.980 (50.3)	2.095 (53.2)
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)	
E	0.390 (9.91)	0.430 (10.92)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)
E			0.290 (7.37)	.330 (8.38)				
E ₁	0.330 (8.39)	0.380 (9.65)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)
E ₁			0.246 (6.25)	0.254 (6.45)				
е	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)
e _A	0.400 BS	0.400 BSC (10.16)		C (15.24)	0.600 BS	C (15.24)	0.600 BSC (15.24)	
e _A				SC (7.62)				
e _B				0.430 (10.92)				
L	0.115 (2.93)	0.160 (4.06)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)
α		15°		15°		15°		15°

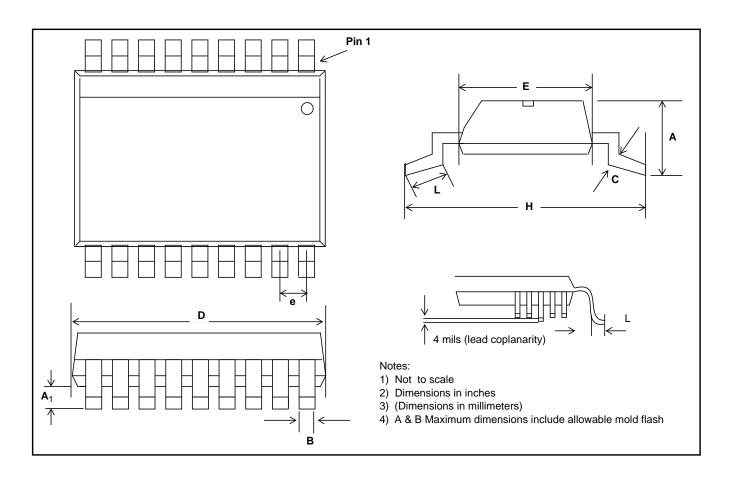

DIM	16-	Pin	18-	Pin	20-	Pin	24-	Pin	28-Pin	
DIIVI	Min	Max								
Α	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104
	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)
A ₁	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012
	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)
В	0.013	0.020	0.013	0.030	0.013	0.020	0.013	0.020	0.013	0.020
	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)
С	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013
	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)
D	0.398	0.413	0.447	0.4625	0.496	0.512	0.5985	0.614	0.697	0.7125
	(10.1)	(10.5)	(11.35)	(11.75)	(12.60)	(13.00)	(15.2)	(15.6)	(17.7)	(18.1)
E	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299
	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)
е	0.050 BSC									
	(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)	
Н	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419
	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)
L	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050
	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)


Lead SOIC Package - S Suffix

NOTES: 1. Controlling dimensions in parenthesis () are in millimeters. 2. Converted inch dimensions are not necessarily exact.

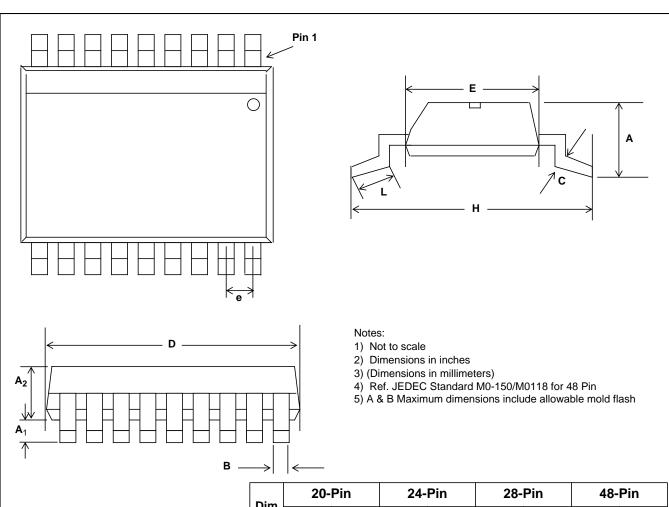

Dim	20-	Pin	24-	Pin	28-	Pin	48-	Pin
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.079 (2)	-	0.079 (2)		0.079 (2)	0.095 (2.41)	0.110 (2.79)
A ₁	0.002 (0.05)		0.002 (0.05)		0.002 (0.05)		0.008 (0.2)	0.016 (0.406)
В	0.0087	0.013	0.0087	0.013	0.0087	0.013	0.008	0.0135
	(0.22)	(0.33)	(0.22)	(0.33)	(0.22)	(0.33)	(0.2)	(0.342)
С		0.008 (0.21)		0.008 (0.21)		0.008 (0.21)		0.010 (0.25)
D	0.27	0.295	0.31	0.33	0.39	0.42	0.62	0.63
	(6.9)	(7.5)	(7.9)	(8.5)	(9.9)	(10.5)	(15.75)	(16.00)
E	0.2	0.22	0.2	0.22	0.2	0.22	0.291	0.299
	(5.0)	(5.6)	(5.0)	(5.6)	(5.0)	(5.6)	(7.39)	(7.59)
е	0.025 BSC		0.025 BSC		0.025 BSC		0.025 BSC	
	(0.635 BSC)		(0.635 BSC)		(0.635 BSC)		(0.635 BSC)	
A ₂	0.065	0.073	0.065	0.073	0.065	0.073	0.089	0.099
	(1.65)	(1.85)	(1.65)	(1.85)	(1.65)	(1.85)	(2.26)	(2.52)
Н	0.29	0.32	0.29	0.32	0.29	0.32	0.395	0.42
	(7.4)	(8.2)	(7.4)	(8.2)	(7.4)	(8.2)	(10.03)	(10.67)
L	0.022 0.037		0.022	0.037	0.022	0.037	0.02	0.04
	(0.55) (0.95)		(0.55)	(0.95)	(0.55)	(0.95)	(0.51)	(1.02)


Package Outlines

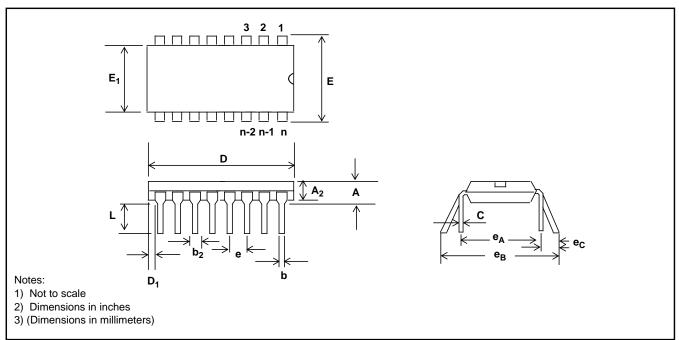

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	8-1	Pin	16-	Pin	18-	Pin	20-	Pin
DIM	Pla	stic	Plastic		Plastic		Plastic	
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)		0.210 (5.33)
A ₂	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)	0.115 (2.92)	0.195 (4.95)
b	0.014 (0.356)	0.356) 0.022 (0.558) 0.014 (0.356) 0.022 (0.558) 0.014 (0.356) 0.022 (0.558		0.022 (0.558)	0.014 (0.356)	0.022 (0.558)		
b ₂	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)	0.045 (1.14)	0.070 (1.77)
С	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014(0.356)	0.008 (0.203)	0.014 (0.356)	0.008 (0.203)	0.014 (0.356)
D	0.355 (9.02)	0.400 (10.16)	0.780 (19.81)	0.800 (20.32)	0.880 (22.35)	0.920 (23.37)	0.980 (24.89)	1.060 (26.9)
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)	
E	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)	0.300 (7.62)	0.325 (8.26)
E ₁	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)	0.240 (6.10)	0.280 (7.11)
е	0.100 BS	0.100 BSC (2.54)		0.100 BSC (2.54)		0.100 BSC (2.54)		SC (2.54)
e _A	0.300 BSC (7.62)		0.300 BS	SC (7.62)	0.300 BS	SC (7.62)	0.300 BS	SC (7.62)
L	0.115 (2.92) 0.150 (3.8		0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)	0.115 (2.92)	0.150 (3.81)
e _B		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)		0.430 (10.92)
e _C	0	0 0.060 (1.52)		0.060 (1.52)	0	0.060 (1.52)	0	0.060 (1.52)

NOTE: Controlling dimensions in parenthesis () are in millimeters.

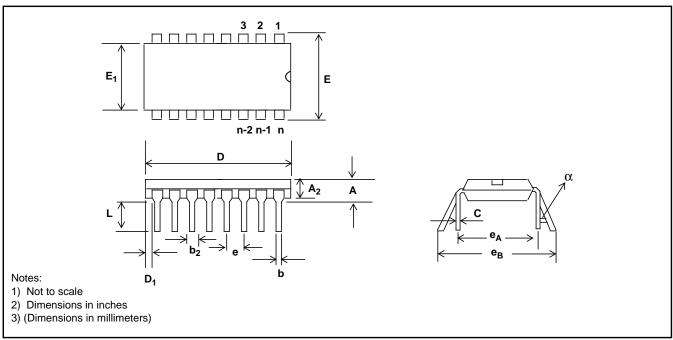

Plastic Dual-In-Line Packages (PDIP) - E Suffix


	22-	Pin	24-	Pin	28-	Pin	40-	Pin
DIM	Pla	stic	Plastic		Pla	stic	Plastic	
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.210 (5.33)		0.250 (6.35)		0.250 (6.35)		0.250 (6.35)
A ₂	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)	0.125 (3.18)	0.195 (4.95)
b	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)	0.014 (0.356)	0.022 (0.558)
b ₂	0.045 (1.15)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)	0.030 (0.77)	0.070 (1.77)
С	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)	0.008 (0.204)	0.015 (0.381)
D	1.050 (26.67)	1.120 (28.44)	1.150 (29.3)	1.290 (32.7)	1.380 (35.1)	1.565 (39.7)	1.980 (50.3)	2.095 (53.2)
D ₁	0.005 (0.13)		0.005 (0.13)		0.005 (0.13)		0.005 (0.13)	
E	0.390 (9.91)	0.430 (10.92)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)	0.600 (15.24)	0.670 (17.02)
E			0.290 (7.37)	.330 (8.38)				
E ₁	0.330 (8.39)	0.380 (9.65)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)	0.485 (12.32)	0.580 (14.73)
E ₁			0.246 (6.25)	0.254 (6.45)				
е	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)	0.100 BS	SC (2.54)
e _A	0.400 BS	0.400 BSC (10.16)		C (15.24)	0.600 BS	C (15.24)	0.600 BSC (15.24)	
e _A				SC (7.62)				
e _B				0.430 (10.92)				
L	0.115 (2.93)	0.160 (4.06)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)	0.115 (2.93)	0.200 (5.08)
α		15°		15°		15°		15°

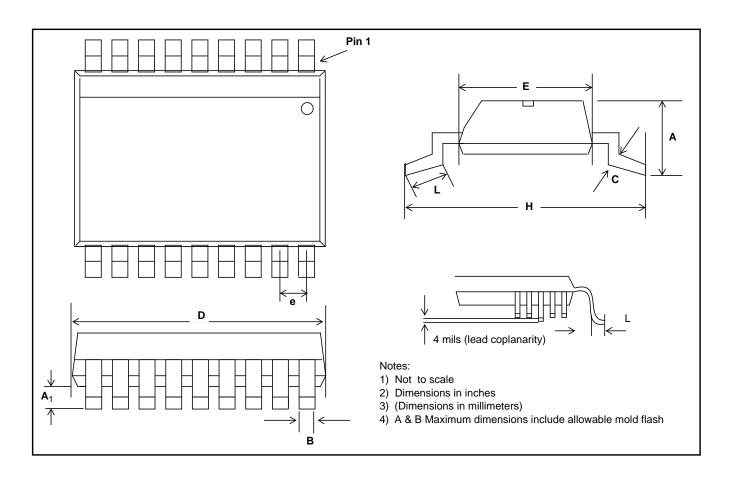


DIM	16-	Pin	18-	Pin	20-	Pin	24-	Pin	28-Pin	
DIIVI	Min	Max								
Α	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104	0.093	0.104
	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)	(2.35)	(2.65)
A ₁	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012	0.004	0.012
	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)	(0.10)	(0.30)
В	0.013	0.020	0.013	0.030	0.013	0.020	0.013	0.020	0.013	0.020
	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)	(0.33)	(0.51)
С	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013	0.009	0.013
	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)	(0.231)	(0.318)
D	0.398	0.413	0.447	0.4625	0.496	0.512	0.5985	0.614	0.697	0.7125
	(10.1)	(10.5)	(11.35)	(11.75)	(12.60)	(13.00)	(15.2)	(15.6)	(17.7)	(18.1)
E	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299	0.291	0.299
	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)	(7.40)
е	0.050 BSC									
	(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)		(1.27 BSC)	
Н	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419	0.394	0.419
	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)	(10.00)	(10.65)
L	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050	0.016	0.050
	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)	(0.40)	(1.27)

Lead SOIC Package - S Suffix

NOTES: 1. Controlling dimensions in parenthesis () are in millimeters. 2. Converted inch dimensions are not necessarily exact.

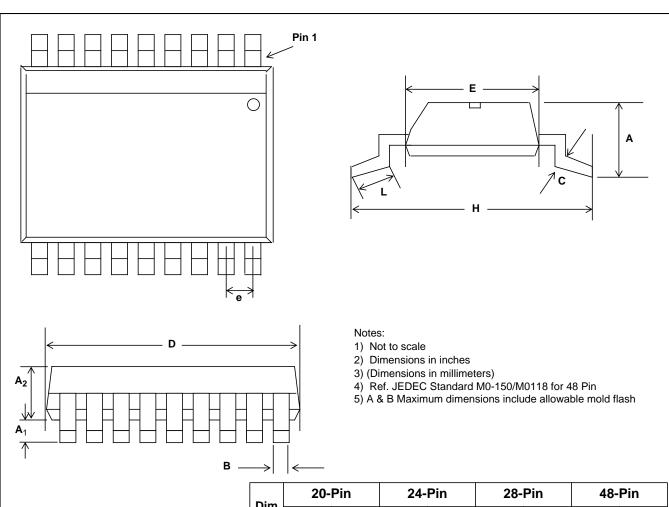

Dim	20-	Pin	24-	Pin	28-	Pin	48-	Pin
	Min	Max	Min	Max	Min	Max	Min	Max
Α		0.079 (2)	-	0.079 (2)		0.079 (2)	0.095 (2.41)	0.110 (2.79)
A ₁	0.002 (0.05)		0.002 (0.05)		0.002 (0.05)		0.008 (0.2)	0.016 (0.406)
В	0.0087	0.013	0.0087	0.013	0.0087	0.013	0.008	0.0135
	(0.22)	(0.33)	(0.22)	(0.33)	(0.22)	(0.33)	(0.2)	(0.342)
С		0.008 (0.21)		0.008 (0.21)		0.008 (0.21)		0.010 (0.25)
D	0.27	0.295	0.31	0.33	0.39	0.42	0.62	0.63
	(6.9)	(7.5)	(7.9)	(8.5)	(9.9)	(10.5)	(15.75)	(16.00)
E	0.2	0.22	0.2	0.22	0.2	0.22	0.291	0.299
	(5.0)	(5.6)	(5.0)	(5.6)	(5.0)	(5.6)	(7.39)	(7.59)
е	0.025 BSC		0.025 BSC		0.025 BSC		0.025 BSC	
	(0.635 BSC)		(0.635 BSC)		(0.635 BSC)		(0.635 BSC)	
A ₂	0.065	0.073	0.065	0.073	0.065	0.073	0.089	0.099
	(1.65)	(1.85)	(1.65)	(1.85)	(1.65)	(1.85)	(2.26)	(2.52)
Н	0.29	0.32	0.29	0.32	0.29	0.32	0.395	0.42
	(7.4)	(8.2)	(7.4)	(8.2)	(7.4)	(8.2)	(10.03)	(10.67)
L	0.022 0.037		0.022	0.037	0.022	0.037	0.02	0.04
	(0.55) (0.95)		(0.55)	(0.95)	(0.55)	(0.95)	(0.51)	(1.02)

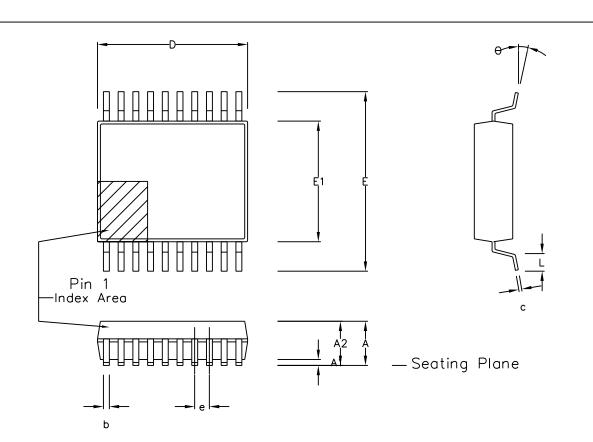


		ol Dimer	nsions			n. Dimer					
Symbol	in	millimeti	res		I	<u>n inches</u>	<u> </u>				
,	MIN	Nominal	MAX		MIN	Nominal	MAX				
Α	1.70		2.00		0.067		0.079				
A1	0.05		0.20		0.002		0.008				
A2	1.65		1.85		0.065		0.073				
D	6.90		7.50		0.272		0.295				
E	7.40		8.20		0.291		0.323				
E1	5.00		5.60		0.197		0.220				
L	0.55		0.95		0.022		0.037				
е	0.65 BSC. 0.026 BSC.										
р	0.22		0.38		0.009		0.015				
С	0.09		0.25		0.004		0.010				
Φ	0, 8, 0, 8,										
	Pin features										
N											
Con	forms	to J	EDEC	МО	-150	AE Is	s. B				

This drawing supersedes: -418/ED/51481/002 (Swindon/Plymouth)

Notes:

- 1. A visual index feature, e.g. a dot, must be located within the cross—hatched area.
- 2. Controlling dimension are in millimeters.
- 3. Dimensions D and E1 do not include mould flash or protusion. Mould flash or protusion shall not exceed
- 0.20 mm per side. D and E1 are maximum plastic body size dimensions including mould mismatch.
 4. Dimension b does not include dambar protusion/intrusion. Allowable dambar protusion shall be 0.13 mm total in excess of b dimension. Dambar intrusion shall not reduce dimension b by more than 0.07 mm.

© Zarlink	Semiconductor	r 2002 All right	s reserved.			Package Code
ISSUE	1	2	3		Previous package codes	Package Outline for 20 lead
ACN	201933	205234	212477	ZARLINK SEMICONDUCTOR	NP / N	SSOP (5.3mm Body Width)
DATE	27Feb97	25Sep98	3Apr02	JEMICON DOCTOR	<u> </u>	
APPRD.						GPD00294

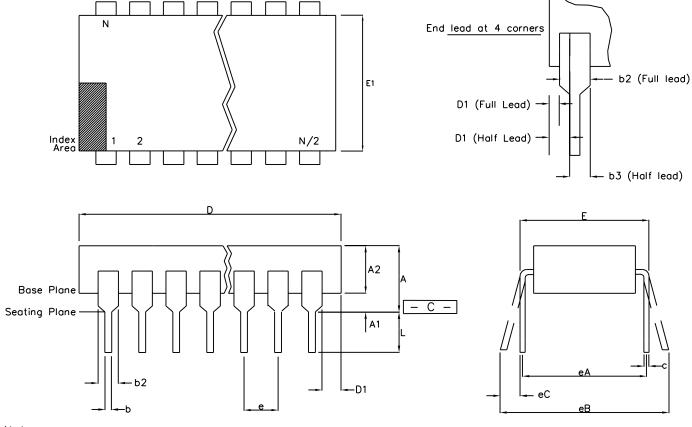

	Min	Max	Min	Max		
	mm	mm	Inches			
Α		5.33		0.210		
A1	0.38		0.015			
A2	2.92	4.95	0.115	0.195		
b	0.36	0.56	0.014	0.022		
b2	1.14	1.78	0.045	0.070		
b3	n/a	n/a	n/a	n/a		
С	0.20	0.36	0.008	0.014		
D	22.35	23.37	0.880	0.920		
D1	0.13		0.005			
E	7.62	8.26	0.300	0.325		
E1	6.10	7.11	0.240	0.280		
е	2.54 BSC		0.100 BSC			
eА	7.62	BSC	0.300) BSC		
eВ		10.92		0.430		
еC	0.00	1.52	0.000	0.060		
L	2.92	3.81	0.115	0.150		
Ν	18		18			
Conforms to Jedec MS-001AC Issue D						

Notes:

- 1. Leadframe Material: Copper
 2. Leadframe finish: Solder Plate
 3. Dimensions D, D1 & E1 do not include mould flash or protrusions.
 4. Dimensions E & eA are measured with leads constrained to be perpendicular to datum C —
 5. Dimensions eB & eC are measured with the leads unconstrained
 6. Controlling dimensions are Inches. Millimeter conversions are not necessarily exact.
 7. N is the maximum of terminal positions.

This drawing supersedes: -

Plymouth/Swindon drawing # 418/ED/39502/004

© Zarlink Semiconductor 2002 All rights reserved.				Package Code		
ISSUE	1	2			Previous package codes	Package Outline for 18 Lead PDIP
ACN	202563	212483		ZARLINK SEMICONDUCTOR	DP / E	
DATE	9Jun97	5Apr02		JEMICONDOCTOR.		
APPRD.						GPD00348



For more information about all Zarlink products visit our Web Site at www.zarlink.com

Information relating to products and services furnished herein by Zarlink Semiconductor Inc. trading as Zarlink Semiconductor or its subsidiaries (collectively "Zarlink") is believed to be reliable. However, Zarlink assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Zarlink or licensed from third parties by Zarlink, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Zarlink, or non-Zarlink furnished goods or services may infringe patents or other intellectual property rights owned by Zarlink.

This publication is issued to provide information only and (unless agreed by Zarlink in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Zarlink without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Zarlink's conditions of sale which are available on request.

Purchase of Zarlink's I^2C components conveys a licence under the Philips I^2C Patent rights to use these components in and I^2C System, provided that the system conforms to the I^2C Standard Specification as defined by Philips.

Zarlink, ZL and the Zarlink Semiconductor logo are trademarks of Zarlink Semiconductor Inc.

Copyright Zarlink Semiconductor Inc. All Rights Reserved.

TECHNICAL DOCUMENTATION - NOT FOR RESALE